

National University of Computer & Emerging Sciences

CS 3001 - COMPUTER NETWORKS

Lecture 20 Chapter 5

31st October, 2023

Nauman Moazzam Hayat
nauman.moazzam@lhr.nu.edu.pk

Office Hours: 02:30 pm till 06:00 pm (Every Tuesday & Thursday)

Network layer: “control plane” roadmap

- introduction
- routing protocols
 - link state
 - **distance vector**
- intra-ISP routing: OSPF
- routing among ISPs: BGP
- SDN control plane
- Internet Control Message Protocol



- network management, configuration
 - SNMP
 - NETCONF/YANG

Distance vector algorithm

Based on *Bellman-Ford* (BF) equation (dynamic programming):

Bellman-Ford equation

Let $D_x(y)$: cost of least-cost path from x to y .

Then:

$$D_x(y) = \min_v \{ c_{x,v} + D_v(y) \}$$


\min taken over all neighbors v of x

direct cost of link from x to v

v 's estimated least-cost-path cost to y

Bellman-Ford Example

Suppose that u 's neighboring nodes, x, v, w , know that for destination z :

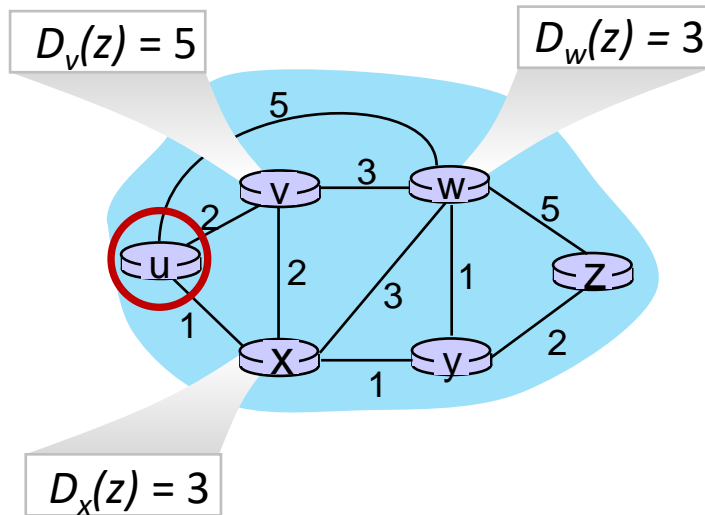

Bellman-Ford equation says:

$$\begin{aligned} D_u(z) &= \min \{ c_{u,v} + D_v(z), \\ &\quad c_{u,x} + D_x(z), \\ &\quad c_{u,w} + D_w(z) \} \\ &= \min \{ 2 + 5, \\ &\quad 1 + 3, \\ &\quad 5 + 3 \} = 4 \end{aligned}$$

*node achieving minimum (x) is
next hop on estimated least-
cost path to destination (z)*

Distance vector algorithm

key idea:


- from time-to-time, each node sends its own distance vector estimate to neighbors
- when x receives new DV estimate from any neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v \{c_{x,v} + D_v(y)\} \text{ for each node } y \in N$$

- under minor, natural conditions, the estimate $D_x(y)$ converge to the actual least cost $d_x(y)$

Distance vector algorithm:

each node:

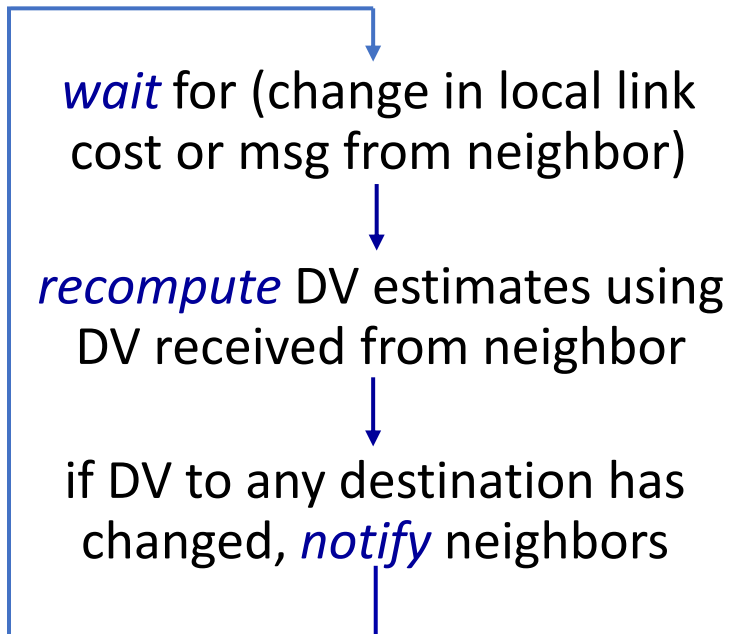

iterative, asynchronous: each local iteration caused by:

- local link cost change
- DV update message from neighbor

distributed, self-stopping: each node notifies neighbors *only* when its DV changes

- neighbors then notify their neighbors – *only if necessary*
- no notification received, no actions taken!

Distance vector: example




t=0

- All nodes have distance estimates to nearest neighbors (only)
- All nodes send their local distance vector to their neighbors

DV in a:

$D_a(a)=0$
 $D_a(b)=8$
 $D_a(c)=\infty$
 $D_a(d)=1$
 $D_a(e)=\infty$
 $D_a(f)=\infty$
 $D_a(g)=\infty$
 $D_a(h)=\infty$
 $D_a(i)=\infty$

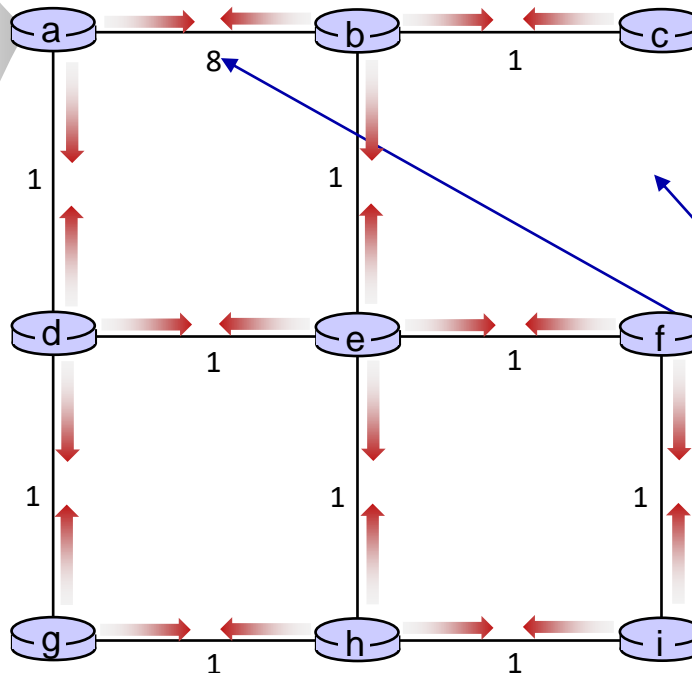

A few asymmetries:

- missing link
- larger cost


Distance vector example: iteration



$t=1$

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

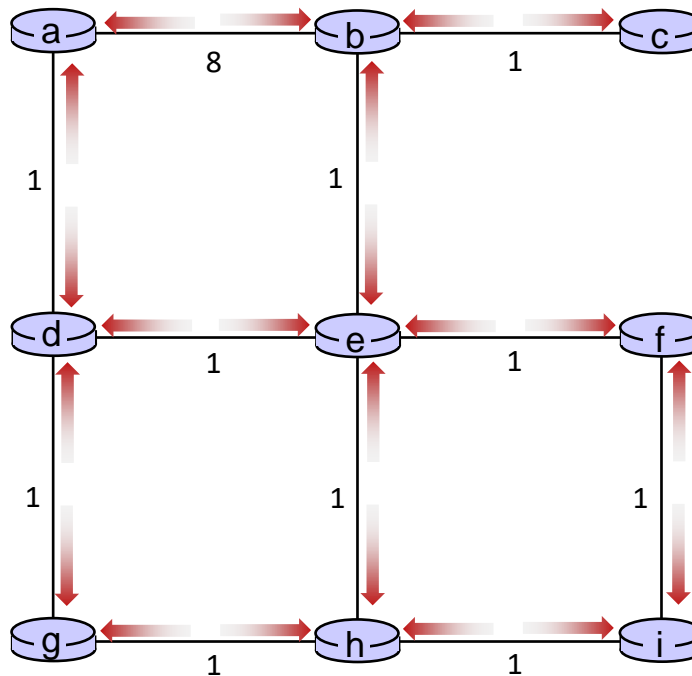


Distance vector example: iteration



$t=1$

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

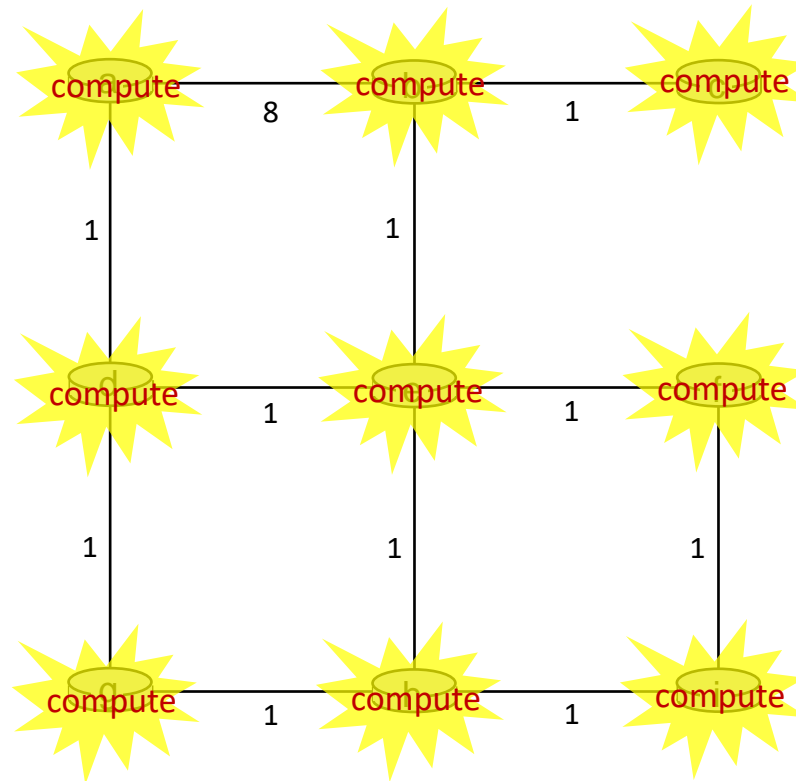


Distance vector example: iteration



$t=1$

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

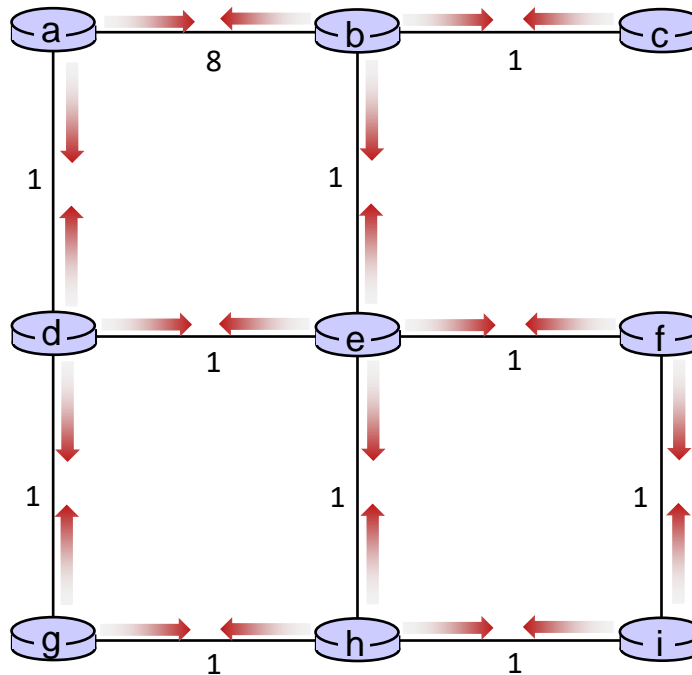


Distance vector example: iteration



t=2

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

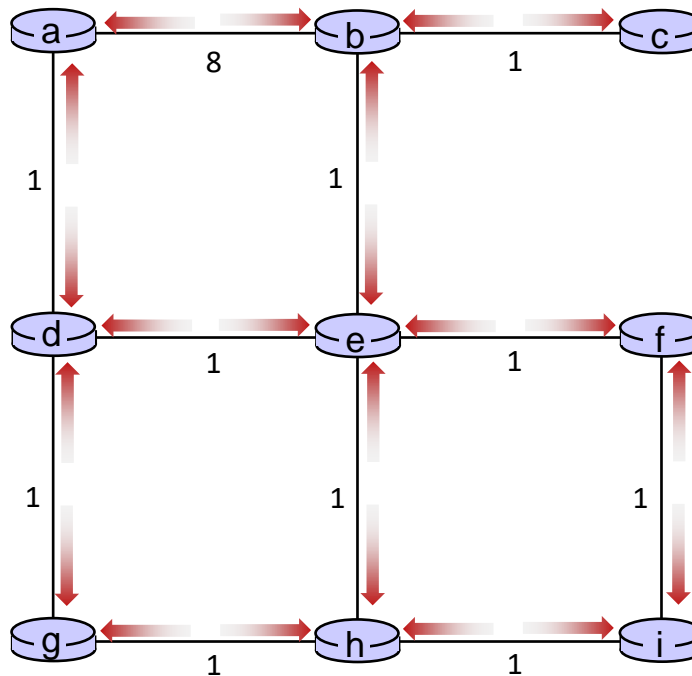


Distance vector example: iteration



t=2

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

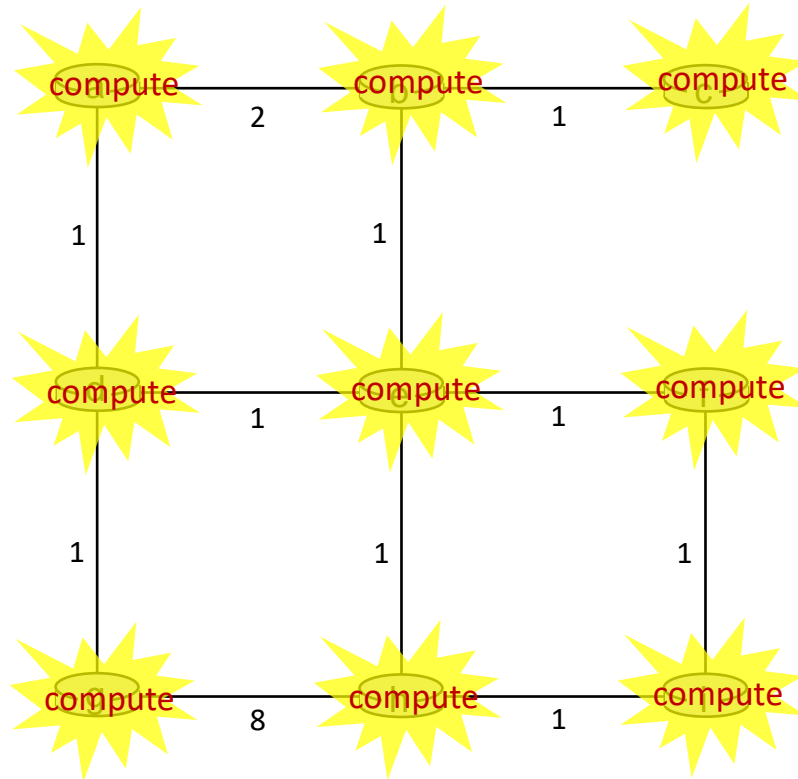


Distance vector example: iteration



t=2

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

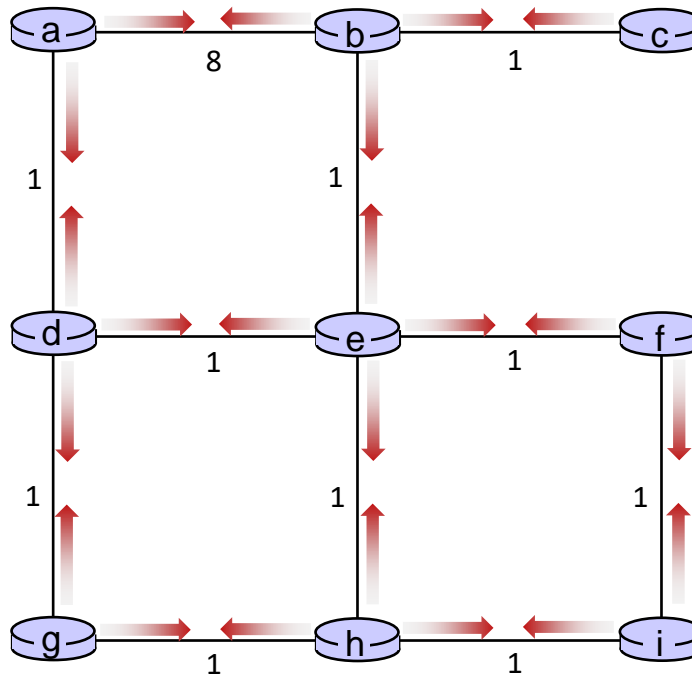

Distance vector example: iteration

.... and so on

Let's next take a look at the iterative *computations* at nodes

Distance vector example:



$t=1$


- b receives DVs from a, c, e

DV in a:
$D_a(a)=0$
$D_a(b)=8$
$D_a(c)=\infty$
$D_a(d)=1$
$D_a(e)=\infty$
$D_a(f)=\infty$
$D_a(g)=\infty$
$D_a(h)=\infty$
$D_a(i)=\infty$

DV in b:	
$D_b(a) = 8$	$D_b(f) = \infty$
$D_b(c) = 1$	$D_b(g) = \infty$
$D_b(d) = \infty$	$D_b(h) = \infty$
$D_b(e) = 1$	$D_b(i) = \infty$

DV in c:
$D_c(a)=\infty$
$D_c(b)=1$
$D_c(c)=0$
$D_c(d)=\infty$
$D_c(e)=\infty$
$D_c(f)=\infty$
$D_c(g)=\infty$
$D_c(h)=\infty$
$D_c(i)=\infty$

DV in e:
$D_e(a)=\infty$
$D_e(b)=1$
$D_e(c)=\infty$
$D_e(d)=1$
$D_e(e)=0$
$D_e(f)=1$
$D_e(g)=\infty$
$D_e(h)=1$
$D_e(i)=\infty$

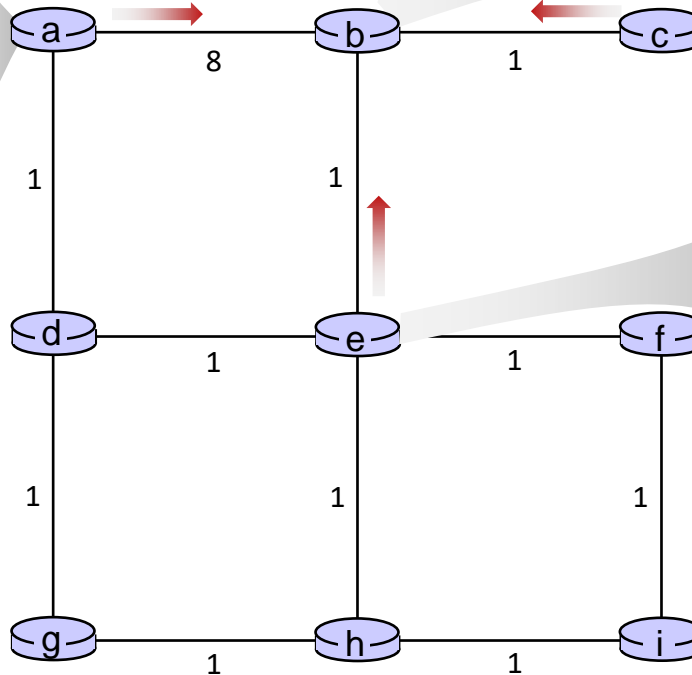

Distance vector example:




t=1

- b receives DVs from a, c, e, computes:

$$\begin{aligned}
 D_b(a) &= \min\{c_{b,a} + D_a(a), c_{b,c} + D_c(a), c_{b,e} + D_e(a)\} = \min\{8, \infty, \infty\} = 8 \\
 D_b(c) &= \min\{c_{b,a} + D_a(c), c_{b,c} + D_c(c), c_{b,e} + D_e(c)\} = \min\{\infty, 1, \infty\} = 1 \\
 D_b(d) &= \min\{c_{b,a} + D_a(d), c_{b,c} + D_c(d), c_{b,e} + D_e(d)\} = \min\{9, \infty, 2\} = 2 \\
 D_b(e) &= \min\{c_{b,a} + D_a(e), c_{b,c} + D_c(e), c_{b,e} + D_e(e)\} = \min\{\infty, \infty, 1\} = 1 \\
 D_b(f) &= \min\{c_{b,a} + D_a(f), c_{b,c} + D_c(f), c_{b,e} + D_e(f)\} = \min\{\infty, \infty, 2\} = 2 \\
 D_b(g) &= \min\{c_{b,a} + D_a(g), c_{b,c} + D_c(g), c_{b,e} + D_e(g)\} = \min\{\infty, \infty, \infty\} = \infty \\
 D_b(h) &= \min\{c_{b,a} + D_a(h), c_{b,c} + D_c(h), c_{b,e} + D_e(h)\} = \min\{\infty, \infty, 2\} = 2 \\
 D_b(i) &= \min\{c_{b,a} + D_a(i), c_{b,c} + D_c(i), c_{b,e} + D_e(i)\} = \min\{\infty, \infty, \infty\} = \infty
 \end{aligned}$$

DV in a:
$D_a(a) = 0$
$D_a(b) = 8$
$D_a(c) = \infty$
$D_a(d) = 1$
$D_a(e) = \infty$
$D_a(f) = \infty$
$D_a(g) = \infty$
$D_a(h) = \infty$
$D_a(i) = \infty$

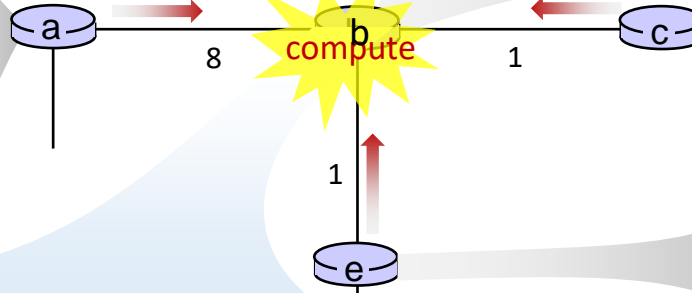

DV in b:	
$D_b(a) = 8$	$D_b(f) = \infty$
$D_b(c) = 1$	$D_b(g) = \infty$
$D_b(d) = \infty$	$D_b(h) = \infty$
$D_b(e) = 1$	$D_b(i) = \infty$

DV in c:
$D_c(a) = \infty$
$D_c(b) = 1$
$D_c(c) = 0$
$D_c(d) = \infty$
$D_c(e) = \infty$
$D_c(f) = \infty$
$D_c(g) = \infty$
$D_c(h) = \infty$
$D_c(i) = \infty$

DV in e:
$D_e(a) = \infty$
$D_e(b) = 1$
$D_e(c) = \infty$
$D_e(d) = 1$
$D_e(e) = 0$
$D_e(f) = 1$
$D_e(g) = \infty$
$D_e(h) = 1$
$D_e(i) = \infty$

DV in b:	
$D_b(a) = 8$	$D_b(f) = 2$
$D_b(c) = 1$	$D_b(g) = \infty$
$D_b(d) = 2$	$D_b(h) = 2$
$D_b(e) = 1$	$D_b(i) = \infty$


Distance vector example:



$t=1$

- c receives DVs from b

DV in a:
$D_a(a)=0$
$D_a(b)=8$
$D_a(c)=\infty$
$D_a(d)=1$
$D_a(e)=\infty$
$D_a(f)=\infty$
$D_a(g)=\infty$
$D_a(h)=\infty$
$D_a(i)=\infty$

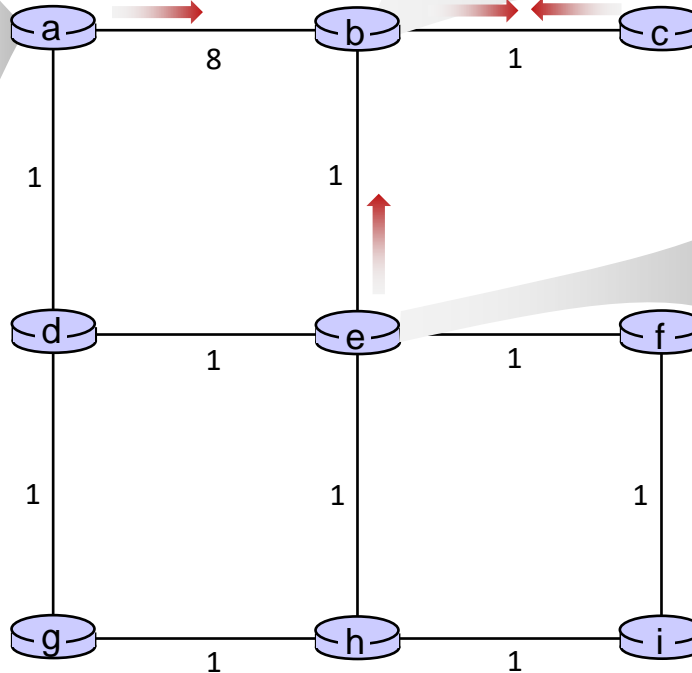

DV in b:	
$D_b(a) = 8$	$D_b(f) = \infty$
$D_b(c) = 1$	$D_b(g) = \infty$
$D_b(d) = \infty$	$D_b(h) = \infty$
$D_b(e) = 1$	$D_b(i) = \infty$

DV in c:
$D_c(a)=\infty$
$D_c(b)=1$
$D_c(c)=0$
$D_c(d)=\infty$
$D_c(e)=\infty$
$D_c(f)=\infty$
$D_c(g)=\infty$
$D_c(h)=\infty$
$D_c(i)=\infty$

DV in e:
$D_e(a)=\infty$
$D_e(b)=1$
$D_e(c)=\infty$
$D_e(d)=1$
$D_e(e)=0$
$D_e(f)=1$
$D_e(g)=\infty$
$D_e(h)=1$
$D_e(i)=\infty$


Distance vector example:



t=1

- c receives DVs from b computes:

$$\begin{aligned}
 D_c(a) &= \min\{c_{c,b} + D_b(a)\} = 1 + 8 = 9 \\
 D_c(b) &= \min\{c_{c,b} + D_b(b)\} = 1 + 0 = 1 \\
 D_c(d) &= \min\{c_{c,b} + D_b(d)\} = 1 + \infty = \infty \\
 D_c(e) &= \min\{c_{c,b} + D_b(e)\} = 1 + 1 = 2 \\
 D_c(f) &= \min\{c_{c,b} + D_b(f)\} = 1 + \infty = \infty \\
 D_c(g) &= \min\{c_{c,b} + D_b(g)\} = 1 + \infty = \infty \\
 D_c(h) &= \min\{c_{c,b} + D_b(h)\} = 1 + \infty = \infty \\
 D_c(i) &= \min\{c_{c,b} + D_b(i)\} = 1 + \infty = \infty
 \end{aligned}$$

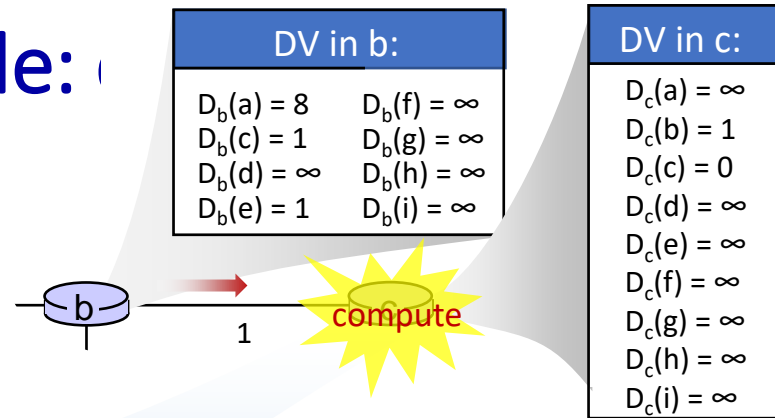

DV in c:
$D_c(a) = 9$
$D_c(b) = 1$
$D_c(c) = 0$
$D_c(d) = 2$
$D_c(e) = \infty$
$D_c(f) = \infty$
$D_c(g) = \infty$
$D_c(h) = \infty$
$D_c(i) = \infty$


* Check out the online interactive exercises for more examples:
http://gaia.cs.umass.edu/kurose_ross/interactive/

Distance vector example:





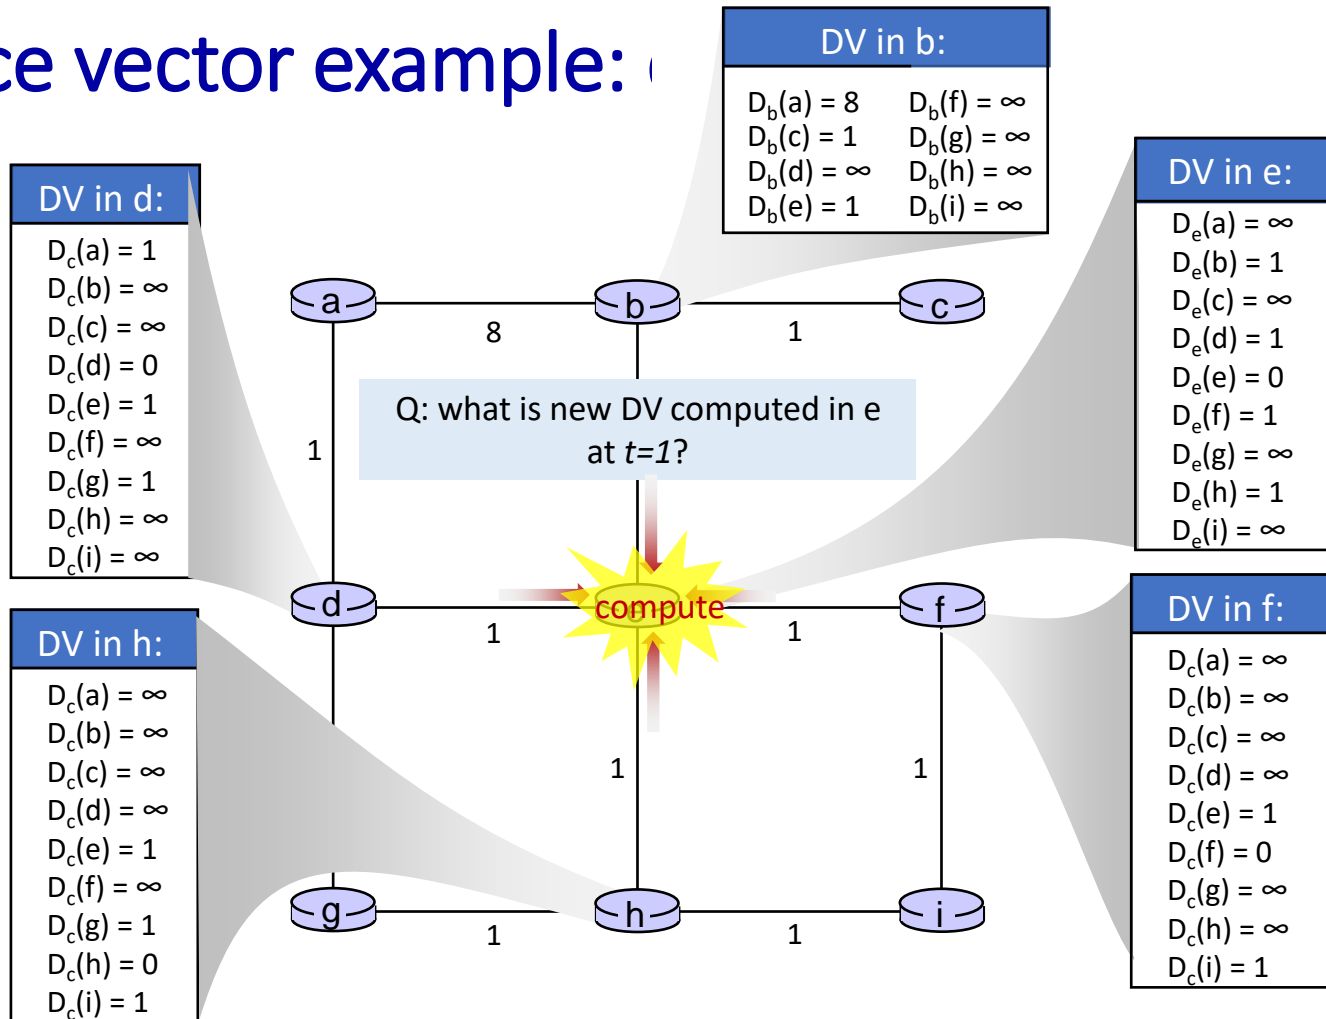


$t=1$


- e receives DVs from b, d, f, h



Distance vector: state information diffusion

Iterative communication, computation steps diffuses information through network:


-  $t=0$ c's state at $t=0$ is at c only
-  $t=1$ c's state at $t=0$ has propagated to b, and may influence distance vector computations up to **1** hop away, i.e., at b
-  $t=2$ c's state at $t=0$ may now influence distance vector computations up to **2** hops away, i.e., at b and now at a, e as well
-  $t=3$ c's state at $t=0$ may influence distance vector computations up to **3** hops away, i.e., at d, f, h
-  $t=4$ c's state at $t=0$ may influence distance vector computations up to **4** hops away, i.e., at g, i

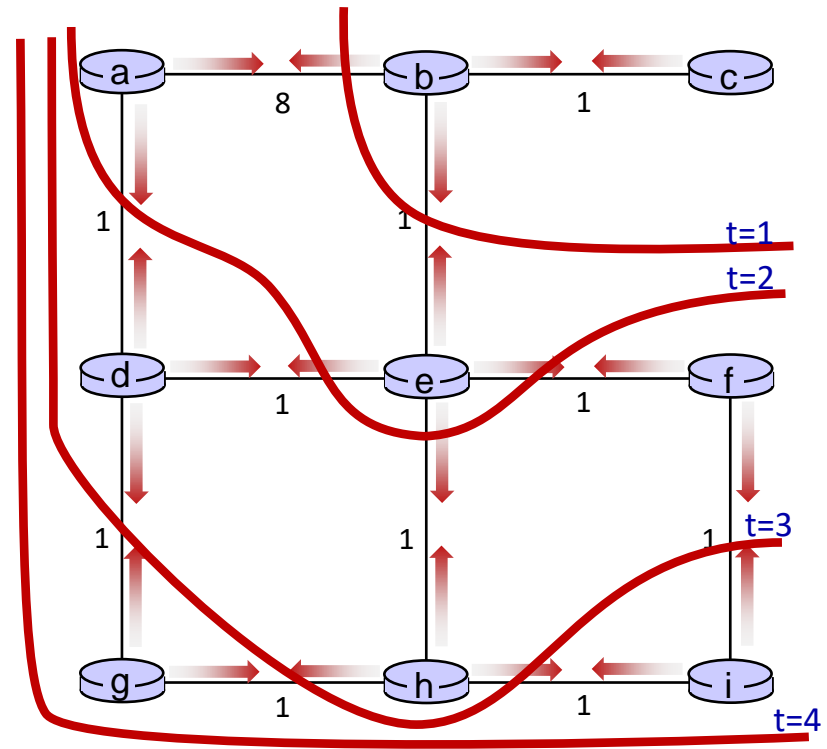

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- updates routing info, recalculates local DV
- if DV changes, notify neighbors

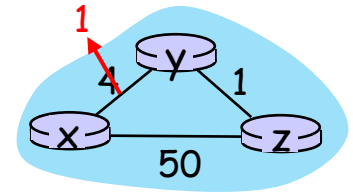

t_0 : y detects link-cost change, updates its DV, informs its neighbors.

“good news
travels fast”


t_1 : z receives update from y, updates its DV, computes new least cost to x, sends its neighbors its DV.

t_2 : y receives z's update, updates its DV. y's least costs do *not* change, so y does *not* send a message to z.

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- “bad news travels slow” – count-to-infinity problem:

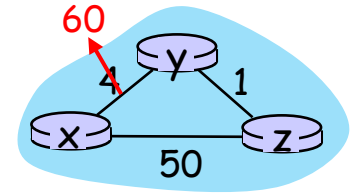

- y sees direct link to x has new cost 60, but z has said it has a path at cost of 5. So y computes “my new cost to x will be 6, via z); notifies z of new cost of 6 to x.
- z learns that path to x via y has new cost 6, so z computes “my new cost to x will be 7 via y), notifies y of new cost of 7 to x.
- y learns that path to x via z has new cost 7, so y computes “my new cost to x will be 8 via y), notifies z of new cost of 8 to x.
- z learns that path to x via y has new cost 8, so z computes “my new cost to x will be 9 via y), notifies y of new cost of 9 to x.
- ...
- *44 iterations before algorithm stabilizes: see textbook*

Poison Reverse (Solution to Count to Infinity Problem)

- If Z routes through Y to get to X :
 - Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)

Will this completely solve count to infinity problem?

It does not. Loops involving three or more nodes (rather than simply two immediately neighboring nodes) will not be detected by the poisoned reverse technique.

- see text**book** for solutions. *Distributed algorithms are tricky!*

Comparison of LS and DV algorithms

message complexity

LS: n routers, $O(n^2)$ messages sent

(LS algorithm is a global algorithm in the sense that it requires each node to first obtain a complete map of the network before running the Dijkstra algorithm)

DV: exchange between neighbors; convergence time varies

(The DV algorithm is decentralized and does not use such global information. Indeed, the only information a node will have is the costs of the links to its directly attached neighbors and information it receives from these neighbors)

speed of convergence

LS: $O(n^2)$ algorithm, $O(n^2)$ messages

- may have oscillations

DV: convergence time varies

- may have routing loops
- count-to-infinity problem

robustness: what happens if router malfunctions, or is compromised?

LS:

- router can advertise incorrect *link* cost
- each router computes only its *own* table

DV:

- DV router can advertise incorrect *path* cost (“I have a *really* low-cost path to everywhere”): *black-holing*
- each router’s DV is used by others: error propagate thru network (*directly to neighbour, but indirectly to neighbour’s neighbour and the entire network*)

Assignment # 4 (Chapter - 4) (already announced)

- *4th Assignment will be uploaded on Google Classroom on Thursday, 26th October, 2023, in the Stream - Announcement Section*
- *Due Date: Thursday, 2nd November, 2023 (Handwritten solutions to be submitted during the lecture)*
- *Please read **all the instructions** carefully in the uploaded Assignment document, follow & submit accordingly*

Quiz # 4 (Chapter - 4)

- *On: Thursday, 2nd November, 2023 (During the lecture)*
- *Quiz to be taken during own section class only*