

National University of Computer & Emerging Sciences

CS 3001 - COMPUTER NETWORKS

Lecture 05 Chapter 2

7th September, 2023

Nauman Moazzam Hayat
nauman.moazzam@lhr.nu.edu.pk

Office Hours: 02:30 pm till 06:00 pm (Every Tuesday & Thursday)

Chapter 2

Application Layer

A note on the use of these PowerPoint slides:


We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

For a revision history, see the slide note for this page.

Thanks and enjoy! JFK/KWR

All material copyright 1996-2023
J.F Kurose and K.W. Ross, All Rights Reserved

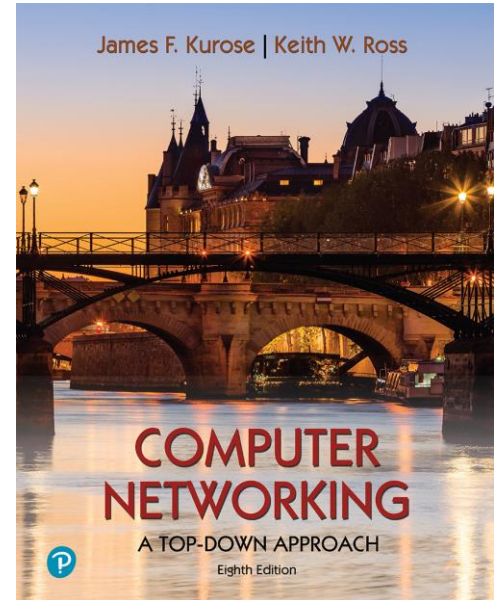

Computer Networking: A Top-Down Approach

8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Application layer: overview

- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



Application layer: overview

Our goals:

- conceptual *and* implementation aspects of application-layer protocols
 - transport-layer service models
 - client-server paradigm
 - peer-to-peer paradigm
- learn about protocols by examining popular application-layer protocols and infrastructure
 - HTTP
 - SMTP, IMAP
 - DNS
 - video streaming systems, CDNs
- programming network applications
 - socket API

Some network apps

- social networking
 - Web
 - text messaging
 - e-mail
 - multi-user network games
 - streaming stored video (YouTube, Hulu, Netflix)
 - P2P file sharing
 - voice over IP (e.g., Skype)
 - real-time video conferencing (e.g., Zoom)
 - Internet search
 - remote login
 - ...
- Q: *your* favorites?


Creating a network app

write programs that:

- run on (different) end systems
- communicate over network
- e.g., web server software communicates with browser software

no need to write software for network-core devices

- network-core devices do not run user applications
- applications on end systems allows for rapid app development, propagation

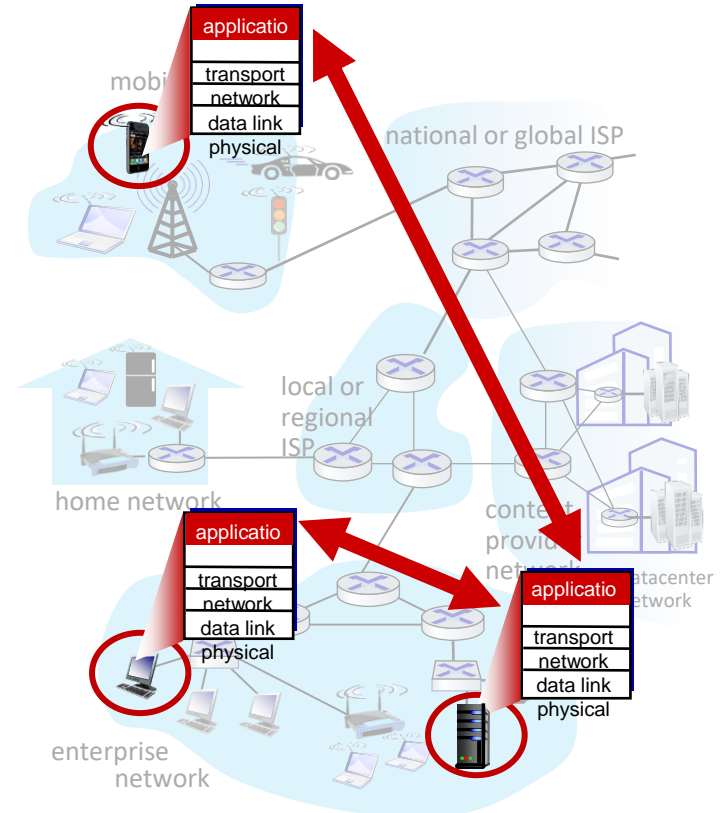


Client-server paradigm

server:

- always-on host
- permanent IP address
- often in data centers, for scaling


clients:

- contact, communicate with server
- may be intermittently connected
- may have dynamic IP addresses
- do *not* communicate directly with each other
- examples: HTTP, IMAP, FTP

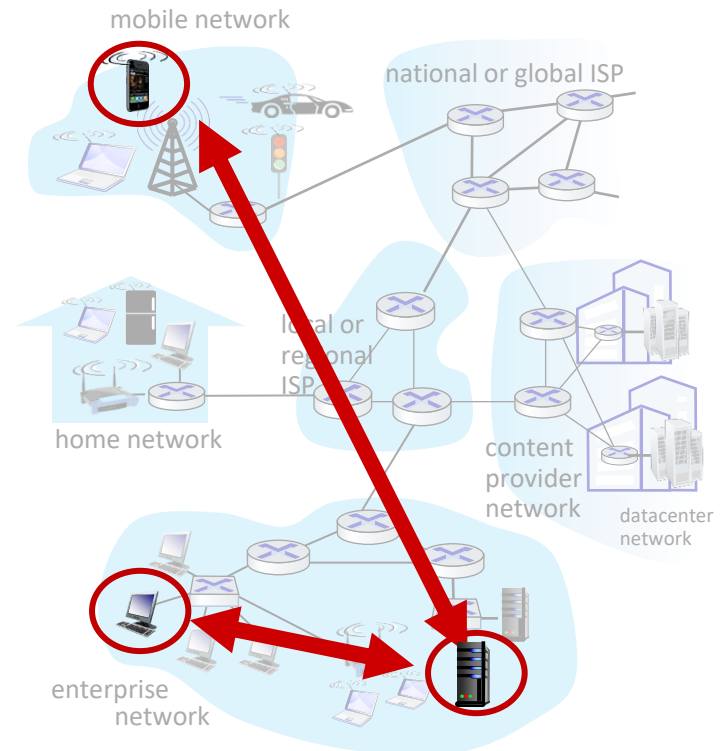

Peer-peer architecture

- *no* always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
 - *self scalability* – new peers bring new service capacity, as well as new service demands
- peers are intermittently connected and change IP addresses
 - complex management
- example: P2P file sharing [BitTorrent]

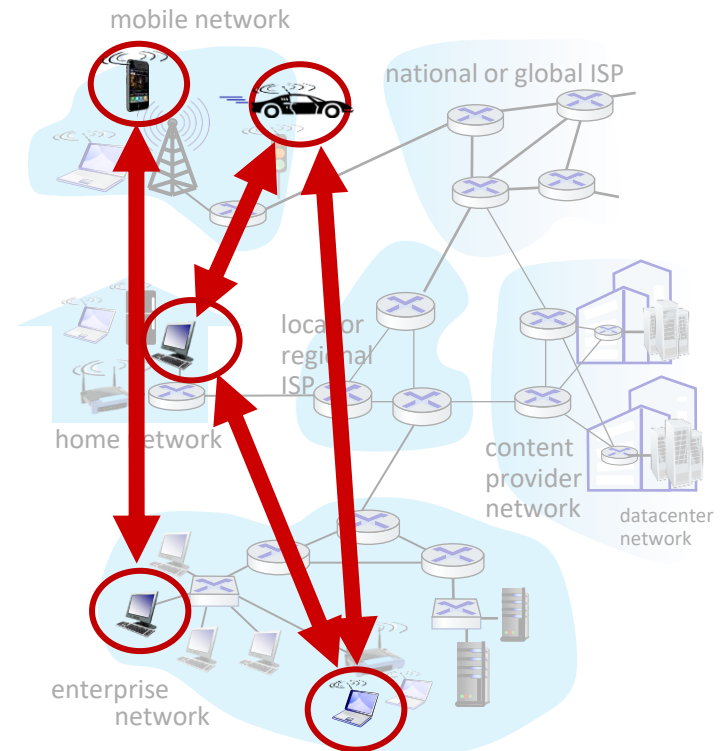

Processes communicating

process: program running within a host

- within same host, two processes communicate using **inter-process communication** (defined by OS)
- processes in different hosts communicate by exchanging **messages**

clients, servers


client process: process that initiates communication

server process: process that waits to be contacted

- note: applications with P2P architectures have client processes & server processes

Sockets

- process sends/receives messages to/from its **socket**
- socket analogous to door
 - sending process shoves message out door
 - sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process
 - two sockets involved: one on each side

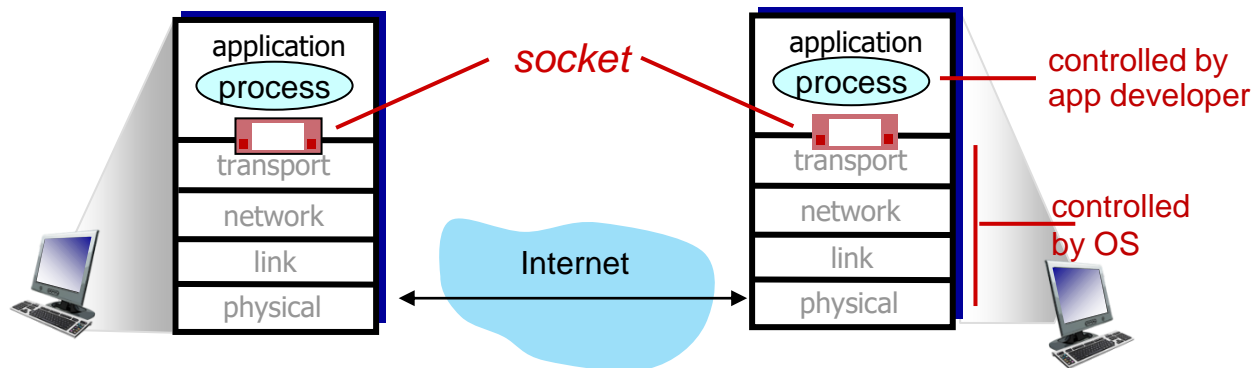


How do we distinguish between two or more processes running on the same host?

Port Numbers


Addressing processes

- to receive messages, process must have *identifier*
- host device has unique 32-bit IP address
- Q: does IP address of host on which process runs suffice for identifying the process?
 - A: no, *many* processes can be running on same host
- *identifier* includes both **IP address** and **port numbers** associated with process on host.
- example port numbers:
 - HTTP server: 80
 - mail server: 25
- to send HTTP message to gaia.cs.umass.edu web server:
 - **IP address:** 128.119.245.12
 - **port number:** 80
- more shortly...

Addressing in TCP/IP

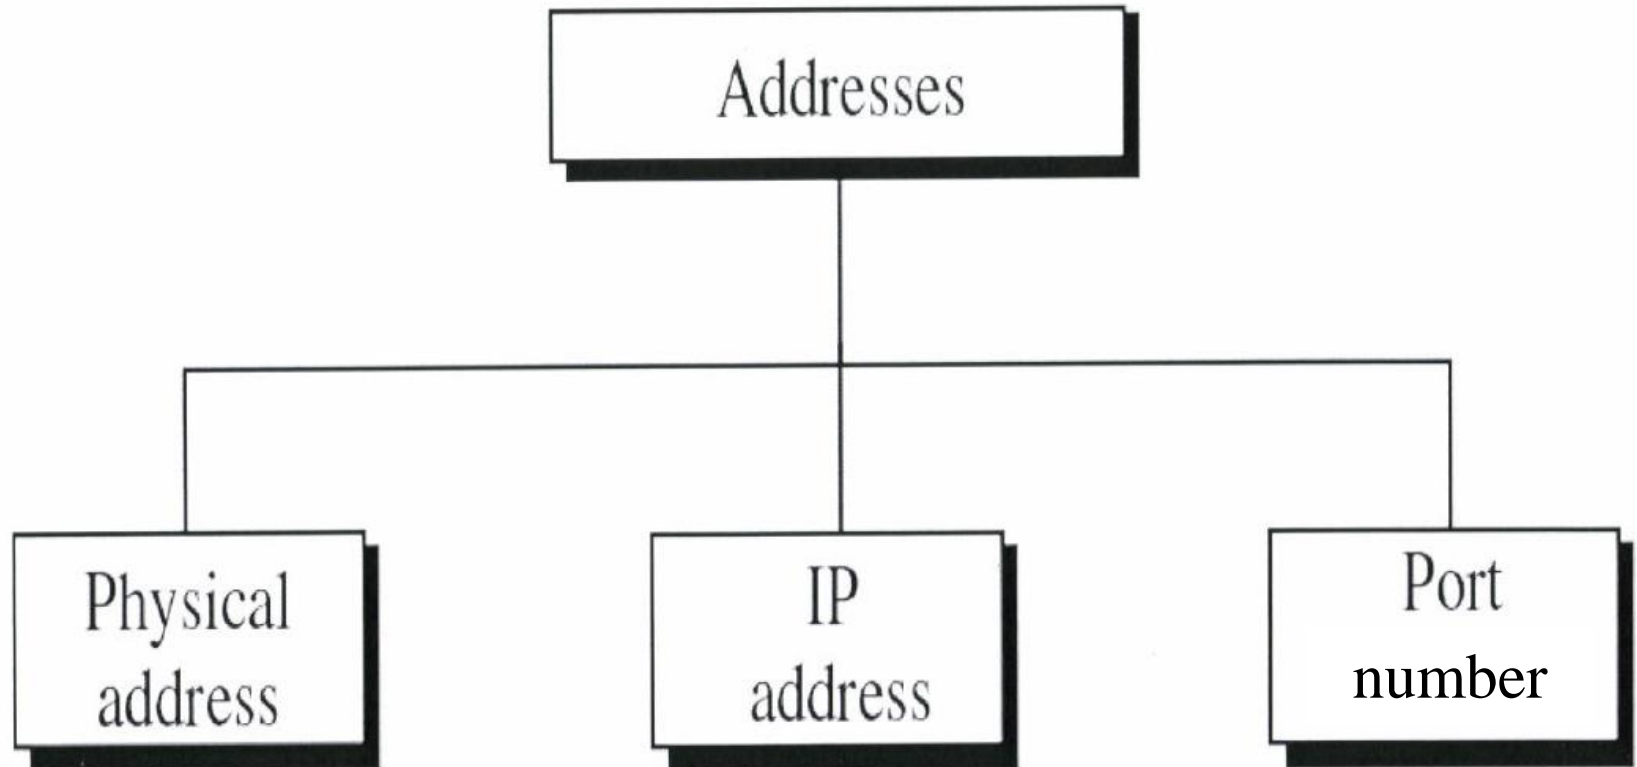

TCP/IP Layers and Addresses

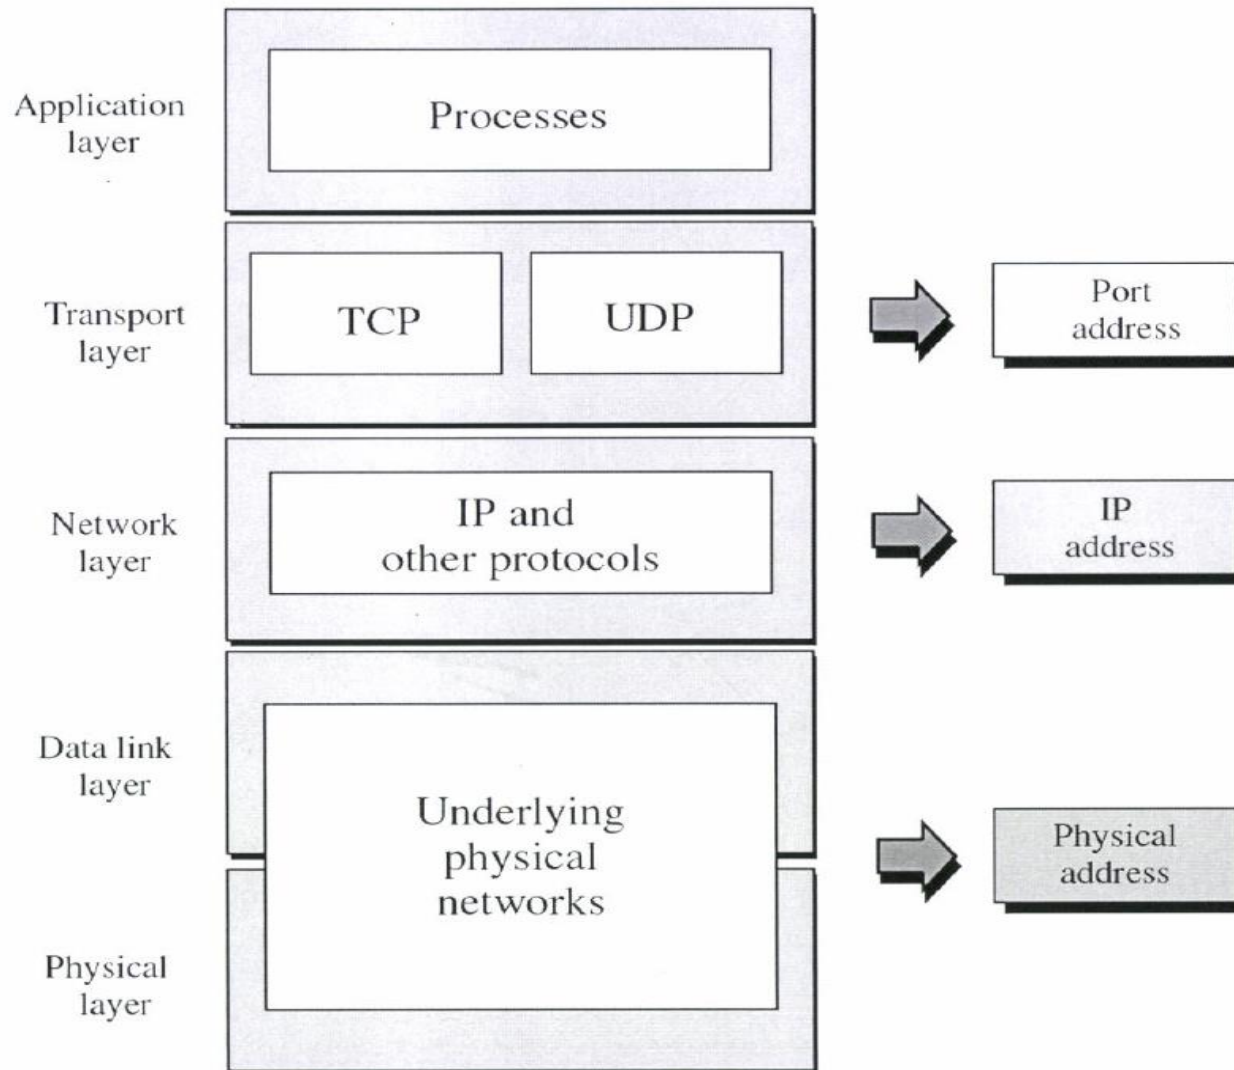

An application-layer protocol defines:

- **types of messages exchanged**,
 - e.g., request, response
- **message syntax**:
 - what fields in messages & how fields are delineated
- **message semantics**
 - meaning of information in fields
- **rules** for when and how processes send & respond to messages

open protocols:

- defined in RFCs, everyone has access to protocol definition
- allows for interoperability
- e.g., HTTP, SMTP

proprietary protocols:

- e.g., Skype, Zoom

What transport service does an app need?

data integrity

- some apps (e.g., file transfer, web transactions) require 100% reliable data transfer
- other apps (e.g., audio) can tolerate some loss

timing

- some apps (e.g., Internet telephony, interactive games) require low delay to be “effective”

throughput

- some apps (e.g., multimedia) require minimum amount of throughput to be “effective”
- other apps (“elastic apps”) make use of whatever throughput they get

security

- encryption, data integrity, ...

Transport service requirements: common apps

application	data loss	throughput	time sensitive?
file transfer/download	no loss	elastic	no
e-mail	no loss	elastic	no
Web documents	no loss	elastic	no
real-time audio/video	loss-tolerant	audio: 5Kbps-1Mbps video:10Kbps-5Mbps	yes, 10's msec
streaming audio/video	loss-tolerant	same as above	yes, few secs
interactive games	loss-tolerant	Kbps+	yes, 10's msec
text messaging	no loss	elastic	yes and no

Internet transport protocols services

TCP service:

- *reliable transport* between sending and receiving process
- *flow control*: sender won't overwhelm receiver
- *congestion control*: throttle sender when network overloaded
- *connection-oriented*: setup required between client and server processes
- *does not provide*: timing, minimum throughput guarantee, security

UDP service:

- *unreliable data transfer* between sending and receiving process
- *does not provide*: reliability, flow control, congestion control, timing, throughput guarantee, security, or connection setup.

Q: why bother? *Why* is there a UDP?

Internet applications, and transport protocols

application	application layer protocol	transport protocol
file transfer/download	FTP [RFC 959]	TCP
e-mail	SMTP [RFC 5321]	TCP
Web documents	HTTP [RFC 7230, 9110]	TCP
Internet telephony	SIP [RFC 3261], RTP [RFC 3550], or proprietary	TCP or UDP
streaming audio/video	HTTP [RFC 7230], DASH	TCP
interactive games	WOW, FPS (proprietary)	UDP or TCP

Securing TCP

Vanilla TCP & UDP sockets:

- no encryption
- cleartext passwords sent into socket traverse Internet in cleartext (!)

Transport Layer Security (TLS)

- provides encrypted TCP connections
- data integrity
- end-point authentication

TLS implemented in application layer

- apps use TLS libraries, that use TCP in turn
- cleartext sent into “socket” traverse Internet *encrypted*
- more: Chapter 8

Application layer: overview

- Principles of network applications
- **Web and HTTP**
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



Web and HTTP

First, a quick review...

- web page consists of *objects*, each of which can be stored on different Web servers
- object can be HTML file, JPEG image, Java applet, audio file,...
- web page consists of *base HTML-file* which includes *several referenced objects, each* addressable by a *URL*, e.g.,

`www.someschool.edu/someDept/pic.gif`

host name

path name

Uniform Record Locator (URL)


protocol://host-name[:port]/directory-path/resource

- *protocol*: http, ftp, https, smtp, rtsp, etc.
- *hostname*: DNS name (or domain name), IP address
- *port*: defaults to protocol's standard port; e.g. http: 80 https: 443
- *directory path*: hierarchical, reflecting file system (on the server side)
- *resource*: Identifies the desired resource

HTTP overview

HTTP: hypertext transfer protocol

- Web's application-layer protocol
- client/server model:
 - *client*: browser that requests, receives, (using HTTP protocol) and “displays” Web objects
 - *server*: Web server sends (using HTTP protocol) objects in response to requests

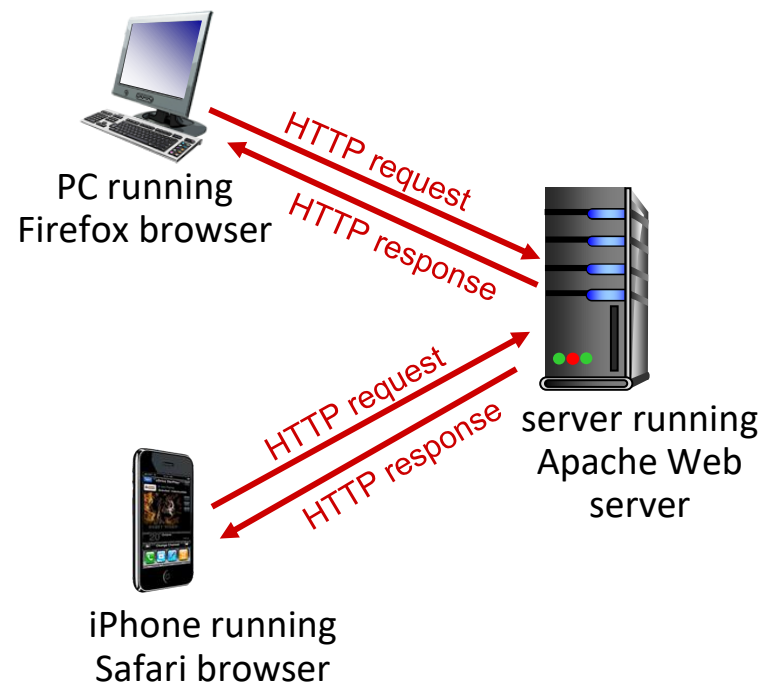

HTTP overview (continued)

HTTP uses TCP:

- client initiates TCP connection (creates socket) to server, port 80
- server accepts TCP connection from client
- HTTP messages (application-layer protocol messages) exchanged between browser (HTTP client) and Web server (HTTP server)
- TCP connection closed

HTTP is “stateless”

- server maintains *no* information about past client requests

aside
protocols that maintain
“state” are complex!

- past history (state) must be maintained
- if server/client crashes, their views of “state” may be inconsistent, must be reconciled

HTTP connections: two types

Non-persistent HTTP

1. TCP connection opened
2. at most one object sent over TCP connection
3. TCP connection closed


downloading multiple objects required multiple connections

Persistent HTTP

- TCP connection opened to a server
- multiple objects can be sent over *single* TCP connection between client, and that server
- TCP connection closed

Non-persistent HTTP: example

User enters URL: `www.someSchool.edu/someDepartment/home.index`
(containing text, references to 10 jpeg images)

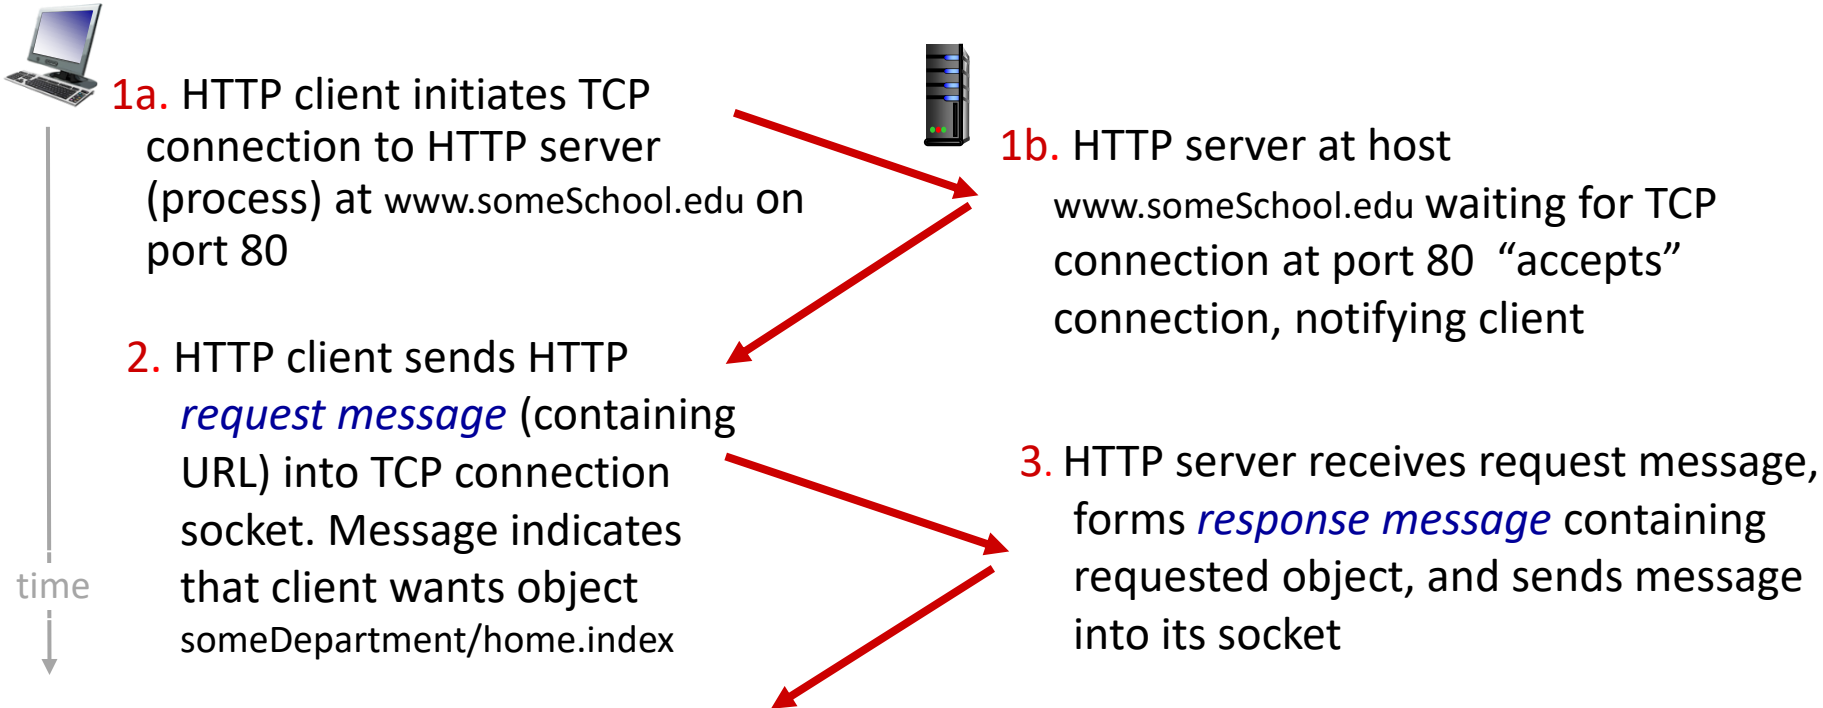

Non-persistent HTTP: example (cont.)

User enters URL: `www.someSchool.edu/someDepartment/home.index`
(containing text, references to 10 jpeg images)



5. HTTP client receives response message containing html file, displays html. Parsing html file, finds 10 referenced jpeg objects

6. Steps 1-5 repeated for each of 10 jpeg objects

4. HTTP server closes TCP connection.




Non-persistent HTTP: response time

RTT (definition): time for a small packet to travel from client to server and back

HTTP response time (per object):

- one RTT to initiate TCP connection
- one RTT for HTTP request and first few bytes of HTTP response to return
- object/file transmission time

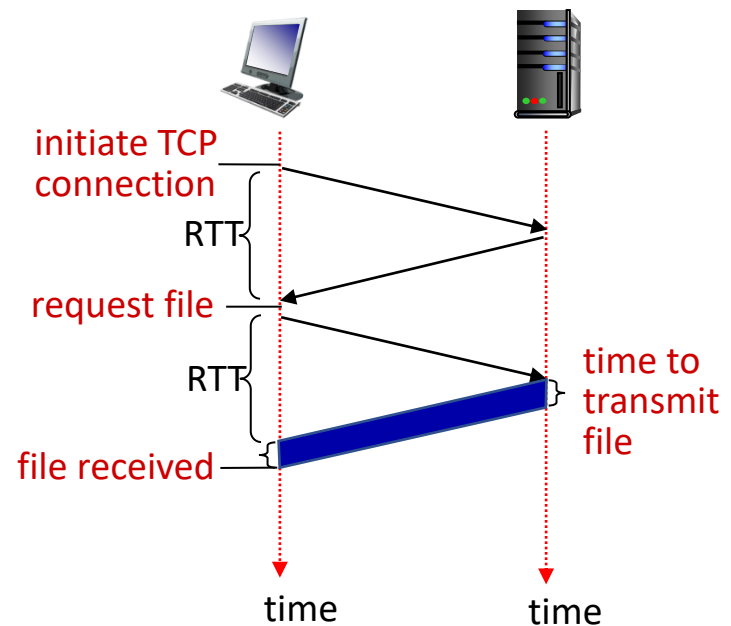

Non-persistent HTTP response time = $2RTT + \text{file transmission time}$

Non Persistent HTTP Shortcomings

- ❖ Most Web pages have multiple objects
 - e.g., HTML file and a bunch of embedded images
- ❖ How do you retrieve those objects (naively)?
 - *One item at a time*
- ❖ Brand New TCP connection per requested object! (even for small object), thus significant TCP resources need to be allocated at both server & client side (TCP buffers)
- ❖ Burden on Web Servers which are servicing multiple simultaneous clients
- ❖ Also each object suffers a delivery delay of 2 RTTs (one to establish the TCP connection and one to request & receive the object)

Persistent HTTP (HTTP 1.1)

Non-persistent HTTP issues:

- requires 2 RTTs per object
- OS overhead for *each* TCP connection
- browsers often open multiple parallel TCP connections to fetch referenced objects in parallel

Persistent HTTP (HTTP1.1):

- server leaves connection open after sending response
- subsequent HTTP messages between same client/server sent over open connection
- client sends requests as soon as it encounters a referenced object
- as little as one RTT for all the referenced objects (cutting response time in half)