

National University of Computer & Emerging Sciences

CS 3001 - COMPUTER NETWORKS

Lecture 07 Chapter 2

12th September, 2023

Nauman Moazzam Hayat
nauman.moazzam@lhr.nu.edu.pk

Office Hours: 02:30 pm till 06:00 pm (Every Tuesday & Thursday)

Chapter 2

Application Layer

A note on the use of these PowerPoint slides:


We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

For a revision history, see the slide note for this page.

Thanks and enjoy! JFK/KWR

All material copyright 1996-2023
J.F Kurose and K.W. Ross, All Rights Reserved

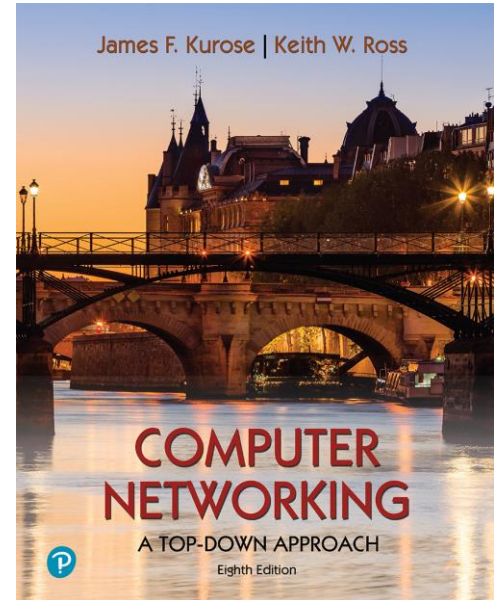

Computer Networking: A Top-Down Approach

8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Application layer: overview

- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP




E-mail

Three major components:

- user agents
- mail servers
- simple mail transfer protocol: SMTP

User Agent

- a.k.a. “mail reader”
- composing, editing, reading mail messages
- e.g., Outlook, iPhone mail client
- outgoing, incoming messages stored on server

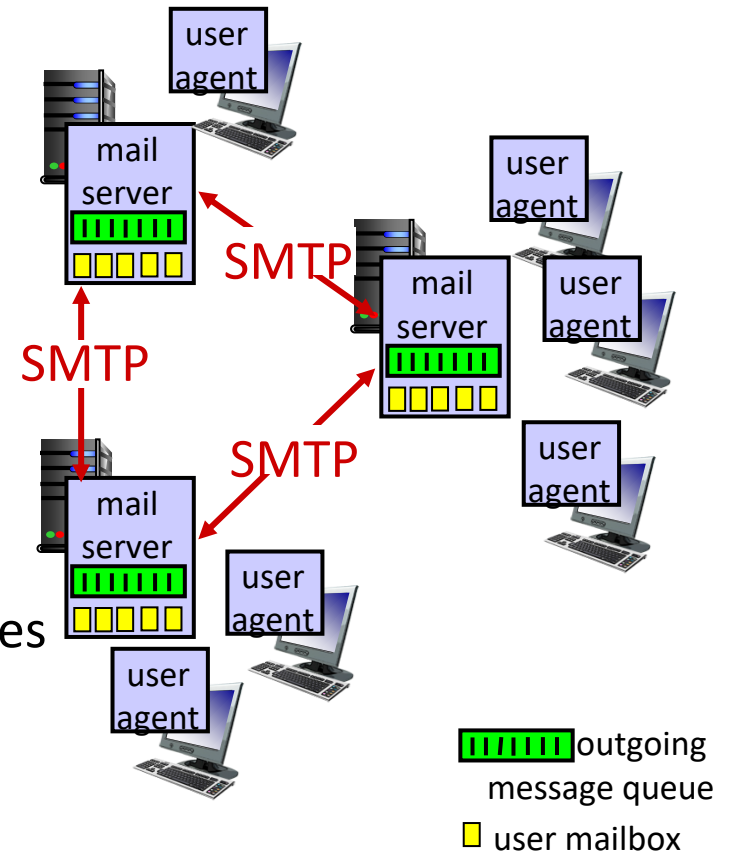


E-mail: mail servers

mail servers:

- *mailbox* contains incoming messages for user
- *message queue* of outgoing (to be sent) mail messages


SMTP protocol between mail servers to send email messages

- **client**: sending mail server
- **“server”**: receiving mail server

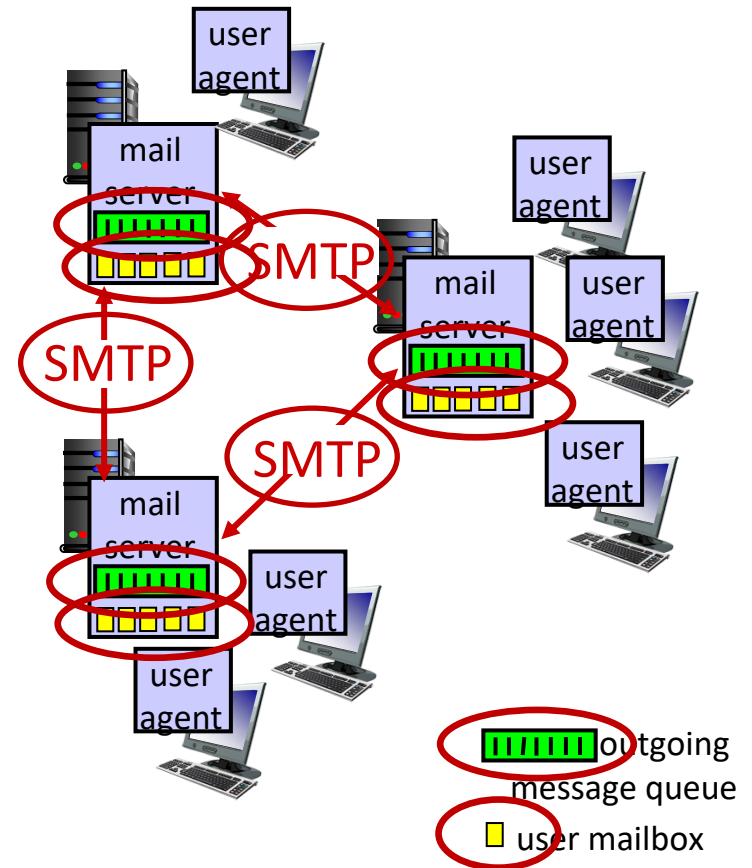


SMTP RFC (5321)

- uses TCP to reliably transfer email message from client (mail server initiating connection) to server, port 25
 - direct transfer: sending server (acting like client) to receiving server
- three phases of transfer
 - SMTP handshaking (greeting)
 - SMTP transfer of messages
 - SMTP closure
- command/response interaction (like HTTP)
 - **commands**: ASCII text
 - **response**: status code and phrase

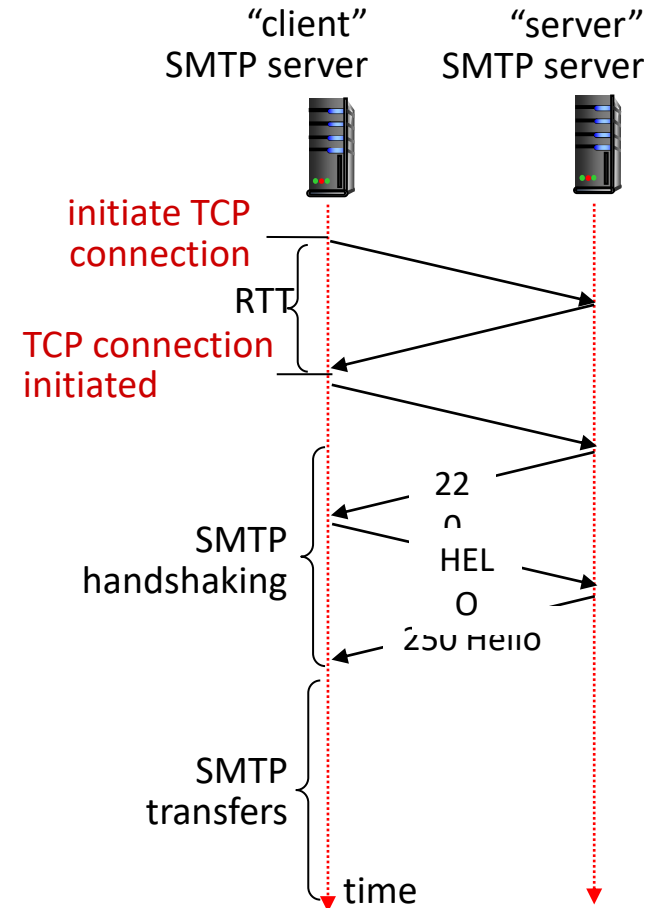

Scenario: Alice sends e-mail to Bob

- 1) Alice uses UA to compose e-mail message "to" bob@some school.edu
- 2) Alice's UA sends message to her mail server using SMTP; message placed in message queue
- 3) client side of SMTP at mail server opens TCP connection with Bob's mail server
- 4) SMTP client sends Alice's message over the TCP connection
- 5) Bob's mail server places the message in Bob's mailbox
- 6) Bob invokes his user agent to read message

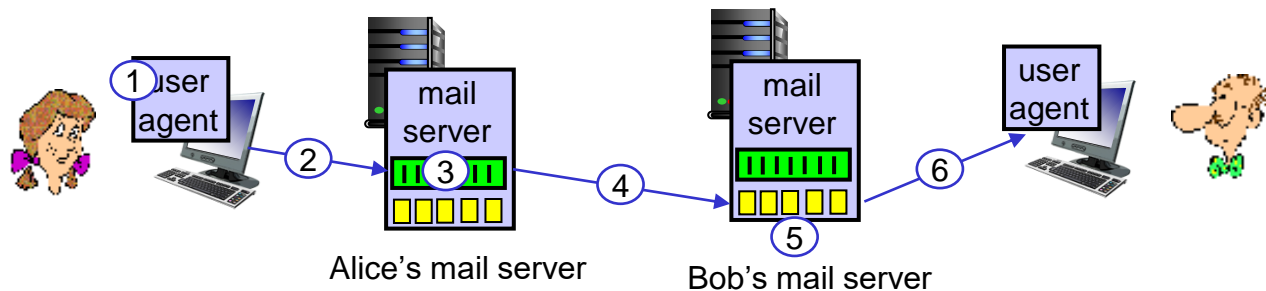

Sample SMTP interaction

S: 220 hamburger.edu

SMTP Interaction

Postmark

SENDING MAIL SERVER (SMTP CLIENT)

RECEIVING MAIL SERVER (SMTP SERVER)

1 Hi there, I want to send an email.

HELO

250 OK

3 Here's who that email is from.

MAIL FROM: hello@homers-dohnuts.com

250 OK

5 Here's who this email is going to.

RCP TO: mary@sweettooth.com

250 OK

7 Alright, here's the message content.

DATA

354

9 That was all the message content.

250 OK

11 That's it! We're done.

QUIT

221

2 Got it! Let's do this.

4 That sender looks good to me.

6 Yep, that recipient looks fine to me.

8 Got it!

10 Cool! The email is on its way!

12 I'm closing the connection.

SMTP: observations

comparison with HTTP:


- HTTP: client pull
- SMTP: client push
- both have ASCII command/response interaction, status codes
- HTTP: each object encapsulated in its own response message
- SMTP: multiple objects sent in multipart message
- SMTP uses persistent connections
- SMTP requires message (header & body) to be in 7-bit ASCII
- SMTP server uses CRLF.CRLF to determine end of message

Mail message format


SMTP: protocol for exchanging e-mail messages, defined in RFC 5321 (like RFC 7231 defines HTTP)

RFC 2822 defines *syntax* for e-mail message itself (like HTML defines syntax for web documents)

- header lines, e.g.,
 - To:
 - From:
 - Subject:these lines, within the body of the email message area different from SMTP MAIL FROM; RCPT TO: commands!
- Body: the “message” , ASCII characters only

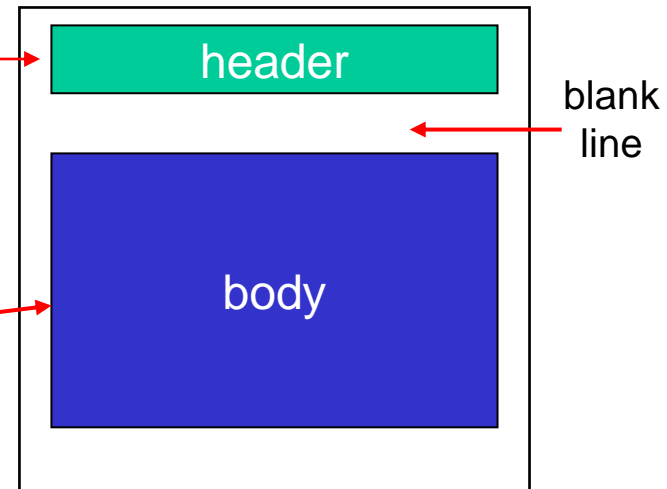

Retrieving email: mail access protocols

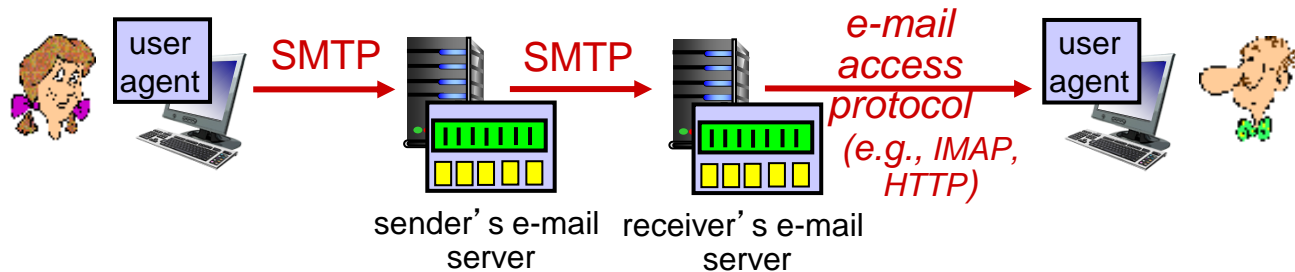

- **SMTP:** delivery/storage of e-mail messages to receiver's server
- mail access protocol: retrieval from server
 - **IMAP:** Internet Mail Access Protocol [RFC 3501]: messages stored on server, IMAP provides retrieval, deletion, folders of stored messages on server
- **HTTP:** gmail, Hotmail, Yahoo!Mail, etc. provides web-based interface on top of SMTP (to send), IMAP (or POP) to retrieve e-mail messages

Application Layer: Overview

- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



DNS: Domain Name System

people: many identifiers:

- SSN, name, passport #

Internet hosts, routers:

- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., cs.umass.edu - used by humans

Q: how to map between IP address and name, and vice versa ?

Domain Name System (DNS):

- *distributed database* implemented in hierarchy of many *name servers*
- *application-layer protocol*: hosts, DNS servers communicate to *resolve* names (address/name translation)
 - *note*: core Internet function, implemented as application-layer protocol
 - complexity at network’s “edge”

DNS: services, structure

DNS services:

- hostname-to-IP-address translation
- host aliasing
 - canonical, alias names
- mail server aliasing
- load distribution
 - replicated Web servers: many IP addresses correspond to one name

Q: Why not centralize DNS?

- single point of failure
- traffic volume
- distant centralized database
- maintenance

A: doesn't scale!

- Comcast DNS servers alone: 600B DNS queries/day
- Akamai DNS servers alone: 2.2T DNS queries/day

Thinking about the DNS

humongous distributed database:

- ~ billion records, each simple

handles many *trillions* of queries/day:

- *many* more reads than writes
- *performance matters*: almost every Internet transaction interacts with DNS - msec count!

organizationally, physically decentralized:

- millions of different organizations responsible for their records

“bulletproof”: reliability, security

