Abelino Athallah Wiyangga / 01

Postman Register

Postman Login

ModelUser
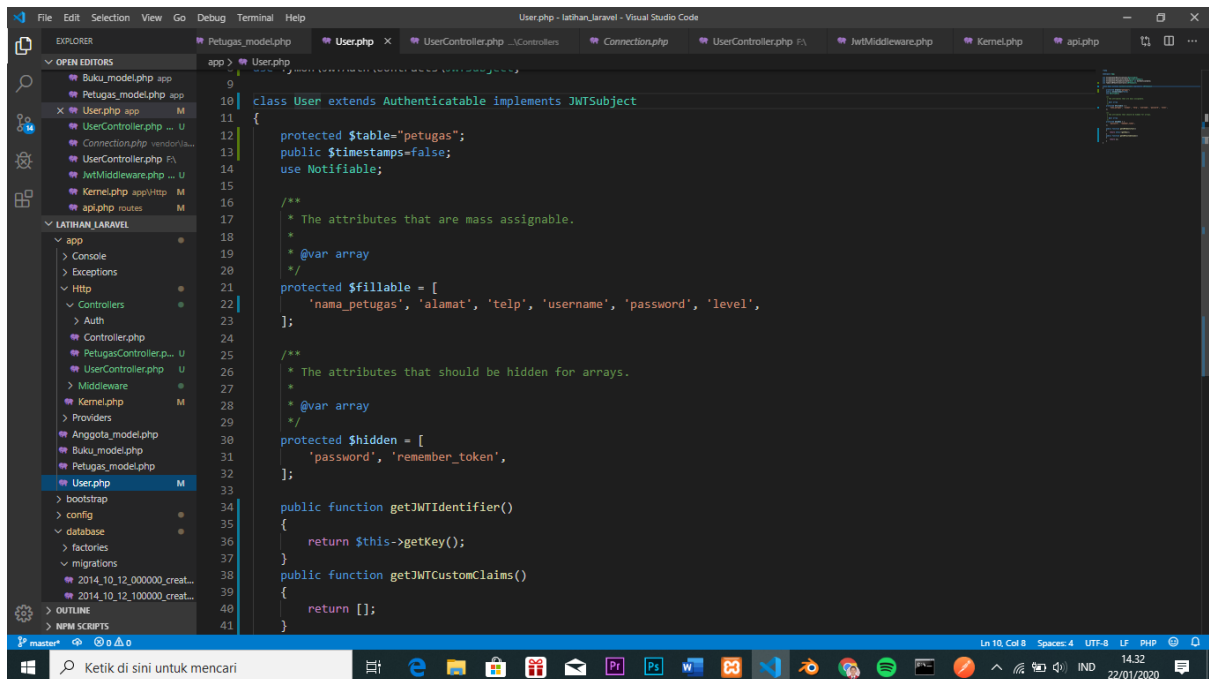
```php
use Tymon\JWTAuth\Contracts\JWTSubject;

class User extends Authenticatable implements JWTSubject
{
    protected $table="petugas";
    public $timestamps=false;
    use Notifiable;

    /**
     * The attributes that are mass assignable.
     *
     * @var array
     */
    protected $fillable = [
        'nama_petugas', 'alamat', 'telp', 'username', 'password', 'level',
    ];

    /**
     * The attributes that should be hidden for arrays.
     *
     * @var array
     */
    protected $hidden = [
        'password', 'remember_token',
    ];

    public function getJWTIdentifier()
    {
        return $this->getKey();
    }
    public function getJWTCustomClaims()
    {
        return [];
    }
}
```
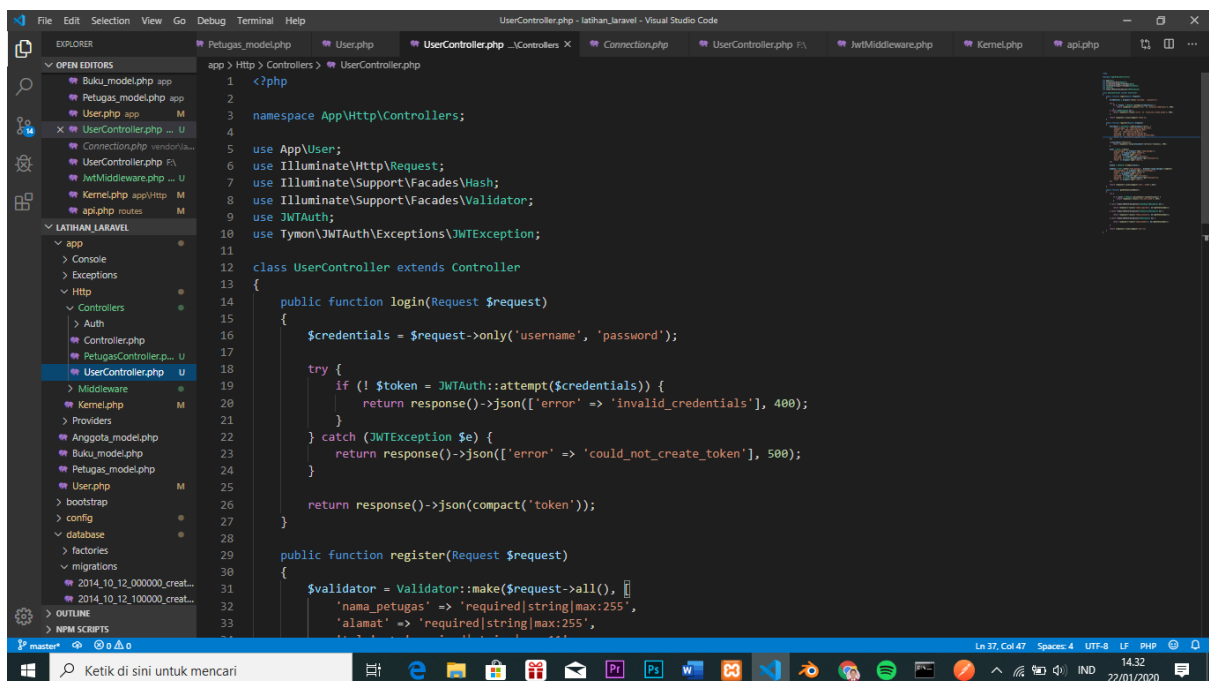
UserController

```php
<?php

namespace App\Http\Controllers;

use App\User;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Hash;
use Illuminate\Support\Facades\Validator;
use JWTAuth;
use Tymon\JWTAuth\Exceptions\JWTException;

class UserController extends Controller
{
    public function login(Request $request)
    {
        $credentials = $request->only('username', 'password');

        try {
            if (! $token = JWTAuth::attempt($credentials)) {
                return response()->json(['error' => 'invalid_credentials'], 400);
            }
        } catch (JWTException $e) {
            return response()->json(['error' => 'could_not_create_token'], 500);
        }

        return response()->json(compact('token'));
    }

    public function register(Request $request)
    {
        $validator = Validator::make($request->all(), [
            'nama_petugas' => 'required|string|max:255',
            'alamat' => 'required|string|max:255',
```
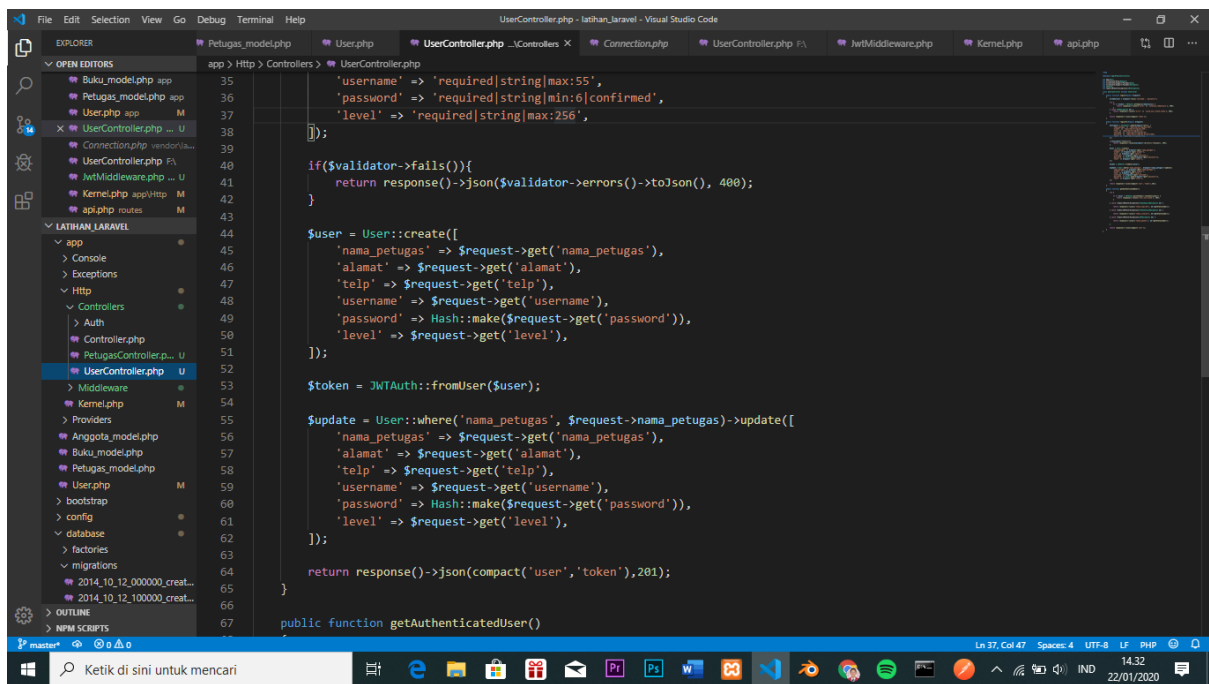
First screenshot code:

```php
                'username' => 'required|string|max:55',
                'password' => 'required|string|min:6|confirmed',
                'level' => 'required|string|max:256',
        ]);

        if($validator->fails()){
            return response()->json($validator->errors()->toJson(), 400);
        }

        $user = User::create([
            'nama_petugas' => $request->get('nama_petugas'),
            'alamat' => $request->get('alamat'),
            'telp' => $request->get('telp'),
            'username' => $request->get('username'),
            'password' => Hash::make($request->get('password')),
            'level' => $request->get('level'),
        ]);

        $token = JWTAuth::fromUser($user);

        $update = User::where('nama_petugas', $request->nama_petugas)->update([
            'nama_petugas' => $request->get('nama_petugas'),
            'alamat' => $request->get('alamat'),
            'telp' => $request->get('telp'),
            'username' => $request->get('username'),
            'password' => Hash::make($request->get('password')),
            'level' => $request->get('level'),
        ]);

        return response()->json(compact('user','token'),201);
    }

    public function getAuthenticatedUser()
```
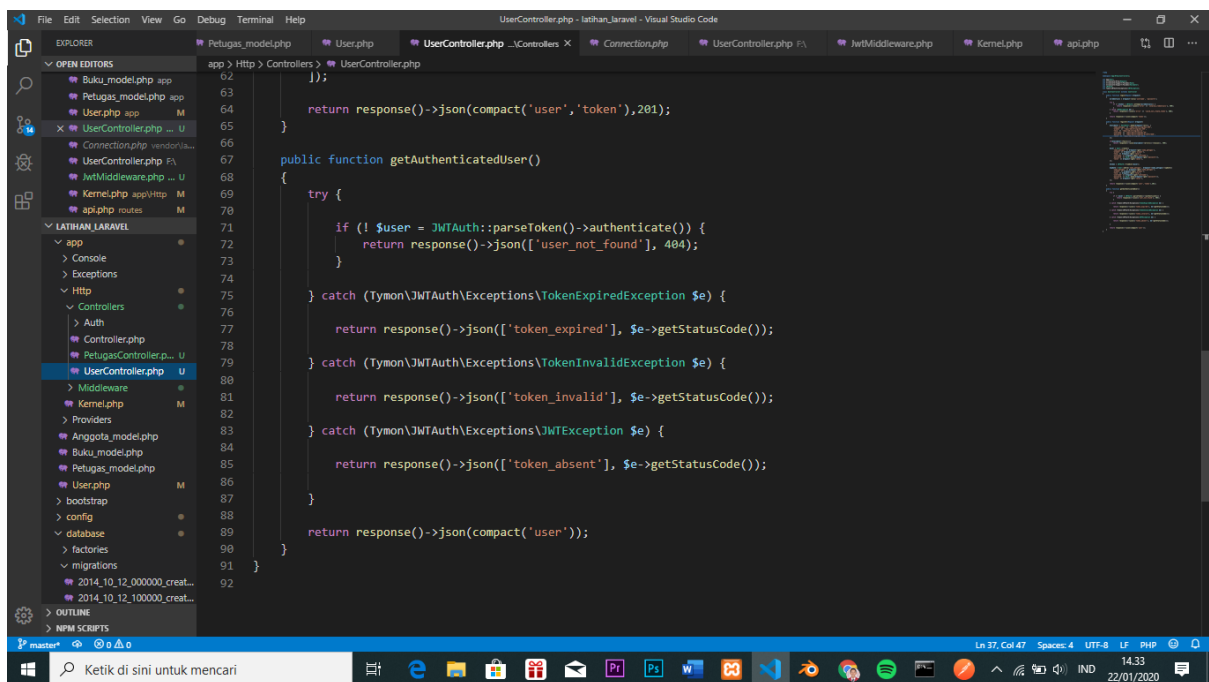

Second screenshot code:

```php
        ]);

        return response()->json(compact('user','token'),201);
    }

    public function getAuthenticatedUser()
    {
        try {

            if (! $user = JWTAuth::parseToken()->authenticate()) {
                return response()->json(['user_not_found'], 404);
            }

        } catch (Tymon\JWTAuth\Exceptions\TokenExpiredException $e) {

            return response()->json(['token_expired'], $e->getStatusCode());

        } catch (Tymon\JWTAuth\Exceptions\TokenInvalidException $e) {

            return response()->json(['token_invalid'], $e->getStatusCode());

        } catch (Tymon\JWTAuth\Exceptions\JWTException $e) {

            return response()->json(['token_absent'], $e->getStatusCode());

        }

        return response()->json(compact('user'));
    }
}
```

Api.php (routes)

```php
<?php

use Illuminate\Http\Request;

/*
|--------------------------------------------------------------------------
| API Routes
|--------------------------------------------------------------------------
|
| Here is where you can register API routes for your application. These
| routes are loaded by the RouteServiceProvider within a group which
| is assigned the "api" middleware group. Enjoy building your API!
|
*/

Route::middleware('auth:api')->get('/user', function (Request $request) {
    return $request->user();
});

Route::post('register', 'UserController@register');
Route::post('login', 'UserController@login');

Route::get('/',function(){
    return Auth::user()->level;
})->middleware('jwt.verify');
```