



eCourts API Specifications

Version 1.0
For High Courts

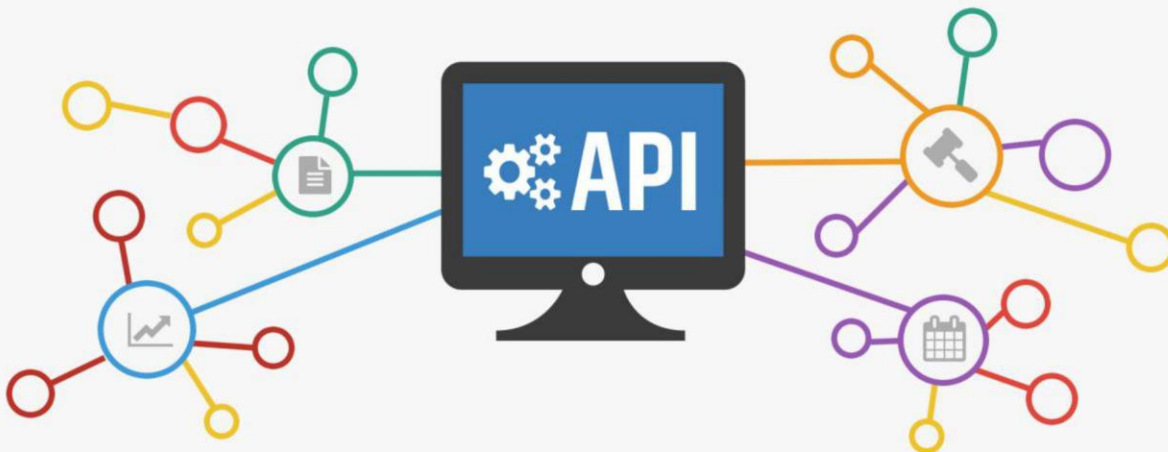


Table of Contents

1	INTRODUCTION	4
2	PURPOSE AND INTENDED AUDIENCE	4
3	ON-BOARDING PROCESS	4
4	LIST OF ECOURT APIS.....	5
	<i>URL Structure</i>	<i>8</i>
	<i>Service Request API</i>	<i>9</i>
5	OVERVIEW API	10
5.1	OVERVIEW API	10
6	CASE SEARCH APIS.....	12
6.1	SEARCH BY CNR API.....	12
6.2	SHOW BUSINESS API	20
6.3	SHOW ORDERS API	23
6.4	SEARCH BY CNR (CURRENT CASE STATUS) API	24
6.5	SEARCH BY CASE NUMBER API	29
6.6	SEARCH BY FILING NUMBER API.....	31
6.7	SEARCH BY PARTY NAME API	33
6.8	SEARCH BY ADVOCATE NAME API	35
6.9	SEARCH BY ADVOCATE BAR REGISTRATION NUMBER API.....	37
6.10	SEARCH BY ACT API	39
7	CAUSELIST API	42
7.1	CAUSELIST BENCH API	42
7.2	CAUSELIST API	44
7.3	SHOW CAUSELIST API.....	46
8	CAVEAT SEARCH APIS	49
8.1	SEARCH BY CAVEATOR/CAVEATEE NAME	49
8.2	CAVEAT HISTORY API	52
9	ESTABLISHMENT APIS.....	56
9.1	HIGH COURT STATE MASTER API.....	56
9.2	DISTRICT MASTER API	58
9.3	BENCH API	60
10	MASTER APIS.....	63
10.1	ACTS MASTER API	63
10.2	CASE TYPE MASTER API	65
11	ANNEXURE-A: ENCRYPTION-DECRYPTION-HASH VALUE.....	68
11.1	HASH VALUE CREATION AND IMPLEMENTATION	68
11.2	ENCRYPTION METHOD FOR REQUEST STRING	68
11.3	FOR SENDING REQUEST TO OPEN API.....	69
11.4	DECRYPTION METHOD FOR RESPONSE STRING	69
11.5	RESPONSE TOKEN VERIFICATION	70
12	ANNEXURE-B: RESPONSE	71
13	SAMPLE CODE FOR ENCRYPTION, DECRYPTION AND HASH VALUE (JAVA AND .NET)	72
13.1	CODE FOR JAVA	72

13.2	CODE FOR .NET	75
14	API CONSUMPTION USING POSTMAN	78
13.1	GETTING ACCESS TOKEN.....	78
13.2	API CONSUMPTION	79
15	API CONSUMPTION USING SAMPLE APPLICATION	82
16	ANNEXURE-C: HTTP STATUS CODE	85

1 Introduction

1. **Introduction:** eCourts project is implemented in more than 3000 Sub-ordinate court complexes and all High Courts of the country. The project is aimed at providing services to Advocates, Individual Litigants, Institutional Litigants (Government, Semi Government Organizations, Banks, Prosecution etc) through various service delivery channels like web sites, mobile app, SMS and automated eMail. Such facilities are provided on occurrence of every event in the respective case.
 2. **Need of Institutional Litigants:** Currently mobile app is available for Advocates or Institutional Litigants who are interested to save and track multiple cases of their interest. The facility in the form of “My Cases” helps the user to create portfolio of the cases of interest and further get automatic alerts on change of Next Date or Status of case. However this facility is available to the individual user on personal mobile. Tracking such cases at central level is demanded by various institutional litigants. Such mechanism may be provided through Open APIs.
 3. **Open API for Institutional litigants:** Open API provided by eCourts shall help institutional litigants to consume eCourts data and use it efficiently into the software developed by respective Institutions to manage their own litigation.
-

2 Purpose and Intended Audience

This document aims to explain the operational procedure on how to use API based interface for accessing the Case data. Also it explains the features and sample method of using this system.

3 On-Boarding Process

Access to open API is restricted and will be through process prescribed by e-Committee. Please refer document **Subscriber creation for eCourts domain on National API Exchange Platform**. In this document steps are provided to create new **Subscriber** login on **NAPIX** platform. On approval by e-Committee or CPC of the respective High Court following information will be securely shared with the department.

- Authentication Key (For Encryption/Decryption of Data)
Using the subscriber user Name and Authentication Key, subscriber can access the data using **NAPIX** platform.

4 List of eCourt APIs

Sr. No	API Name	API Web Service Name	Description
Overview API			
1	Overview	https://delhigw.napix.gov.in/nic/ecourts/overview/	API provides details about current eCourts API specification including version, contact information, license information, URI scheme, etc.
Case Search API			
1	Search by CNR Number	https://delhigw.napix.gov.in/nic/ecourts/hc-cnr-api/	API provides complete history of the case including, case details, party names, current status, daily proceedings, orders, judgments, IA details and process issued information based on CNR number of the case.
2	Show Business	https://delhigw.napix.gov.in/nic/ecourts/hc-show-business-api/	API provides details of business transacted on a particular date based on CNR number and date for which business is needed.
3	Show Order	https://delhigw.napix.gov.in/nic/ecourts/hc-order-api/	API provides facility to view Order or Judgment delivered on a particular date based on CNR number and order date .
4	Current Status	https://delhigw.napix.gov.in/nic/ecourts/hc-current-status-api/	API provides only the current status like next date, stage or decision date of the case based on CNR number . Instead of getting the complete history of case which is more elaborate, this API provides the current status of the case in short. This API provides facility to request single CNR or comma separated multiple CNRs in single request.
5	Search by Case Number	https://delhigw.napix.gov.in/nic/ecourts/hc-case-search-api/	API provides list of cases from a High court establishment matching the Case Registration Number. Input for this API is the Establishment Code, Case Registration Number, Case Registration Year , and other details.
6	Search by Filing Number	https://delhigw.napix.gov.in/nic/ecourts/hc-filing-api/	API provides list of cases from a High court establishment matching the Case Filing Number. Input for this API is the Establishment Code, Case Filing Number, Case Filing Year and other details.
7	Search by Party Name	https://delhigw.napix.gov.in/nic/ecourts/hc-party-name-api/	API provides list of cases from a High court establishment matching

			name of the party. Input for this API is Establishment Code, Litigants Name, Case Registration Year, Status of the Case (Pending or Disposed) and other details. The litigants name may be petitioner's name or respondent's name or an extra party name. The search string for litigant name may consist of full name of the party or even few characters (minimum 3) for searching.
8	Search by Advocate Name	https://delhigw.napix.gov.in/nic/ecourts/hc-advocate-name-api/	API provides list of cases from a High court establishment matching name of the Advocate. Input for this API is Establishment Code, Advocate's Name, Case Registration Year, Status of the Case (Pending or Disposed) and other details. The Advocate's name may be petitioner's advocate name or respondent's advocate name or an extra party advocate name. The search string for advocate name may consist of full name of the Advocate or even few characters (minimum 3) for searching.
9	Search by Advocate Bar Regn. Number	https://delhigw.napix.gov.in/nic/ecourts/hc-advocate-bar-reg-api/	API provides list of cases from a High court establishment for a given Advocate Registration number. Input for this API is Establishment Code, Advocate's Bar Registration Year, Case Registration Year, Status of the Case (Pending or Disposed) and other details. The Advocate may be petitioner's advocate or respondent's advocate or an extra party advocate.
10	Search by Act	https://delhigw.napix.gov.in/nic/ecourts/hc-act-details-api/	API provides list of cases from a High court establishment matching the Act. Input for this API is Establishment Code, National Act Code, Case Registration Year, Status of the Case (Pending or Disposed) and other details.
Causelist API			
1	Causelist Bench	https://delhigw.napix.gov.in/nic/ecourts/hc-causelist-bench-api/	API provides list of benches based on causelist date. Input for this API is Establishment Code, Causelist Date and other details.
2	Cause List	https://delhigw.napix.gov.in/nic/ecourts/hc-causelist-details-api/	API provides cases listed (CauseList) on a particular date. Input for this API is Establishment Code, Cause List Date, Bench id and other details. The format of Cause List may vary from State to State. Sequence of cases is provided in the API, however it is advisable to cross check the cause list vis-à-vis as available on

			the hcservices.ecourts.gov.in portal or mobile app for better understanding and accuracy and refer the cause list available on the portal.
3	Show CauseList	https://delhigw.napix.gov.in/nic/ecourts/hc-show-causelist-api/	API provides facility to view CauseList delivered on a particular date based on Establishment Code, Bench ID, CauseList ID and CauseListdate .

Caveat Search API

1	Search by Caveat Anywhere	https://delhigw.napix.gov.in/nic/ecourts/hc-caveat-name-api/	API provides list of caveats from a High court establishment matching name of the party. Input for this API is Establishment Code, Party Name, Search Type and other details. Search type provides facility to search the name string anywhere or starting with the input characters.
2	Caveat History	https://delhigw.napix.gov.in/nic/ecourts/hc-caveat-details-api/	API provides complete history of the caveat from a High court establishment matching the Caveat Code. Input for this API is Establishment Code, Caveat Code and other details. Every Caveat has a unique 15 digit Caveat Code within the establishment.

Establishment API

1	State	https://delhigw.napix.gov.in/nic/ecourts/hc-state-api/	API provides list of the states and relevant state codes used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id , token,request_str,version to get the list of the states.
2	District	https://delhigw.napix.gov.in/nic/ecourts/hc-district-api/	API provides list of the Districts and relevant District codes pertaining to the given state used in the eCourts project for further accessing relevant APIs. Input for this API is State Code and other details.
3	Bench Master	https://delhigw.napix.gov.in/nic/ecourts/hc-bench-master-api/	API provides list of all benches of High Court.

Master API

1	Act	https://delhigw.napix.gov.in/nic/ecourts/hc-act-master-api/	Every Act has unique National Act Code. API provides list of the Acts and relevant National Act Codes used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id , token,request_str,version to get the list of all the Acts with the respective National Act codes.
2	Case Type	https://delhigw.napix.gov.in/nic/ecourts/hc-case-type-master-api/	API provides list of the Case Types (referred as type_name) and relevant Case Type Codes (referred as case_type) used in the establishment for further accessing relevant APIs. Input for this API is Establishment Code and other details. Type Name and Case Type retrieved using this API can be used to access the case data using various Case Search APIs like Search by Case Registration Number, Filing Number etc.

URL Structure

APIs can be accessed using following URL structure


```
https://delhigw.napix.gov.in/nic/ecourts/api_filename?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

Following Four parameters to be passed for every API

Sr.No.	Element	Description
1	request_str	Request String variable shall contain key – value pair of variables used as input to respective API. Single string request_str variable is to be created by joining all input key-value pair of variables separated by pipe (). String value is encrypted using the Authentication Key and algorithm provided in Annexure A. Authentication Key is provided by e-Committee or respective High Court. Example: request_str= encrypted(cino=value business_date=value)
2	dept_id	Department ID same as Subscriber User name, passed through the variable dept_id .
3	request_token	Hash value of the Request String (request_str) is to be created using mechanism provided in Annexure 'A'.
4	version	It contains value of the API version.

Service Request API

To access the service requests like search by CNR, Search by party name etc. The user application should have the valid authentication token. With the authentication token he has to send the request for the services with the relevant parameters to get the response or result.

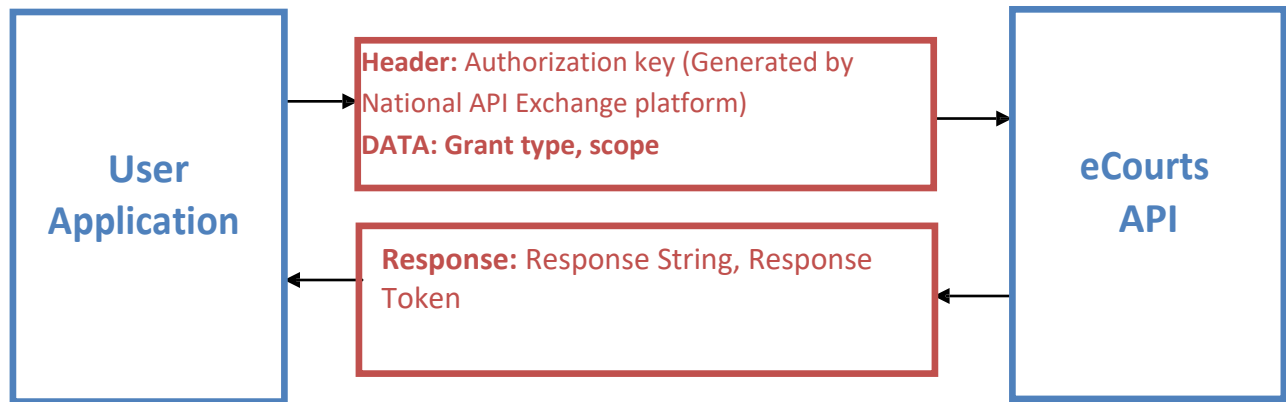

5 Overview API

5.1 Overview API

API provides details about current eCourts API specification including version, contact information, license information, URI scheme, etc.

5.1.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/overview/overview?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

5.1.2 HTTP Method *GET*

5.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	dept_id	M	N	dept_id same as Scubscriber User name
2	request_str	M	Y	Doesn't require any input string (eg. request_str="")
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. " v1.0 ".

5.1.4 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

5.1.5 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
overview	This document describe a RESTful API for eCourt Projects	Overview
version	v1.0	API Version
contact	eCommittee Supreme Court of India, E-mail-	Contact Information
	ecommittee@aij.gov.in	
license	Apache 2.0	License Information
uri_scheme	HTTPS	URI scheme
consumes	application/json	
produces	application/json	

5.1.6 Sample Response

```
{
  "overview": "This document describe a RESTful API for eCourt Projects",
  "version": "v1.0",
  "contact": "eCommittee Supreme Court of India, E-mail-ecommittee@aij.gov.in",
  "license": "Apache 2.0",
  "uri_scheme": "HTTPS",
  "consumes": "application/json",
  "produces": "application/json"
}
```

5.1.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
629	UNEXPECTED_ERROR	Service unresponsive.

6 Case Search APIs

6.1 Search by CNR API

API provides complete history of the case including, case details, party names, current status, daily proceedings, orders, judgments, IA details and process issued information based on **CNR number** of the case.

6.1.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-cnr-  
api/CNR?dept_id=dept_id&request_str=request_str&request_token=request  
_token&version=version
```

6.1.2 HTTP Method *GET*

6.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key-value pair of cino .
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. " v1.0 ".

6.1.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such **request_str=encrypted (cino=value)**

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR.

6.1.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.

2. **response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version:** Contains version of API.

6.1.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description	PrivayConcern
date_of_filing	2019-01-02	Filing date of case	
cino	JKHC020000132019	16 digit unique CNR number of case	
dt_regis	2019-01-03	Registration date of case	
type_name_reg	PIL	Registration Case type name	
type_name_fil	PIL	Filing Case Type name	
case_type_id	153	Case Type code	
fil_no	11	Filing number of case	
fil_year	2019	Filing year of case	
reg_no	1	Registration number of case	
reg_year	2019	Registration year of case	
date_first_list	2019-02-07	First hearing date	
date_next_list	2019-07-09	Next hearing date	
pend_disp	D	Character value 'P' or 'D'. P for pending cases and D for disposed cases	
date_of_decision	2019-07-09	Date of decision (When case is disposed). If the case is pending Null value will be returned.	
disposal_type	Disposed Off	Disposal type	
disp_nature	Allowed	Reason of disposal. If the case is pending Null value will be returned.	
bench_type	2	Bench type	
causelist_type	Advance	CauseList Type name	
bench_name	Division Bench	Bench Name	
Judicial_branch	PUBLIC INTEREST LITIGATION (WPPIL)	Judicial Branch	
coram	HON'BLE MR. JUSTICE DHIRAJ SINGH THAKUR , HON'BLE MRS. JUSTICE		

	SINDHU SHARMA		
short_order	DATE FIXED		
bench_id	1620	Bench id	
court_est_name	JAMMU AND KASHMIR	Court establishment	
est_code	JKHC02	Court establishment code	
purpose_name	FOR ADMISSION	Purpose or current stage of the case	
state_name	JAMMUKASHMIR	State Name	
dist_name	SRINAGAR	District Name	
pet_name	COURT ON ITS OWN MOTION	Main petitioner's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.	Petitioner name are masked
pet_adv	NEMO	Main petitioner's advocate name	
pet_legal_heir	N	'Y' means petitioner has legal heir	
res_name	STATE AND ORS.	Main respondent's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.	Respondent name is masked
res_adv	Adv. Gopalkar R.C.	Main respondent's advocate name	
res_legal_heir	N	Y means respondent has legal heir	
fir_no	67	FIR number	
police_station		Police station	
fir_year	2009	FIR year	
lower_court_name	DJ, MAHARAJGANJ	Lower court designation	
lower_court_caseno	Criminal Appeal - 0000066 - 2017	Lower court case number	
lower_court_dec_dt	2017-12-06	Lower court decision date	
trial_lower_court_name	DJ , JAUNPUR	Trial Court designation	
trial_lower_court_caseno	Motor Vehicle Act - 0000271 - 2016	Trial Court Case Number	
trial_lower_court_dec_dt	2017-10-18	Trial Court decision date	

date_last_list	2019-05-01	Last Proceeding Date	
main_matter_cino	JKHC020065332017	Main case CNR, If case is an application.	
main_matter	Case Number - CDLSW/114/2017		
date_filing_disp			
reason_for_rej			
pet_extra_party		Nested response for more than one petitioner.	
party_no1	Aalka Ramdas Gore	1 st extra petitioner name if any	Names of Extra Petitioner is masked
party_no2	Ramdas Ashruba Gore	2 nd extra petitioner name if any	
res_extra_party		Nested response for more than one respondent.	
party_no1	Ramesh Ramdas Gore	1 st extra respondent name if any	Names of Extra respondent is masked
party_no2	Senior Divisional Manager, ICICI_Lombard General Insurance Co. Ltd.	2 nd extra respondent name if any	
act		Nested response for more than one acts.	
act1		1 st Act and Section details	
actname	WPPIIL	1 st Act name	
section	1A	Sections mentioned in 1 st Act.	
historyofcasehearing		Nested response for more than one court proceedings.	
sr_no1		1 st Proceeding details	
judge_name		Judge name	
business_date		Business date. (Business details for this date can be accessed by using Show Business API)	Business on date details are not visible
hearing_date	2019-02-07	Next hearing date	
purpose_of_listing	FOR ADMISSION	Purpose or stage of listing	
causelist_type			
sr_no2		2 nd Proceeding details	

judge_name	HON'BLE THE CHIEF JUSTICE , HON'BLE MR. JUSTICE TASHI RABSTAN	Judge designation	
business_date	2019-02-08	Business date	Business on date details are not visible
hearing_date	2019-03-06	Next hearing date	
purpose_of_listing	FOR ADMISSION	Purpose or stage of listing	
causelist_type	Regular		
interimorder		Nested response for Interim Orders	
sr_no1		1 st order details	
order_no	1	Order number	
order_date	2019-02-08	Order date	
order_details	COPY OF ORDERS	Order details	PDF File cannot be opened
sr_no2		2 nd order details	
order_no	2	Order number	
order_date	2019-03-06	Order date	
order_details	COPY OF ORDERS	Order details	PDF File cannot be opened
finalorder		Nested response for Final Order	
sr_no1		1 st order details	
order_no	1	Order number	
order_date	2019-05-01	Order date	
order_details	COPY OF ORDERS	Order details	PDF File cannot be opened
iafiling		Nested response for Interlocutory Applications	
sr_no1		1 st IA details	
ia_number	IA/1/2018	IA (interlocutory application) number	
ia_pet_name	JAMMU AND KASHMIR GRAMEEN BANK ARUN KUMAR SHARMA AND ORS.	Party name	
ia_pend_disp	P	Character value 'P' or 'D'. P for pending IAs and D for disposed IAs	
date_of_filing	2018-12-20	Filing date of IA	

link_cases		Nested response for linked/connected cases .	
sr_no1		1 st linked case	
filing_number	LPA/9461/2018	Linked case filing number	
case_number	LPA/221/2018	Linked case registration number	
sr_no2		2 nd linked case	
filing_number	LPA/3704/2018	Linked case filing number	
case_number	LPA/43/2018	Linked case registration number	
objections			
objection1	All Objections are Complied	Objection	
scrutiny_date	2019-01-03	Scrutiny Date	
objections_compliance_by_date		Objections Compliance Date	
obj_receipt_date	2019-04-11	Objection Receipt Date	
category_details			
category	DB LPA(SW) (200)	Category	
sub_category	MATTERS RELATING TO MINOR PENALTIES. (2)	Sub Category	

6.1.7 Sample Response

```
{
  "date_of_filing": "2019-01-02",
  "cino": "JKHC020000132019",
  "dt_regis": "2019-01-03",
  "type_name_fil": "PIL",
  "type_name_reg": "PIL",
  "case_type_id": 153,
  "fil_no": "11",
  "fil_year": "2019",
  "reg_no": "1",
  "reg_year": "2019",
  "date_first_list": "2019-02-07",
  "date_next_list": "2019-07-09",
  "pend_disp": "D",
  "date_of_decision": "2019-07-09",
  "disposal_type": "Disposed Off",
  "bench_type": 2,
  "causelist_type": "Advance",
  "bench_name": "Division Bench",
  "judicial_branch": "PUBLIC INTEREST LITIGATION (WPIL)",
  "coram": "HON'BLE MR. JUSTICE ALI MOHAMMAD MAGREY , HON'BLE MRS.
```

```

JUSTICE SINDHU SHARMA",
  "short_order": "DATE FIXED",
  "bench_id": "1620",
  "court_est_name": "JAMMU AND KASHMIR",
  "est_code": "JKHC02",
  "state_name": "JAMMUKASHMIR",
  "dist_name": "SRINAGAR",
  "purpose_name": "FOR ADMISSION (After Notice)",
  "pet_name": "COURT ON ITS OWN MOTION",
  "pet_adv": "NEMO",
  "pet_legal_heir": "N",
  "res_name": "STATE AND ORS.",
  "res_adv": "",
  "res_legal_heir": "N",
  "main_matter": "",
  "fir_no": "",
  "police_station": null,
  "fir_year": "",
  "lower_court_name": "",
  "lower_court_caseno": "",
  "lower_court_dec_dt": "",
  "trial_lower_court_name": "",
  "trial_lower_court_caseno": "",
  "trial_lower_court_dec_dt": "",
  "date_last_list": "2019-07-09",
  "main_matter_cino": "",
  "date_filing_disp": "",
  "reason_for_rej": "",
  "acts": {
    "act1": {
      "actname": "WPPIL",
      "section": "1A"
    }
  },
  "pet_extra_party": [],
  "res_extra_party": [],
  "historyofcasehearing": {
    "sr_no1": {
      "judge_name": "",
      "business_date": "",
      "hearing_date": "2019-02-07",
      "purpose_of_listing": "FOR ADMISSION (After Notice)"
    },
    "sr_no2": {
      "judge_name": "HON'BLE THE CHIEF JUSTICE , HON'BLE MR.
JUSTICE TASHI RABSTAN",
      "business_date": "2019-02-08",
      "hearing_date": "2019-03-06",
      "purpose of listing": "FOR ADMISSION (After Notice)",

```

```

        "causelist_type": "Advance"
    },
    "sr_no3": {
        "judge_name": "HON'BLE THE CHIEF JUSTICE , HON'BLE MR.
JUSTICE TASHI RABSTAN",
        "business_date": "2019-03-06",
        "hearing_date": "2019-04-10",
        "purpose_of_listing": "FOR ADMISSION (After Notice)",
        "causelist_type": "Advance"
    },
    "sr_no4": {
        "judge_name": "HON'BLE MR. JUSTICE DHIRAJ SINGH THAKUR ,
HON'BLE MRS. JUSTICE SINDHU SHARMA",
        "business_date": "2019-04-10",
        "hearing_date": "2019-05-01",
        "purpose_of_listing": "FOR ADMISSION (After Notice)",
        "causelist_type": "Advance"
    },
    "sr_no5": {
        "judge_name": "HON'BLE MR. JUSTICE DHIRAJ SINGH THAKUR ,
HON'BLE MRS. JUSTICE SINDHU SHARMA",
        "business_date": "2019-05-01",
        "hearing_date": "2019-07-09",
        "purpose_of_listing": "FOR ADMISSION (After Notice)",
        "causelist_type": "Advance"
    },
    "sr_no6": {
        "judge_name": "HON'BLE MR. JUSTICE ALI MOHAMMAD MAGREY ,
HON'BLE MRS. JUSTICE SINDHU SHARMA",
        "business_date": "2019-07-09",
        "hearing_date": "",
        "purpose_of_listing": "Disposed",
        "causelist_type": ""
    }
},
"interimorder": {
    "sr_no1": {
        "order_no": "1",
        "order_date": "2019-02-08",
        "order_details": "COPY OF ORDERS"
    },
    "sr_no2": {
        "order_no": "2",
        "order_date": "2019-03-06",
        "order_details": "COPY OF ORDERS"
    },
    "sr_no3": {
        "order_no": "3",
        "order_date": "2019-04-10",

```

```

        "order_details": "COPY OF ORDERS"
    },
    "sr_no4": {
        "order_no": "4",
        "order_date": "2019-05-01",
        "order_details": "COPY OF ORDERS"
    }
},
"finalorder": null,
"iafiling": null,
"link_cases": null,
"objections": {
    "objection1": "All Objections are Complied",
    "scrutiny_date": "2019-01-03",
    "objections_compliance_by_date": null,
    "obj_reciept_date": null
},
"category_details": {
    "category": "DB PUBLIC INTEREST LITIGATION - PIL  ( 210 )"
}
}

```

6.1.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
629	UNEXPECTED_ERROR	Service unresponsive
628	RECORD_NOT_FOUND	Record is not available.
632	INVALID_VERSION	Invalid version of API

6.2 Show Business API

API provides details of business transacted on a particular date based on **CNR number** and **date** for which business is needed. Business date is the date of court proceedings which may be available from the Case History.

6.2.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-show-business-  
api/showBusiness?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.2.2 HTTP Method **GET**

6.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of cino and business_date .
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”

6.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(cino=value|business_date=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR.
2	business_date	M	Business date in yyyy-mm-dd format.

6.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API

6.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description	Privacy Concern
desgname	Justice	Designation of the Judge	Business details are not visible
case_number	LPA/0000057/2018	Case Number	
business_date	2018-05-31	Business Date	
business	Issue Notice	Business happened in the respective case.	
short_order_det		Short order details	

6.2.7 Sample Response

```
{
  "desgname": "Justice",
  "case_number": "AR/0000123/2019",
  "business_date": "2020-01-15",
  "business": "Issue Notice",
  "short_order_det": ""
}
```

6.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
601	INVALID_DATE	Date of business is not in correct format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.3 Show Orders API

API provides facility to view Order or Judgment delivered on a particular date based on **CNR number** and **order date**. Order date is the date of Order or Judgment delivered in the case which may be available from the Case History.

6.3.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-order-api/order?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.3.2 HTTP Method *GET*

6.3.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of cino,order_no, order_date in (yyyy-mm-dd) format.
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanisis provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

6.3.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(cino=value|order_no=value|order_date=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR.
2	order_no	M	Order Number
3	order_date	M	Order date in yyyy-mm-dd format.

6.3.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

6.3.6 Response

Sample Response	Description	Privacy Concern
.pdf file will be shared	.pdf file for the Order or Judgment will be provided in response.	PDF File cannot be opened

6.3.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
602	INVALID_ORDER_NO	The order number is invalid.
601	INVALID_DATE	Date of order is not in correct
		format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.4 Search by CNR (Current Case Status) API

API provides only the current status like next date, stage or decision date of the case based on **CNR number**. Instead of getting the complete history of case which is more elaborate, this API provides the current status of the case in short. This API is used to update the current status of the case and may be used in batch processing mode periodically. Single CNR or Multiple CNRs can be sent as request parameter to get the current status of the Case(s).

6.4.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-current-status-api/currentStatus
```

6.4.2 HTTP Method *POST*

6.4.3 Post Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of cino .
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. " v1.0 ".

6.4.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such **request_str=encrypted(cino=value)**

Ex: request_str=encrypted(cino=JKHC020000012018) --- If single CNR is sent.

request_str=encrypted(cino=JKHC020000012018, JKHC020000212018) --- If multiple CNRs are sent.

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	cino	M	16 characters alphanumeric CNR. More than one CNR can be passed as comma separated. (Maximum 500 CNRs can be sent at a time)

6.4.5 Response

JSON response contains following parameters.

1. **response_str:** This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version:** Contains version of API.

6.4.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description	Privacy Concern
case1		Nested response for Cases	
date_of_filing	2018-05-28	Filing date of case	
cino	JKHC020045882018	16 digit unique CNR number of case	
dt_regis	2019-05-28	Registration date of case	
type_name	LPA	Case type	
fil_no	3951	Filing number of case	
fil_year	2018	Filing year of case	
reg_no	57	Registration number of case	
reg_year	2018	Registration year of case	
date_first_list	2018-05-30	First hearing date	
date_next_list	2018-07-18	Next hearing date	
pend_disp	P	P=Pending case D=Disposed case	
date_of_decision		Date of decision (When case is disposed). If the case is pending Null value will be returned.	
disp_nature		Reason of disposal. If the case is pending Null value will be returned.	
bench_id	1304	Bench ID	
purpose_name	FOR ADMISSION	Purpose or current stage of the case	
pet_name	GHARU RAM AND ORS.	Main petitioner's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.	Petitioner name is masked
res_name	STATE TH.HOUSING AND URBAN DEVELOPMENT DEPTT.AND ORS.	Main respondent's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.	Respondent name is masked
date_last_list	2018-05-31	Last Proceeding Date	
causelist_type	Regular	CauseList Type	
bench_name	Division Bench	Bench Name	
judicial_branch	LETTERS PATENT APPEAL (LPA)	Judicial Branch	

coram	HON'BLE MR. JUSTICE TASHI RABSTAN , HON'BLE MR. JUSTICE SANJAY KUMAR GUPTA		
short_order	DATE FIXED	Short Order	
cases2			
date_of_filing	2018-01-11	Filing date of case	
cino	UPHC010045882018	16 digit unique CNR number of case	
dt_regis	2018-01-11	Registration date of case	
type_name	A482	Case type	
fil_no	875	Filing number of case	
fil_year	2018	Filing year of case	
reg_no	875	Registration number of case	
reg_year	2018	Registration year of case	
date_first_list	2018-01-15	First hearing date	
date_next_list	2018-01-15	Next hearing date	
pend_disp	P	P=Pending case D=Disposed case	
date_of_decision		Date of decision (When case is disposed). If the case is pending Null value will be returned.	
disp_nature	Dismiss	Reason of disposal. If the case is pending Null value will be returned.	
bench_id	1007	Bench ID	
purpose_name	FOR ADMISSION	Purpose or current stage of the case	
pet_name	ASHOK NAGAR	Main petitioner's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.	Petitioner name is masked
res_name	STATE OF U.P. AND ANOTHER	Main respondent's name. In some sensitive cases or disputes of private nature value will be shared as xxxxxx.	Respondent name is masked
date_last_list		Last Proceeding Date	
causelist_type	Regular	CauseList Type	

bench_name	Single Bench	Bench Name	
judicial_branch	Criminal Misc.	Judicial Branch	
coram	RAJUL BHARGAVA		
short_order		Short Order	

6.4.7 Sample Response

```
{
  "cases1": {
    "date_of_filing": "2018-05-28",
    "cino": "JKHC020045882018",
    "dt_regis": "2018-05-28",
    "type_name": "LPA",
    "fil_no": "3951",
    "fil_year": "2018",
    "reg_no": "57",
    "reg_year": "2018",
    "date_first_list": "2018-05-30",
    "date_next_list": "2020-09-23",
    "pend_disp": "P",
    "date_of_decision": "",
    "goshwara_no": "0",
    "disp_nature": null,
    "bench_id": "1640",
    "purpose_name": "FOR ADMISSION (After Notice)",
    "pet_name": "GHARU RAM AND ORS.",
    "res_name": "STATE TH.HOUSING AND URBAN DEVELOPMENT
DEPTT.AND ORS.",
    "date_last_list": "2020-08-28",
    "causelist_type": "After Notice",
    "bench_name": "Division Bench",
    "judicial_branch": "LETTERS PATENT APPEAL ( LPA )",
    "coram": "HON'BLE MR. JUSTICE RAJESH BINDAL , HON'BLE MR.
JUSTICE JAVED IQBAL WANI",
    "short_order": "DATE FIXED"
  },
  "cases2": {
    "date_of_filing": "2018-01-11",
    "cino": "UPHC010045882018",
    "dt_regis": "2018-01-11",
    "type_name": "A482",
    "fil_no": "875",
    "fil_year": "2018",
    "reg_no": "875",
    "reg_year": "2018",
    "date_first_list": "2018-01-15",
    "date_next_list": "2018-01-15",
    "pend_disp": "P",
```

```

    "date_of_decision": "",
    "goshwara_no": "0",
    "disp_nature": "Dismiss",
    "bench_id": "1007",
    "purpose_name": "FOR ADMISSION (After Notice)",
    "pet_name": "ASHOK NAGAR",
    "res_name": "STATE OF U.P. AND ANOTHER",
    "date_last_list": "",
    "bench_name": "Single Bench",
    "judicial_branch": "Criminal Misc.",
    "coram": "RAJUL BHARGAVA",
    "short_order": null
  }
}

```

6.4.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
600	INVALID_CNR	The CNR is invalid. The CNR is not in the prescribed format.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
629	UNEXPECTED_ERROR	Service unresponsive
628	RECORD_NOT_FOUND	Record is not available.
632	INVALID_VERSION	Invalid version of API

6.5 Search by Case Number API

API provides list of cases from a High court establishment matching the Case Registration Number. Input for this API is the **Establishment Code**, **Case Registration Number**, **Case Registration Year**, and other details. Case Registration number consists of Case Type/Registration Number/Registration Year. Registration Number input is optional, and if not provided, will give list of all cases of the given case type and registration year.

6.5.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-case-search-  
api/casesearch?dept_id=dept_id&request_str=request_str&request_token=  
request_token&version=version
```

6.5.2 HTTP Method: *GET*

6.5.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,case_type,reg_no,reg_year
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

6.5.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code=value|case_type=value|reg_no=value|reg_year=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) received using Court Complex API.
2	case_type	M	Integer value (ex. 15) of the Case Type. This value case_type can be obtained using Case Type Master API.
3	reg_no	O	Integer value with max length 7 digits (ex. 234) i.e. Registration number of case. If Case Number is not provided, all the cases registered for the given Case type in the given registration year will be shown.

4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.
---	----------	---	--

6.5.5 Response

As shown in Annexure “B”

6.5.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
604	INVALID_CASE_TYPE	The Case type is invalid.
605	INVALID_REG_NO	The Case registration number is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.6 Search by Filing Number API

API provides list of cases from a High court establishment matching the Case Filing Number. Input for this API is the **Establishment Code, Case Filing Number, Case Filing Year** and other details.

6.6.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-filing-
api/Filing?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.6.2 HTTP Method **GET**

6.6.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,case_type,fil_no,fil_year .
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

6.6.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code=value|case_type=value|fil_no=value|fil_year=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	case_type	M	Integer value (ex. 15) of the Case Type. This value case_type can be obtained using Case Type Master API.
3	fil_no	M	Integer value with max length 7 digits (ex. 234) i.e. filing number of case
4	fil_year	M	4 digit integer value (ex 2019). i.e. filing Year of the case.

6.6.5 Response

As shown in Annexure "B"

6.6.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is

missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
604	INVALID_CASE_TYPE	The Case type is invalid.
607	INVALID_FIL_NO	The Case registration number is invalid.
608	INVALID_FIL_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.7 Search by Party Name API

API provides list of cases from a High court establishment matching name of the party. Input for this API is **Establishment Code, Litigants Name, Case Registration Year, Status of the Case (Pending or Disposed)** and other details. The litigants name may be petitioner's name or respondent's name or an extra party name. The search string for litigant name may consist of full name of the party or even few characters (minimum 3) for searching.

6.7.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-party-name-  
api/partyname?dept_id=dept_id&request_str=request_str&request_token=r  
equest_token&version=version
```

6.7.2 HTTP Method *GET*

6.7.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,litigant_name,reg_year.
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

6.7.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str=

encrypted(est_code=value|pend_disp=value|litigant_name=value|reg_year=value)

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value ‘P’ or ‘D’. P for pending cases and D for disposed cases
3	litigant_name	M	Character string with maximum length 99. Minimum length of 3 characters is mandatory.
4	reg_year	M	4 digit integer value (ex 2019)i.e. Registration Year of the case.

6.7.5 Response

As shown in Annexure “B”

6.7.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.
610	INVALID_LITIGANT_NAME	The litigant's name is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.8 Search by Advocate Name API

API provides list of cases from a High court establishment matching name of the Advocate. Input for this API is **Establishment Code, Advocate's Name, Case Registration Year, Status of the Case (Pending or Disposed)** and other details. The Advocate's name may be petitioner's advocate name or respondent's advocate name or an extra party advocate name. The search string for advocate name may consist of full name of the Advocate or even few characters (minimum 3) for searching.

6.8.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-advocate-name-  
api/advocatename?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.8.2 HTTP Method *GET*

6.8.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,advocate_name,reg_year .
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

6.8.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str=

encrypted(est_code=value|pend_disp=value|advocate_name=value|reg_year=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value 'P' or 'D'. P for pending cases and D for disposed cases
3	advocate_name	M	Character string with maximum length 99. Minimum length of 3 characters is mandatory.
4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.

6.8.5 Response

As shown in Annexure "B"

6.8.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.
614	INVALID_ADVOCATE_NAME	The litigant's name is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.9 Search by Advocate Bar Registration Number API

API provides list of cases from a High court establishment for a given Advocate Registration number. Input for this API is **Establishment Code, Advocate's Bar Registration Year, Case Registration Year, Status of the Case (Pending or Disposed)** and other details. The Advocate may be petitioner's advocate or respondent's advocate or an extra party advocate. The search string for advocate bar registration number shall be input in the format state characters-bar registration number-registration year.

6.9.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-advocate-bar-reg-api/advocateBarReg?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

6.9.2 HTTP Method *GET*

6.9.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
--------	---------	------------------------------	---------------------	-------------

1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,advocate_bar_regn_no,reg_year.
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, which is v1.0.

6.9.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code=value|pend_disp=value| advocate_bar_regn_no=value|reg_year=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value ‘P’ or ‘D’. P for pending cases and D for disposed cases
3	advocate_bar_regn_no	M	Character string with maximum length 13.
4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.

6.9.5 Response

As shown in Annexure “B”

6.9.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02

609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.
615	INVALID_ ADVOCATE_BAR_REGN_NO	The Advocate's Bar Registration Number is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

6.10 Search by Act API

API provides list of cases from a High court establishment matching the Act. Input for this API is **Establishment Code, National Act Code, Case Registration Year, Status of the Case (Pending or Disposed)** and other details.

6.10.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-act-details-  
api/actdetails?dept_id=dept_id&request_str=request_str&request_token=  
request_token&version=version
```

6.10.2 HTTP Method **GET**

6.10.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,pend_disp,national_act_code,reg_year.
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'

4	version	M	N	It contains value of the API version, e.g. "v1.0" .
---	---------	---	---	--

6.10.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str=

encrypted(est_code=value|pend_disp=value|national_act_code=value|reg_year=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	pend_disp	M	Character value 'P' or 'D'. P for pending cases and D for disposed cases
3	national_act_code	M	e-Committee has provided 14 digits National Act Codes for Acts. Same may be used (eg. 18600450099001 is the national act code for Indian Penal Code) . This code can be obtained using Act Master API.
4	reg_year	M	4 digit integer value (ex 2019). i.e. Registration Year of the case.

6.10.5 Response

As shown in Annexure "B"

6.10.6 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
609	INVALID_PEND_DISP	The pending or disposal (i.e. P or D) value is invalid.
617	INVALID_NATIONAL_ACT_CODE	The National Act Code is invalid.
606	INVALID_REG_YEAR	The Case registration year is invalid.

626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

7 CauseList API

7.1 Causelist Bench API

API provides list of benches based on causelist date. Input for this API is **Establishment Code**, **Causelist Date** and other details.

7.1.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-causelist-bench-  
api/causelistbench?dept_id=dept_id&request_str=request_str&request_to  
ken=request_token&version=version
```

7.1.2 HTTP Method **GET**

7.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code, causelist_date
2	dept_id	M	N	Alpha numeric string shared by e-Committee.
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

7.1.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code=value| causelist_date=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) received using Court Complex API.
2	causelist_date	M	Cause list date in yyyy-mm-dd format.

7.1.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

7.1.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
case1		
bench_id	4812	Bench id
judge_name	HONBLE THE CHIEF JUSTICE	Judge Name
srno2		
bench_id	4813	Bench id
judge_name	HONBLE THE CHIEF JUSTICE, HON'BLE MR. JUSTICE S. TALAPATRA	Judge Name

7.1.7 Sample Response

```
{
  "case1":{
    "bench_id":4812,
    "judge_name":"HONBLE THE CHIEF JUSTICE"
  },
  "case2":{
    "bench_id":4813,
    "judge_name":"HONBLE THE CHIEF JUSTICE, HON'BLE MR. JUSTICE S.
TALAPATRA"
  }
}
```

7.1.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
616	INVALID_CAUSELIST_DATE	Causelist date is not in correct format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

7.2 CauseList API

API provides cases listed (CauseList) on a particular date. Input for this API is **Establishment Code** , **Bench ID** and **Cause List Date** and other details. The format of Cause List may vary from State to State. Sequence of cases is provided in the API, however it is advisable to cross check the cause list vis-à-vis as available on the hcservices.ecourts.gov.in portal or mobile app for better understanding and accuracy and refer the cause list available on the portal.

7.2.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-causelist-details-api/causelistdetails?dept_id=dept_id&request_str=request_str&request_token=request_token&version=version
```

7.2.2 HTTP Method GET

7.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code, causelist_date, bench_id
2	dept_id	M	N	Alpha numeric string shared by e-Committee.
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

7.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code=value|causelist_date=value |bench_id=value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) received using Court Complex API.
2	causelist_date	M	Cause list date in yyyy-mm-dd format.
3	bench_id	M	4 digit bench ID

7.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

7.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
case1		
bench	HONBLE THE CHIEF JUSTICE	Bench
bench_id	4812	Bench ID
causelist_id	1001	CauseList ID
cause_list_type	DAILY MAIN CAUSE LIST	CauseList Type Name

7.2.7 Sample Response

```
{
  "case1":{
    "bench":"HONBLE THE CHIEF JUSTICE",
    "bench_id":4812,
    "causelist_id":1001,
    "cause_list_type":"DAILY MAIN CAUSE LIST "
  }
}
```

7.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
616	INVALID_CAUSELIST_DATE	Causelist date is not in correct format or not valid.
633	INVALID_BENCH_ID	The Bench id is invalid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

7.3 Show CauseList API

API provides facility to view CauseList delivered on a particular date based on **Establishment Code**, **Bench ID**, **CauseList ID** and **CauseList date**.

7.3.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-show-causelist-  
api/showcauselist?dept_id=dept_id&request_str=request_str&request_tok  
en=request_token&version=version
```

7.3.2 HTTP Method **GET**

7.3.3 Request Parameters

Sr. No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code, bench_id, causelist_id, causelist_date in (yyyy-mm-dd) format.
2	dept_id	M	N	Alpha numeric string shared by e-Committee.
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

7.3.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code =value| bench_id=value| causelist_id =value| causelist_date =value)

Sr.No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric establishment code
2	bench_id	M	4 digit bench ID
3	causelist_id	M	4 digit CauseList ID
4	causelist_date	M	CauseList date in yyyy-mm-dd format.

7.3.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details

are shown in the Response JSON table along with the elements, sample and description.

2. **response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version:** Contains version of API.

7.3.6 Response

Sample Response	Description	Privacy Concern
.pdf file will be shared	.pdf file for the CauseList will be provided in response.	PDF File cannot be opened

7.3.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
633	INVALID_BENCH_ID	Bench Id is invalid.
634	INVALID_CAUSELIST_ID	CauseList ID is invalid.
616	INVALID_CAUSELIST_DATE	Causelist date is not in correct format or not valid.
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

8 Caveat Search APIs

8.1 Search by Caveator/Caveatee Name

API provides list of Caveats from a High court establishment matching name of the party. Input for this API is **Establishment Code, Party Name, Search type** and other details. Search type parameter provides facility to search the name string anywhere (A) or starting with (S) with the input characters. The list also includes matched case numbers along with the Caveats.

8.1.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-caveat-name-  
api/caveatname?dept_id=dept_id&request_str=request_str&request_token=  
request_token&version=version
```

8.1.2 HTTP Method *GET*

8.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,caveat_party_name,search_type
2	dept_id	M	N	dept_id same as Subscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

8.1.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code=value|caveat_party_name=value|search_type)

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	caveat_party_name	M	Character string with maximum length 99. Minimum length of 3 characters is mandatory.
3	search_type	M	Single character to define type of search. 'A' anywhere, 'S' starting with

8.1.5 Response

JSON response contains following parameters.

- 1. response_str:** This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
- 2. response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
- 3. version:** Contains version of API.

8.1.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description	Privacy Concern
Caveat		Nested response for caveats matching the name	
caveat1		1 st Caveat	
caveat_no	1	Caveat Registration Number	
caveat_year	2019	Caveat Registration Year	
matched_case_no	M.C.A./16/2019	Matched Case Number	
caveat_filing_date	01-01-2019	Filing Date	
caveator_caveatee_details	Asaram Laxman Kamthe Vs Anna Laxman Kamthe	Caveator OR Caveatee Name	Caveator and Caveatee name is masked
caveat_code	100000000012019	Caveat number	

8.1.7 Sample Response

```
{
  "caveat": {
    "caveat1": {
      "caveat_no": "251",
      "caveat_year": "2018",
      "matched_case_no": "",
      "caveat_filing_date": "2018-11-13",
      "caveator_caveatee_details": "Ramesh Krishnaji Kulkarni VS
Bhalchandra Kushnaji Kulkarni",
      "caveat_code": "100000002512018"
    },
    "caveat2": {
      "caveat_no": "303",
      "caveat_year": "2018",
      "matched_case_no": "",
      "caveat_filing_date": "2018-12-18",
      "caveator_caveatee_details": "Ramu Ambadas Nagre VS Uttam
Kondiba Sonwane",
      "caveat_code": "100000003032018"
    }
  }
}
```

8.1.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
619	INVALID_CAVEAT_PARTY_NAME	The Caveator's or Caveatee's name is invalid.
620	INVALID_SEARCH_TYPE	Search value provided is invalid
626	INVALID_TOKEN	The Token is invalid
627	INVALID_DEPT_ID	The Department id is invalid
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive
632	INVALID_VERSION	Invalid version of API

8.2 Caveat History API

API provides complete history of the caveat from a High court establishment matching the Caveat Code. Input for this API is **Establishment Code**, **Caveat Code** and other details. Every Caveat has a unique 15 digit Caveat Code within the establishment. This unique code can be retrieved by accessing Caveat using Caveat Search by party name or Caveat Registration Number API.

8.2.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-caveat-details-  
api/caveatdetails?dept_id=dept_id&request_str=request_str&request_tok  
en=request_token&version=version
```

8.2.2 HTTP Method *GET*

8.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code,caveat_code
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

8.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(est_code=value|caveat_code=value)

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API.
2	caveat_code	M	15 digits Caveat Code.

8.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

8.2.6 Response JSON (after decrypting response_str)

Json key	value	Description	Privacy Concern
caveat_details			
caveat_no	0000143	Caveat Number	
caveat_year	2019	Caveat Registration Year	
cnr_no	JKHC01-C00143-2019	Matched Case CNR	
subject			
caveat_filing_date	2019-01-24		
time_of_filing	16:26:56	Caveat Number	
matched_case_no	M.C.A./36/2019	Matched Case Number	
caveator_details			
caveator_name	RAMEES WANI	Caveator Name	Caveator name is masked
caveator_add	Aurangabad	Caveator Address	
caveatee_details			
caveatee_name	PUBLIC AT LARGE	Caveatee Name	Caveatee name is masked
caveatee_add	Aurangabad	Caveatee Address	
extra_party_caveator			
extra_party_caveator1			
extra_caveator_name	Lekhita Gopal Purushottam	Extra Party Caveator Name	Extra Party names of Caveator name is masked
extra_caveator_address	Akola	Extra Party Caveator Address	
extra_party_caveatee			
extra_party_caveatee1			
extra_caveatee_name	Ashok Krushnaji Kulkarni	Extra Party Caveatee Name	Extra Party names of Caveator name is masked
extra_caveatee_address	Aurangabad	Extra Party Caveatee Address	

8.2.7 Sample Response

```
{
  "caveat_details": {
    "caveat_no": "0000143",
    "caveat_year": "2019",
    "cnr_no": "JKHC01-C00143-2019",
    "subject": "",
    "caveat_filing_date": "2019-01-24",
    "time_of_filing": "16:26:56"
  },
  "caveator_details": {
    "caveator_name": "RAMEES WANI",
    "caveator_add": ""
  },
  "caveatee_details": {
    "caveatee_name": "PUBLIC AT LARGE",
    "caveatee_add": ""
  },
  "extra_party_caveator": {
    "extra_party_caveator1": {
      "extra_caveator_name": "Rajesh Ramesh Kulkarni",
      "extra_caveator_add": "Aurangabad."
    },
    "extra_party_caveator2": {
      "extra_caveator_name": "Jotsana Jaybant Devdhar",
      "extra_caveator_add": "Aurangabad."
    }
  },
  "extra_party_caveatee": {
    "extra_party_caveatee1": {
      "extra_caveatee_name": "Ashok Krushnaji Kulkarni",
      "extra_caveatee_add": "Aurangabad."
    },
    "extra_party_caveatee2": {
      "extra_caveatee_name": "Vijay Krishnaji Kulkarni",
      "extra_caveatee_add": "Aurangabad."
    }
  }
}
```

8.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
623	INVALID_CAVEAT_CODE	15 digits Caveat Code.
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

9 Establishment APIs

9.1 High Court State Master API

API provides list of High Courts and states relevant **state codes** used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id,request_str,token & version to get the list of the states.

9.1.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-state-api/state?dept_id=dept_id&request_token=request_token&version=version
```

9.1.2 HTTP Method *GET*

9.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	dept_id	M	N	dept_id same as Scubscriber User name
2	request_str	M	Y	Doesn't require any input string (eg. request_str="")
2	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
3	version	M	N	It contains value of the API version, e.g. "v1.0".

9.1.4 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

9.1.5 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
state		Nested response for states
state1		1 st state
state_code	9	State Code
state_name	Allahabad High Court	Name of High Court
state2		2 nd State
state_code	19	State Code
state_name	Calcutta High Court	Name of High Court

9.1.6 Sample Response

```
{
  "state": {
    "state14": {
      "state_code": 9,
      "state_name": "Allahabad High Court"
    },
    "state17": {
      "state_code": 19,
      "state_name": "Calcutta High Court"
    }
  }
}
```

9.1.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

9.2 District Master API

API provides list of the Districts and relevant **District codes** pertaining to the given state used in the eCourts project for further accessing relevant APIs. Input for this API is **State Code** and other details.

9.2.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-district-  
api/district?dept_id=dept_id&request_str=request_str&request_token=re  
quest_token&version=version
```

9.2.2 HTTP Method *GET*

9.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of state_code
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure ‘A’
4	version	M	N	It contains value of the API version, e.g. “ v1.0 ”.

9.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such
request_str= encrypted(state_code=value)

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	state_code	M	2 digit state code retrieved from State Master.

9.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

9.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
district		Nested response for Districts within the state
district1		1 st district
dist_code	2	District Code
dist_name	ANANTNAG	District Name
district2		2 nd district
dist_code	4	District Code
dist_name	BADGAM	District Name

9.2.7 Sample Response

```
{
  "district1": {
    "dist_code": 2,
    "dist_name": "ANANTNAG"
  },
  "district2": {
    "dist_code": 4,
    "dist_name": "BADGAM"
  }
}
```

9.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
624	INVALID_STATE_CODE	The state code is invalid.
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department ID is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Internal server error or service unresponsive.
632	INVALID_VERSION	Invalid version of API

9.3 Bench API

API provides list of the Benches and relevant High Establishment codes. Input for this API is State Code and other details. Establishment Code retrieved using this API can be used to access the case data using various Case Search APIs.

9.3.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-bench-master-  
api/bench?dept_id=dept_id&request_str=request_str&request_token=reque  
st_token&version=version
```

9.3.2 HTTP Method *GET*

9.3.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of state_code
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. " v1.0 ".

9.3.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such

request_str= encrypted(state_code=value)

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	state_code	M	2 digit state code retrieved from State Master.

9.3.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.

- 2. response_token:** Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
- 3. version:** Contains version of API.

9.3.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
benches		
sr_no1		
bench_id	1	Bench ID
bench_name	Jammu Wing	Bench Name of High Court
est_code	JKHC02	Establishment Code
sr_no2		
bench_id	2	Bench ID
bench_name	Srinagar Wing	Bench Name of High Court
est_code	JKHC01	Establishment Code

9.3.7 Sample Response

```
{
  "benches": {
    "sr_no1": {
      "bench_id": 1,
      "bench_name": "Jammu Wing",
      "est_code": "JKHC02"
    },
    "sr_no2": {
      "bench_id": 1,
      "bench_name": "Srinagar Wing",
      "est_code": "JKHC01"
    }
  }
}
```

9.3.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
633	INVALID_BENCH_ID	The Bench id is invalid.
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Internal server error or service unresponsive.
632	INVALID_VERSION	Invalid version of API

10 Master APIs

10.1 Acts Master API

For every Act, a unique **National Act Code**. API provides list of the Acts and relevant National Act Codes used in the eCourts project for further accessing relevant APIs. This API doesn't require any input string and can just be connected using dept_id,request_str,token & version to get the list of all the Acts with the respective National Act codes.

10.1.1 URL Structure

```
https://delhigw.napix.gov.in/nic/ecourts/hc-act-master-  
api/actMaster?dept_id=dept_id&request_token=request_token&version=ver  
sion
```

10.1.2 HTTP Method *GET*

10.1.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	dept_id	M	N	dept_id same as Scubscriber User name
2	request_str	M	Y	Doesn't require any input string (eg. request_str="")
2	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
3	version	M	N	It contains value of the API version, e.g. "v1.0" .

10.1.4 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

10.1.5 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
act1		1 st act
national_act_code	18600450099001	National Act Code
actname	INDIAN PENAL CODE	Act
act2		2nd act
national_act_code	19590540099001	National Act Code
actname	ARMS ACT	Act

10.1.6 Sample Response

```
{
  "act1":{
    "national_act_code":"18360100000000",
    "actname":"Bengal Indigo Contracts Act"
  },
  "act2":{
    "national_act_code":"18360200000000",
    "actname":"Bengal Districts Act"
  },
  "act3":{
    "national_act_code":"18370400000000",
    "actname":"Madras Public Property Malversation Act"
  }
}
```

10.1.7 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

10.2 Case Type Master API

API provides list of the Case Types (referred as **type_name**) and relevant Case Type Codes (referred as **case_type**) used in the establishment for further accessing relevant APIs. Input for this API is **Establishment Code** and other details. Type Name and Case Type retrieved using this API can be used to access the case data using various Case Search APIs like Search by Case Registration Number, Filing Number etc.

10.2.1 URL STRUCTURE

```
https://delhigw.napix.gov.in/nic/ecourts/hc-case-type-master-api/casetytemaster?dept_id=dept_id&request_str=request_str&request_to_ken=request_token&version=version
```

10.2.2 HTTP Method *GET*

10.2.3 Request Parameters

Sr.No.	Element	Mandatory (M) / Optional (O)	Encryption required	Description
1	request_str	M	Y	Request String variable shall contain key –value pair of est_code
2	dept_id	M	N	dept_id same as Scubscriber User name
3	request_token	M	N	Hash Value creation mechanism is provided in Annexure 'A'
4	version	M	N	It contains value of the API version, e.g. "v1.0" .

10.2.4 Request String

Following elements are to be clubbed by piping in sequence by Key-Value pair. In this case only one key-value pair is to be passed as such
request_str= encrypted(est_code=value)

Sr. No.	Element	Mandatory (M) / Optional (O)	Description
1	est_code	M	6 characters alphanumeric est_code (ex. JKHC02) retrieved using Bench API

10.2.5 Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

10.2.6 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description
casetype1		1 st case type
case_type	158	Case Type Code
type_name	491: CRIMINAL	Case Type Name
casetype2		2nd case type
case_type	144	Case Type Code
type_name	491_A : 491_A CRIMINAL PROCEDURE CODE	Case Type Name
Casetype3		2nd case type
case_type	157	Case Type Code
type_name	561 : CRIMINAL	Case Type Name

10.2.7 Sample Response

```
{
  "casetype1": {
    "case_type": "158",
    "type_name": "491 : CRIMINAL"
  },
  "casetype2": {
    "case_type": "144",
    "type_name": "491_A : 491_A CRIMINAL PROCEDURE CODE"
  },
  "casetype3": {
    "case_type": "157",
    "type_name": "561 : CRIMINAL"
  }
}
```

10.2.8 ERRORS/STATUS

If the request fails due to a missing, invalid, or mismatching redirection URI, or if the client identifier is missing or invalid, the flow will result in error response.

The following table lists the possible error/status codes:

Status Code	Status	Status Description
603	INVALID_EST_CODE	The court code is invalid. The court code is not in the prescribed format e.g. JKHC02
626	INVALID_TOKEN	The Token is invalid.
627	INVALID_DEPT_ID	The Department id is invalid.
628	RECORD_NOT_FOUND	Record is not available.
629	UNEXPECTED_ERROR	Service unresponsive.
632	INVALID_VERSION	Invalid version of API

11 Annexure-A: Encryption-Decryption-Hash Value

11.1 Hash value creation and implementation

Hash value is prepared by using **hash_hmac** function in PHP. **sha256** algorithm along with requested string and **15081947** key is used for generating Hash. Hash value is generated by concatenating sequence of Key-Value pairs of parameters separated by pipe (|) and then generating hash of this concatenated string by using **hash_hmac** function.

Ex: `$input_str="Key1=Value1|Key2=Value2|Key3=Value3|Key4=Value4";`

e.g. input_str="cino=JKHC020045882018|business_date=2019-07-29". In the example concatenated string may be stored in variable `input_str`.

```
$input_str="cino=JKHC020045882018|business_date=2019-07-29";  
$request_token = hash_hmac('sha256', $input_str,"15081947");
```

Generated hash value is passed as **request_token** to the API.

URL of the API will be

```
https://delhigw.napix.gov.in/nic/ecourts/hc-show-business-  
api/showBusiness?dept_id=dept_id&request_str=request_str&request_token=  
request_token&version=version
```

11.2 Encryption method for request string

The request string is encrypted by using **openssl_encrypt** function. 'AES-128-CBC' is used.

\$authentication_key="xxxxxx"; // Authentication key provided by e-committee

\$iv="xxxxxx";

Note: Authentication Key and IV have same values.

Request string is formed by concatenating sequence of Key-Value pairs of parameters

`$input_str="Key1=Value1|Key2=Value2|Key3=Value3|Key4=Value4";`

e.g. input_str="cino=JKHC020045882018|business_date=2019-07-29"

In the example concatenated string may be stored in variable `input_str`.

```
$encrypt=openssl_encrypt($input_str, 'AES-128-CBC', $ authentication_key, 'OPENSSL_RAW_DATA', $iv);  
  
$request_str = base64_encode($encrypt);
```

11.3 For sending request to open API

\$dept_id="XXXXXX"; // Department id same as Subscriber user name

\$request_token is the hash value as mentioned in section **11.1**

\$request_string is a encrypted string as mentioned in section **11.2**

```
https://delhigw.napix.gov.in/nic/ecourts/hc-show-business-api/showBusiness?dept_id=$dept_id&request_str=$request_string&request_token=$request_token&version=version
```

11.4 Decryption method for response string

The response string, response_str (variable), received from the respective API, is decrypted by using **openssl_decrypt** function at the client end. 'AES-128-CBC' is used.

\$authentication_key="xxxxxx"; // Authentication key provided by e-committee

\$iv="xxxx";

Note: Authentication Key and IV have same values.

```
$payload=base64_decode($response_str);  
  
$decrypt=openssl_decrypt($payload, 'AES-128-CBC', $authentication_key, 'OPENSSL_RAW_DATA', $iv);
```

\$decrypt variable contains decrypted response of the respective API in JSON format.

11.5 Response token verification

The decrypted response string (eg \$decrypt), as detailed in section 11.4 is passed to the **hash_hmac** function to generate the hash value. Hash value is prepared by using **hash_hmac** function in PHP. **sha256** algorithm along with requested string and **15081947** key is used for generating Hash.

```
$decrypt= "{
  "desgname": "Justice",
  "case_number":
  "LPA/0000057/2018",
  "business_date":
  "2019-07-29",
  "business": "",
  "short_order_det": ""
}";

$response_hash_value = hash_hmac('sha256',$decrypt,"15081947");
```

The generated hash value of response (e.g. **response_hash_value**) may be compared with **response_token** received in the response.

12 Annexure-B: Response

JSON response contains following parameters.

1. **response_str**: This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

12.1.1 Response JSON (after decrypting response_str)

JSON key	Sample Response	Description	Privacy Concern
establishment_name	Jammu Wing	Court Establishment Name	
casenos		Nested response for more than one cases.	
case1		1 st Case details	
cino	JKHC020106422017	CNR Number of the case	
type_name	LPASW	Case Type of the Case	
reg_no	1	Registration Number	
reg_year	2018	Registration Year	
pet_name	J.K.B.O.S.E.TH.ITS CHAIRMAN	Petitioner Name	Petitioner name is masked
res_name	ASHOK KUMAR GANDOTRA AND ORS	Respondent Name	Respondent name is masked

12.1.2 Sample Response

```
{
  "establishment_name": "Jammu Wing",
  "casenos": {
    "case1": {
      "cino": "JKHC020106422017",
      "type_name": "LPASW",
      "reg_no": "1",
      "reg_year": "2018",
      "pet_name": "J.K.B.O.S.E.TH.ITS CHAIRMAN",
      "res_name": "ASHOK KUMAR GANDOTRA AND ORS"
    }
  }
}
```

13 Sample code for Encryption, Decryption and Hash value (Java and .Net)

13.1 Code for Java

13.1.1 Encryption

```
import javax.crypto.Cipher;
import javax.crypto.spec.IvParameterSpec;
import javax.crypto.spec.SecretKeySpec;
import java.util.Base64;

public class Main {
    public static void main(String[] args) throws Exception {
        String inputStr = "Hello, World!";
        String authenticationKey = "your_authentication_key";
        String ivString = "your_iv_value";

        // Convert IV string to byte array
        byte[] iv = ivString.getBytes("UTF-8");

        // Create AES key and IV
        SecretKeySpec keySpec = new
SecretKeySpec(authenticationKey.getBytes("UTF-8"), "AES");
        IvParameterSpec ivSpec = new IvParameterSpec(iv);

        // Create AES cipher
        Cipher cipher = Cipher.getInstance("AES/CBC/PKCS5Padding"); //
Note the change here

        // Initialize the cipher for encryption
        cipher.init(Cipher.ENCRYPT_MODE, keySpec, ivSpec);

        // Encrypt the input string
        byte[] encryptedBytes = cipher.doFinal(inputStr.getBytes("UTF-
8"));

        // Encode the encrypted bytes as Base64
        String requestStr =
Base64.getEncoder().encodeToString(encryptedBytes);
        System.out.println(requestStr);
    }
}
```

13.1.2 Decryption

```
import javax.crypto.Cipher;
import javax.crypto.spec.IvParameterSpec;
import javax.crypto.spec.SecretKeySpec;
import java.util.Base64;

public class Main {
    public static void main(String[] args) throws Exception {
        String responseStr = "your_base64 encoded response_str";
        String authenticationKey = "your_authentication_key";
        String ivString = "your_iv_value";

        // Convert IV string to byte array
        byte[] iv = ivString.getBytes("UTF-8");

        // Create AES key and IV
        SecretKeySpec keySpec = new
SecretKeySpec(authenticationKey.getBytes("UTF-8"), "AES");
        IvParameterSpec ivSpec = new IvParameterSpec(iv);

        // Create AES cipher
        Cipher cipher = Cipher.getInstance("AES/CBC/PKCS5Padding");

        // Initialize the cipher for decryption
        cipher.init(Cipher.DECRYPT_MODE, keySpec, ivSpec);

        // Decode the base64-encoded response
        byte[] encryptedBytes = Base64.getDecoder().decode(responseStr);

        // Decrypt the payload
        byte[] decryptedBytes = cipher.doFinal(encryptedBytes);

        // Convert the decrypted bytes to a string
        String decryptedText = new String(decryptedBytes, "UTF-8");
        System.out.println(decryptedText);
    }
}
```

13.1.3 Hash Value

```
import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;
import java.nio.charset.StandardCharsets;

public class Main {
    public static void main(String[] args) throws Exception {
        String reqString = "your_request_string";
        String secretKey = "15081947";

        byte[] keyBytes = secretKey.getBytes(StandardCharsets.US_ASCII);
        byte[] dataBytes = reqString.getBytes(StandardCharsets.US_ASCII);

        SecretKeySpec keySpec = new SecretKeySpec(keyBytes, "HmacSHA256");

        Mac hmac = Mac.getInstance("HmacSHA256");
        hmac.init(keySpec);

        byte[] hashBytes = hmac.doFinal(dataBytes);
        StringBuilder stoken = new StringBuilder();

        for (byte b : hashBytes) {
            stoken.append(String.format("%02x", b));
        }

        System.out.println(stoken.toString());
    }
}
```

13.2 Code for .Net

13.2.1 Encryption

```
using System;
using System.Security.Cryptography;
using System.Text;

public class Program
{
    public static void Main(string[] args)
    {
        string inputStr = "Hello, World!";
        string authenticationKey = "your_authentication_key";
        byte[] iv = Encoding.ASCII.GetBytes("your_iv_value");

        using (Aes aesAlg = Aes.Create())
        {
            aesAlg.Key = Encoding.ASCII.GetBytes(authenticationKey);
            aesAlg.IV = iv;
            aesAlg.Mode = CipherMode.CBC;
            aesAlg.Padding = PaddingMode.PKCS7;

            ICryptoTransform encryptor = aesAlg.CreateEncryptor();

            byte[] encryptedBytes;

            using (var msEncrypt = new System.IO.MemoryStream())
            {
                using (var csEncrypt = new CryptoStream(msEncrypt,
                    encryptor, CryptoStreamMode.Write))
                {
                    using (var swEncrypt = new
                        System.IO.StreamWriter(csEncrypt))
                    {
                        swEncrypt.Write(inputStr);
                    }
                }
                encryptedBytes = msEncrypt.ToArray();
            }

            string requestStr = Convert.ToBase64String(encryptedBytes);
            Console.WriteLine(requestStr);
        }
    }
}
```

13.2.2 Decryption

```
using System;
using System.Security.Cryptography;
using System.Text;

public class Program
{
    public static void Main(string[] args)
    {
        string base64Ciphertext = "your_base64_encoded_response_str";
        string authenticationKey = "your_authentication_key"; // Replace
with a 16-byte key
        string ivString = "your_iv_value"; // Replace with a 16-byte IV

        // Convert IV string to byte array
        byte[] iv = Encoding.ASCII.GetBytes(ivString);

        // Convert Base64-encoded ciphertext to bytes
        byte[] encryptedBytes =
Convert.FromBase64String(base64Ciphertext);

        // Create AES key and IV
        byte[] keyBytes = Encoding.ASCII.GetBytes(authenticationKey);

        // Ensure the key and IV have the correct lengths
        Array.Resize(ref keyBytes, 16); // For AES-128
        Array.Resize(ref iv, 16);

        using (Aes aesAlg = Aes.Create())
        {
            aesAlg.Key = keyBytes;
            aesAlg.IV = iv;
            aesAlg.Mode = CipherMode.CBC;
            aesAlg.Padding = PaddingMode.PKCS7;

            ICryptoTransform decryptor = aesAlg.CreateDecryptor();

            byte[] decryptedBytes;

            using (var msDecrypt = new
System.IO.MemoryStream(encryptedBytes))
            {
                using (var csDecrypt = new CryptoStream(msDecrypt,
decryptor, CryptoStreamMode.Read))
                {
                    using (var srDecrypt = new
System.IO.StreamReader(csDecrypt))
                    {
                        string decryptedText = srDecrypt.ReadToEnd();
                        Console.WriteLine(decryptedText);
                    }
                }
            }
        }
    }
}
```

```

    }
}
}
}

```

13.2.3 Hash Value

```

using System;
using System.Security.Cryptography;
using System.Text;

public class Program
{
    public static void Main()
    {
        string reqString = "Hello, World!";
        string secretKey = "15081947";

        // Convert the secret key to a byte array
        byte[] keyBytes = Encoding.ASCII.GetBytes(secretKey);

        using (HMACSHA256 hmac = new HMACSHA256(keyBytes))
        {
            // Convert the request string to a byte array
            byte[] dataBytes = Encoding.UTF8.GetBytes(reqString);

            // Compute the HMAC-SHA256 hash
            byte[] hashBytes = hmac.ComputeHash(dataBytes);

            // Convert the hash to a hexadecimal string
            string stoken = BitConverter.ToString(hashBytes).Replace("-",
""").ToLower();
            Console.WriteLine(stoken);
        }
    }
}

```

14 API Consumption using Postman

POSTMAN is a tool to test API functionality. It offers a simple user interface for constructing requests and reading responses so that the API can be tested without writing code.

Follow the steps given below to test the API-

1. Getting Access Token

- Enter the URL - Method 'POST'
- Enter the parameters – Grant Type And Scope
- Enter the Authorization type, username and password
- Send; User will receive **Access Token** as response.

2. API Consumption

- Enter the URL – Method 'POST' or 'GET'
- Enter request Parameters – dept ID, Request string, Request Token and Version
- Enter Header
- Send; User will receive response string, response token and version as test output

13.1 Getting Access Token

The image displays two screenshots of the Postman application interface, illustrating the steps to obtain an access token via a POST request.

Top Screenshot: The 'Body' tab is selected. The URL is `https://delhigw.napix.gov.in/nic/ecourts/oauth2/token`. The request method is 'POST'. The 'Body' tab shows the following parameters:

Key	Value	Description
☒ grant_type	client_credentials	
☒ scope	napix	

The 'Body' tab also shows the following JSON response:

```
1 {
2   "token_type": "Bearer",
3   "access_token":
4     "AAIgYjIwNDI4OGI2ZGU5YmY4NTU0NTkMTA1YWVmYmQ0YjFj5utd9zn2UpB1x3V5jowKv1aXNyw1h5RHhYkqFZQfu7kw-PTLEjDWE5Wm5bjcHeAhnVP2rt7JGQXM7P_af3bH5uw1xL
5     1QWhGKRLIsDH07TPz76KQJyT9AVsLbcaegdgg",
6   "scope": "napix",
7   "expires_in": 3600,
8   "consented_on": 1690958838
9 }
```

Bottom Screenshot: The 'Authorization' tab is selected. The URL is `https://delhigw.napix.gov.in/nic/ecourts/oauth2/token`. The request method is 'POST'. The 'Authorization' tab shows the following parameters:

Type	Value
Basic Auth	b204288b6de9af855458d105adfb4b1
Password	cafdc6333c860d1e86a8486570bbec98

The 'Body' tab also shows the following JSON response:

```
1 {
2   "token_type": "Bearer",
3   "access_token":
4     "AAIgYjIwNDI4OGI2ZGU5YmY4NTU0NTkMTA1YWVmYmQ0YjFj5utd9zn2UpB1x3V5jowKv1aXNyw1h5RHhYkqFZQfu7kw-PTLEjDWE5Wm5bjcHeAhnVP2rt7JGQXM7P_af3bH5uw1xL
5     1QWhGKRLIsDH07TPz76KQJyT9AVsLbcaegdgg",
6   "scope": "napix",
7   "expires_in": 3600,
8   "consented_on": 1690958838
9 }
```

Body Request Parameter :

1. grant_type=client_credentials
2. scope=napix

Authorization:

Type – Basic Auth

Username : ***** // NAPIX Subscriber Application Client ID

Password : ***** // NAPIX Subscriber Application Client Secret

Getting Response :

1 access_token=

AAIgYjIwNDI4OGI2ZGU5YWY4NTU0NTkMTA1YWVmYmQ0YjFj5utd9zn2UpB1x3V5jowKvlaXNyw1h5RHRyKqFZQ
fu7kW-

PTLEjDWESWM5bjcHeAhnVP2rt7JGQXM7P_af3bH5uw1xL1QWhGKRLIsDH07TPz76KQJyT9AVsLbcaegdgg
” // this access token pass to header for each api consumption.

13.2 API Consumption

https://delhigw.napix.gov.in/nic/ecourts/dc-cnr-api/cnr?dept_id=CE00001&request_str=Dxik%2Bw6DclwVA4Jntm43mjPa4TySNXwd1IGevc2...

GET https://delhigw.napix.gov.in/nic/ecourts/hc-cnr-api/CNR?dept_id=SE00003&request_str=4d6aZfV5xjn1c%2FLGkezGoVG4OA%2FaSpNVLyJIDPLXjRo%3D&r...

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies

Key	Value	Description
dept_id	SE00003	
request_str	4d6aZfV5xjn1c%2FLGkezGoVG4OA%2FaSpNVLyJIDPLXjR...	
request_token	2682e427e81dec94bace6a19b4fa29ac500bfff23d6a03...	
version	v1.0	

body Cookies (1) Headers (20) Test Results Status: 200 OK Time: 1705 ms Size: 3.1 KB Save as Example

1 {"response_str": "bhDpRej41\\QoS8zrNHmWQNKAK21fGmWcm4uSeEpmCozHAB5nMKjMv2ZCefCLmAL6d0M3PdqqTOPDqWsCNENYmSXQakU2GZnB45vvYI+Rpc0oorKLTGd3NFhVRS5y9NGSTwzKLMVswYnS7CeGpAAT512c8J1Ip9r3P+g6n4sQcNjE20qveNUPX2JvnoYq47m1tG0FwxIOixvTDRBiixUwNI0pQhKfUCDakw+UADehsC8LUcx\\oxFkxxuzVpz874rvmIuv+Yk741rp8KwtaspR0EPmoqID0zF1AaAfqevhKEVYCZ8025Jj0GJuL0D2BqpZk3q+qytEYnTZyU1CqzvLmkc1BwPR\\Z5BJLD9AphdAHJR47zZ3Vda6NLG47pdyJPQ13dUWeNQY4tNwFVyJhKviPtLA8SwDHiE4QHjW+7bJeUI1fRzaBZXmh0por7MuMLTSnqeg7xZ0vMT8U33Z\\wbh313FYaG0oRaoc2ozhIxi7ZERU9V+pSoc9UnR160QZ\\sFNPw9NH0s0sdS+VnAnN+S3IAycoD\\+DZgc9oVpDfc4V4vkV3MSfRkaUjCjA8Iw9f37+oTfCKaJ8uKVJUK0uVKCq+knjRsswup0o1vet2viPguUId\\Z1yjfz2NUPmHac8rH8pg85jlu4A2rFTAhs711p+tkN8z7W95VzLyLlyHak01xB6cur0rbz\\y9zJiH0CYp\\AsggRgycuzF6ddX4ftJ9cwmZewYIHVxWSVZtsondKuB8nhAf3j0B6fQw6Ipycg1LvFF7zHLtDeI3T\\WQwTI14GdC0e0ahSAbPS1K+evYE1Nw20fs6G0qt2\\1McaCsZh\\Q0iJTx1aVQCNr3Wso5LWSa0+ovdjIevp\\cX+Z7spei+2CFaz6hXLFuIpyF1p3j0xMPhY4b1Gg\\H+94qYzZCfSP0I3Ko\\

https://delhigw.napix.gov.in/nic/ecourts/dc-cnr-api/cnr?dept_id=CE00001&request_str=Dxik%2Bw6DclwVA4Jntm43mjPa4TySNXwd1IGevc2...

GET https://delhigw.napix.gov.in/nic/ecourts/hc-cnr-api/CNR?dept_id=SE00003&request_str=4d6aZfV5xjn1c%2FLGkezGoVG4OA%2FaSpNVLyJIDPLXjRo%3D&r...

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies

Headers 8 hidden

Key	Value	Description
Authorization	Bearer AAlGyJlWNDI4OGI2ZGU5YWY4NTU0NThkMTA1YW...	

Body Cookies (1) Headers (20) Test Results Status: 200 OK Time: 1705 ms Size: 3.1 KB Save as Example

1 {"response_str": "bhDpRej41\\QoS8zrNHmWQNKAK21fGmWcm4uSeEpmCozHAB5nMKjMv2ZCefCLmAL6d0M3PdqqTOPDqWsCNENYmSXQakU2GZnB45vvYI+Rpc0oorKLTGd3NFhVRS5y9NGSTwzKLMVswYnS7CeGpAAT512c8J1Ip9r3P+g6n4sQcNjE20qveNUPX2JvnoYq47m1tG0FwxIOixvTDRBiixUwNI0pQhKfUCDakw+UADehsC8LUcx\\oxFkxxuzVpz874rvmIuv+Yk741rp8KwtaspR0EPmoqID0zF1AaAfqevhKEVYCZ8025Jj0GJuL0D2BqpZk3q+qytEYnTZyU1CqzvLmkc1BwPR\\Z5BJLD9AphdAHJR47zZ3Vda6NLG47pdyJPQ13dUWeNQY4tNwFVyJhKviPtLA8SwDHiE4QHjW+7bJeUI1fRzaBZXmh0por7MuMLTSnqeg7xZ0vMT8U33Z\\wbh313FYaG0oRaoc2ozhIxi7ZERU9V+pSoc9UnR160QZ\\sFNPw9NH0s0sdS+VnAnN+S3IAycoD\\+DZgc9oVpDfc4V4vkV3MSfRkaUjCjA8Iw9f37+oTfCKaJ8uKVJUK0uVKCq+knjRsswup0o1vet2viPguUId\\Z1yjfz2NUPmHac8rH8pg85jlu4A2rFTAhs711p+tkN8z7W95VzLyLlyHak01xB6cur0rbz\\y9zJiH0CYp\\AsggRgycuzF6ddX4ftJ9cwmZewYIHVxWSVZtsondKuB8nhAf3j0B6fQw6Ipycg1LvFF7zHLtDeI3T\\WQwTI14GdC0e0ahSAbPS1K+evYE1Nw20fs6G0qt2\\1McaCsZh\\Q0iJTx1aVQCNr3Wso5LWSa0+ovdjIevp\\cX+Z7spei+2CFaz6hXLFuIpyF1p3j0xMPhY4b1Gg\\H+94qYzZCfSP0I3Ko\\

Request prameters:

1. dept_id =***** //subscriber user name same as dept_id
2. request_str ="zBQOVk9fwPdbGTAgmARvcUNpMLGoBJOxXZb0DD1LV4U%3D" //request_str is a encrypted string as mentioned in section 11.2
3. request_token=" 4bdd85be82d967bf46bc6c533a07bd26272fd849619f327645c9d46bcfd4f20e" // request_token is the hash value as mentioned in section 11.1
4. version="v1.0"

Headers:

1. Authorization="Bearer

```
AAIgYjIwNDI4OGI2ZGU5YWY4NTU0NTkMTA1YWRmYmQ0YjEg_wlZQesM0w7zujZjXmhmW0l__8fBMxhMFo  
XiXs6f5bo-  
u7JwsBbEeVJYy2JHu0Zp1rgggzQk5vVXxIXhD3SMPMpZdQAjD22zTtzWoNwjihNLCZ7AnpVW0lk6ALMvC9Y" //
```

This access token used further for validating subscriber user on NAPIX Platform

Response parameters :

1. **response_str** : This encrypted string, on decryption gives all the data in JSON format. Details are shown in the Response JSON table along with the elements, sample and description.
2. **response_token**: Contains hash value of the JSON string after decrypting response_str. This may be compared to check data authenticity.
3. **version**: Contains version of API.

15 API Consumption using Sample Application

Note:

- Authorization Key is generated for particular subscriber-application. Authorization key will be different for every application.
- API Consumer program should pass this authorization key in header.
- In response, API consumer program will receive access token from **NAPIX** Platform.
- While consuming API, authorization key needs to pass in header for getting access token. Access Token will validate subscriber at NAPIX platform and then subscriber can consume API through program

Sample PHP code:

```
<?php

/*Note :
Enter text as client_credentials for 'grant_type'
Enter text as napix for 'scope'
*/
ini_set( "display_errors", 0 );
$grant_type="client_credentials";
$scope="napix";
$apikey='*****'; // NAPIX subscriber application client id
$secret_key='*****'; // NAPIX subscriber application client secret

$combine_key=$apikey.'.'.$secret_key;
$basic_auth_value=base64_encode($combine_key);

$url = "https://delhigw.napix.gov.in/nic/ecourts//oauth2/token"; // NAPIX token generation URL
$credentials = array();
$credentials['grant_type'] = $grant_type;
$credentials['scope'] = $scope;
$credentials['authorization'] = $basic_auth_value;
$credentials['url'] = $url;
//print_r($credentials);exit;
```

```

function get_token(array $credentials){
    $grant_type=$credentials['grant_type'];
    $scope = $credentials['scope'];
    $authorization=$credentials['authorization'];
    $url = $credentials['url'];
    $post_fields = "grant_type=".$grant_type."&scope=".$scope;
    //echo $post_fields;exit;
    $curl = curl_init();

    curl_setopt_array($curl, array(
        CURLOPT_URL => $url,
        CURLOPT_RETURNTRANSFER => true,
        CURLOPT_ENCODING => "",
        CURLOPT_MAXREDIRS => 10,
        CURLOPT_TIMEOUT => 0,
        CURLOPT_SSL_VERIFYHOST => false,
        CURLOPT_SSL_VERIFYPEER => false,
        CURLOPT_FOLLOWLOCATION => true,
        CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
        CURLOPT_CUSTOMREQUEST => "POST",
        CURLOPT_POSTFIELDS => $post_fields,
        CURLOPT_HTTPHEADER => array(
            "Authorization: Basic ".$authorization,
            "Content-Type: application/x-www-form-urlencoded"
        ),
    ));
    $response = curl_exec($curl);
    curl_close($curl);
    return $response;
}
$result = get_token($credentials);
$result1=json_decode($result,true);
$access_token = $result1['access_token'];

// API Consumption Code :

$authentication_key="";
$dept_id='*****'; // dept_id given by ecomittee
$version='v1.0';
$request_str="cino=HCBM010472992019";
$request_token = hash_hmac('sha256', $request_str, "15081947");

function encrypt($input_str) {

$authentication_key="*****"; // authentication_key given by ecomittee

```

```

$iv="*****";
// Note: Authentication Key and IV have same values.
$encrypt=openssl_encrypt($input_str, 'AES-128-CBC', $authentication_key, 1, $iv);
$request_str = base64_encode($encrypt);

return $request_str;
}

$request_str=encrypt($request_str);
$request_str=urlencode($request_str);

$header=array();
$header[]='Authorization: Bearer '.$access_token;
$url = "https://delhigw.napix.gov.in/nic/ecourts/hc-cnr-
api/CNR?dept_id=".$dept_id."&request_str=".$request_str."&request_token=".$request_token."&ve
rsion=".$version;

$ch = curl_init();
    curl_setopt($ch, CURLOPT_SSL_VERIFYHOST, 0);
    curl_setopt($ch, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($ch, CURLOPT_URL, $url);
    curl_setopt($ch, CURLOPT_HTTPHEADER,$header);
    curl_setopt($ch, CURLOPT_RETURNTRANSFER, true);
    $result = curl_exec($ch);    //Returned Result from your API
    //echo $result;

if (curl_errno($ch)) {
    print curl_error($ch);
}
curl_close($ch);
$result1=json_decode($result,true);
if(isset($result1['response_str']))
{
    echo $result;
}

elseif(isset($result1['status']))
{
    echo $result1;
}

?>

```

16 Annexure-C: HTTP Status Code

The following table lists the possible Common error/status codes:

Status Code	Status	Status Description
200	OK	Everything is normal
400	BAD_REQUEST	Server didn't understand the URL you gave it
403	FORBIDDEN	Server refuses to give you a file, authentication won't help
404	NOT_FOUND	A file doesn't exist at that address
500	INTERNAL_SERVER_ERROR	Something on the server didn't work right
504	SERVICE_UNAVAILABLE	Too busy to respond to a client
631	API_ACCESS_NOT_ALLOWED	API Access is not allowed