1. *代码下载*

下载命令:repo init -u https://gitcode.com/openharmony/manifest -b master

repo sync -c

2. *代码编译*

代码下载好后,先在代码根目录输入以下命令

repo forall -c 'git lfs pull'

bash build/prebuilts_download.sh --skip-ssl

然后执行编译命令

./build.sh --product-name wukong100 -–ccache --gn-args make_pac_format_image=true

编译完成后出现如下 success 代表编译成功

```
02:28:06   Please refer to: [91mhttps://gitee.com/openharmony/developtools_integration_v
02:28:06 Please modify according to README.md
02:28:06 [OHOS INFO]  wukong100 build success
02:28:06 [OHOS INFO]  Cost Time:  0:46:30
02:28:06 [32m=====build  successful=====[0m
02:28:06 2026-01-29 02:28:06
02:28:06 ++++++++++++++++++++++++++++++++++++++++
02:28:06 [K383_OHV6.0.0-RK_Daily] $ /bin/bash /tmp/jenkins1703665656144794078l.sh
02:28:06 + OUTPUT_DIR=/ext/jenkins_workspace/workspace/K383_OHV6.0.0-RK_Daily/code/out/w
```

编译成功的版本放在代码根目录

/out/wukong100/packages/phone/images/wukong100_nosec_userdebug.pac

3. *版本手动烧录 亮屏*

先将编译出来的版本拷贝到你需要烧录的机器上

用 sprd 官方的刷机工具【ResearchDownload_R25.21.1401】，先 load 版本，

如何进入刷机模式（先看下文档末尾的主板功能分布图）

a、 有三个按键的一侧按住中间按键音量+，上电就可以下载了

b、 上电状态按住中间按键音量+然后在按一下板子另一侧的 reset 按键也可以开始下载

备注：

type c 是调试下载口

Debug 串口（uart_usb）波特率 921600

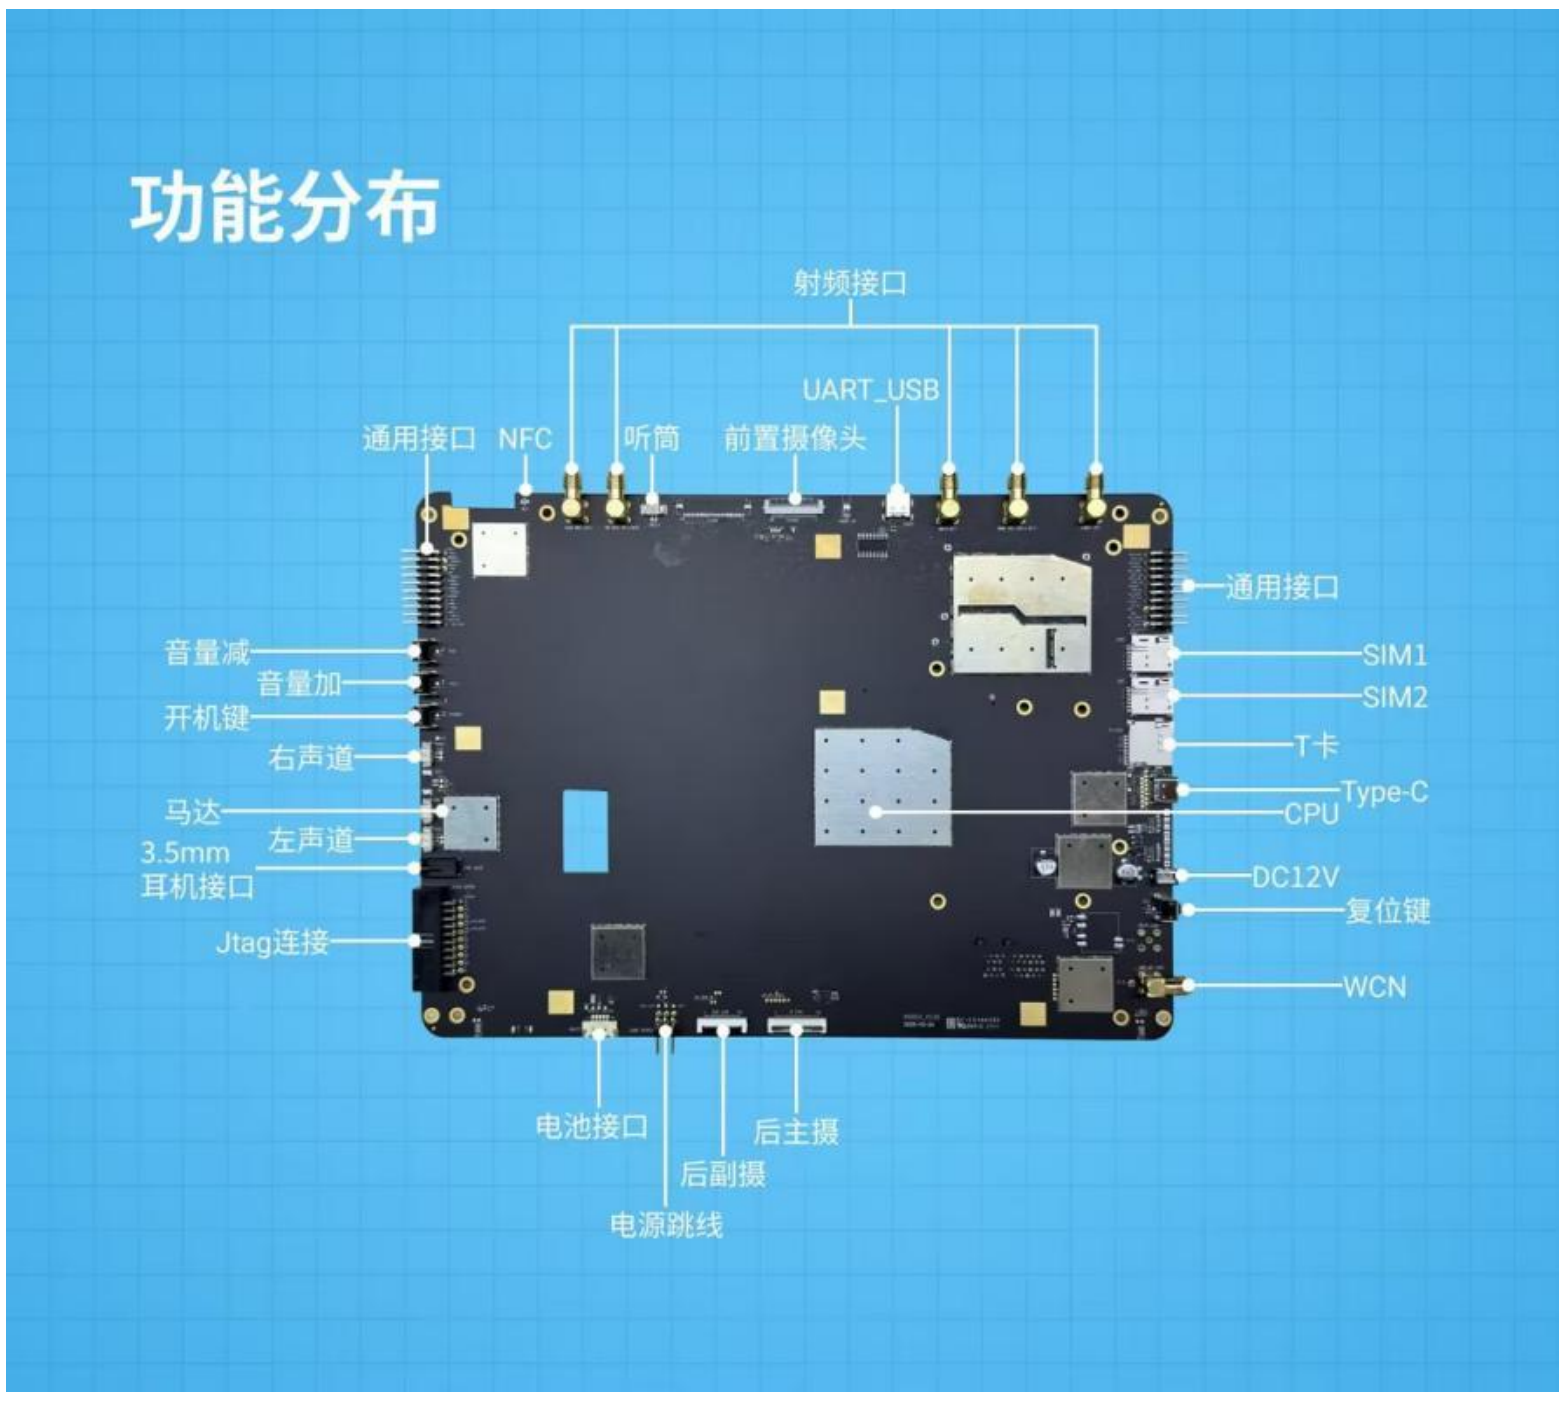

烧录成功后屏幕可成功亮屏

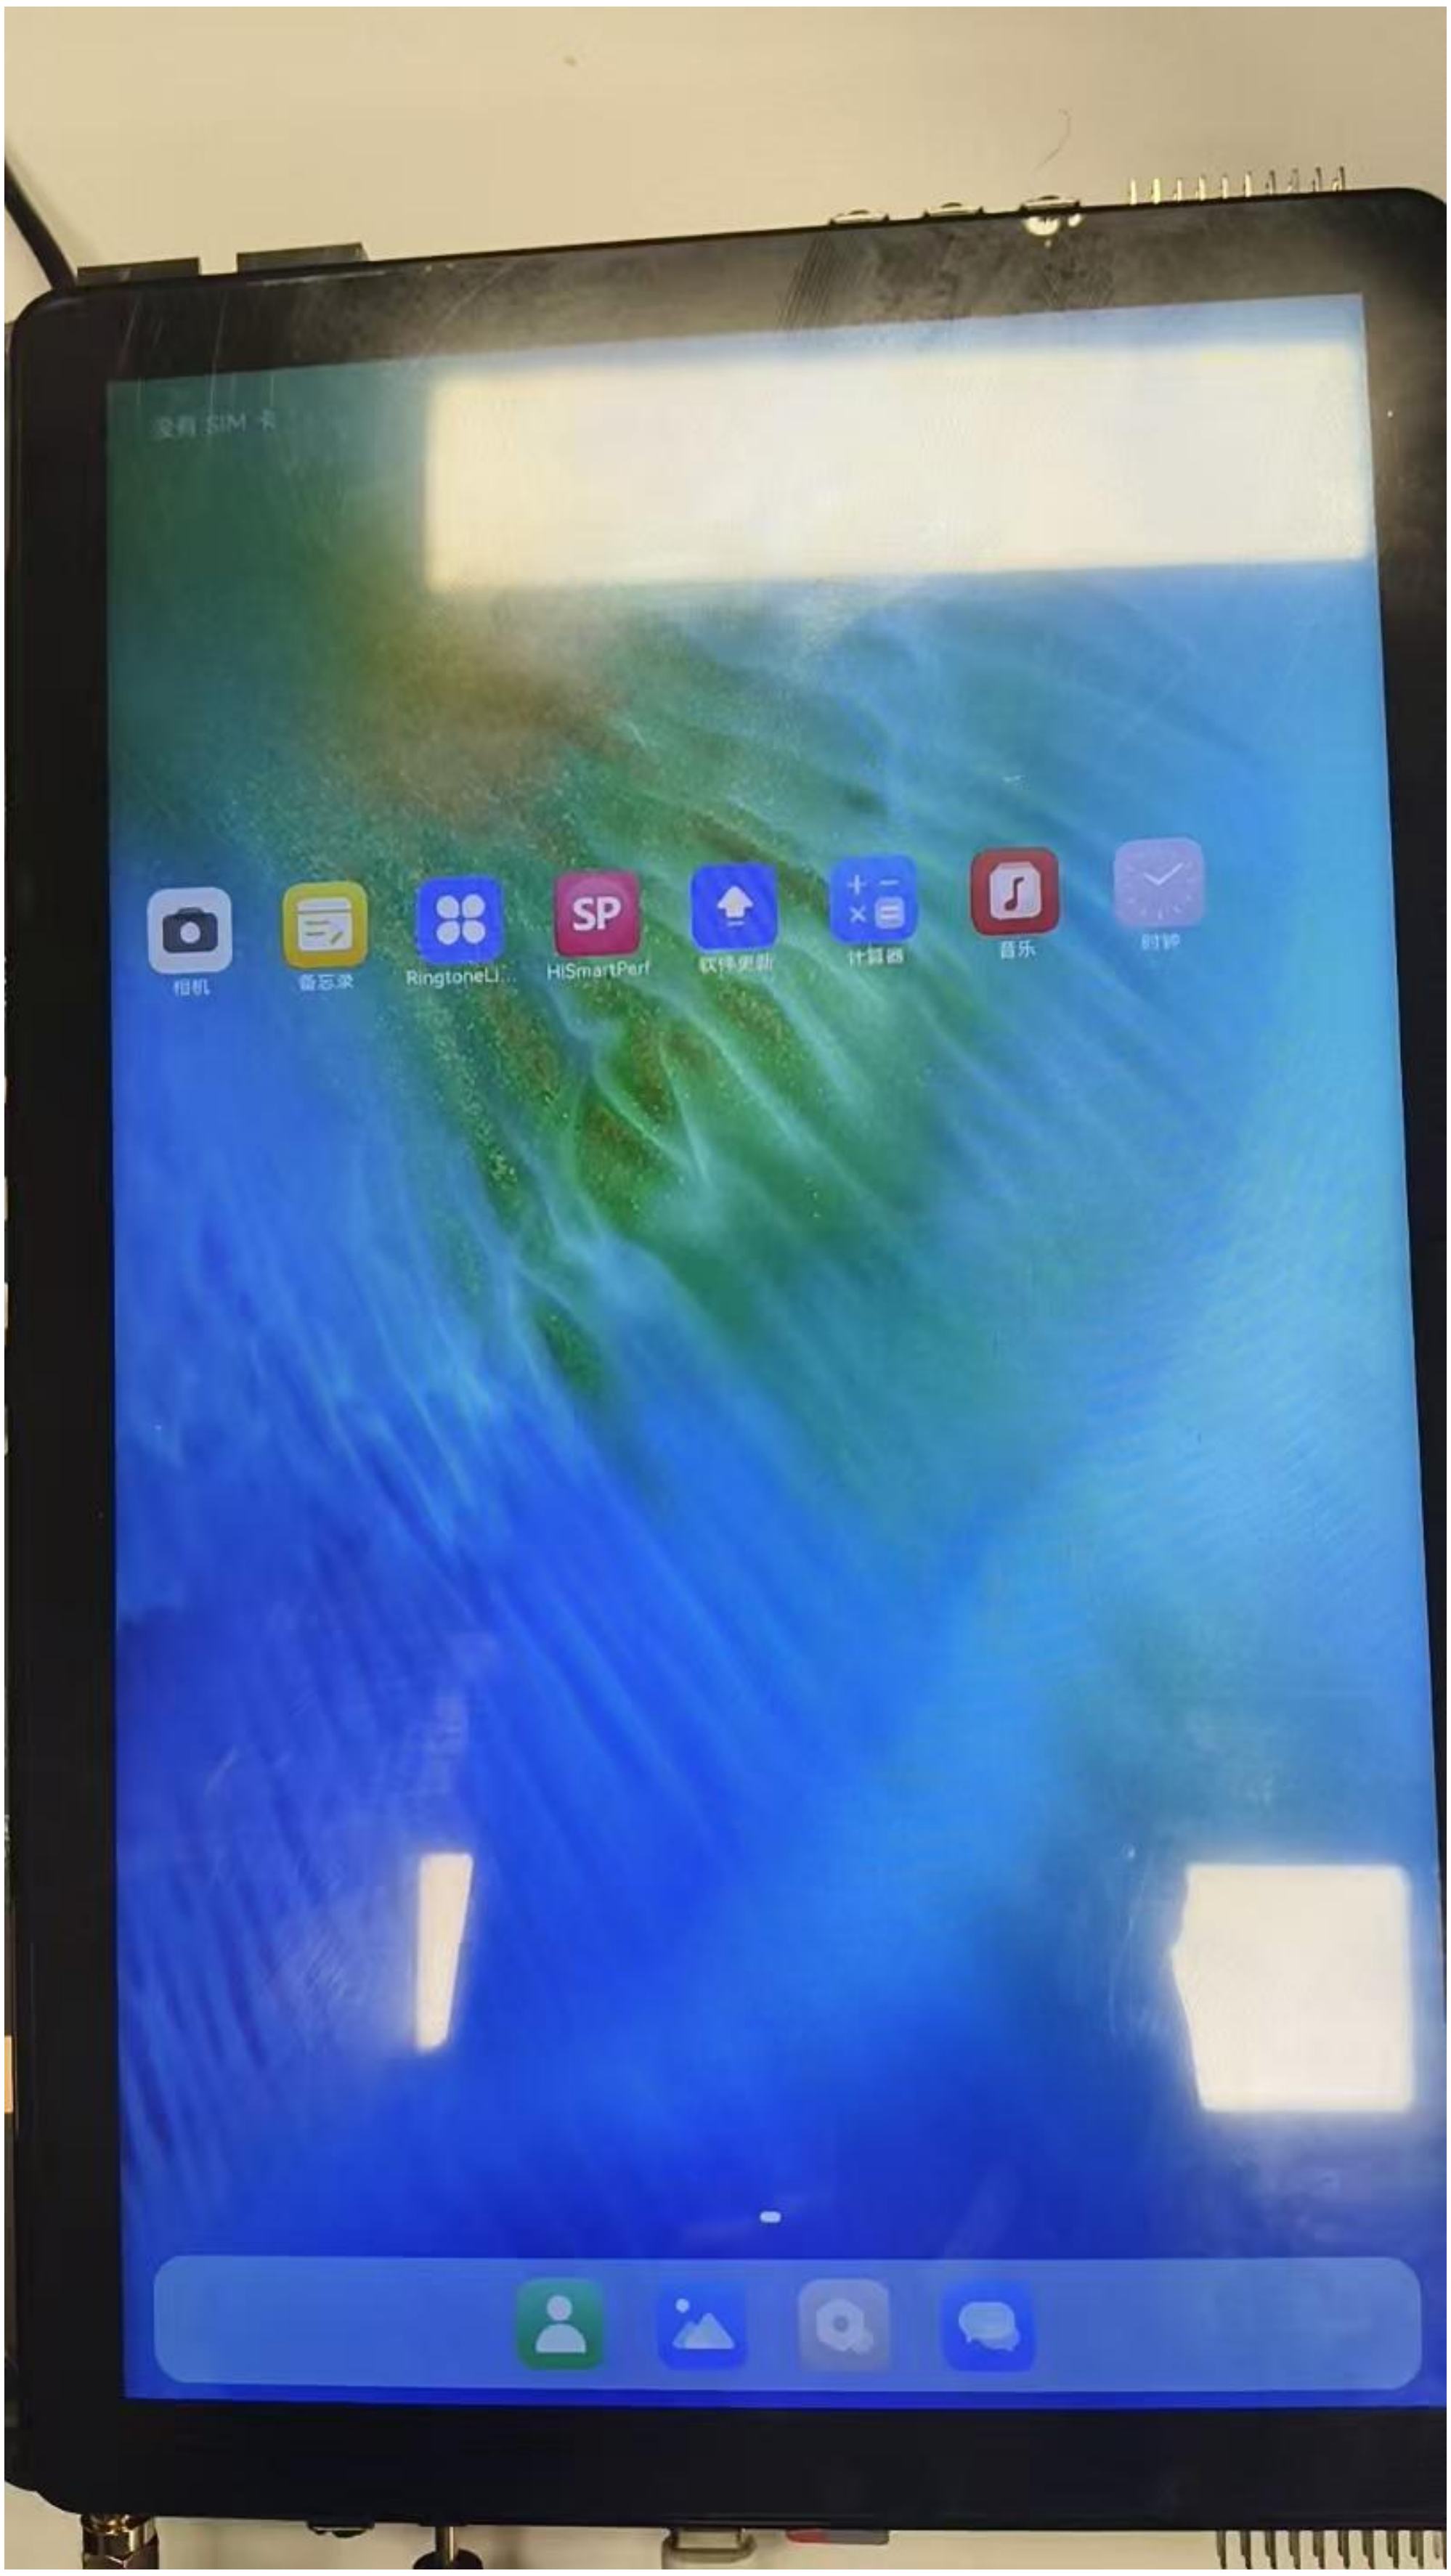
SP
RingtoneLi...
HiSmartPerf

4、自动化流水线配置建议（自动编译 自动化烧录）

4.1 首先 CI 流水线上先配置好门禁编译功能,保证提交 PR 后能触发门禁构建,执行 wukong100 编译命令并且 out 目录下正常生成 wukong100_nosec_userdebug.pac 包.

4.2 找一台 windows 系统的机器来作为自动化烧录的环境,这台机器必须与门禁编译服务器网络互通,并且保证可以使用命令行来互相拷贝文件.同时连接烧录环境的开发板必须是开机状态.

4.3 门禁编译脚本执行成功后,使用命令将生成的 wukong100_nosec_userdebug.pac 包拷贝到烧录环境下的指定目录(例如拷贝到 D 盘).

4.4 将下面 Bin.rar 附件解压到烧录环境,在 Bin 目录下执行如下命令

Bin.rar

自动化烧录命令:

hdc shell reboot autodloader

CmdDloader.exe -Reset -pac d:\wukong100_nosec_userdebug.pac

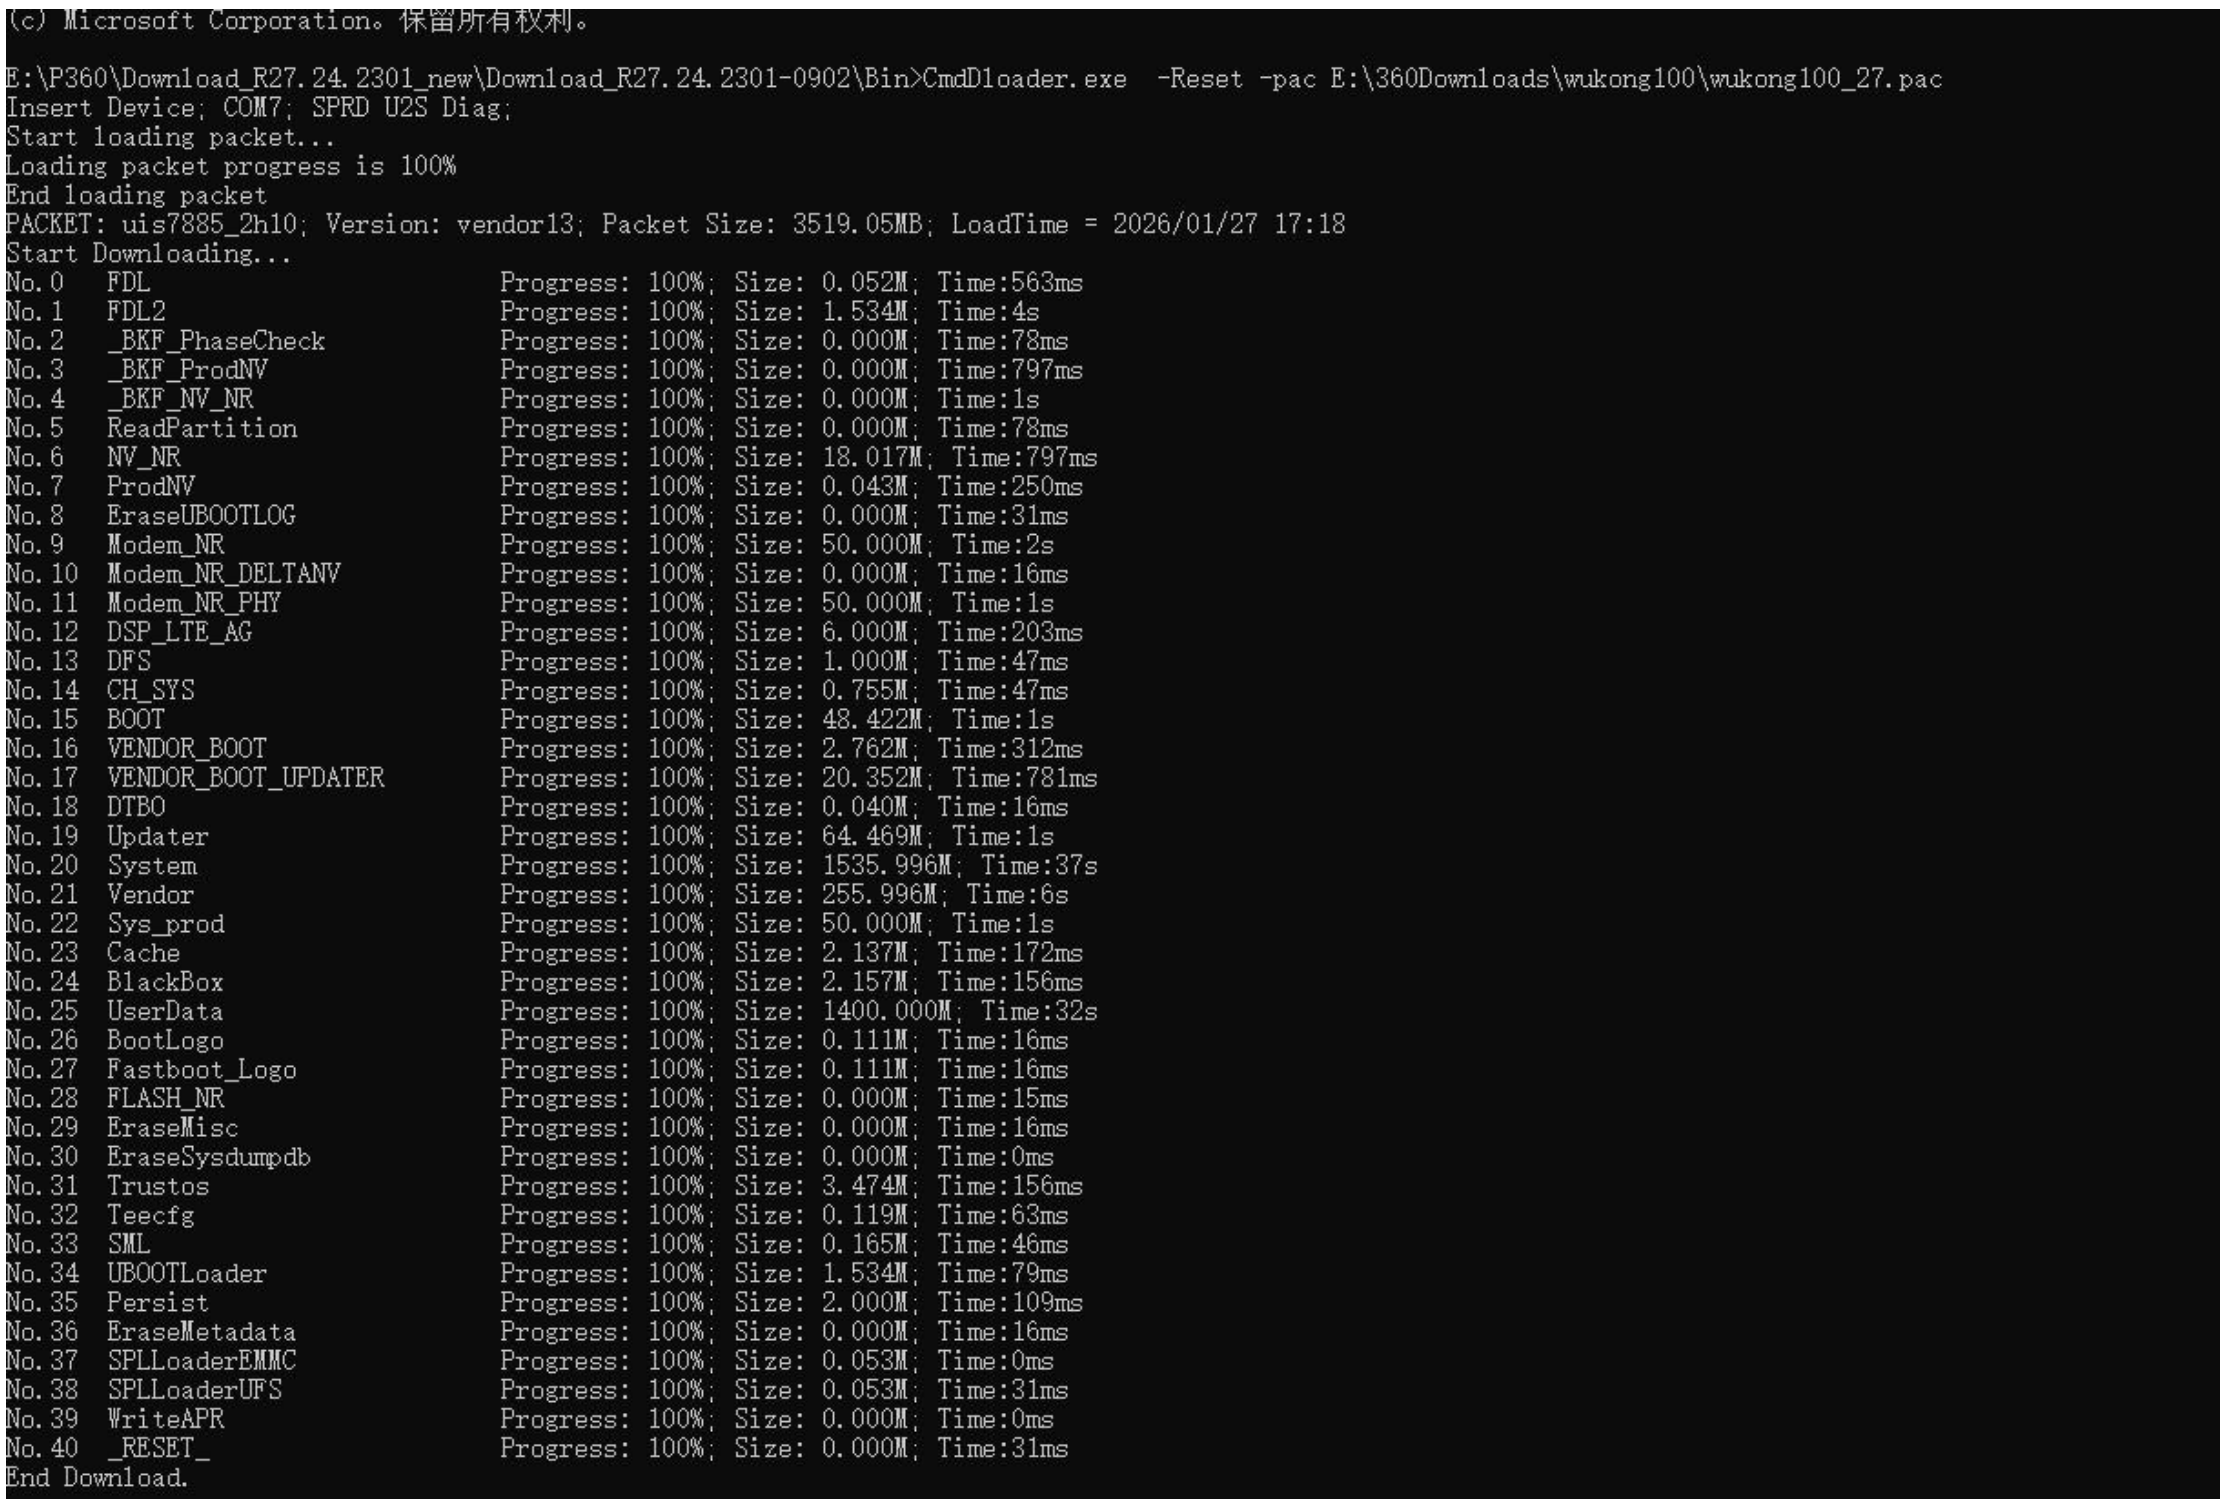

```
(c) Microsoft Corporation。保留所有权利。

E:\P360\Download_R27.24.2301_new\Download_R27.24.2301-0902\Bin>CmdDloader.exe  -Reset -pac E:\360Downloads\wukong100\wukong100_27.pac
Insert Device; COM7; SPRD U2S Diag;
Start loading packet...
Loading packet progress is 100%
End loading packet
PACKET: uis7885_2h10; Version: vendor13; Packet Size: 3519.05MB; LoadTime = 2026/01/27 17:18
Start Downloading...
No.0   FDL                          Progress: 100%; Size: 0.052M; Time:563ms
No.1   FDL2                         Progress: 100%; Size: 1.534M; Time:4s
No.2   _BKF_PhaseCheck              Progress: 100%; Size: 0.000M; Time:78ms
No.3   _BKF_ProdNV                  Progress: 100%; Size: 0.000M; Time:797ms
No.4   _BKF_NV_NR                   Progress: 100%; Size: 0.000M; Time:1s
No.5   ReadPartition                Progress: 100%; Size: 0.000M; Time:78ms
No.6   NV_NR                        Progress: 100%; Size: 18.017M; Time:797ms
No.7   ProdNV                       Progress: 100%; Size: 0.043M; Time:250ms
No.8   EraseUBOOTLOG                Progress: 100%; Size: 0.000M; Time:31ms
No.9   Modem_NR                     Progress: 100%; Size: 50.000M; Time:2s
No.10  Modem_NR_DELTANV             Progress: 100%; Size: 0.000M; Time:16ms
No.11  Modem_NR_PHY                 Progress: 100%; Size: 50.000M; Time:1s
No.12  DSP_LTE_AG                   Progress: 100%; Size: 6.000M; Time:203ms
No.13  DFS                          Progress: 100%; Size: 1.000M; Time:47ms
No.14  CH_SYS                       Progress: 100%; Size: 0.755M; Time:47ms
No.15  BOOT                         Progress: 100%; Size: 48.422M; Time:1s
No.16  VENDOR_BOOT                  Progress: 100%; Size: 2.762M; Time:312ms
No.17  VENDOR_BOOT_UPDATER          Progress: 100%; Size: 20.352M; Time:781ms
No.18  DTBO                         Progress: 100%; Size: 0.040M; Time:16ms
No.19  Updater                      Progress: 100%; Size: 64.469M; Time:1s
No.20  System                       Progress: 100%; Size: 1535.996M; Time:37s
No.21  Vendor                       Progress: 100%; Size: 255.996M; Time:6s
No.22  Sys_prod                     Progress: 100%; Size: 50.000M; Time:1s
No.23  Cache                        Progress: 100%; Size: 2.137M; Time:172ms
No.24  BlackBox                     Progress: 100%; Size: 2.157M; Time:156ms
No.25  UserData                     Progress: 100%; Size: 1400.000M; Time:32s
No.26  BootLogo                     Progress: 100%; Size: 0.111M; Time:16ms
No.27  Fastboot_Logo                Progress: 100%; Size: 0.111M; Time:16ms
No.28  FLASH_NR                     Progress: 100%; Size: 0.000M; Time:15ms
No.29  EraseMisc                    Progress: 100%; Size: 0.000M; Time:16ms
No.30  EraseSysdumpdb               Progress: 100%; Size: 0.000M; Time:0ms
No.31  Trustos                      Progress: 100%; Size: 3.474M; Time:156ms
No.32  Teecfg                       Progress: 100%; Size: 0.119M; Time:63ms
No.33  SML                          Progress: 100%; Size: 0.165M; Time:46ms
No.34  UBOOTLoader                  Progress: 100%; Size: 1.534M; Time:79ms
No.35  Persist                      Progress: 100%; Size: 2.000M; Time:109ms
No.36  EraseMetadata                Progress: 100%; Size: 0.000M; Time:16ms
No.37  SPLLoaderEMMC                Progress: 100%; Size: 0.053M; Time:0ms
No.38  SPLLoaderUFS                 Progress: 100%; Size: 0.053M; Time:31ms
No.39  WriteAPR                     Progress: 100%; Size: 0.000M; Time:0ms
No.40  _RESET_                      Progress: 100%; Size: 0.000M; Time:31ms
End Download.
```

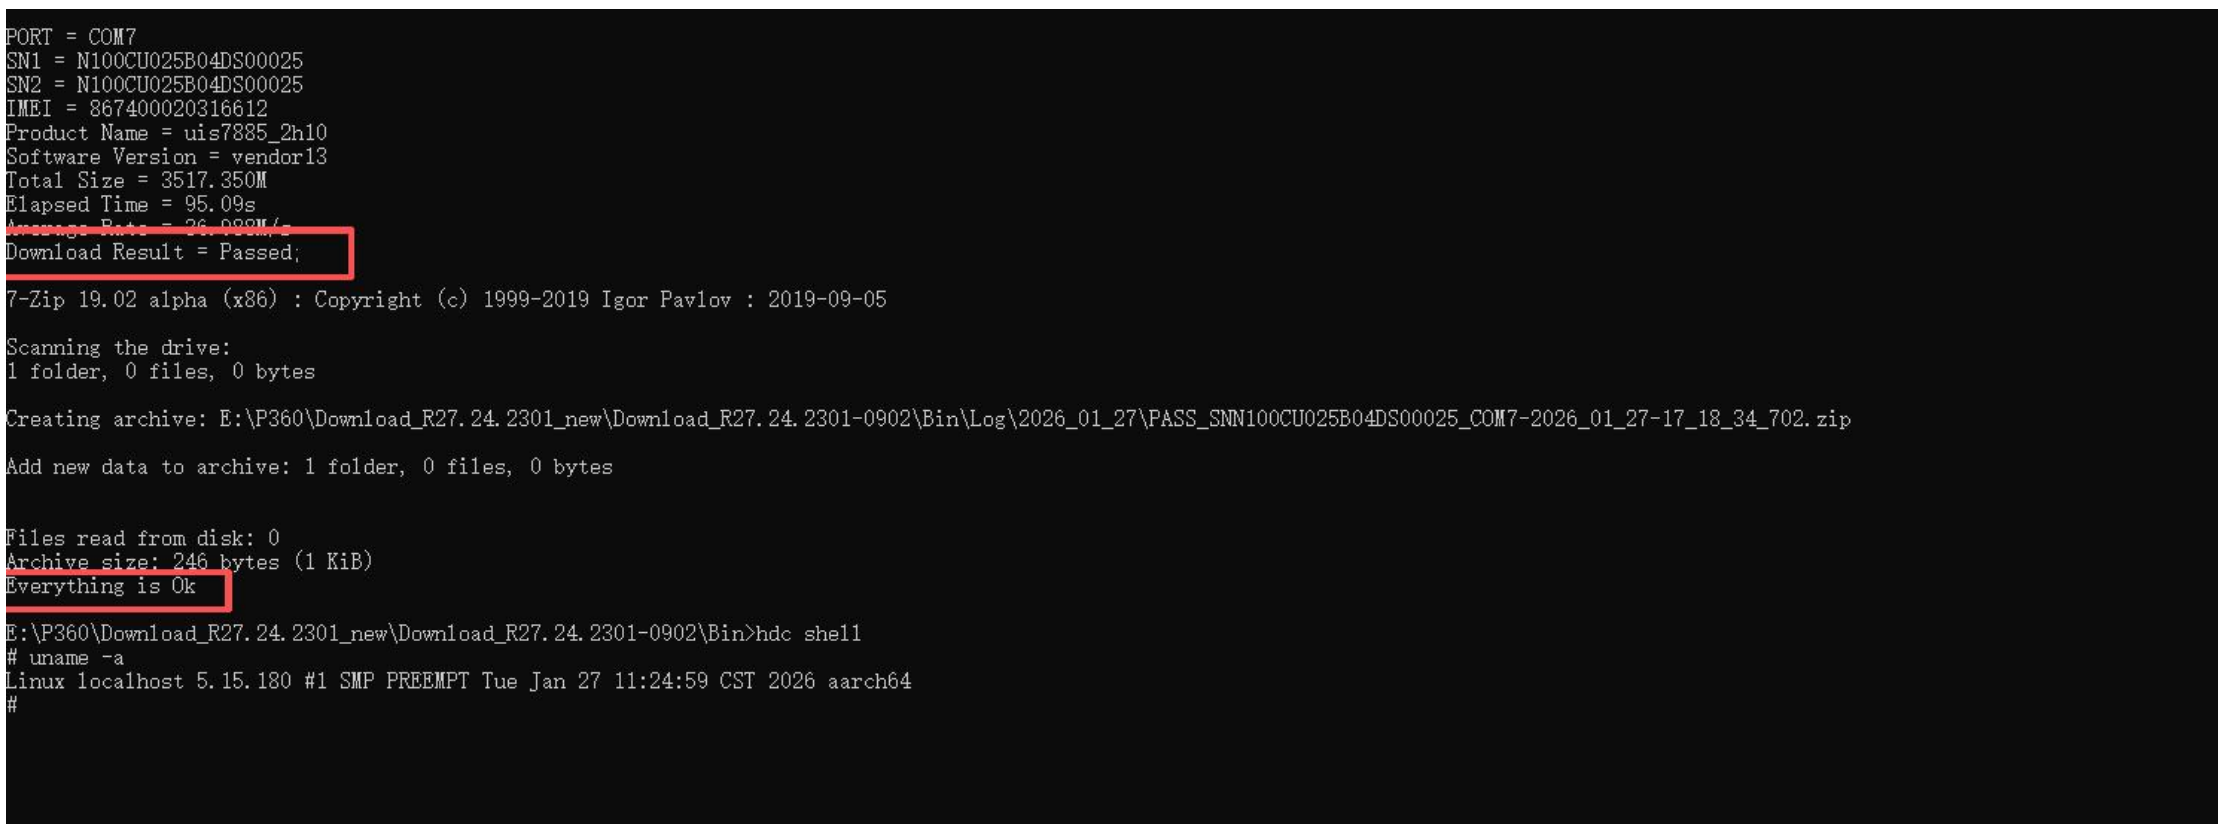

结果返回是 passed 代码自动化烧录成功

也可是输入命令
hdc shell param get const.image.buildtime
来显示版本编译的时间

4.5 用脚本提取关键字信息(例如 Passed 或者版本编译时间),将烧录成功的结果反馈到门禁的流水线中,这样通过提交 PR 触发门禁的自动化编译和烧录流程就打通了.