


CONFIGURING CUSTOM FIORI LAUNCHPAD IN FES

CONFIGURING EXTERNAL ALIAS FOR FLP (FES)

After activating the SICF service for the launchpad with cache buster, you can create an external alias for the default URL of the launchpad. This enables your users to use the same URL.

Alternatively, you can make the launchpad available under a short URL of your choice within your domain.

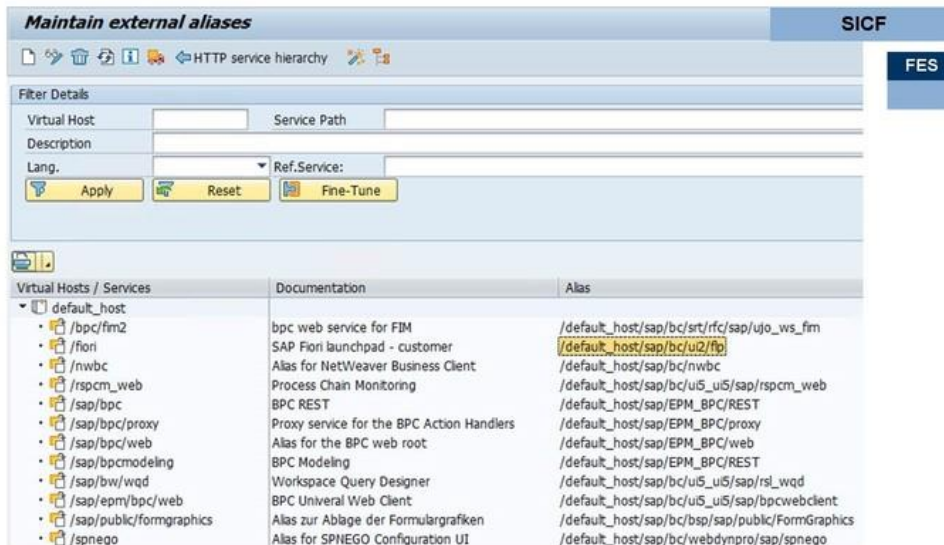

STEPS FOR CONFIGURATION

1. Start transaction SICF
2. Select hierarchy type SERVICE, then choose
3. Choose External Aliases
4. Select DEFAULT_HOST and right click to create an external host
5. In the External Alias field, enter the alias under which you want the launchpad to be available. Enter an alias of your choice, for example: /fiori
6. On the Trg Element tab, select the following target handler: /sap/bc/ui2/flp

Maintain external aliases

External Alias /fiori

Trg Element: /default_host/sap/bc/ui2/flp

Description

Description 1 SAP Fiori

Description 2

Description 3

Service Data Logon Data **Trg Element** Error Pages Administration

Select target handler by double-clicking:

Virtual Hosts / Services	Documentation	Reference Service
• theming	UI Theming Repository: Administrative Acc...	
▼ ui2	UI Extension	
• app_index	Access for Application Index queries (Used...	
• c2g	SAP Content to Go Integration	
• cdm_fcc	HTTP handler for FCC on CDM	
• check_app_i	Check Infrastructure for SAPUI5 Apps on ...	
• encode_file	Encode a file in base 64	
• flp	SAP Fiori launchpad with dynamic page pr...	