

Description | Editorial | Submissions | Solutions | Accepted

All Submissions

Accepted 42 / 42 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:46


Runtime

24 ms | Beats 74.88%

Analyze Complexity

Memory

59.20 MB | Beats 91.53%

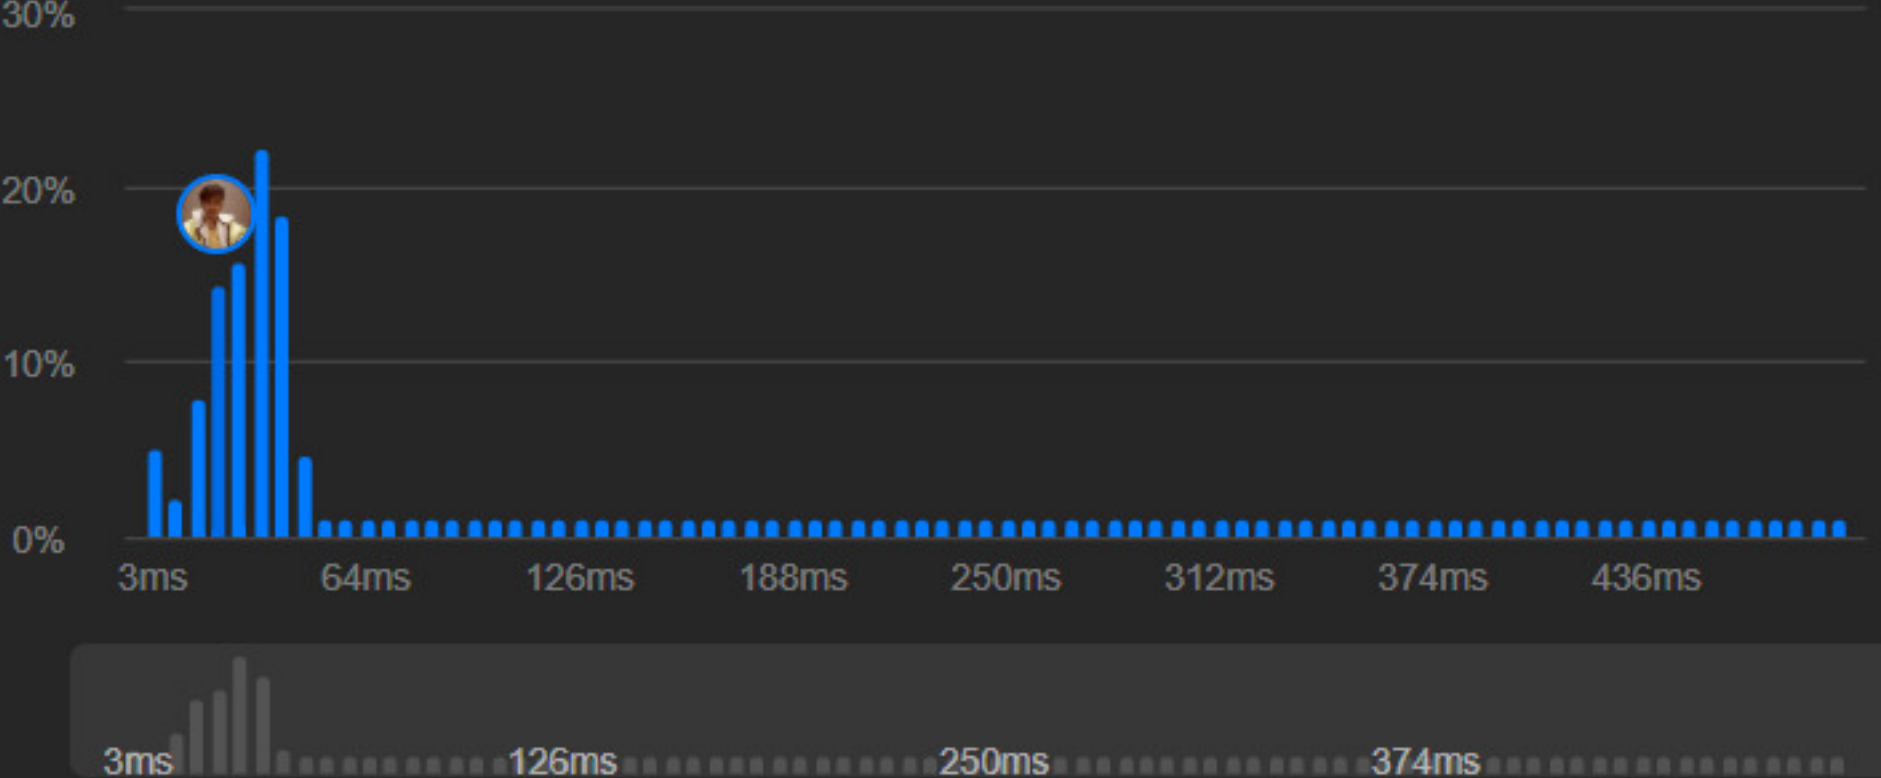

Code | C++

```
class Solution {
public:
    int findKthLargest(vector<int>& nums, int k) {
        sort(nums.begin(), nums.end());
    }
};
```

Code

C++ Auto

```
1 class Solution {
2 public:
3     int findKthLargest(vector<int>& nums, int k) {
4         sort(nums.begin(), nums.end());
5         return nums[nums.size() - k];
6     }
7 };
```

Saved

Ln 7, Col 3

Testcase | Test Result

Case 1

Case 2

+

nums =

[3,2,1,5,6,4]

k =

2


Source

Accepted 59 / 59 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:43

Editorial

Solution

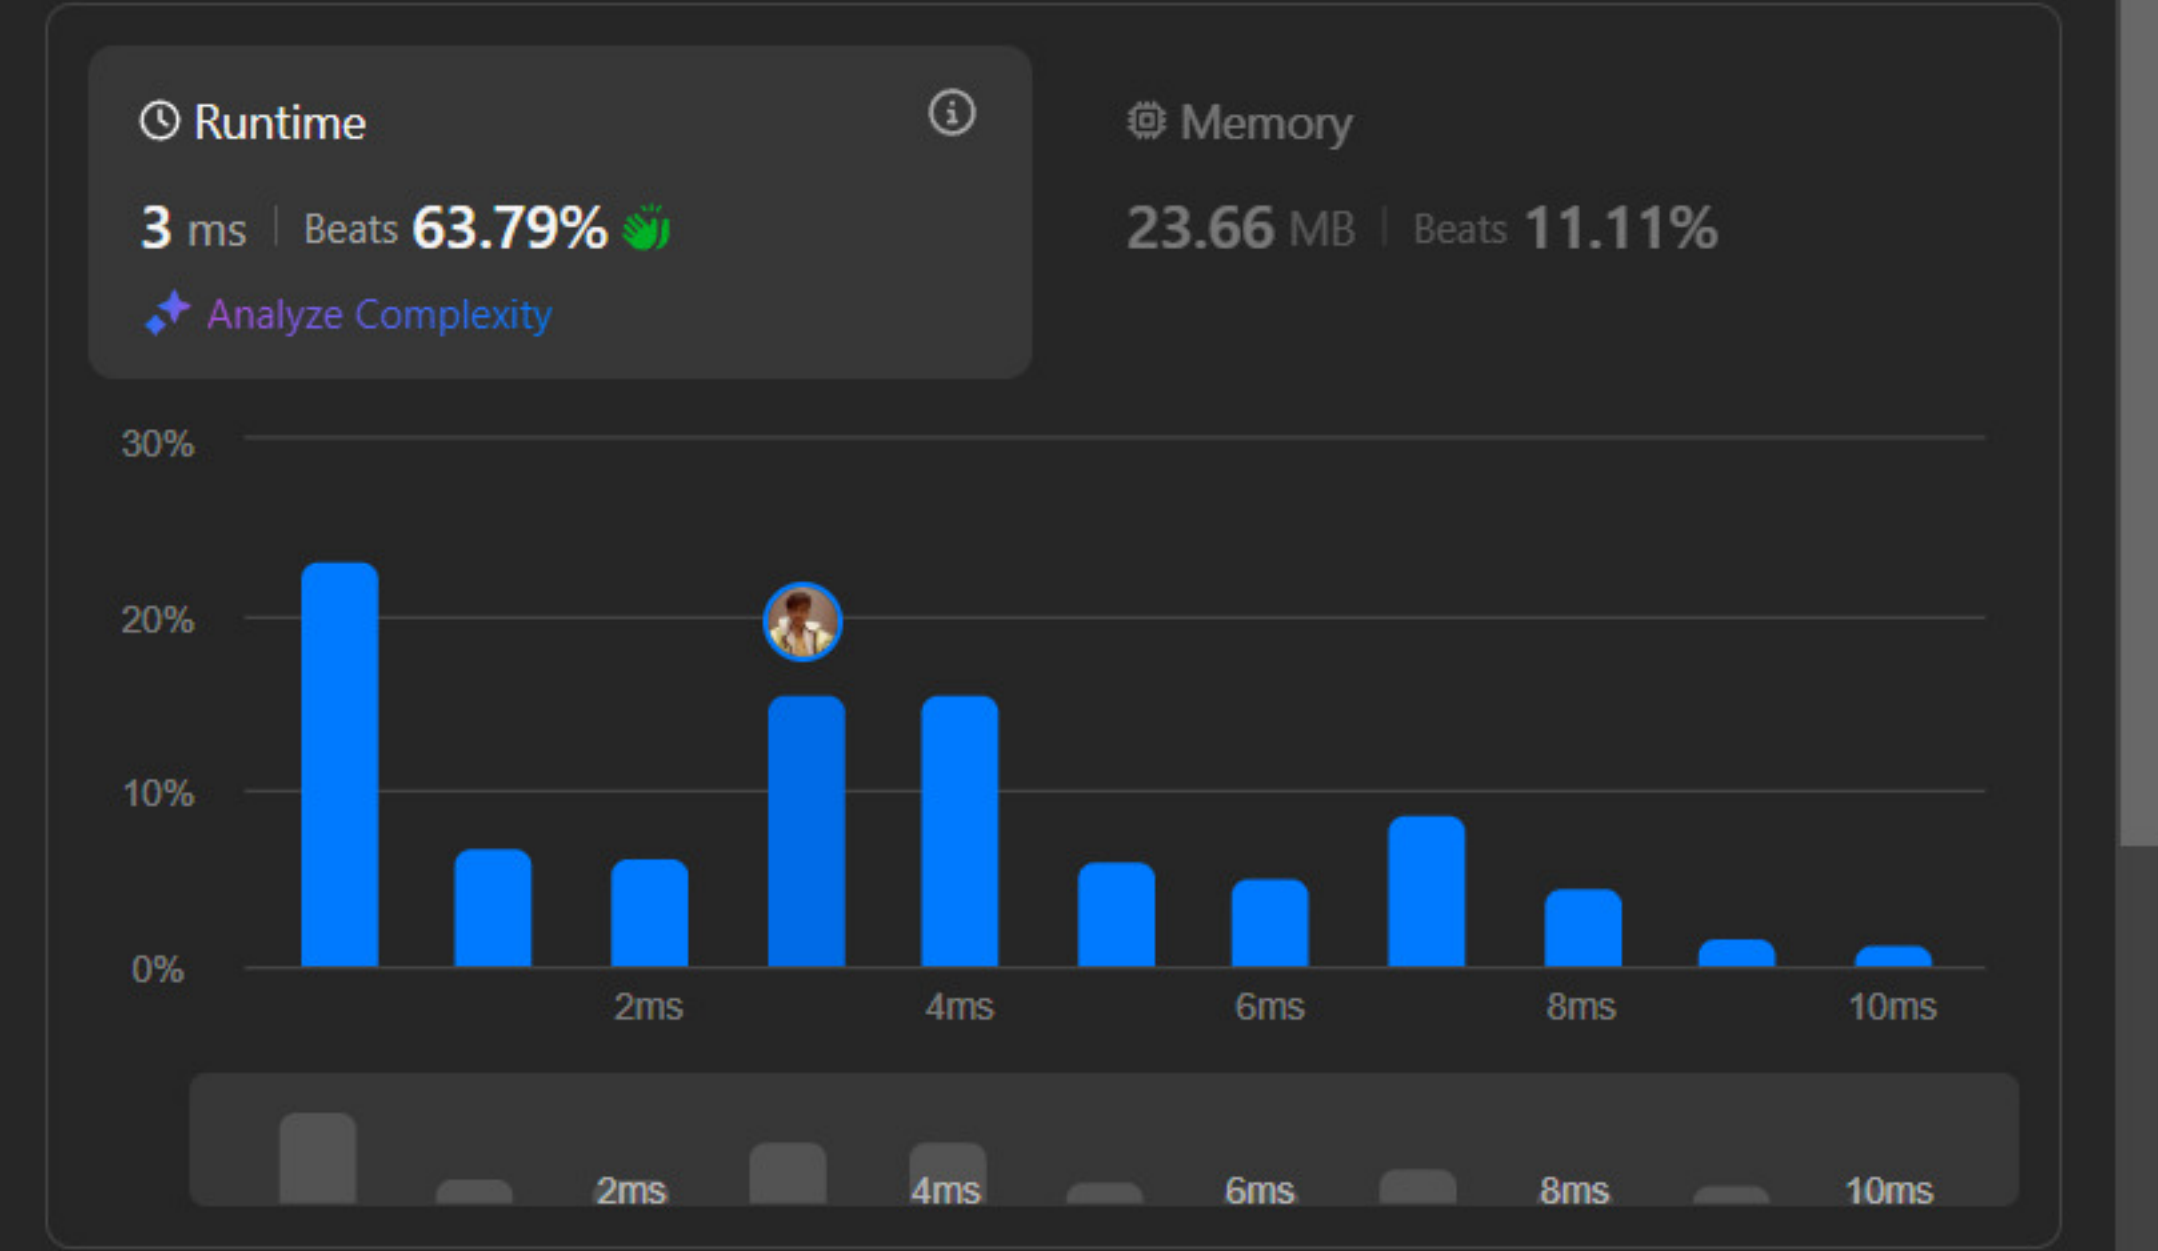

Code | C++

```
// Time Complexity: O(1)
// Space Complexity: O(N)
class MyCircularQueue {
public:
```

C++

Auto

```
68 // return true if the count is equal to the queue size
69 // else return false
70 return cnt == sz;
71 }
72
73 private:
74 int cnt, sz, headIdx;
75 vector<int> q;
76 };
77
78 ***
```

Saved

Ln 87, Col 4

Case 1


["MyCircularQueue","enqueue","enqueue","enqueue","enqueue","Rear","isFull","deQueue","enqueue","Rear"]

[[3],[1],[2],[3],[4],[],[],[4],[]]

Accepted 31 / 31 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:38

Editorial Solution

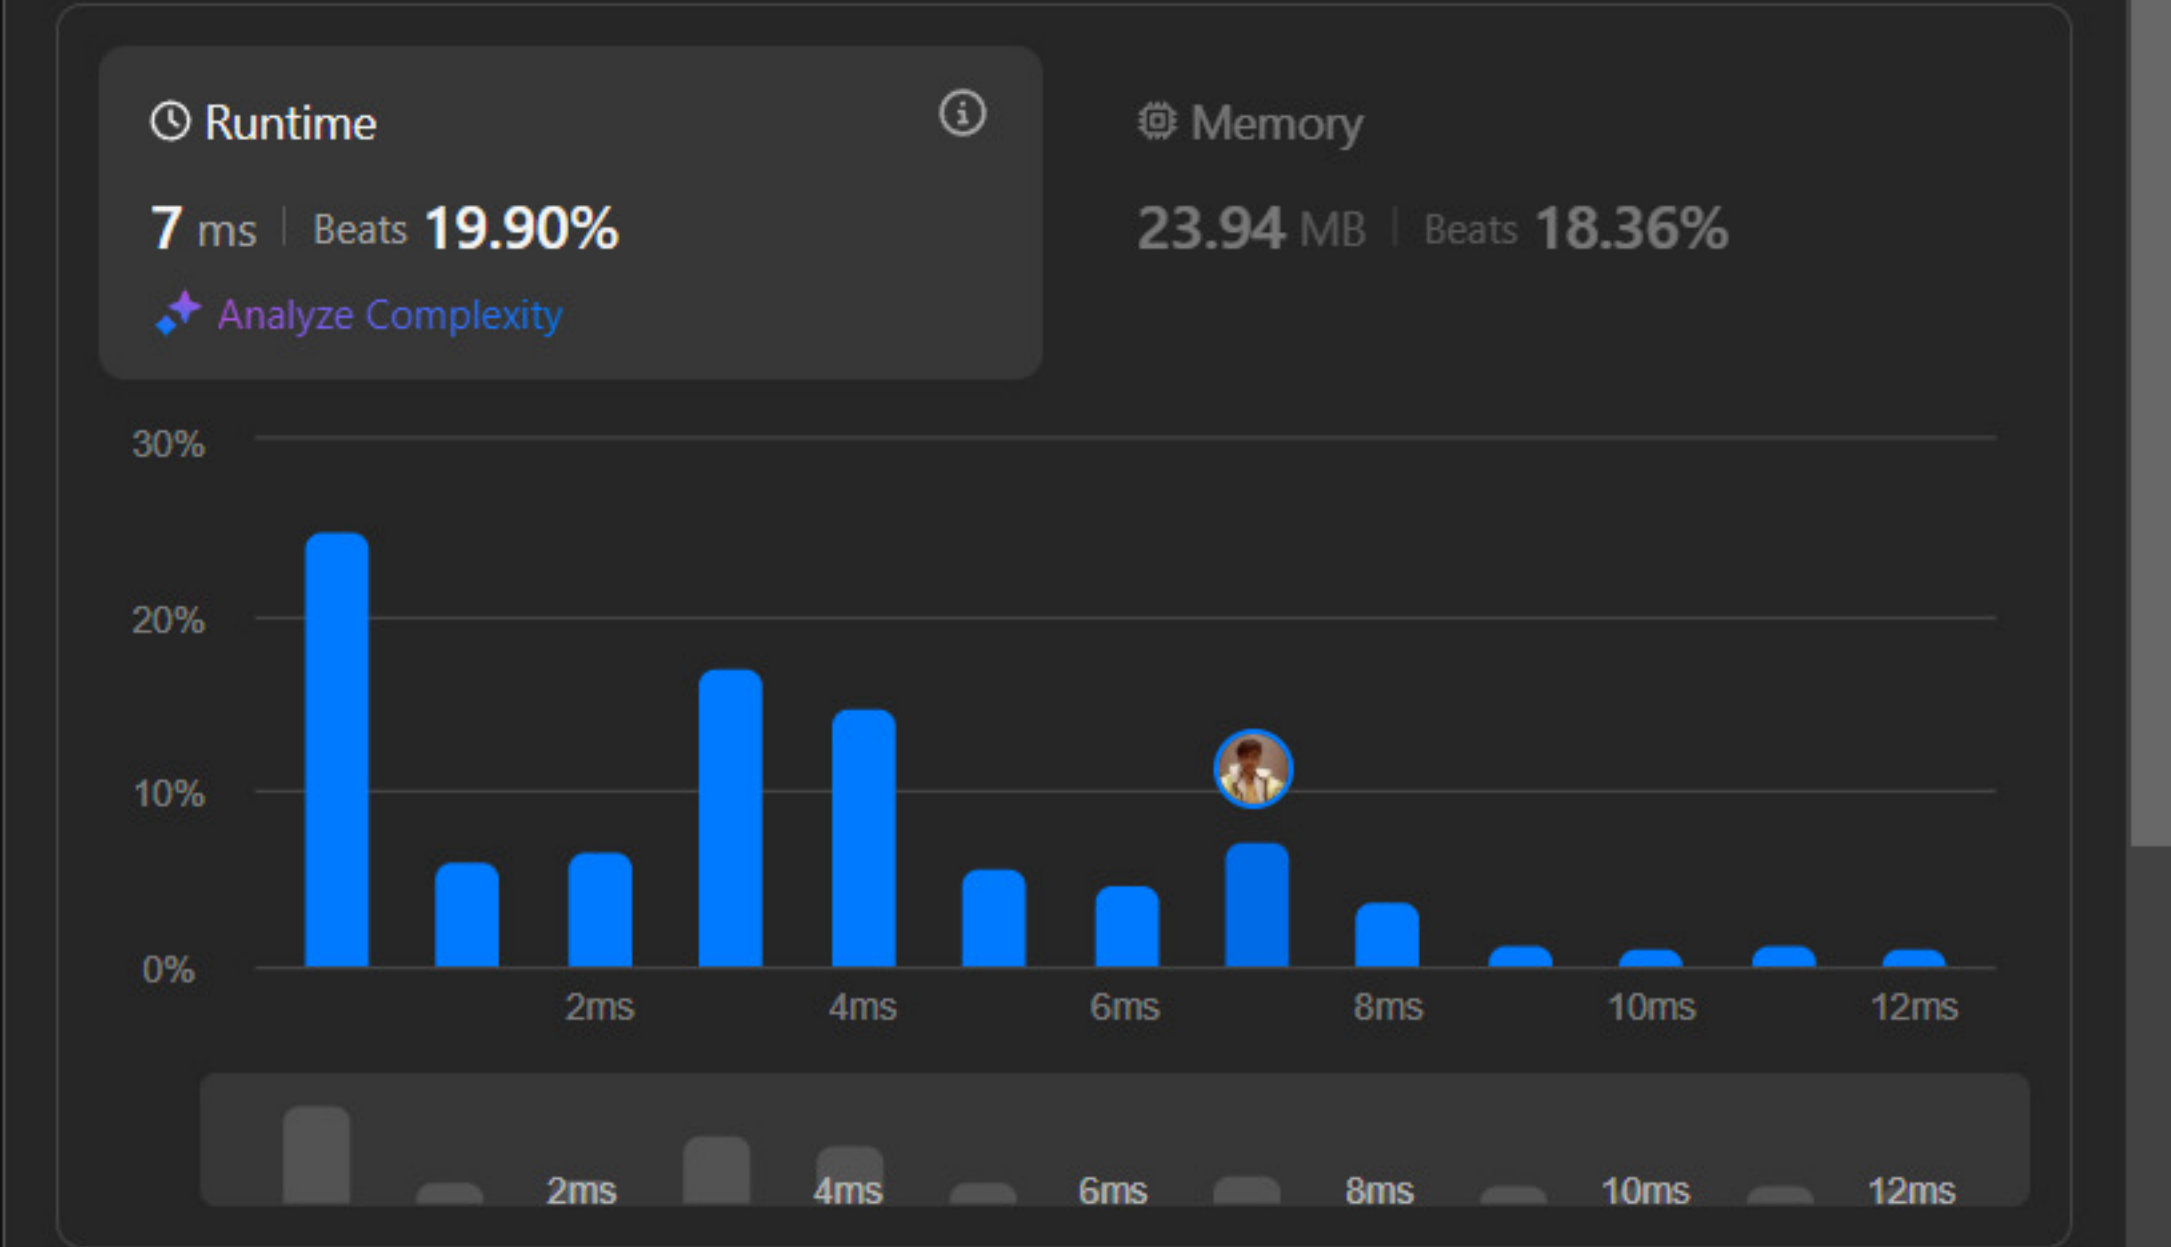

Code | C++

```
class MinStack {
private:
    vector<vector<int>>> st;
```

```
24     }
25
26     int getMin() {
27         return st.empty() ? -1 : st.back()[1];
28     }
29 };
```

Saved Ln 29, Col 3

Case 1 +

["MinStack","push","push","push","getMin","pop","top","getMin"]

[[],[-2],[0],[-3],[],[],[],[]]

</> Source ?


Description | Editorial | Submissions | Solutions | **Accepted** ×

← All Submissions

Accepted 18 / 18 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:41

Editorial **Solution**

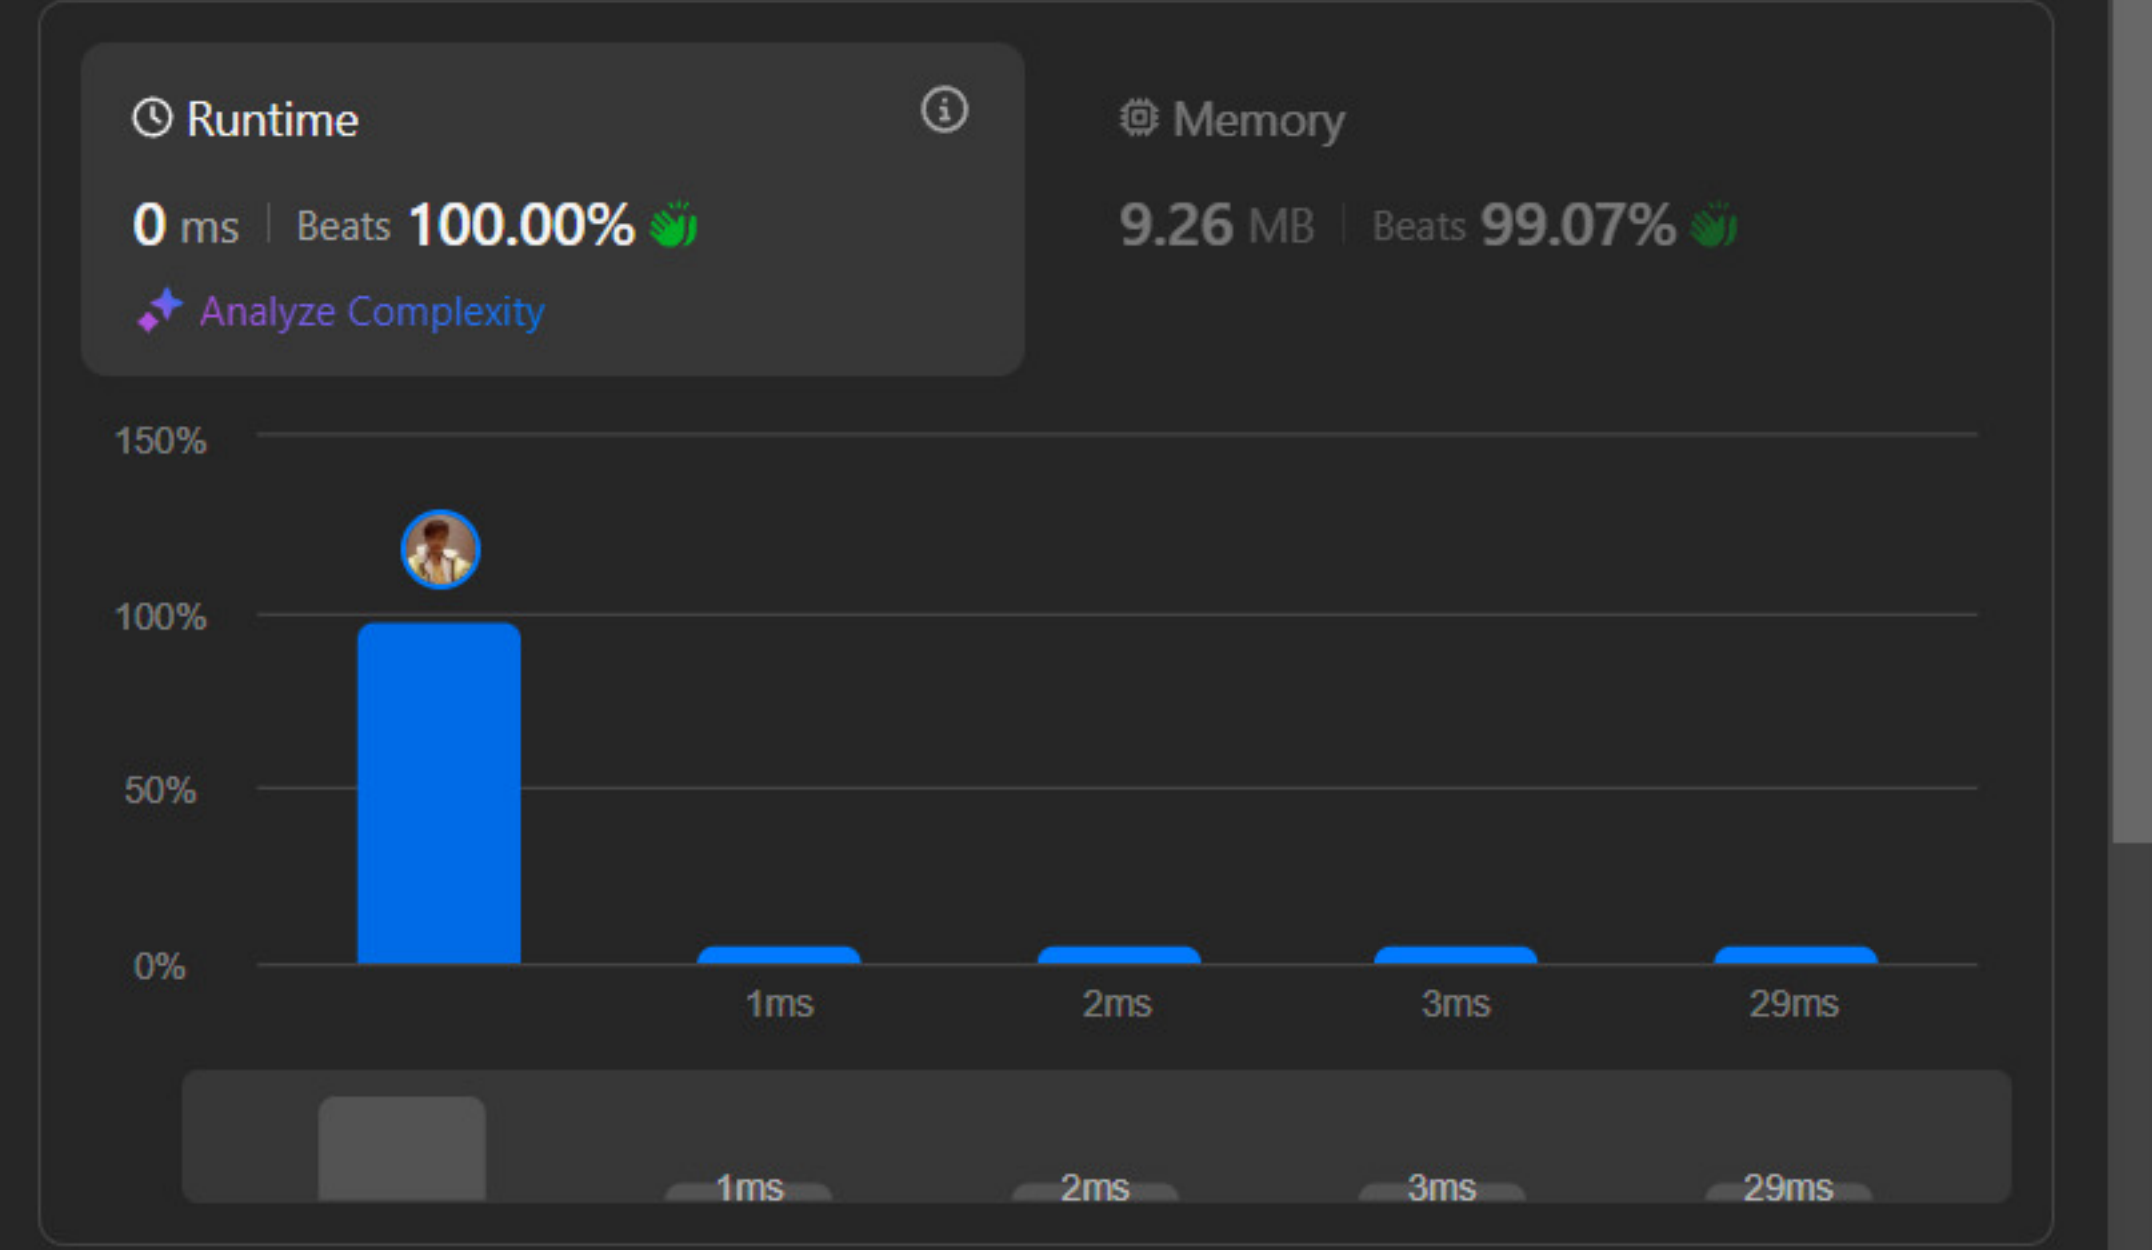

Code | C++

```
class MyStack {
private:
    std::queue<int> q;
```

Code

C++ Auto

```
20
21
22     int top() {
23         return q.front();
24     }
25
26     bool empty() {
27         return q.empty();
28     }
29 };
```

Saved Ln 29, Col 3

☒ **Testcase** | Test Result

Case 1

["MyStack","push","push","top","pop","empty"]

[[],[1],[2],[],[],[]]

Description Editorial Submissions Solutions Accepted

All Submissions

Accepted 16 / 16 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:47

Editorial

Solution


Runtime

7 ms | Beats 99.32%

Analyze Complexity

Memory

50.52 MB | Beats 53.57%

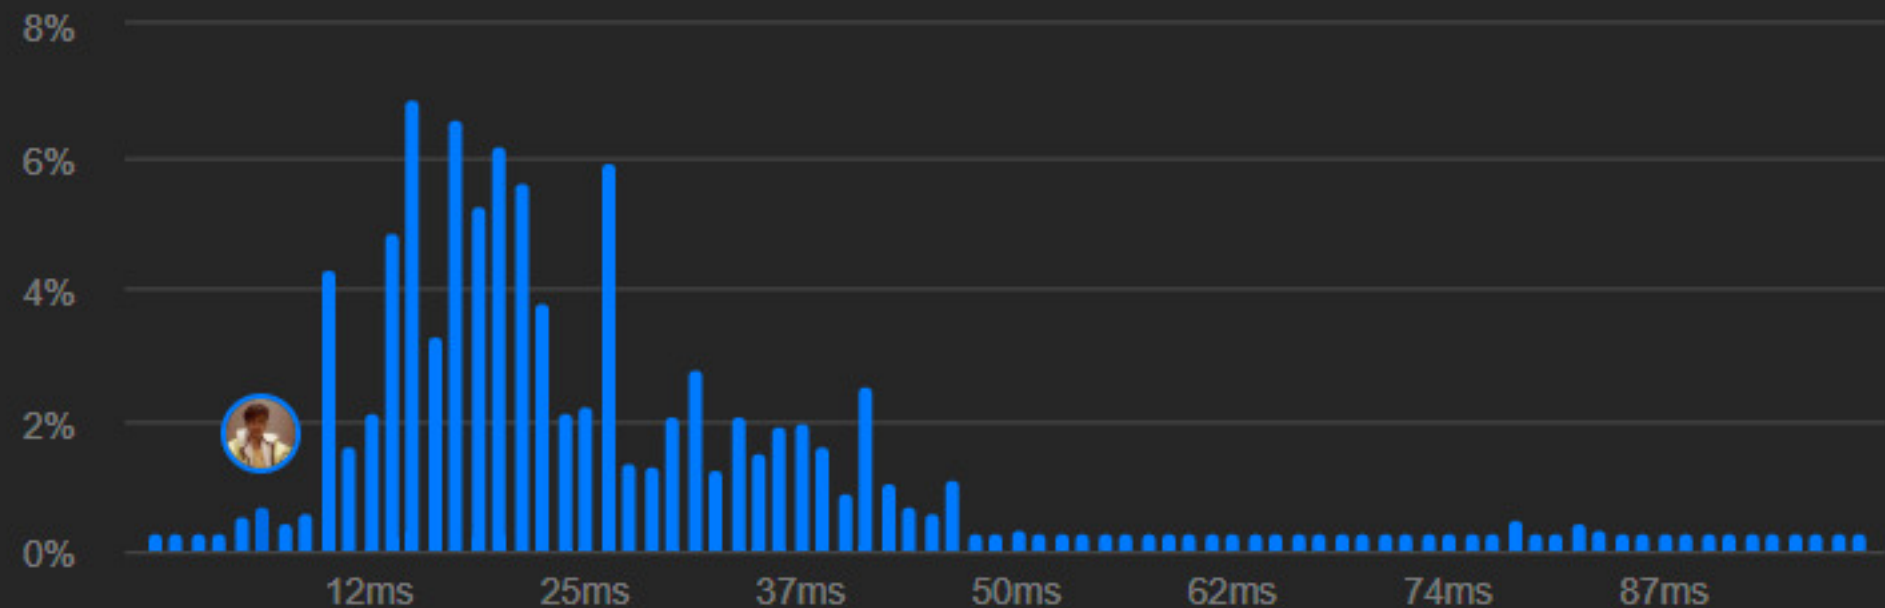

Code C++

```
#include <string>
using namespace std;

class TrieNode {
```

Code

C++ Auto

```
51 for (char c : prefix) {
52     int index = c - 'a';
53     if (!node->children[index]) {
54         return false;
55     }
56     node = node->children[index];
57 }
58 return true;
59 }
60 };
```

Saved Upgrade to Cloud Saving

Ln 60, Col 3

Testcase Test Result

Case 1

["Trie","insert","search","search","startsWith","insert","search"]

[[],["apple"],["apple"],["app"],["app"],["app"],["app"],["app"]]


Source

Accepted 35 / 35 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:43

Editorial

Solution

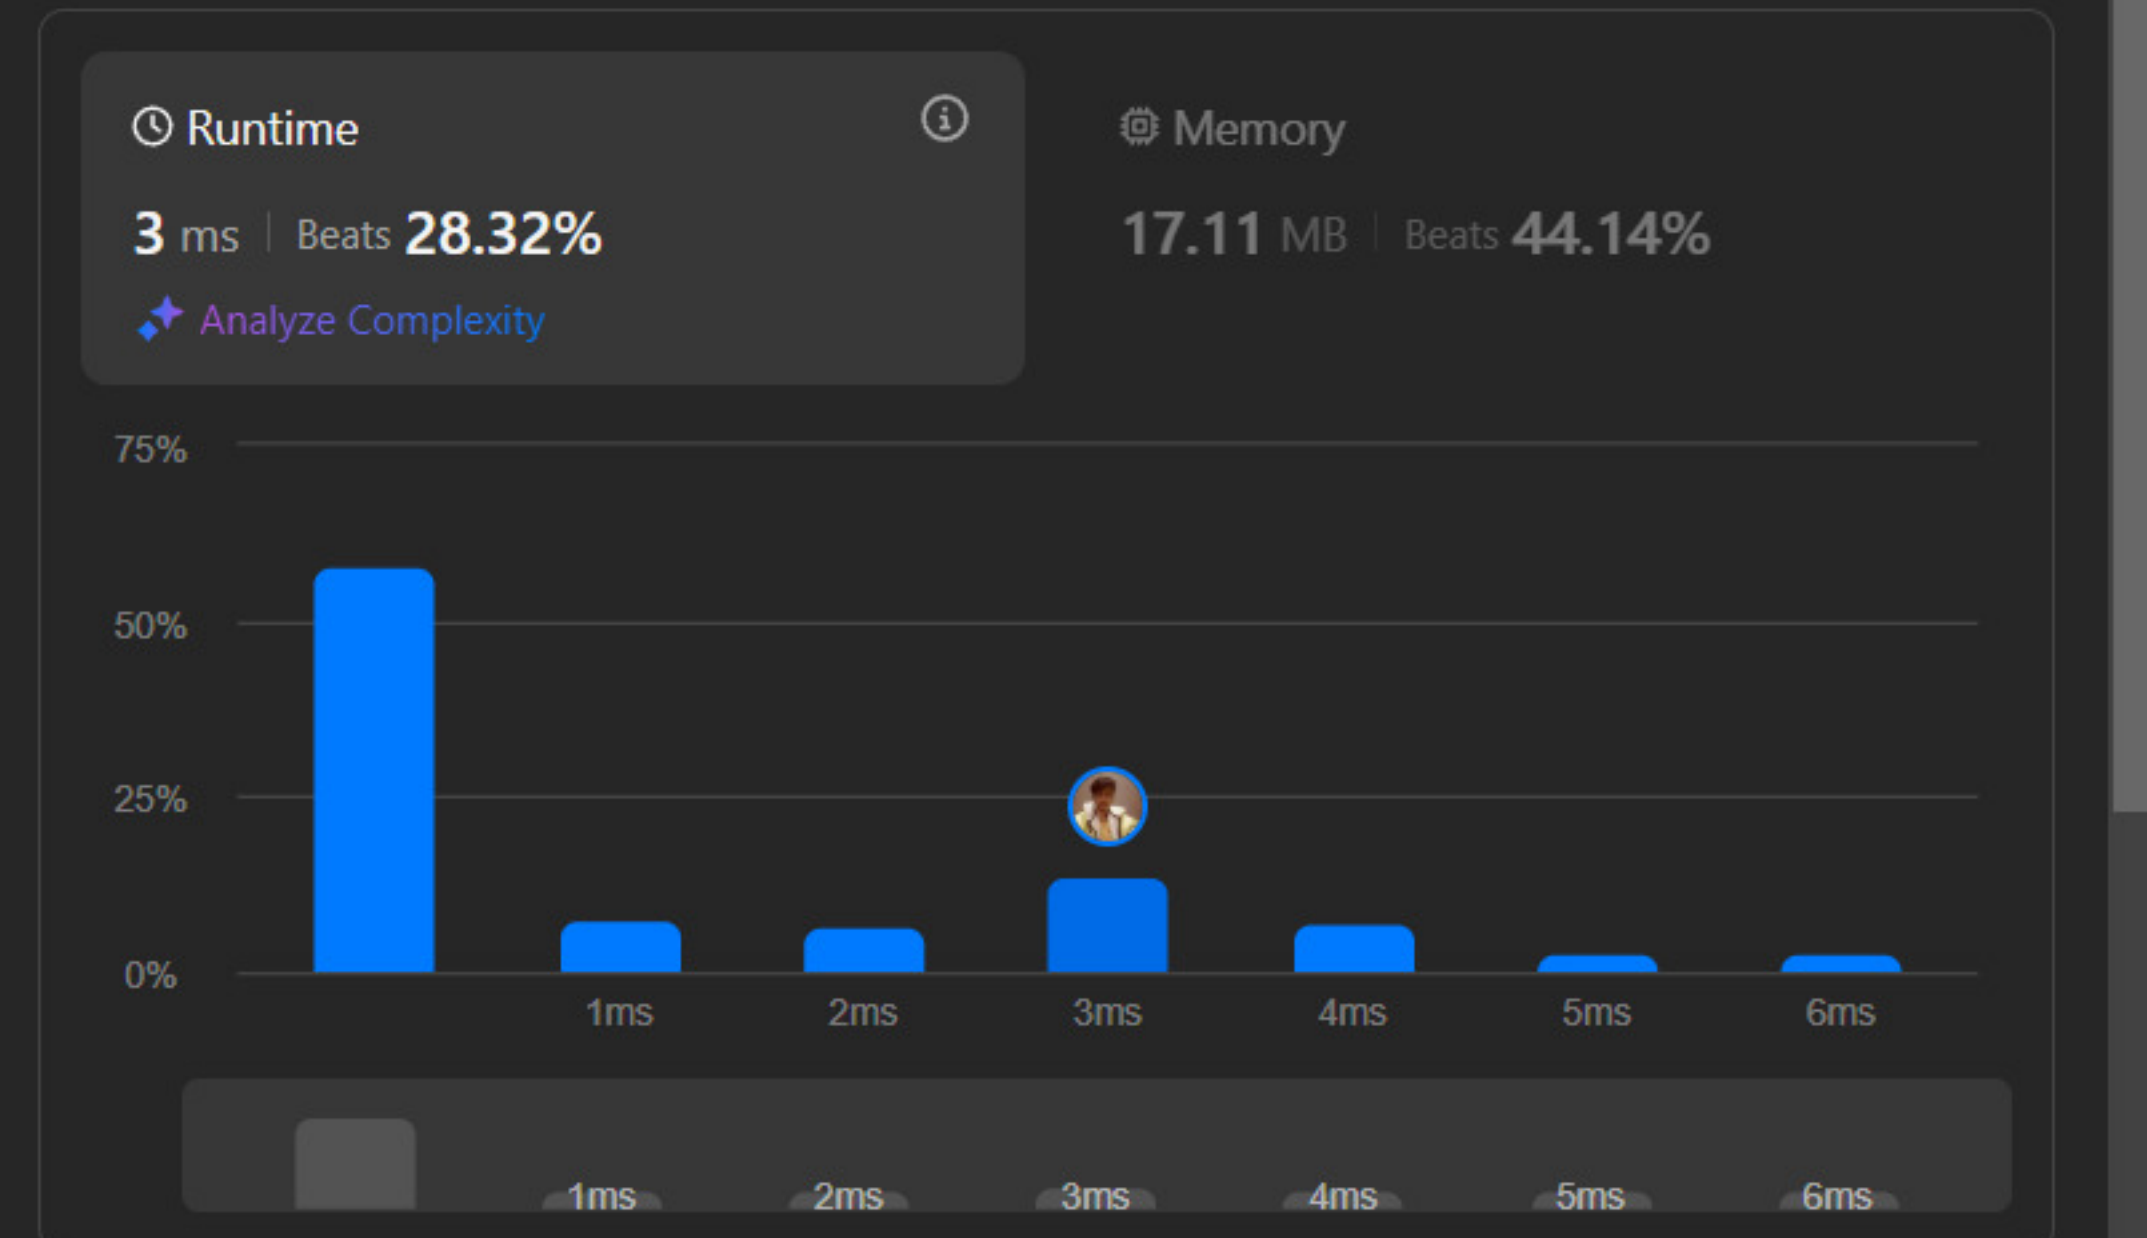

Code | C++

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
```

Code

C++ Auto

```
45         if (temp->right) {
46             q.push(temp->right);
47         }
48     }
49 }
50 }
51
52 return ans;
53 }
54 };
```

Saved

Ln 54, Col 3

Testcase | Test Result

Case 1 | Case 2 | Case 3 | +

root =

[3,9,20,null,null,15,7]

```
graph TD
    3((3)) --- 9((9))
    3 --- 20((20))
    20 --- 15((15))
    20 --- 7((7))
```

</> Source ?

← All Submissions

Accepted 71 / 71 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:39

Editorial

Solution


Runtime

0 ms | Beats 100.00%

Analyze Complexity

Memory

10.86 MB | Beats 66.32%

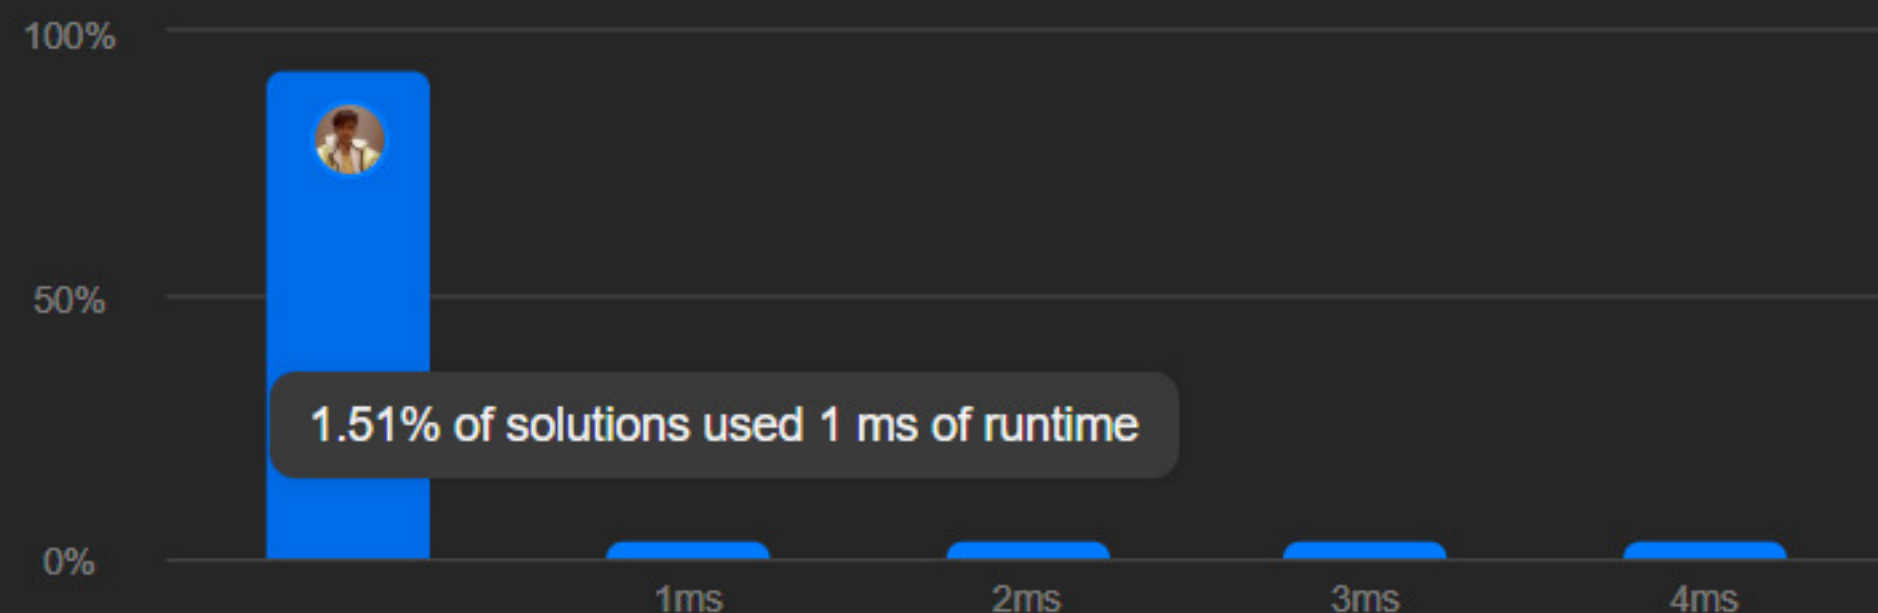

Code | C++

```
/**
 * Definition for a binary tree node.
 * struct TreeNode {
 *     int val;
```

Code

C++ Auto

```
18     }
19     inorder(root->left);
20     ans.push_back(root->val);
21     inorder(root->right);
22 }
23 vector<int> inorderTraversal(TreeNode* root) {
24     inorder(root);
25     return ans;
26 }
27 };
```

Saved

Ln 27

Testcase Test Result

Case 1

Case 2

Case 3

Case 4

+

root =

[1,null,2,3]



Source ?


Description | Accepted | Editorial | Submissions | Solutions

All Submissions

Accepted 22 / 22 testcases passed

Abhay Kumar submitted at Mar 19, 2025 14:21

Editorial Solution

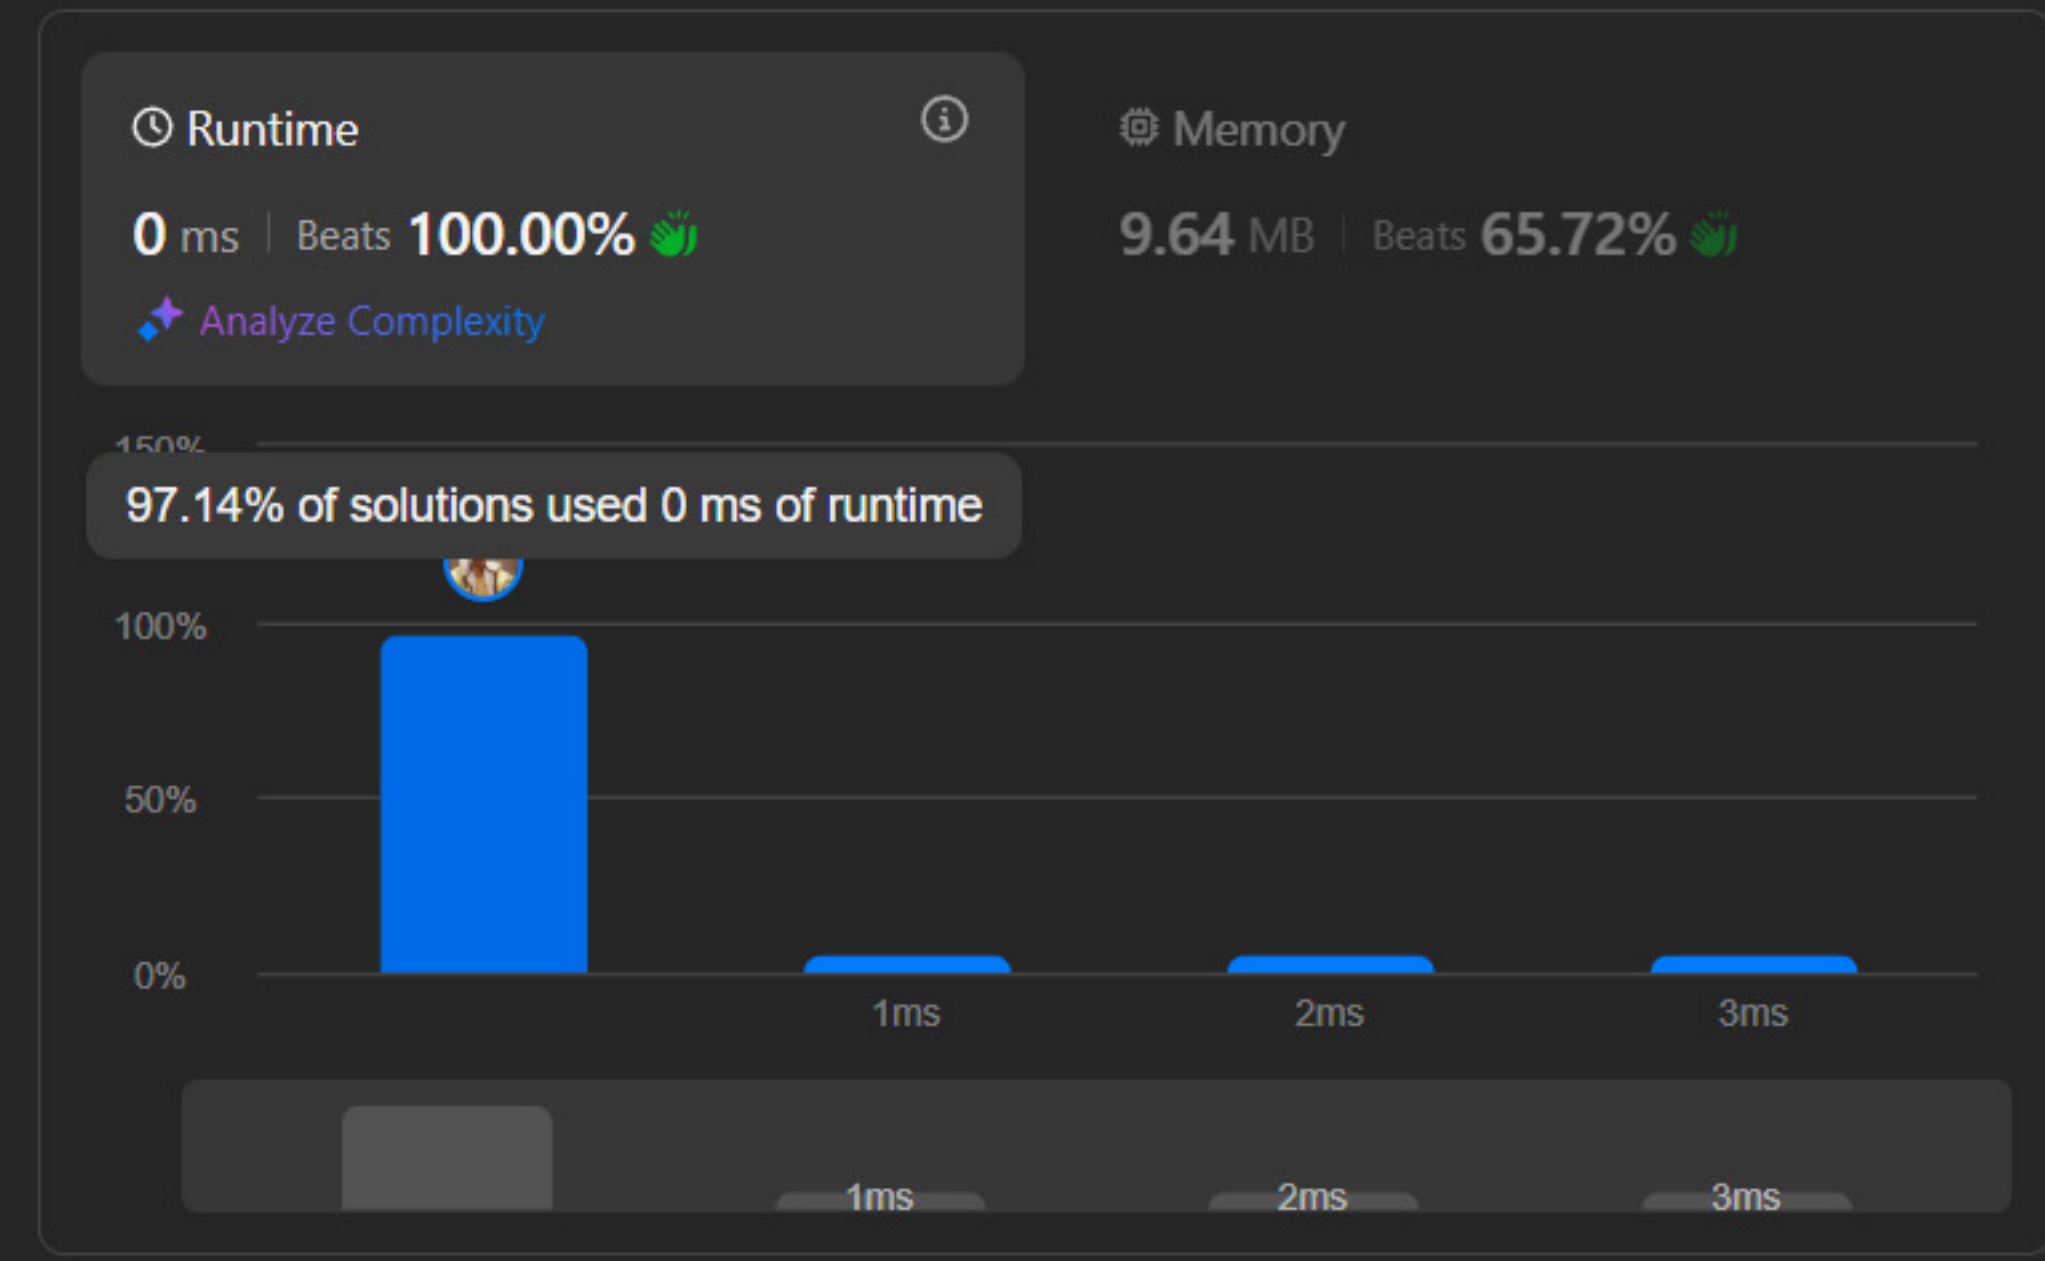

Code | C++

```
class MyQueue {
private:
    stack<int> input;
    stack<int> output;
```

Code

C++ Auto

```
26         }
27         return output.top();
28     }
29
30     bool empty() {
31         return input.empty() && output.empty();
32     }
33 };
```

Saved Ln 33, Col 3

Continue to work on your code from 3/19/2025, 2:20:23 PM [Restore](#)

Testcase | Test Result

Case 1

["MyQueue","push","push","peek","pop","empty"]

[[],[1],[2],[],[],[1]]