neovide Window Thu 12 Mar 12:38 PM

Neovide

server.js | docker-compose.yml | dockerfile

```yaml
services:
  app:
    build: .
    container_name: node_app
    ports:
      - "3000:3000"
    depends_on:
      - mongo
    restart: always

  mongo:
    image: mongo:6
    container_name: mongo_db
    ports:
      - "27017:27017"
    volumes:
      - mongo_data:/data/db
    restart: always

volumes:
  mongo_data:
```

```dockerfile
FROM node:18
WORKDIR /app
COPY package.json .
RUN npm install
COPY . .
EXPOSE 3000
CMD [node, server.js]
```

Neo-tree

~/Documents/docker/nodejsmongo/

- docker-compose.yml ?
- dockerfile ?
- package.json ?
- server.js ?

NORMAL main docker dockerfile 109b 19 Top 1:1 12:38

:vsplit

neovide Window Thu 12 Mar 12:38 PM

Neovide

server.js | docker-compose.yml | dockerfile | package.json

```
6  const express = require("express");      ● File is a CommonJS m
5  const mongoose = require("mongoose");
4  const app = express();
3  const PORT = 3000;
2  mongoose.connect("mongodb://mongo:27017/mydatabase", {
1    useNewUrlParser: true,
7    useUnifiedTopology: true
1  })
2    .then(() => console.log("MongoDB Connected"))
3    .catch(err => console.log(err));
4  app.get("/", (req, res) => {      ● 'req' is declared but its v
5    res.send("Node.js + MongoDB running with Docker Compose");
6  });
7  app.listen(PORT, () => {
8    console.log(`Server running on port ${PORT}`);
9  });
```

```
1  {
1    "name": "nodejsmongo",
2    "version": "1.0.0",
3    "main": "server.js",
4    "dependencies": {
5      "express": "^4.18.2",
6      "mongoose": "^7.0.0"
7    }
8  }
```

Neo-tree

~/Documents/docker/nodejsmongo/n

- docker-compose.yml ?
- dockerfile ?
- package.json ?
- server.js ?

Wrap

Enabled Wrap

NORMAL main docker 2 server.js useUnifiedTopology

:vsplit

iTerm2 Shell Edit View Session Scripts Profiles Window Help Thu 12 Mar 12:39 PM

sm-agent

-zsh ⌘1 | -zsh ⌘2 | sm-agent ⌘3

```
➜  node-mongose-compose git:(main) ✗ docker compose up --build -d
[+] Building 0.7s (12/12) FINISHED
 => [internal] load local bake definitions                                                                    0.0s
 => => reading from stdin 601B                                                                                0.0s
 => [internal] load build definition from dockerfile                                                          0.0s
 => => transferring dockerfile: 146B                                                                          0.0s
 => [internal] load metadata for docker.io/library/node:18                                                    0.5s
 => [internal] load .dockerignore                                                                             0.0s
 => => transferring context: 2B                                                                               0.0s
 => [1/5] FROM docker.io/library/node:18@sha256:c6ae79e38498325db67193d391e6ec1d224d96c693a8a4d943498556716d3783  0.0s
 => => resolve docker.io/library/node:18@sha256:c6ae79e38498325db67193d391e6ec1d224d96c693a8a4d943498556716d3783  0.0s
 => [internal] load build context                                                                             0.0s
 => => transferring context: 130B                                                                             0.0s
 => CACHED [2/5] WORKDIR /app                                                                                 0.0s
 => CACHED [3/5] COPY package.json .                                                                          0.0s
 => CACHED [4/5] RUN npm install                                                                              0.0s
 => CACHED [5/5] COPY . .                                                                                     0.0s
 => exporting to image                                                                                        0.0s
 => => exporting layers                                                                                       0.0s
 => => exporting manifest sha256:0862221aee587287a10e12d0f3e51f2a5a94f5d5effdd3b99d2ce3cc43682310             0.0s
 => => exporting config sha256:c6ec439895a499abf1a50a5d772c193f2c5b3ff1c5212366de6b8291b4edc3aa               0.0s
 => => exporting attestation manifest sha256:006d29e388e4cbd147b1c435efeba7e8e106c691d0ff895fab291d144a8db2ba  0.0s
 => => exporting manifest list sha256:5843f61bacba55298cab92d558ad16fd58f23c65b3e42cd896a9920888ef32fb        0.0s
 => => naming to docker.io/library/node-mongose-compose-app:latest                                            0.0s
 => => unpacking to docker.io/library/node-mongose-compose-app:latest                                         0.0s
 => resolving provenance for metadata file                                                                    0.0s
[+] Running 3/3
 ✔ node-mongose-compose-app  Built                                                                            0.0s
 ✔ Container node_app        Started                                                                          0.2s
 ✔ Container mongo_db        Started                                                                          0.1s
➜  node-mongose-compose git:(main) ✗ neovide
```

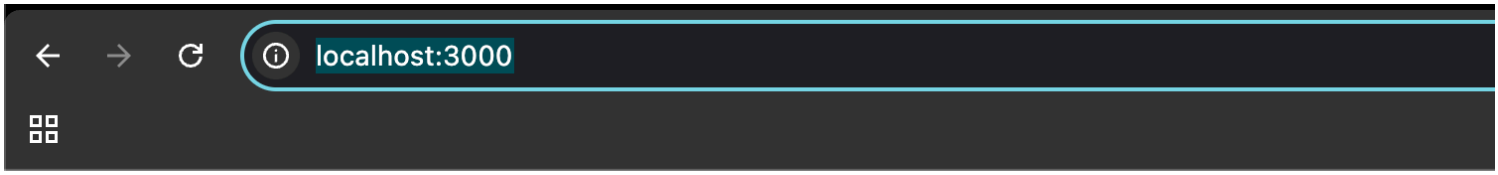

Node.js + MongoDB running with Docker Compose