Qualcomm Technologies, Inc.

SW6100 Arm® Cortex® -M55 Zephyr RTOS Boot Flow Technical Overview

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

80-74841-125 Rev. AA

Confidential – Qualcomm Technologies, Inc. and/or its affiliated companies – May Contain Trade Secrets

NO PUBLIC DISCLOSURE PERMITTED: Please report postings of this document on public servers or websites to: DocCtrlAgent@qualcomm.com.

© Qualcomm Technologies, Inc. and/or its subsidiaries. All rights reserved.

Revision History

Revision	Date	Description
AA	October 2025	Initial release

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Contents

1 M55 AWM/SWM Boot Flow 5
2 Remappers 10
3 References 12

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Introduction

- This document provides an overview of the Zephyr RTOS boot flow in Arm® Cortex ® -M55.
- Zephyr is a small real-time operating system (RTOS) for connected resource-constrained and embedded devices supporting multiple architectures.
- Sensor wearable microcontroller (SWM), Ambient wearable microcontroller (AWM) Cortex -M55 cores use Zephyr kernel v3.7.0 as the underlying RTOS.
- The SW6100 chipset has two Cortex M55 processors, SWM and AWM, that are part of the low power artificial intelligence (LPAI) subsystem.
  - SWM is for sensors use cases and hosts Qualcomm sensing hub Sensor Algorithms.
  - AWM is responsible for managing Display rendering in the Ambient mode such as Always on Display (AoD) offload cases.

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Section 1

M55 AWM/SWM Boot Flow

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

M55 AWM/SWM Boot Flow

The following figure shows the M55 AWM/SWM boot flow:

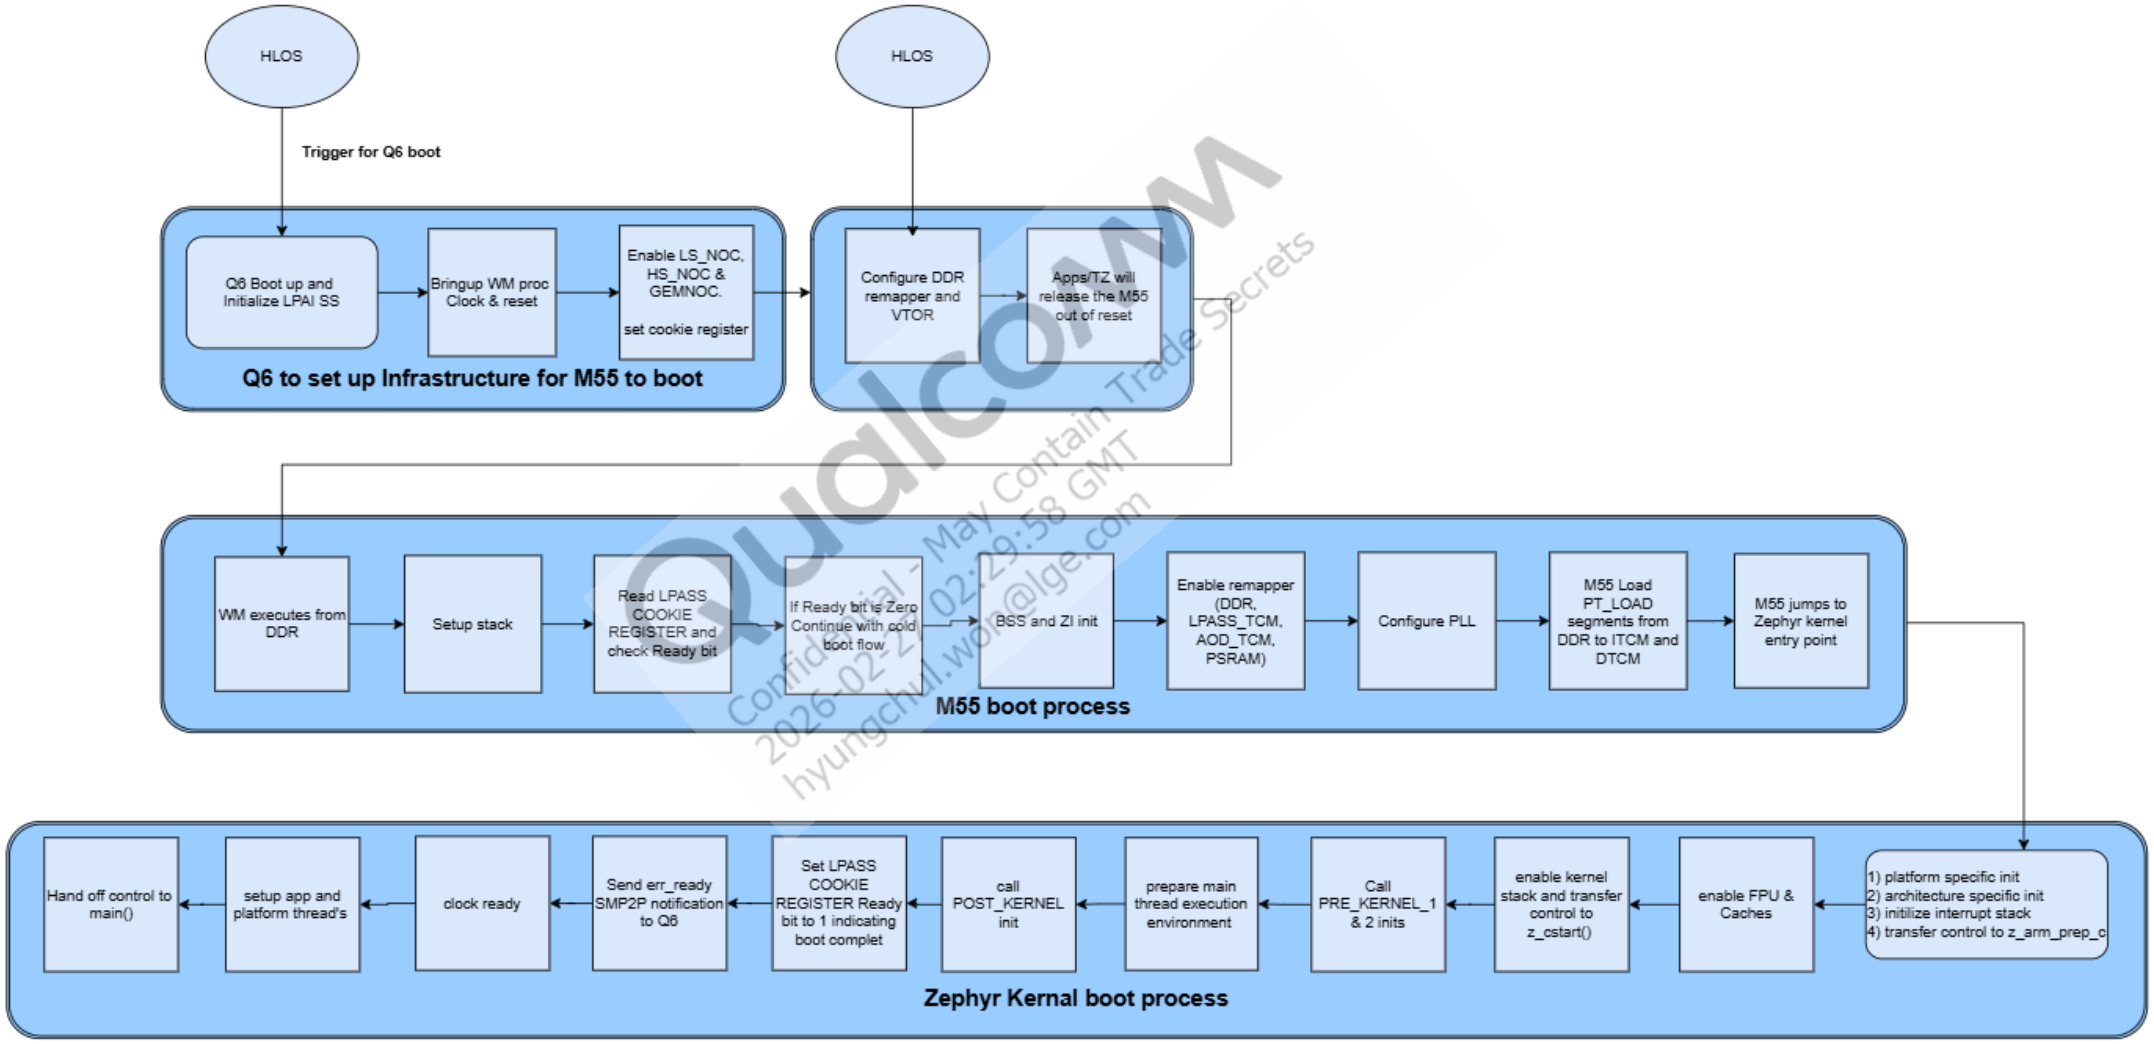

Qualcomm Confidential - May Contain Trade Secrets 2026-02-27 02:29:58 GMT hyungchul.woo@lge.com

M55 AWM/SWM Boot Flow (cont.)

- ADSP Q6 must be booted up and configured to set up the required LPAI infrastructure for M55.
- M55 boots from DDR because RPROC on HLOS does not support copying TCM segments to M55's internal TCM.
- TrustZone (TZ) authenticates the M55 firmware, enables a remapper to allow M55 to access DDR, and then releases the reset.
- A tiny bootloader is implemented within the M55 firmware that runs from DDR. The vector table offset register (VTOR) points to the DDR address.
- Tiny bootloader: `wm_proc/core_ect/boot`
  - Initializes the remaining remappers—LPASS TCM, AOD TCM, AOSS RAM, and the PMIC region—to enable M55 to access external memory.
  - Configures PLL, adjusts core clock so that TCM copying can be done.
  - Loads segments from DDR to data tightly coupled memory (DTCM) and instruction tightly coupled memory (ITCM).
  - Relocates the VTOR to TCM vector table and jumps to the Zephyr entry function defined in the linker script.

```
wm_proc/core_ect/boot/subsys_boot/subsys_boot.c

/* Execute entry point */
ctxt->entry_fn();

zephyr/kernel/config/soc/arm/aspen_lpai/linker.ld :: ENTRY(CONFIG_KERNEL_ENTRY)
zephyr/kernel/config/aop.conf::  CONFIG_KERNEL_ENTRY="Reset_Handler" (core_ect/boot/arch/cortex_m/startup.c)
```

- From the Zephyr kernel entry point, M55 begins execution from its internal TCM.
- Subsequently, M55 initializes the platform and the interrupt stack.

```
wm_proc/zephyr/zephyr/arch/arm/core/cortex_m/vector_table.h
```

Qualcomm Confidential - May Contain Trade Secrets 2025-02-27 02:29:56 GMT hyungchul.won@lge.com

M55 AWM/SWM Boot Flow (cont.)

- Transfers control to `z_prep_c.c` at `wm_proc/zephyr/zephyr/arch/arm/core/cortex_m/prep_c.c`. This enables the FPU and caches.
- Next, transfers control to `z_cstart()` at `wm_proc/zephyr/zephyr/kernel/init.c`.

```
enum init_level {
      INIT_LEVEL_EARLY = 0,
      INIT_LEVEL_PRE_KERNEL_1,
      INIT_LEVEL_PRE_KERNEL_2,
      INIT_LEVEL_POST_KERNEL,
      INIT_LEVEL_APPLICATION,
   #ifdef CONFIG_SMP
      INIT_LEVEL_SMP,
   #endif /* CONFIG_SMP */
   };
```

- `z_cstart()` calls `INIT_LEVEL_PRE_KERNEL_1` and `INIT_LEVEL_PRE_KERNEL_2` sys inits.
- It then calls `bg_thread_main()`, which does `INIT_LEVEL_POST_KERNEL` sys init and `INIT_LEVEL_APPLICATION` sys init.

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

M55 AWM/SWM Boot Flow (cont.)

- Error-ready-irq is done as part of `INIT_LEVEL_POST_KERNEL` in `err_init()` located at

  `wm_proc/core_ect/debugtools/err/src/err.c`.

- This marks the end of the boot flow.

- The list of sys init tasks is auto-generated in the build at the following location for SWM:

  `wm_proc/config/bsp/lpai_swm_img/build/aspen.swm.prod/LPAI_SWM_IMG_aspen.swm.prod_sys_init_report.txt`

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Section 2

Remappers

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Remappers

- Memory remapping is a technique used to ensure that all physical memory in the system is accessible to the cores (AWM/SWM), especially in systems with large RAM.
- During the DDR boot, memory remapping is done by the bus interface unit using memory remappers located on the AXI and QHB paths.
- AWM/SWM could access DDR, LPASS_TCM, AOD_TCM, or PSRAM through the AXI/QHB interface. To access the appropriate memory, respective remapper must be configured and enabled using the device tree located at `wm_proc/core_ect/dt_settings/soc/aspen_lpai_swm/core/boot/remapper`.
- AXI remapper is for memory (DDR, LPASS_TCM, AOD_TCM, and PSRAM).
- QHB remapper is for IO mapped memory.
- Remappers configurations are not recommended to be modified by customers as they are tightly coupled with SMMU stage-2 mapping and access control mechanism.

Qualcomm
Confidential – May Contain Trade Secrets
2026-02-27 02:20:58 GMT
hyungchul.won@lge.com

Section 3

References

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Documents and Standards

Title	Number
Qualcomm Technologies, Inc.	
SW6100 Software User Guide	80-74841-50

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Acronyms and Terms

Acronym or Term	Definition
AWM	Ambient wearable microcontroller
AoD	Always on Display
DTCM	Data tightly coupled memory
ITCM	Instruction tightly coupled memory
LPAI	Low power artificial intelligence
SWM	Sensor wearable microcontroller
TZ	TrustZone
VTOR	Vector table offset register

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

Questions?

For additional information or to submit technical questions, go to: https://www.qualcomm.com/support

Qualcomm
Confidential - May Contain Trade Secrets
2026-02-27 02:29:58 GMT
hyungchul.won@lge.com

LEGAL INFORMATION

Your access to and use of this material, along with any documents, software, specifications, reference board files, drawings, diagnostics and other information contained herein (collectively this "Material"), is subject to your (including the corporation or other legal entity you represent, collectively "You" or "Your") acceptance of the terms and conditions ("Terms of Use") set forth below. If You do not agree to these Terms of Use, you may not use this Material and shall immediately destroy any copy thereof.

1) Legal Notice.
This Material is being made available to You solely for Your internal use with those products and service offerings of Qualcomm Technologies, Inc. ("**Qualcomm Technologies**"), its affiliates and/or licensors described in this Material, and shall not be used for any other purposes. If this Material is marked as "**Qualcomm Internal Use Only**", no license is granted to You herein, and You must immediately (a) destroy or return this Material to Qualcomm Technologies, and (b) report Your receipt of this Material to qualcomm.support@qti.qualcomm.com. This Material may not be altered, edited, or modified in any way without Qualcomm Technologies' prior written approval, nor may it be used for any machine learning or artificial intelligence development purpose which results, whether directly or indirectly, in the creation or development of an automated device, program, tool, algorithm, process, methodology, product and/or other output. Unauthorized use or disclosure of this Material or the information contained herein is strictly prohibited, and You agree to indemnify Qualcomm Technologies, its affiliates and licensors for any damages or losses suffered by Qualcomm Technologies, its affiliates and/or licensors for any such unauthorized uses or disclosures of this Material, in whole or part.

Qualcomm Technologies, its affiliates and/or licensors retain all rights and ownership in and to this Material. No license to any trademark, patent, copyright, mask work protection right or any other intellectual property right is either granted or implied by this Material or any information disclosed herein, including, but not limited to, any license to make, use, import or sell any product, service or technology offering embodying any of the information in this Material.

THIS MATERIAL IS BEING PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESSED, IMPLIED, STATUTORY OR OTHERWISE. TO THE MAXIMUM EXTENT PERMITTED BY LAW, QUALCOMM TECHNOLOGIES, ITS AFFILIATES AND/OR LICENSORS SPECIFICALLY DISCLAIM ALL WARRANTIES OF TITLE, MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR A PARTICULAR PURPOSE, SATISFACTORY QUALITY, COMPLETENESS OR ACCURACY, AND ALL WARRANTIES ARISING OUT OF TRADE USAGE OR OUT OF A COURSE OF DEALING OR COURSE OF PERFORMANCE. MOREOVER, NEITHER QUALCOMM TECHNOLOGIES, NOR ANY OF ITS AFFILIATES AND/OR LICENSORS, SHALL BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY EXPENSES, LOSSES, USE, OR ACTIONS HOWSOEVER INCURRED OR UNDERTAKEN BY YOU IN RELIANCE ON THIS MATERIAL.

Certain product kits, tools and other items referenced in this Material may require You to accept additional terms and conditions before accessing or using those items.

Technical data specified in this Material may be subject to U.S. and other applicable export control laws. Transmission contrary to U.S. and any other applicable law is strictly prohibited.

Nothing in this Material is an offer to sell any of the components or devices referenced herein.

This Material is subject to change without further notification.

In the event of a conflict between these Terms of Use and the *Website Terms of Use* on www.qualcomm.com , the *Qualcomm Privacy Policy* referenced on www.qualcomm.com, or other legal statements or notices found on prior pages of the Material, these Terms of Use will control. In the event of a conflict between these Terms of Use and any other agreement (written or click-through, including, without limitation any non-disclosure agreement) executed by You and Qualcomm Technologies or a Qualcomm Technologies affiliate and/or licensor with respect to Your access to and use of this Material, the other agreement will control.

These Terms of Use shall be governed by and construed and enforced in accordance with the laws of the State of California, excluding the U.N. Convention on International Sale of Goods, without regard to conflict of laws principles. Any dispute, claim or controversy arising out of or relating to these Terms of Use, or the breach or validity hereof, shall be adjudicated only by a court of competent jurisdiction in the county of San Diego, State of California, and You hereby consent to the personal jurisdiction of such courts for that purpose.

2) Trademark and Product Attribution Statements.
Qualcomm is a trademark or registered trademark of Qualcomm Incorporated. Arm is a registered trademark of Arm Limited (or its subsidiaries) in the U.S. and/or elsewhere. The Bluetooth® word mark is a registered trademark owned by Bluetooth SIG, Inc. Other product and brand names referenced in this Material may be trademarks or registered trademarks of their respective owners.

Snapdragon and Qualcomm branded products referenced in this Material are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm patented technologies are licensed by Qualcomm Incorporated.

THE DOCUMENTATION ACCOMPANYING THE MATERIALS AND/OR RELEVANT PRODUCTS AND SERVICE OFFERINGS MAY INCLUDE IMPORTANT USE LIMITATIONS. ANY DEVIATIONS FROM APPLICABLE USE LIMITATIONS MAY ADVERSELY IMPACT PERFORMANCE, DURABILITY, QUALITY OR SAFETY. YOU ASSUME ALL RISKS AND LIABILITIES ASSOCIATED WITH ANY DEVIATIONS

Qualcomm
Confidential - May Contain Trade Secrets
2022-02-2 29:58 GMT
hyungoo.l wer@qc.com