

Cucumber PDF Report

11-May-2024, 9:32:21 PM

Start : May 11, 9:31:55.997 PM

End : May 11, 9:32:20.467 PM

Duration : 24.470 s

Features

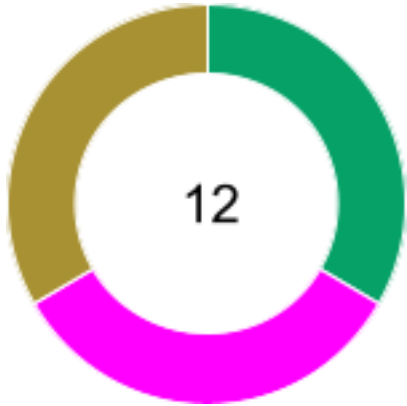
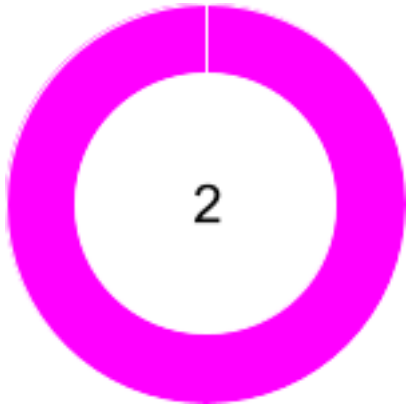
Scenarios

Steps

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 0
FAILED - 4
SKIPPED - 0

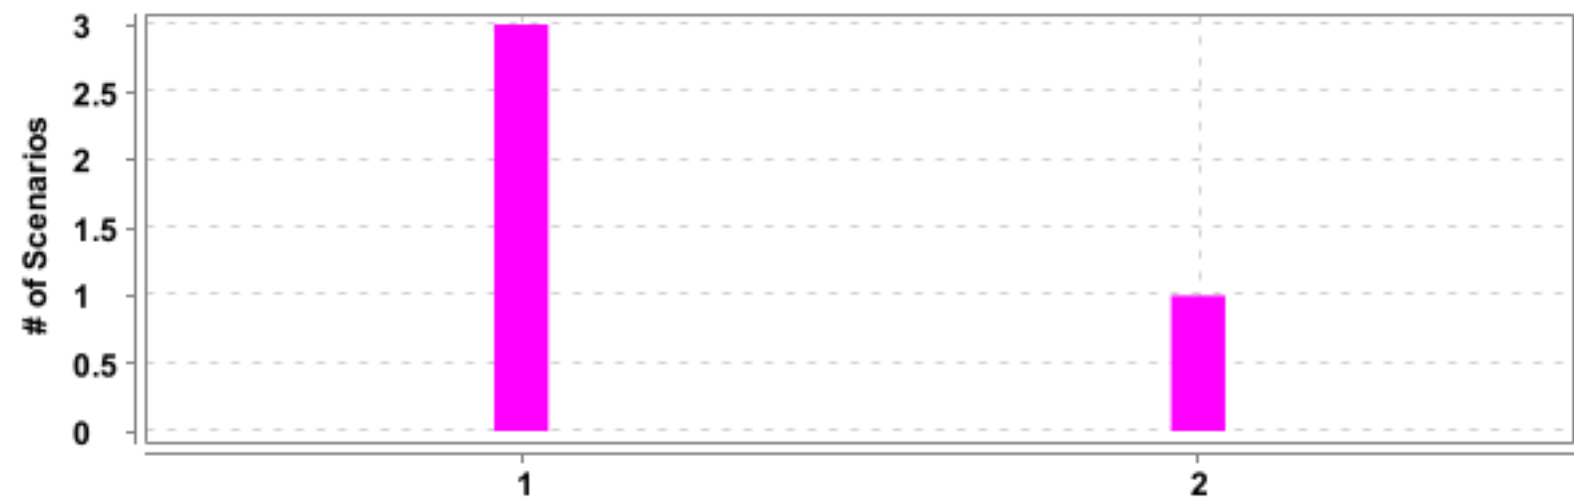
PASSED - 4
FAILED - 4
SKIPPED - 4



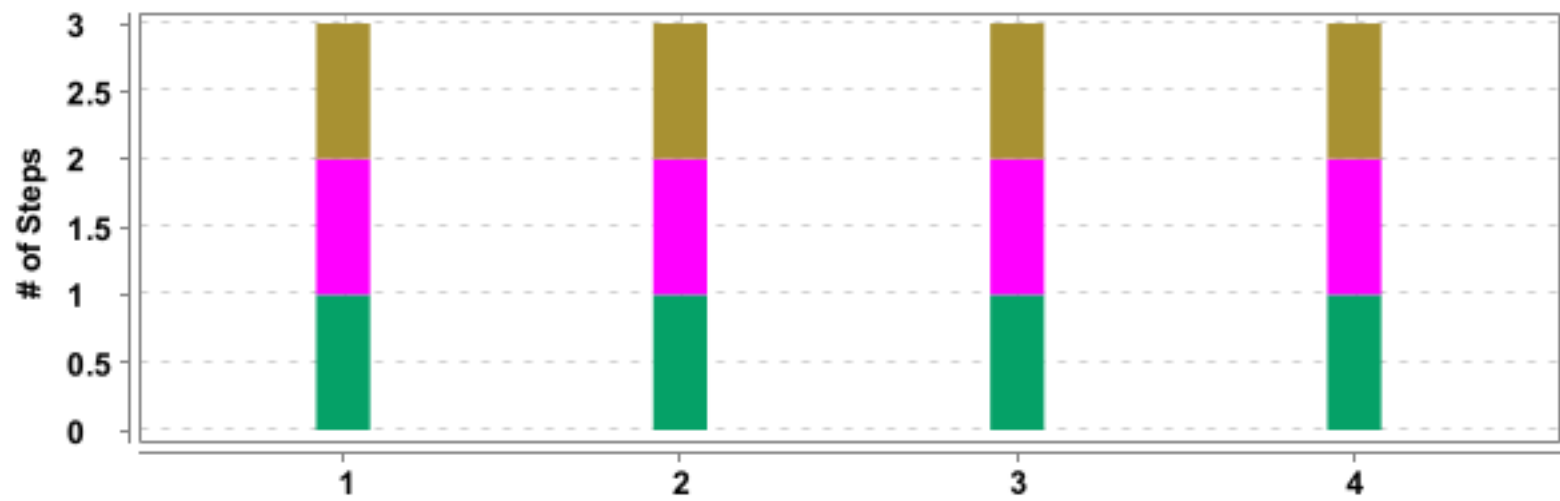
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>InValid Login validations</u>	24.470 s	3	0	3	0	9	3	3	3
<u>Login validations</u>	14.886 s	1	0	1	0	3	1	1	1

#	Feature Name	Scenario Name
1	<u>InValid Login validations</u>	<u>Login with invalid credentials</u>
2		<u>Login with invalid credentials</u>
3		<u>Login with invalid credentials</u>
4	<u>Login validations</u>	<u>Login with valid credentials</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@InvalidCredentials	4	0	4	0	2	0	2	0





#	Feature Name	T	P	F	S	Duration
1	<u>InValid Login validations</u>	3	0	3	0	24.470 s
2	<u>Login validations</u>	1	0	1	0	14.886 s

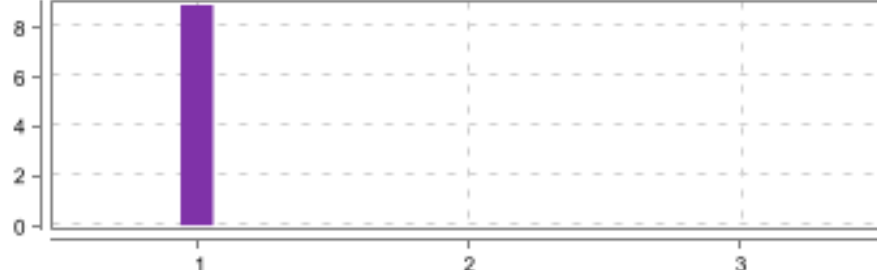




#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>InValid Login validations</u>	<u>Login with invalid credentials</u>	3	1	1	1	16.464 s
2		<u>Login with invalid credentials</u>	3	1	1	1	24.458 s
3		<u>Login with invalid credentials</u>	3	1	1	1	22.224 s
4	<u>Login validations</u>	<u>Login with valid credentials</u>	3	1	1	1	14.886 s

InValid Login validations

FAILED	DURATION - 24.470 s	Scenarios		Steps	
/ 9:31:55.997 PM // 9:32:20.467 PM /		Total - 3		Total - 9	
		Pass - 0		Pass - 3	
		Fail - 3		Fail - 3	
		Skip - 0		Skip - 3	

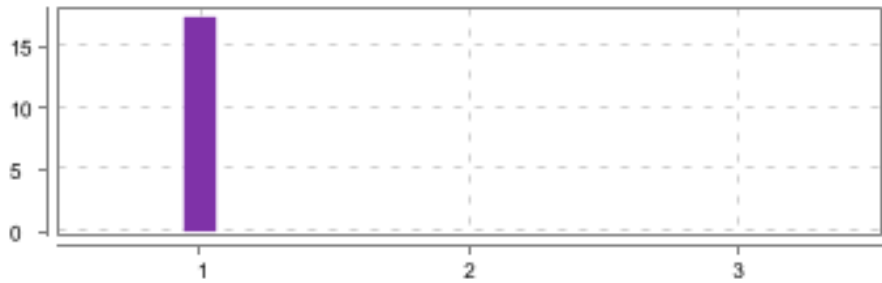

Login with invalid credentials

<div>FAILED</div> <div>DURATION - 16.464 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 9:31:56.005 PM // 9:32:12.469 PM /				
InValid Login validations				
@InvalidCredentials				

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	8.883 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.807 s
	Login with invalid credentials		
			
2	When User enters username as "admin\$\$" and password as "admin123"	FAILED	0.006 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.20.0', revision: '866c76ca80' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.13' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, findElement {using=name, value=username}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 124.0.6367.119, chrome: {chromedriverVersion: 124.0.6367.201 (46cf136d27d..., userDataDir: C:\Users\abhigh\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:58147}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:58147/devtoo..., se:cdpVersion: 124.0.6367.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:151) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:66) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at com.sun.proxy.\$Proxy25.sendKeys(Unknown Source) at Actions.LoginPageActions.setUserName(LoginPageActions.java:21) at Actions.LoginPageActions.login(LoginPageActions.java:76) at StepDefinitions.LoginPageDefinitions.goToHomePage(LoginPageDefinitions.java:30) at ?.User enters username as "admin\$\$" and password as "admin123"(file:///C:/Users/abhig/OneDrive/Desktop/Cucumber%20Tutorials/Cucumber%20Eclipse%20WS/CucumberExtentReportsTestNg/src/test/resources/featureFile/LoginPageOne.feature:9) * Not displayable characters are replaced by '?'. </pre>		
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario) Login with invalid credentials +	PASSED	2.720 s
3	Then User should be able to see error message "credentials"	SKIPPED	0.000 s

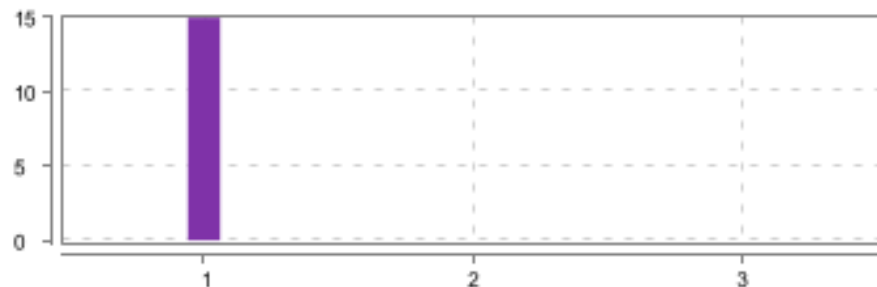

Login with invalid credentials

FAILED DURATION - 24.458 s / 9:31:56.009 PM // 9:32:20.467 PM / Invalid Login validations @InvalidCredentials		Steps Total - 3 Pass - 1 Fail - 1 Skip - 1	
--	--	--	---

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	17.376 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.888 s
	Login with invalid credentials		
			
2	When User enters username as "Admin" and password as "admin12\$\$"	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.20.0', revision: '866c76ca80' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.13' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, findElement {using=name, value=username}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 124.0.6367.119, chrome: {chromedriverVersion: 124.0.6367.201 (46cf136d27d..., userDataDir: C:\Users\abhig\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:58149}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:58149/devtoo..., se:cdpVersion: 124.0.6367.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:151) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:66) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at com.sun.proxy.\$Proxy25.sendKeys(Unknown Source) at Actions.LoginPageActions.setUserName(LoginPageActions.java:21) at Actions.LoginPageActions.login(LoginPageActions.java:76) at StepDefinitions.LoginPageDefinitions.goToHomePage(LoginPageDefinitions.java:30) at ?.User enters username as "Admin" and password as "admin12\$\$" (file:///C:/Users/abhig/OneDrive/Desktop/Cucumber%20Tutorials/Cucumber%20Eclipse%20WS/CucumberExtentReportsTestNg/src/test/resources/featureFile/LoginPageOne.feature:9) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	2.141 s
	Login with invalid credentials		

#	Step / Hook Details	Status	Duration
	+		
3	Then User should be able to see error message "Invalid credentials"	SKIPPED	0.002 s



Login with invalid credentials

FAILED	DURATION - 22.224 s		Steps Total - 3 Pass - 1 Fail - 1 Skip - 1	
/ 9:31:56.013 PM // 9:32:18.237 PM /				
InValid Login validations				
@InvalidCredentials				

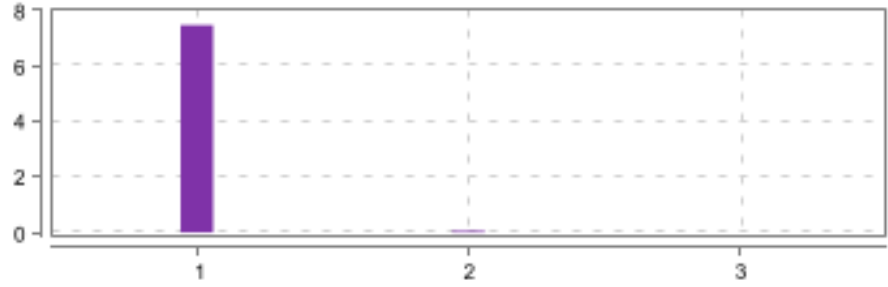

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	14.962 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.905 s
	Login with invalid credentials		
	+		
2	When User enters username as "abc123" and password as "xyz\$\$"	FAILED	0.003 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.20.0', revision: '866c76ca80' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.13' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, findElement {using=name, value=username}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 124.0.6367.119, chrome: {chromedriverVersion: 124.0.6367.201 (46cf136d27d..., userDataDir: C:\Users\abhig\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:58148}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:58148/devtoo..., se:cdpVersion: 124.0.6367.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:151)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:66) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at com.sun.proxy.\$Proxy25.sendKeys(Unknown Source) at Actions.LoginPageActions.setUserName(LoginPageActions.java:21) at Actions.LoginPageActions.login(LoginPageActions.java:76) at StepDefinitions.LoginPageDefinitions.goToHomePage(LoginPageDefinitions.java:30) at ?.User enters username as "abc123" and password as "xyz\$\$"(file:///C:/Users/abhig/OneDrive/Desktop/Cucumber%20Tutorials/Cucumber%20Eclipse%20WS/CucumberExtentReportsTestNg/src/test/resources/featureFile/LoginPageOne.feature:9) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario) Login with invalid credentials +	PASSED	2.315 s
3	Then User should be able to see error message "credentials"	SKIPPED	0.000 s

Login validations

FAILED DURATION - 14.886 s / 9:31:56.013 PM // 9:32:10.899 PM /	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	 1	Steps Total - 3 Pass - 1 Fail - 1 Skip - 1	 3
--	--	---	--	---

Login with valid credentials

<div>FAILED</div> <div>DURATION - 14.886 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
/ 9:31:56.013 PM // 9:32:10.899 PM /				
Login validations				
@InvalidCredentials				

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	7.462 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.853 s
	Login with valid credentials		
			
2	When User enters username as "Admin" and password as "admin12"	FAILED	0.060 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.20.0', revision: '866c76ca80' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.13' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, findElement {using=name, value=username}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 124.0.6367.119, chrome: {chromedriverVersion: 124.0.6367.201 (46cf136d27d..., userDataDir: C:\Users\abhig\AppData\Loca..., fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:58150}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:58150/devtoo..., se:cdpVersion: 124.0.6367.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:151) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:66) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at com.sun.proxy.\$Proxy25.sendKeys(Unknown Source) at Actions.LoginPageActions.setUserName(LoginPageActions.java:21)		

#	Step / Hook Details	Status	Duration
	at Actions.LoginPageActions.login(LoginPageActions.java:76) at StepDefinitions.LoginPageDefinitions.goToHomePage(LoginPageDefinitions.java:30) at ?.User enters username as "Admin" and password as "admin12"(file:///C:/Users/abhig/OneDrive/Desktop/Cucumber%20Tutorials/Cucumber%20Eclipse%20WS/CucumberExtentReportsTestNg/src/test/resources/featureFile/LoginPage.feature:9) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario) Login with valid credentials +	PASSED	2.421 s
3	Then User should be able to login successfully and new page open	SKIPPED	0.000 s

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with valid credentials

(F) Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with valid credentials

(F) Login validations