

Cucumber PDF Report

11-May-2024, 9:37:46 PM

Start : May 11, 9:36:37.717 PM

End : May 11, 9:37:45.483 PM

Duration : 1 m 7.766 s

Features

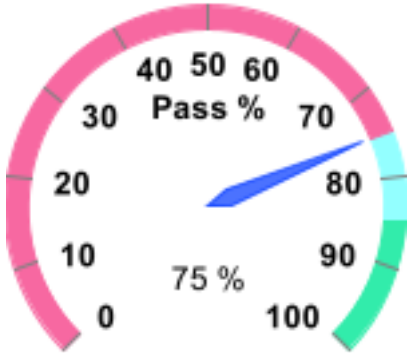
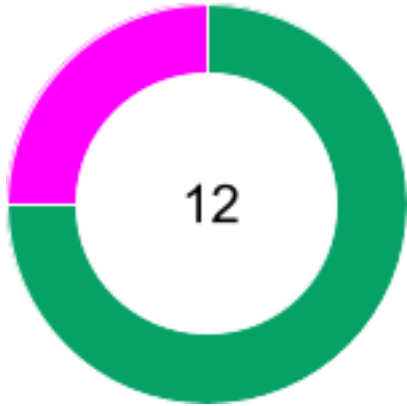
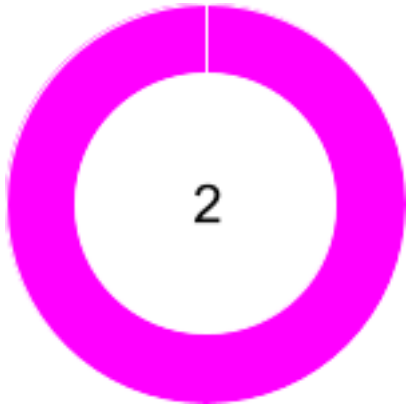
Scenarios

Steps

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 1
FAILED - 3
SKIPPED - 0

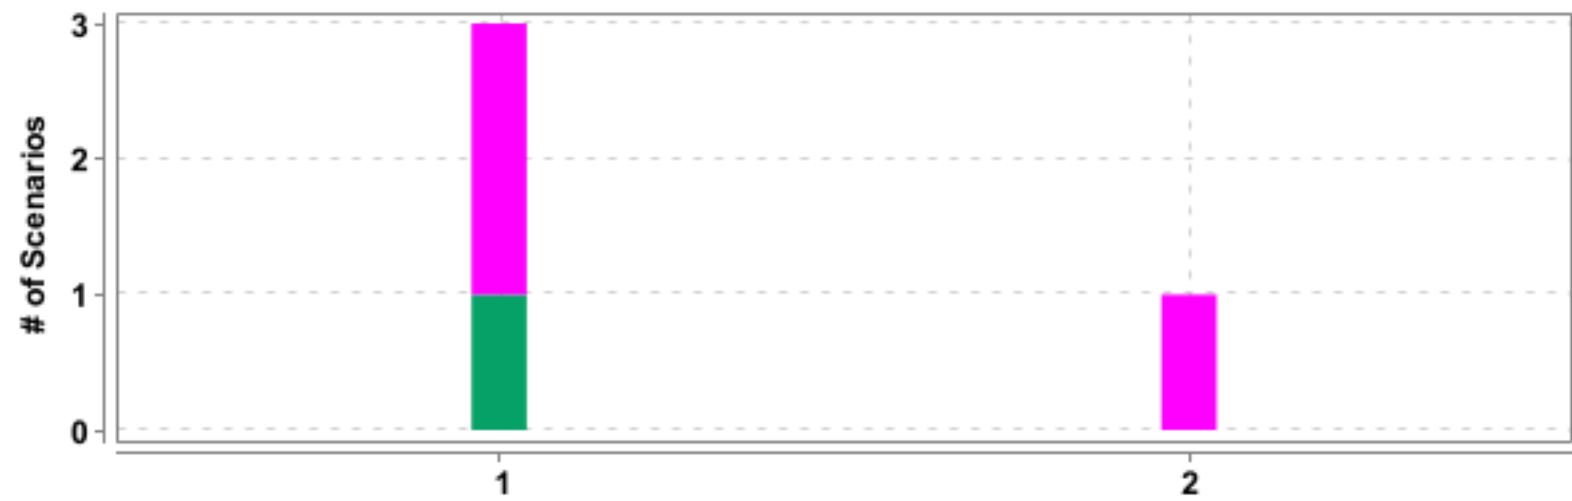
PASSED - 9
FAILED - 3
SKIPPED - 0



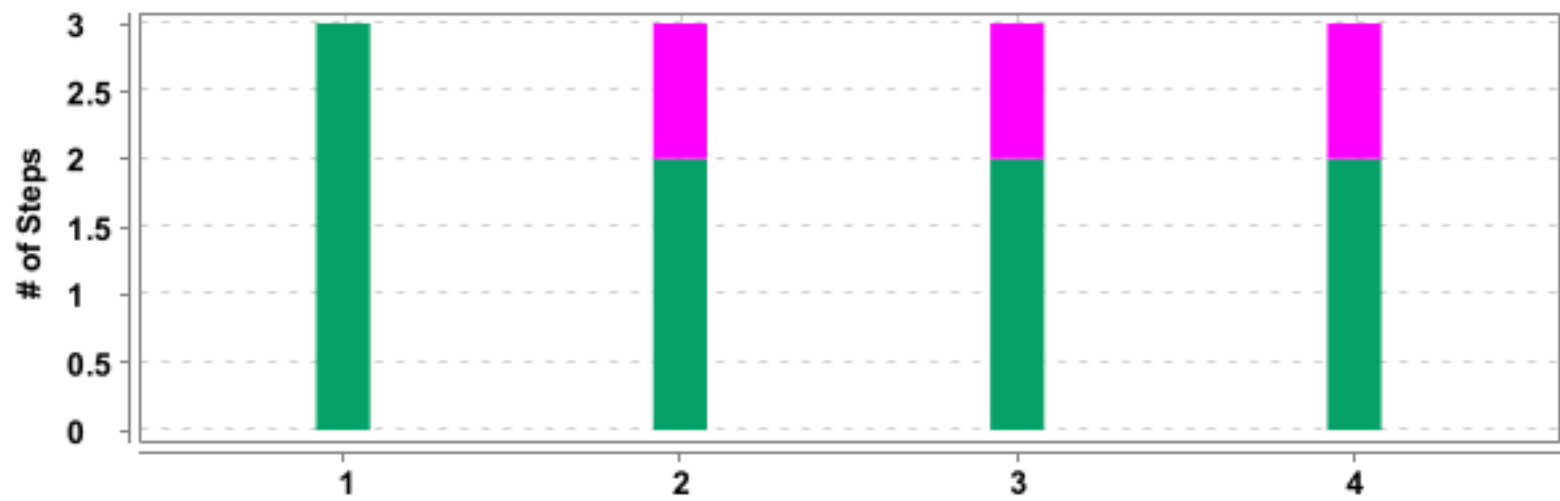
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>InValid Login validations</u>	1 m 7.766 s	3	1	2	0	9	7	2	0
<u>Login validations</u>	41.279 s	1	0	1	0	3	2	1	0

#	Feature Name	Scenario Name
1	<u>InValid Login validations</u>	<u>Login with invalid credentials</u>
2		<u>Login with invalid credentials</u>
3	<u>Login validations</u>	<u>Login with valid credentials</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@InvalidCredentials	4	1	3	0	2	0	2	0





#	Feature Name	T	P	F	S	Duration
1	<u>InValid Login validations</u>	3	1	2	0	1 m 7.766 s
2	<u>Login validations</u>	1	0	1	0	41.279 s

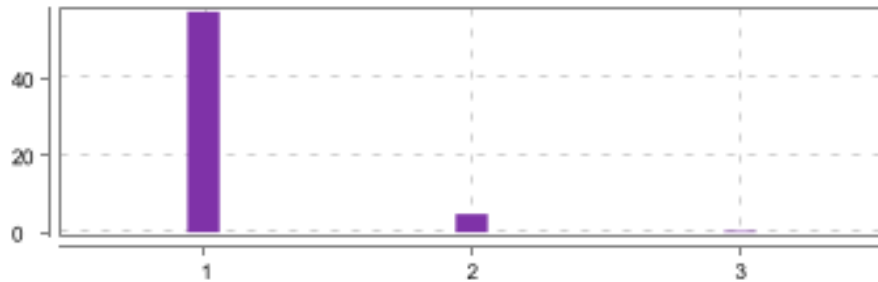





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>InValid Login validations</u>	<u>Login with invalid credentials</u>	3	3	0	0	1 m 7.758 s
2		<u>Login with invalid credentials</u>	3	2	1	0	23.363 s
3		<u>Login with invalid credentials</u>	3	2	1	0	11.455 s
4	<u>Login validations</u>	<u>Login with valid credentials</u>	3	2	1	0	41.279 s


InValid Login validations

FAILED	DURATION - 1 m 7.766 s	Scenarios		Steps	
/ 9:36:37.717 PM // 9:37:45.483 PM /		Total - 3 Pass - 1 Fail - 2 Skip - 0		Total - 9 Pass - 7 Fail - 2 Skip - 0	

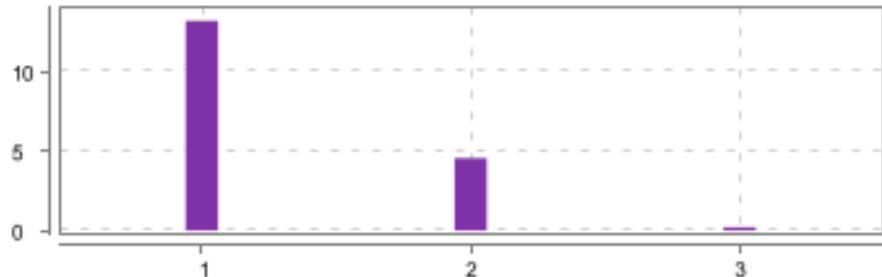

Login with invalid credentials



<div>PASSED</div> <div>DURATION - 1 m 7.758 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 3</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:36:37.725 PM // 9:37:45.483 PM /</div>				
<div>InValid Login validations</div>				
<div>@InvalidCredentials</div>				


#	Step / Hook Details	Status	Duration
1	Given User is on HRMLLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	57.279 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.153 s
	Login with invalid credentials		
			
2	When User enters username as "Admin" and password as "admin12\$\$"	PASSED	4.805 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.145 s
	Login with invalid credentials		
			
3	Then User should be able to see error message "Invalid credentials"	PASSED	0.360 s

#	Step / Hook Details	Status	Duration
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.142 s
	Login with invalid credentials		
			

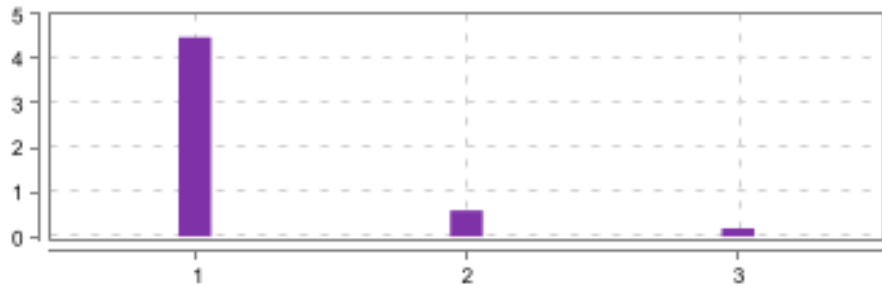

Login with invalid credentials

FAILED		DURATION - 23.363 s			Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
/ 9:36:37.729 PM // 9:37:01.092 PM /						
Invalid Login validations						
@InvalidCredentials						




#	Step / Hook Details	Status	Duration
1	Given User is on HRMLLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	13.198 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.185 s
	Login with invalid credentials		
			
2	When User enters username as "abc123" and password as "xyz\$\$"	PASSED	4.552 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.191 s
	Login with invalid credentials		
			
3	Then User should be able to see error message "credentials"	FAILED	0.209 s

#	Step / Hook Details	Status	Duration
	<pre>java.lang.AssertionError: expected [credentials] but found [Invalid credentials] at org.testng.Assert.fail(Assert.java:111) at org.testng.Assert.failNotEquals(Assert.java:1578) at org.testng.Assert.assertEqualsImpl(Assert.java:150) at org.testng.Assert.assertEquals(Assert.java:132) at org.testng.Assert.assertEquals(Assert.java:656) at org.testng.Assert.assertEquals(Assert.java:666) at StepDefinitions.LoginPageDefinitions.verifyErrorMessage(LoginPageDefinitions.java:55) at ?.User should be able to see error message "credentials"(file:///C:/Users/abhig/OneDrive/Desktop/Cucumber%20Tutorials/Cucumber%20Eclipse%20WS/CucumberExtentReportsTestNg/src/test/resources/featureFile/LoginPageOne.feature:10) * Not displayable characters are replaced by '?'. </pre>		
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.213 s
	Login with invalid credentials		
			



Login with invalid credentials

FAILED	DURATION - 11.455 s		Steps Total - 3 Pass - 2 Fail - 1 Skip - 0	
/ 9:36:37.733 PM // 9:36:49.188 PM /				
InValid Login validations				
@InvalidCredentials				

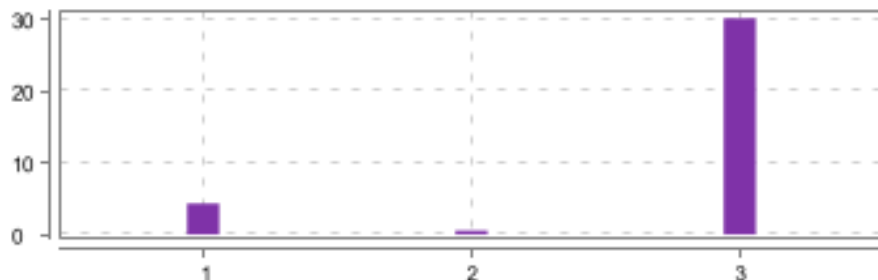

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLive login page "https://opensource-demo.orangehrmlive.com/"	PASSED	4.479 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.173 s
	Login with invalid credentials		



#	Step / Hook Details	Status	Duration
			
2	When User enters username as "admin\$\$" and password as "admin123"	PASSED	0.584 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.985 s
	Login with invalid credentials		
			
3	Then User should be able to see error message "credentials"	FAILED	0.180 s
	<pre>java.lang.AssertionError: expected [credentials] but found [Invalid credentials] at org.testng.Assert.fail(Assert.java:111) at org.testng.Assert.failNotEquals(Assert.java:1578) at org.testng.Assert.assertEqualsImpl(Assert.java:150) at org.testng.Assert.assertEquals(Assert.java:132) at org.testng.Assert.assertEquals(Assert.java:656) at org.testng.Assert.assertEquals(Assert.java:666) at StepDefinitions.LoginPageDefinitions.verifyErrorMessage(LoginPageDefinitions.java:55) at ?.User should be able to see error message "credentials"(file:///C:/Users/abhig/OneDrive/Desktop/Cucumber%20Tutorials/Cucumber%20Eclipse%20WS/CucumberExtentReportsTestNg/src/test/resources/featureFile/LoginPageOne.feature:10) * Not displayable characters are replaced by '?'. </pre>		
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.150 s
	Login with invalid credentials		
			


Login validations

FAILED	DURATION - 41.279 s	Scenarios		Steps	
/ 9:36:37.732 PM // 9:37:19.011 PM /		Total - 1	1	Total - 3	3
		Pass - 0		Pass - 2	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

Login with valid credentials

<div>FAILED</div> <div>DURATION - 41.279 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 2</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
/ 9:36:37.732 PM // 9:37:19.011 PM /				
Login validations				
@InvalidCredentials				

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	4.316 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.165 s
	Login with valid credentials		
	 +		
2	When User enters username as "Admin" and password as "admin12"	PASSED	0.529 s
	AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	1.173 s
	Login with valid credentials		
	 +		
3	Then User should be able to login successfully and new page open	FAILED	30.144 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//*[@class='oxd-topbar-header-breadcrumb']/h6"} (Session info: chrome=124.0.6367.119) For documentation on this error, please visit: https://www.selenium.		

#	Step / Hook Details	Status	Duration
	<p>dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.20.0', revision: '866c76ca80' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.13' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [144872c23b611de131bafa8bee07a7a3, findElement {value=//*[@class='oxd-topbar-header-breadcrumb']/h6, using=xpath}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 124.0.6367.119, chrome: {chromedriverVersion: 124.0.6367.201 (46cf136d27d..., userDataDir: C:\Users\abhigh\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:58350}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:58350/devtoo..., se:cdpVersion: 124.0.6367.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 144872c23b611de131bafa8bee07a7a3</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.openqa.selenium.remote.ErrorCodec.decode(ErrorCodec.java:167) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:138) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:50) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:174) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at com.sun.proxy.\$Proxy26.getText(Unknown Source) at Actions.HomePageActions.getHomePageText(HomePageActions.java:22) at StepDefinitions.LoginPageDefinitions.verifyLogin(LoginPageDefinitions.java:47) at ?.User should be able to login successfully and new page open(file:///C:/Users/abhigh/OneDrive/Desktop/Cucumber%20Tutorials/Cucumber%20Eclipse%20WS/CucumberExtentReportsTestNg/src/test/resources/featureFile/LoginPage.feature:10) * Not displayable characters are replaced by '?'. </p>		
	<p>AFTER_STEP - StepDefinitions.Hook.tearDown(io.cucumber.java.Scenario)</p> <p>Login with valid credentials</p> 	PASSED	0.149 s

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations



Login

Invalid credentials

Username : Admin
Password : admin123

Username

Username

Password

Password

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations



Login

! Invalid credentials

Username : Admin
Password : admin123

👤 Username

🔑 Password



(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with invalid credentials

(F) InValid Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with valid credentials

(F) Login validations



Login

! Invalid credentials

Username : Admin
Password : admin123

👤 Username

🔑 Password



(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with valid credentials

(F) Login validations

(Step) AFTER_STEP - StepDefinitions.
Hook.tearDown(io.cucumber.java.
Scenario)

(S) Login with valid credentials

(F) Login validations



Login

! Invalid credentials

Username : Admin
Password : admin123

👤 Username

🔑 Password

