

kafka

File

Home

Share

View

< > ^ ↑ > This PC > Windows7_OS (C:) > demo > confluent-5.4.0 > etc > kafka

★ Quick access

OneDrive

This PC

3D Objects

Desktop

Documents

Downloads

Music

Pictures

Videos

Windows7_OS (C:)

Backup (E:)

Network

Name

Date modified

Type

Size

connect-console-sink.properties	1/11/2020 8:22 AM	PROPERTIES File	1 KB
connect-console-source.properties	1/11/2020 8:22 AM	PROPERTIES File	1 KB
connect-distributed.properties	1/11/2020 8:22 AM	PROPERTIES File	6 KB
connect-file-sink.properties	1/11/2020 8:22 AM	PROPERTIES File	1 KB
connect-file-source.properties	1/11/2020 8:22 AM	PROPERTIES File	1 KB
connect-log4j.properties	1/11/2020 8:22 AM	PROPERTIES File	3 KB
connect-mirror-maker.properties	1/11/2020 8:22 AM	PROPERTIES File	2 KB
connect-standalone.properties	1/11/2020 8:22 AM	PROPERTIES File	3 KB
consumer.properties	1/11/2020 8:22 AM	PROPERTIES File	2 KB
log4j.properties	1/11/2020 8:22 AM	PROPERTIES File	5 KB
producer.properties	1/11/2020 8:22 AM	PROPERTIES File	2 KB
server-0.properties	1/11/2020 8:22 AM	PROPERTIES File	9 KB
server-1.properties	1/11/2020 8:22 AM	PROPERTIES File	9 KB
server-2.properties	1/11/2020 8:22 AM	PROPERTIES File	9 KB
tools-log4j.properties	1/11/2020 8:22 AM	PROPERTIES File	2 KB
trogdor.conf	1/11/2020 8:22 AM	CONF File	2 KB
zookeeper.properties	1/11/2020 8:22 AM	PROPERTIES File	2 KB

server-0.properties X

C: > demo > confluent-5.4.0 > etc > kafka > server-0.properties

```
1  # Licensed to the Apache Software Foundation (ASF) under one or more
2  # contributor license agreements.  See the NOTICE file distributed with
3  # this work for additional information regarding copyright ownership.
4  # The ASF licenses this file to You under the Apache License, Version 2.0
5  # (the "License"); you may not use this file except in compliance with
6  # the License.  You may obtain a copy of the License at
7  #
8  # http://www.apache.org/licenses/LICENSE-2.0
9  #
10 # Unless required by applicable law or agreed to in writing, software
11 # distributed under the License is distributed on an "AS IS" BASIS,
12 # WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
13 # See the License for the specific language governing permissions and
14 # limitations under the License.
15
16 # see kafka.server.KafkaConfig for additional details and defaults
17
18 ##### Server Basics #####
19
20 # The id of the broker. This must be set to a unique integer for each broker.
21 broker.id=0
22
23 ##### Socket Server Settings #####
24
```


server-0.properties

server-1.properties

C: > demo > confluent-5.4.0 > etc > kafka > server-1.properties

```
1  # Licensed to the Apache Software Foundation (ASF) under one or more
2  # contributor license agreements. See the NOTICE file distributed with
3  # this work for additional information regarding copyright ownership.
4  # The ASF licenses this file to You under the Apache License, Version 2.0
5  # (the "License"); you may not use this file except in compliance with
6  # the License. You may obtain a copy of the License at
7  #
8  # http://www.apache.org/licenses/LICENSE-2.0
9  #
10 # Unless required by applicable law or agreed to in writing, software
11 # distributed under the License is distributed on an "AS IS" BASIS,
12 # WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
13 # See the License for the specific language governing permissions and
14 # limitations under the License.
15
16 # see kafka.server.KafkaConfig for additional details and defaults
17
18 ##### Server Basics #####
19
20 # The id of the broker. This must be set to a unique integer for each broker.
21 broker.id=1
22
23 ##### Socket Server Settings #####
24
```

server-0.properties server-1.properties server-2.properties

C: > demo > confluent-5.4.0 > etc > kafka > server-2.properties

```
1  # Licensed to the Apache Software Foundation (ASF) under one or more
2  # contributor license agreements.  See the NOTICE file distributed with
3  # this work for additional information regarding copyright ownership.
4  # The ASF licenses this file to You under the Apache License, Version 2.0
5  # (the "License"); you may not use this file except in compliance with
6  # the License.  You may obtain a copy of the License at
7  #
8  #   http://www.apache.org/licenses/LICENSE-2.0
9  #
10 # Unless required by applicable law or agreed to in writing, software
11 # distributed under the License is distributed on an "AS IS" BASIS,
12 # WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
13 # See the License for the specific language governing permissions and
14 # limitations under the License.
15
16 # see kafka.server.KafkaConfig for additional details and defaults
17
18 ##### Server Basics #####
19
20 # The id of the broker. This must be set to a unique integer for each broker.
21 broker.id=2
22
23 ##### Socket Server Settings #####
24
```


server-0.properties • server-1.properties • server-2.properties

C:\> demo > confluent-5.4.0 > etc > kafka > server-0.properties

20
21 broker.id=0

22

23 ##### Socket Server Settings #####

24

25 # The address the socket server listens on. It will get the value returned from

26 # java.net.InetAddress.getCanonicalHostName() if not configured.

27 # FORMAT:

28 # listeners = listener_name://host_name:port

29 # EXAMPLE:

30 # listeners = PLAINTEXT://your.host.name:9092

31 listeners=PLAINTEXT://:9092

32

33 # Hostname and port the broker will advertise to producers and consumers. If not set,

34 # it uses the value for "listeners" if configured. Otherwise, it will use the value

35 # returned from java.net.InetAddress.getCanonicalHostName().

36 #advertised.listeners=PLAINTEXT://your.host.name:9092

37

38 # Maps listener names to security protocols, the default is for them to be the same. See the config documentation for

39 #listener.security.protocol.map=PLAINTEXT:PLAINTEXT,SSL:SSL,SASL_PLAINTEXT:SASL_PLAINTEXT,SASL_SSL:SASL_SSL

40

41 # The number of threads that the server uses for receiving requests from the network and sending responses to the network

42 num.network.threads=3

43

44 # The number of threads that the server uses for processing requests

server-0.properties • server-1.properties • server-2.properties

C: > demo > confluent-5.4.0 > etc > kafka > server-1.properties

```
11 # distributed under the License is distributed on an "AS IS" BASIS,
12 # WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
13 # See the License for the specific language governing permissions and
14 # limitations under the License.
15
16 # see kafka.server.KafkaConfig for additional details and defaults
17
18 ##### Server Basics #####
19
20 # The id of the broker. This must be set to a unique integer for each broker.
21 broker.id=1
22
23 ##### Socket Server Settings #####
24
25 # The address the socket server listens on. It will get the value returned from
26 # java.net.InetAddress.getCanonicalHostName() if not configured.
27 #   FORMAT:
28 #     listeners = listener_name://host_name:port
29 #   EXAMPLE:
30 #     listeners = PLAINTEXT://your.host.name:9092
31 listeners=PLAINTEXT://:9093
32
33 # Hostname and port the broker will advertise to producers and consumers. If not set,
34 # it uses the value for "listeners" if configured. Otherwise, it will use the value
```


server-0.properties X server-1.properties server-2.properties

C:\> demo > confluent-5.4.0 > etc > kafka > server-0.properties

```
47 # The send buffer (SO_SNDBUF) used by the socket server
48 socket.send.buffer.bytes=102400
49
50 # The receive buffer (SO_RCVBUF) used by the socket server
51 socket.receive.buffer.bytes=102400
52
53 # The maximum size of a request that the socket server will accept (protection against OOM)
54 socket.request.max.bytes=104857600
55
56
57 ##### Log Basics #####
58
59 # A comma separated list of directories under which to store log files
60 log.dirs=/tmp/kafka-logs-0
61
62 # The default number of log partitions per topic. More partitions allow greater
63 # parallelism for consumption, but this will also result in more files across
64 # the brokers.
65 num.partitions=1
66
67 # The number of threads per data directory to be used for log recovery at startup and flushing at shutdown.
68 # This value is recommended to be increased for installations with data dirs located in RAID array.
69 num.recovery.threads.per.data.dir=1
70
```

server-0.properties server-1.properties server-2.properties

C: > demo > confluent-5.4.0 > etc > kafka > server-1.properties

```
43
44 # The number of threads that the server uses for processing requests, which may include disk I/O
45 num.io.threads=8
46
47 # The send buffer (SO_SNDBUF) used by the socket server
48 socket.send.buffer.bytes=102400
49
50 # The receive buffer (SO_RCVBUF) used by the socket server
51 socket.receive.buffer.bytes=102400
52
53 # The maximum size of a request that the socket server will accept (protection against OOM)
54 socket.request.max.bytes=104857600
55
56
57 ##### Log Basics #####
58
59 # A comma separated list of directories under which to store log files
60 log.dirs=/tmp/kafka-logs-1
61
62 # The default number of log partitions per topic. More partitions allow greater
63 # parallelism for consumption, but this will also result in more files across
64 # the brokers.
65 num.partitions=1
66
67 # The number of threads per data directory to be used for log recovery at startup and flushing at shutdown
```


server-0.properties server-1.properties server-2.properties X

C: > demo > confluent-5.4.0 > etc > kafka > server-2.properties

```
47 # The send buffer (SO_SNDBUF) used by the socket server
48 socket.send.buffer.bytes=102400
49
50 # The receive buffer (SO_RCVBUF) used by the socket server
51 socket.receive.buffer.bytes=102400
52
53 # The maximum size of a request that the socket server will accept (protection against OOM)
54 socket.request.max.bytes=104857600
55
56
57 ##### Log Basics #####
58
59 # A comma separated list of directories under which to store log files
60 log.dirs=/tmp/kafka-logs-2
61
62 # The default number of log partitions per topic. More partitions allow greater
63 # parallelism for consumption, but this will also result in more files across
64 # the brokers.
65 num.partitions=1
66
67 # The number of threads per data directory to be used for log recovery at startup and flushing at shutdown.
68 # This value is recommended to be increased for installations with data dirs located in RAID array.
69 num.recovery.threads.per.data.dir=1
70
```

← → ↶ ↷ > This PC > Windows7_OS (C:) > demo > confluent-5.4.0

★ Quick access

OneDrive

This PC

3D Objects

Desktop

Documents

Downloads

Music

Pictures

Videos

Windows7_OS (C:)

Backup (E:)


Network


C:\Windows\System32\cmd.exe

Microsoft Windows [Version 10.0.18362.592]

(c) 2019 Microsoft Corporation. All rights reserved.

C:\demo\confluent-5.4.0>bin\windows\zookeeper-server-start.bat etc\kafka\zookeeper.properties

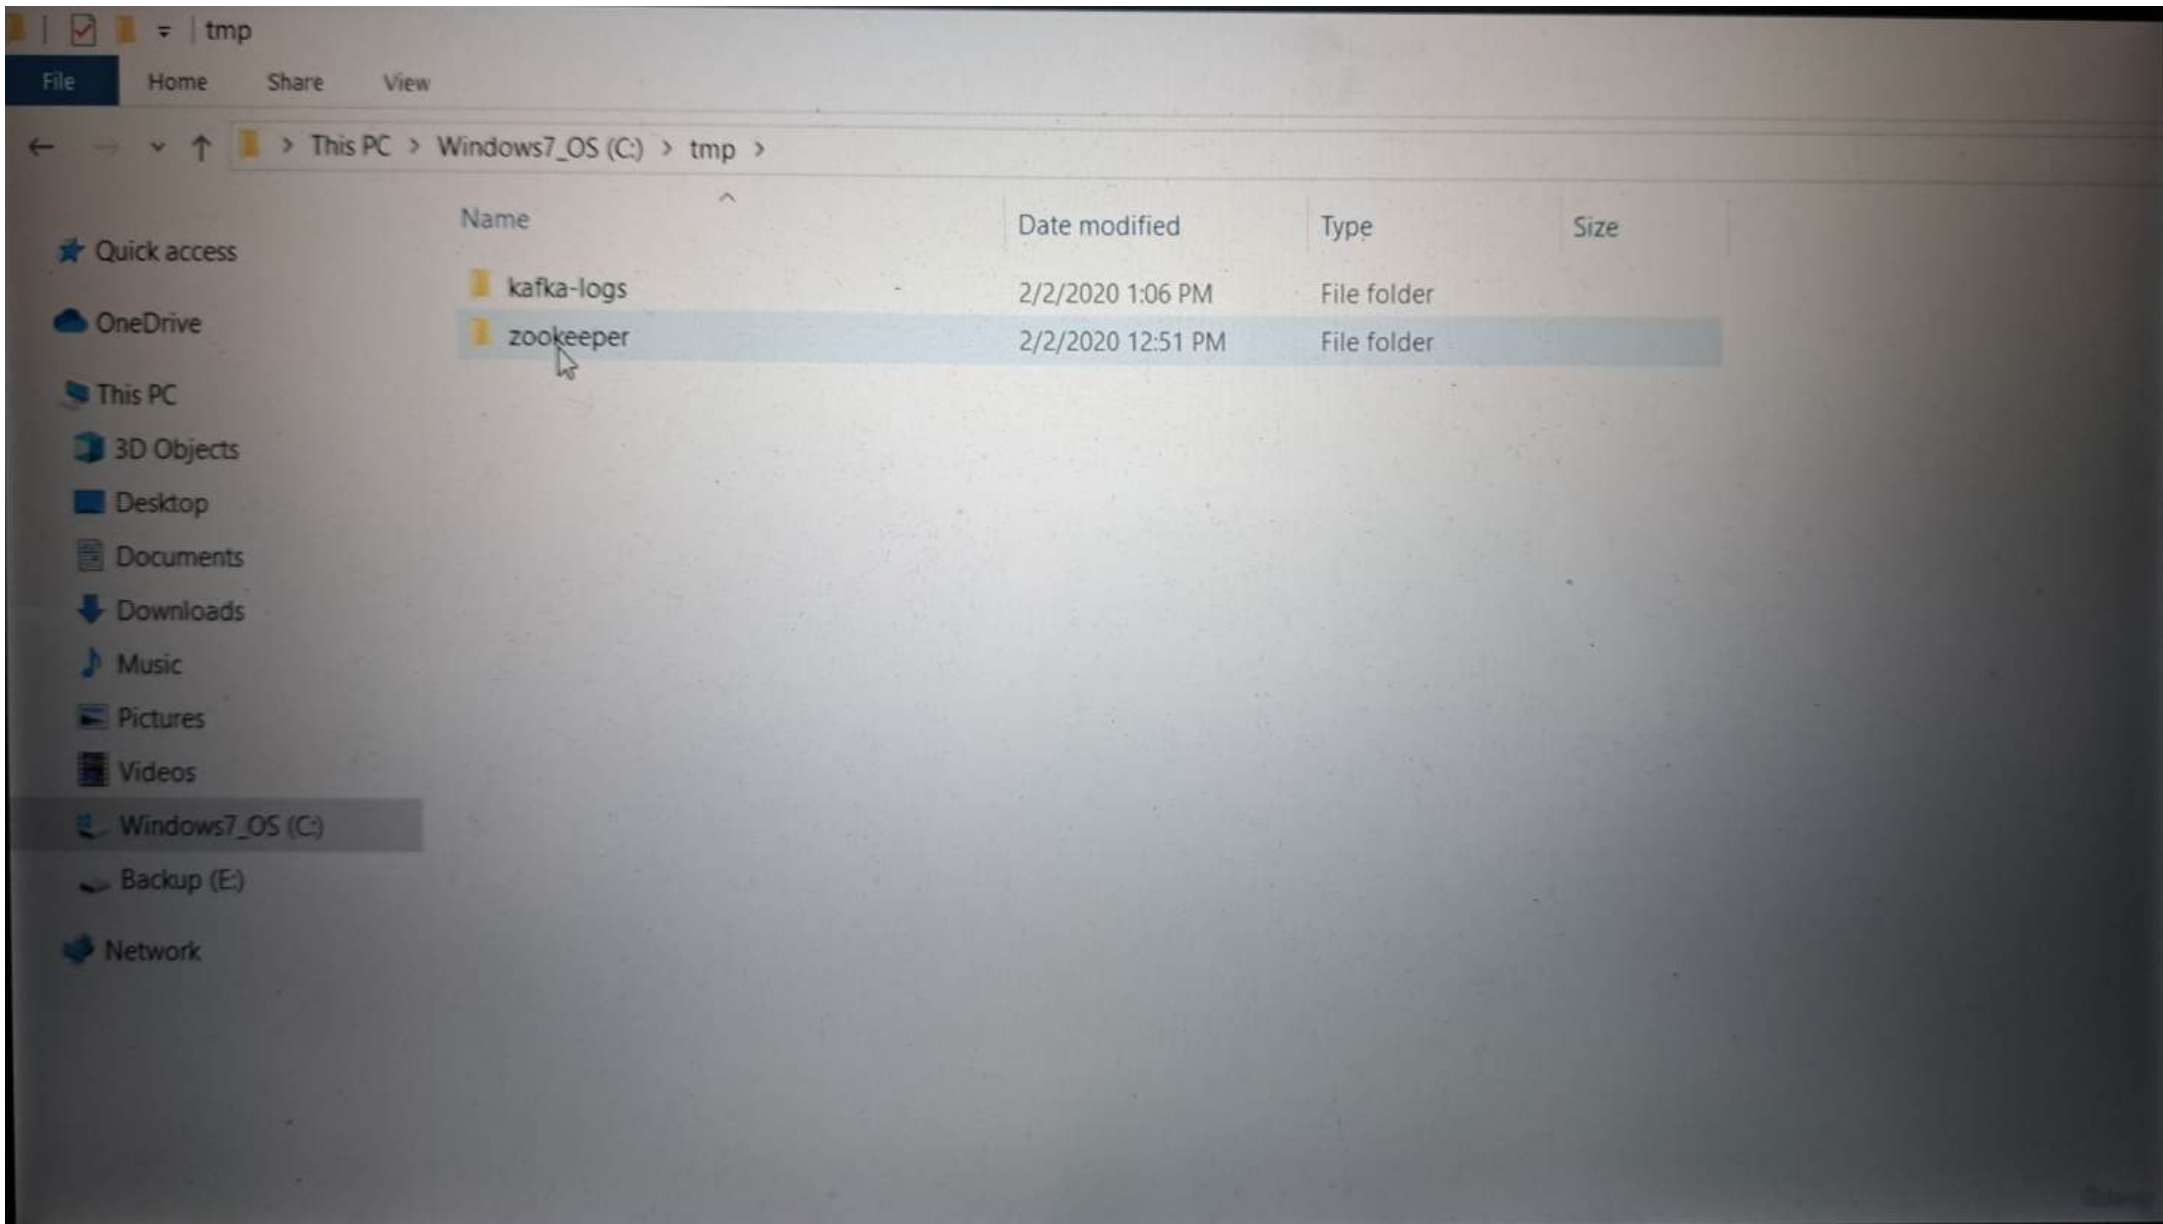

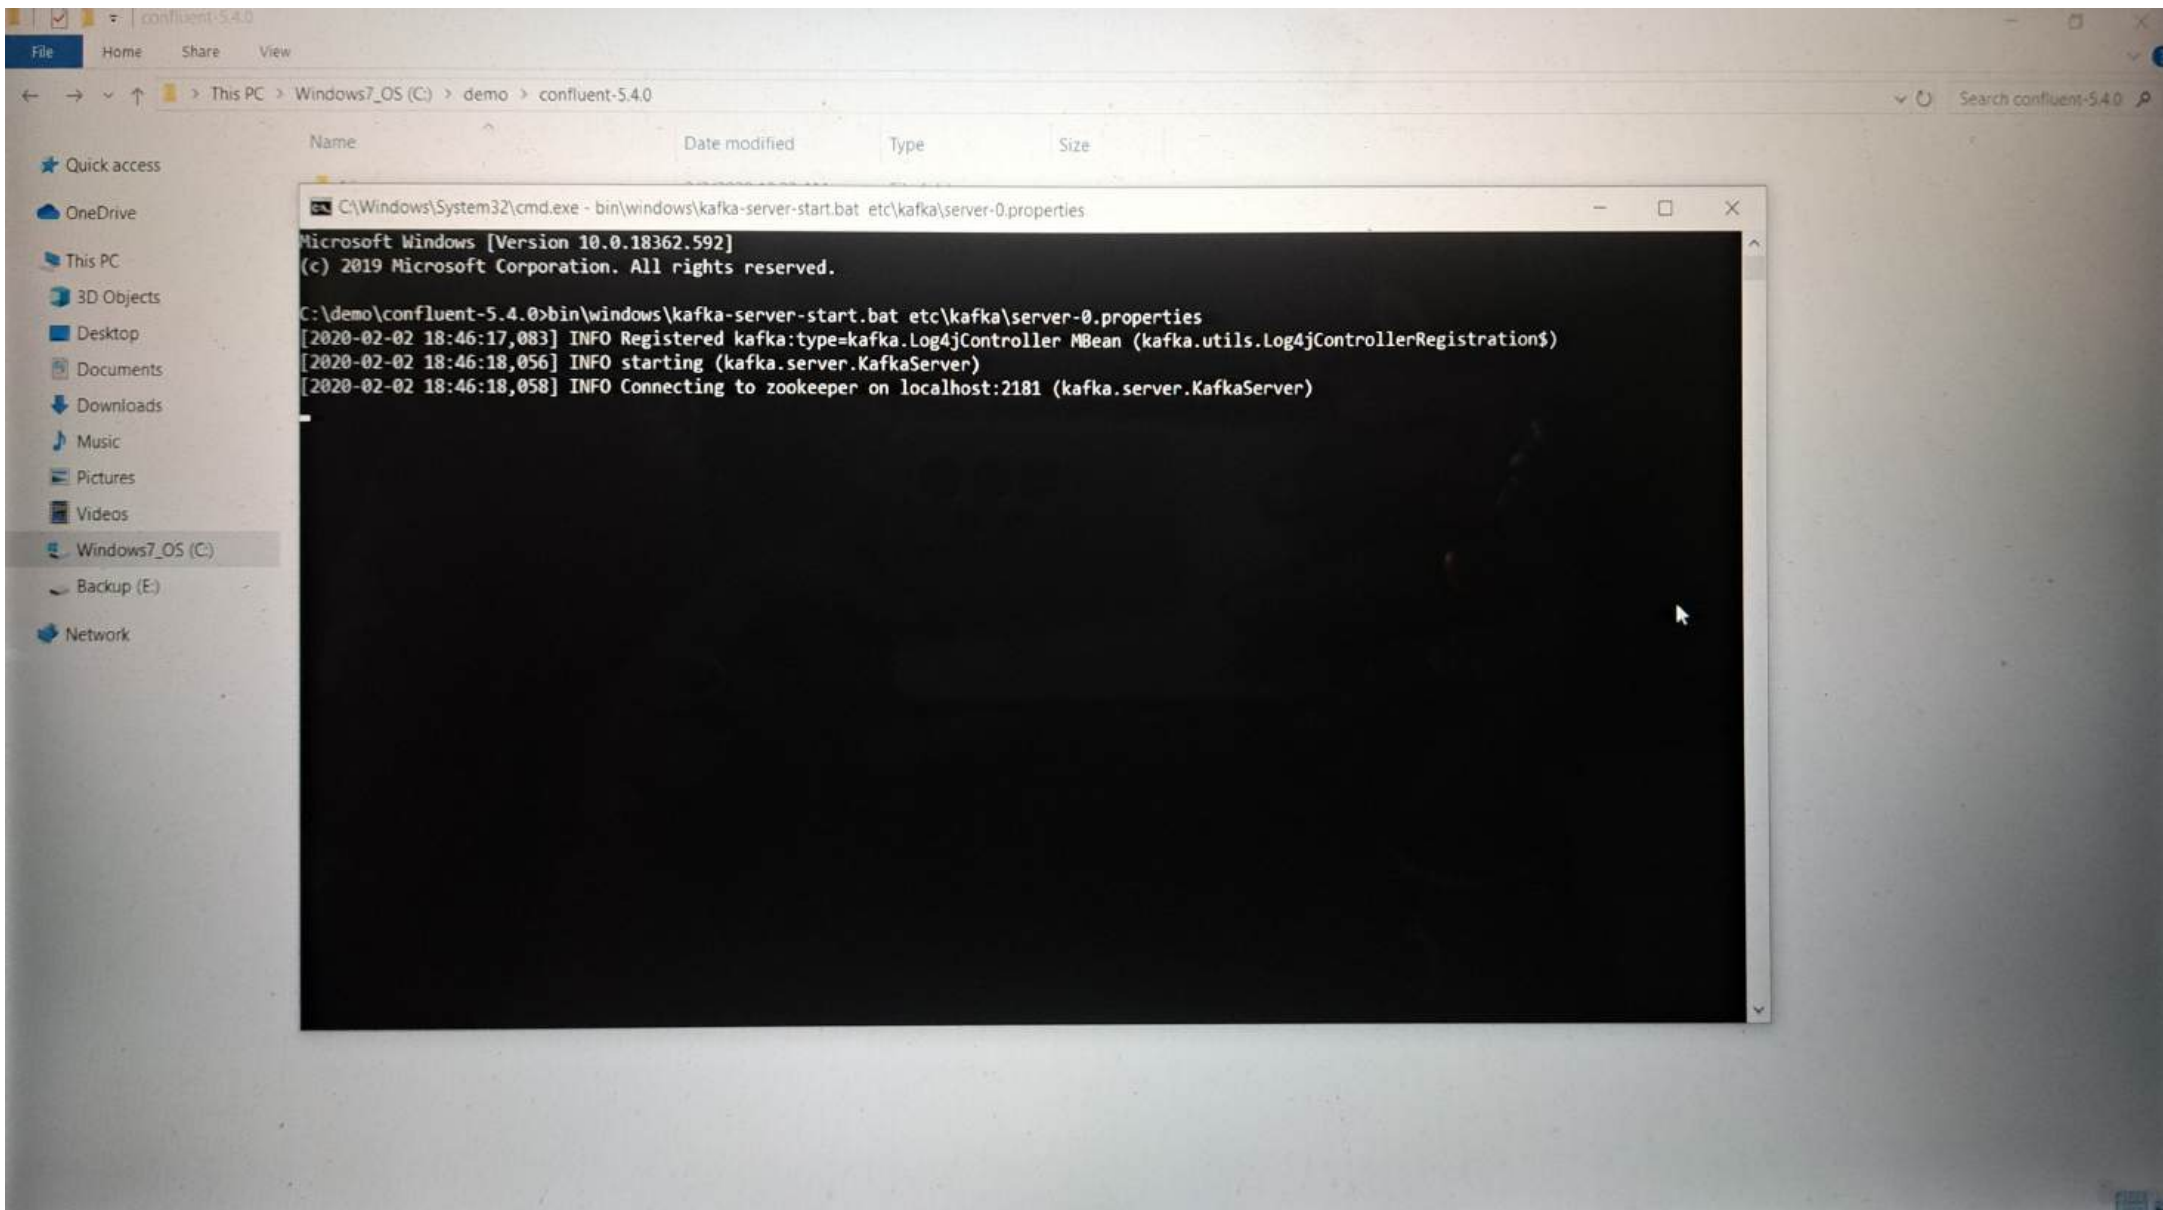

C:\Windows\System32\cmd.exe - bin\windows\kafka-server-start.bat etc\kafka\server-1.properties

Microsoft Windows [Version 10.0.18362.592]

© 2019 Microsoft Corporation. All rights reserved.

C:\demo\confluent-5.4.0>bin\windows\kafka-server-start.bat etc\kafka\server-1.properties

```
C:\demo\confluent-5.4.0>bin\windows\kafka-server-start.bat etc\kafka\server-2.properties
```

```
[2020-02-02 18:49:06,415] INFO Registered kafka:type=kafka.Log4jController MBean (kafka.utils.Log4jControllerRegistration$)
```