


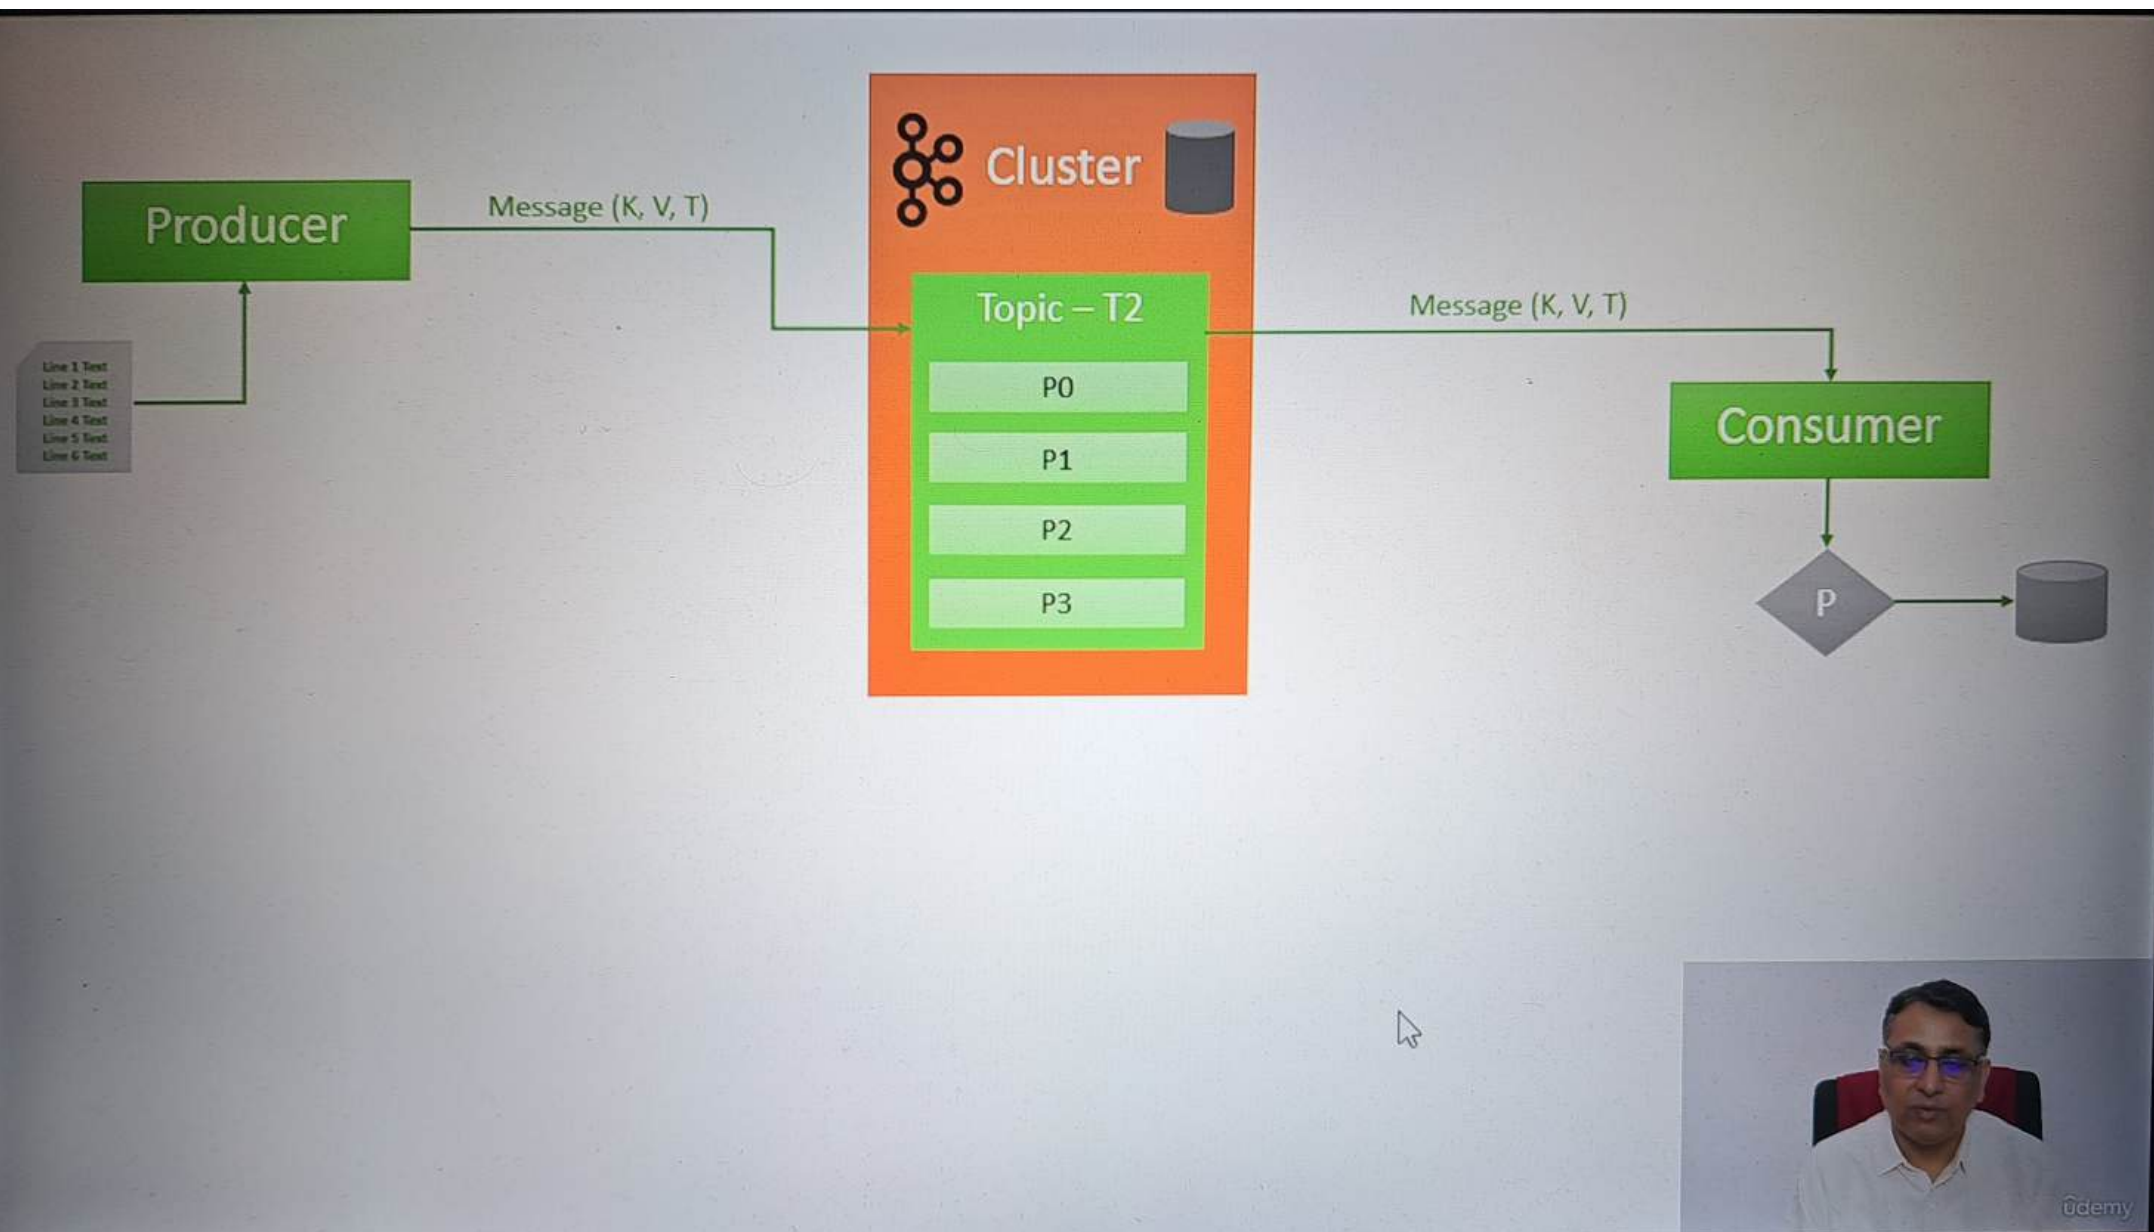

Cluster Settings - Confluent Cl

confluent.cloud/environments/env=7pqq91/clusters/lkc-p9n0ok/settings/kafka

Stream CatalogLEARN

CONFLUENT

Cluster: learning-cluster

Cluster OverviewNetworkingAPI KeysCluster SettingsStream LineageStream DesignerTopicsksqlDBConnectorsClientsSchema Registry

Identification

Name	learning-cluster
Cluster ID	lkc-p9n0ok

Endpoints

Bootstrap server	pkc-6ojv2.us-west4.gcp.confluent.cloud:9092
REST endpoint	https://pkc-6ojv2.us-west4.gcp.confluent.cloud:443

Use the Kafka REST API to interact with your cluster and produce [records](#).

Cloud details

Provider	GCP
Region	us-west4
Availability	Single zone

Cluster type





- Cluster
- learning-cluster
- Cluster Overview
- Networking
- API Keys
- Cluster Settings
- Stream Lineage
- Stream Designer
- Topics
- ksqldb
- Connectors
- Clients

Create key

1. Access control

Select scope for API key



Global access

Allow your API key to access everything you can access. Key access will be linked to your account.

**Recommended for development.*



Granular access

Limit the access for your API key. Manage your API key's access through a service account.

**Recommended for production.*

Next Cancel



Create key

1. Access control 2. Get your API key

Use this API key to connect with the cluster. Store the API key and secret below somewhere safe. This is the only time you'll see the secret.

These credentials can take up to one minute to propagate.

Key

TQ7F3730G6J4TT4G



Secret

ftb0mWOYcCT6oAG9GS1jyUxHYu7mbUPDi0G0
cSymt0t6FK31J1IVDbDRVqKoGSH4



Description

Download and continue



KafkaProducer - invoice_producer.py

KafkaProducer > invoice_producer.py

Project

- KafkaProducer C:\ScholarNest\exp
 - data
 - invoices.json
 - venv library root
 - invoice_producer.py
 - External Libraries
 - Scratches and Consoles

Structure

```
1 from confluent_kafka import Producer
2 import json
3 import time
4
5
6 class InvoiceProducer:
7     def __init__(self):
8         self.topic = "invoices"
9         self.conf = {'bootstrap.servers': 'pkc-6ojv2.us-west4.gcp.confluent.cloud:9092',
10                     'security.protocol': 'SASL_SSL',
11                     'sasl.mechanism': 'PLAIN',
12                     'sasl.username': 'TQ7F3730G6J4TT4G',
13                     'sasl.password': 'ftb0mW0YcCT6oAG9GSIjyUxHYuJmbUPDi0G0c5ymt0t6FKJ1J1',
14                     'client.id': "prashant-laptop"}
15
16     def delivery_callback(self, err, msg):
17         if err:
18             print('ERROR: Message failed delivery: {}'.format(err))
19         else:
20             key = msg.key().decode('utf-8')
21             invoice id = json.loads(msg.value().decode('utf-8'))["InvoiceNumber"]
```

InvoiceProducer > __init__ > 'sasl.password'

Problems Terminal Python Packages Python Console Services

Notifications GitHub Copilot



FileEditViewNavigateCodeRefactorRunToolsVCSWindowHelp

KafkaProducer - invoice_producer.py

KafkaProducer > invoice_producer.py

Project

KafkaProducer

data

invoices.json

venv library root

invoice_producer.py

External Libraries

Scratches and Consoles

invoice_producer.py

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

```
def delivery_callback(self, err, msg):
    if err:
        print('ERROR: Message failed delivery: {}'.format(err))
    else:
        key = msg.key().decode('utf-8')
        invoice_id = json.loads(msg.value().decode('utf-8'))["InvoiceNumber"]
        print(f"Produced event : key = {key} value = {invoice_id}")

def produce_invoices(self, producer, counts):
    counter = 0
    with open("data/invoices.json") as lines:
        for line in lines:
            invoice = json.loads(line)
            store_id = invoice["StoreID"]
            producer.produce(self.topic, key=store_id, value=line, callback=self.deli
            time.sleep(0.5)
            producer.poll(1)
            counter = counter + 1
            if counter == counts:
                break
```

InvoiceProducer > _init_0 > 'sasl.password'

blemsTerminalPython PackagesPython ConsoleServices

Notifications

GitHub Copilot

Structure



File Edit View Navigate Code Refactor Run Tools VCS Window Help KafkaProducer - invoice_producer.py

KafkaProducer invoice_producer.py

Project KafkaProducer C:\ScholarNest\exp
data
invoices.json
venv library root
invoice_producer.py
External Libraries
Scratches and Consoles

```
27 for line in lines:
28     invoice = json.loads(line)
29     store_id = invoice["StoreID"]
30     producer.produce(self.topic, key=store_id, value=line, callback=self.deliver)
31     time.sleep(0.5)
32     producer.poll(1)
33     counter = counter + 1
34     if counter == counts:
35         break
36
37 def start(self):
38     kafka_producer = Producer(self.conf)
39     self.produce_invoices(kafka_producer, 10)
40     kafka_producer.flush(10)
41
42
43 if __name__ == "__main__":
44     invoice_producer = InvoiceProducer()
45     invoice_producer.start()
46
```

InvoiceProducer › __init__ › 'sasl.password'

Problems Terminal Python Packages Python Console Services



File Edit View Navigate Code Refactor Run Tools VCS Window Help KafkaProducer - invoice_producer.py

KafkaProducer > invoice_producer.py

Project > Project > KafkaProducer C:\ScholarNest\exp > data > invoices.json > venv library root > invoice_producer.py > External Libraries > Scratches and Consoles

```
32 producer.poll(1)
33 counter = counter + 1
34 if counter == counts:
35     break
36
37 def start(self):
38     kafka_producer = Producer(self.conf)
39     self.produce_invoices(kafka_producer, 10)
40     kafka_producer.flush(10)
41
42
43 if __name__ == '__main__':
44     InvoiceProducer > __init__ > 'sasl.password'
```

Run: invoice_producer

Produced event : key = STR6347 value = 89101510
Produced event : key = STR7188 value = 26723058
Produced event : key = STR6162 value = 96837834
Produced event : key = STR8513 value = 78302645
with exit code 0

Problems Terminal Python Packages Python Console Services



Confluent Cloud

confluent.cloud/environments/env-7pqq91/clusters/lkc-p9n0ok/topics/invoices/message-viewer

CONFLUENT

Stream Catalog

LEARN

Home > Environments > dev > learning-cluster > Topics >

Cluster

learning-cluster

Cluster Overview

Networking

API Keys

Cluster Settings

Stream Lineage

Stream Designer

Topics

ksqlDB

Connectors

Clients

invoices

Share

Overview

Messages

Schema

Configuration

Producers

Bytes in/sec

Consumers

Bytes out/sec

0

Message fields

topic

partition

offset

timestamp

timestampType

key

value

Filter by keyword

Jump to offset

offset

+ Produce a new message to this topic

["InvoiceNumber": "51402977", "CreateTime": 1595688900348, "StoreID": "STR7188", "PosID": "POS956", "CashierID": "OAS134", "_Partition": 0, "Offset": 10, "Timestamp": 1697965337528]

["InvoiceNumber": "78302645", "CreateTime": 1595689029506, "StoreID": "STR8513", "PosID": "POS956", "CashierID": "OAS134", "_Partition": 1, "Offset": 14, "Timestamp": 1697965344852]

["InvoiceNumber": "96837834", "CreateTime": 1595689029002, "StoreID": "STR6162", "PosID": "POS956", "CashierID": "OAS134", "_Partition": 1, "Offset": 13, "Timestamp": 1697965344720]

