


Lesson 6 Modify Wi-Fi

1.Modify Raspberry Pi Wi-Fi


The computer is supposed to connect to the Wi-Fi hotspot named with the first letters “HW” which is launched by Raspberry Pi. When there are multiple robots around, the wrong connection may occur. If you want to modify the default Wi-Fi name and password, please check the following steps.

- 1) Turn on Raspberry Pi, start NoMachine and then connect it to the Raspberry Pi remote desktop.
- 2) Press “Ctrl+ALT+T” to open LX terminal.
- 3) Enter the following command to jump and open the Wi-Fi configuration file with an editor.

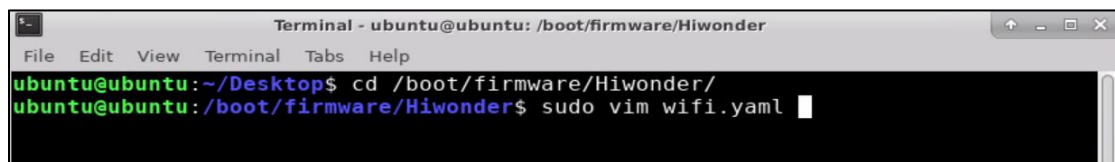


```
Terminal - ubuntu@ubuntu: /boot/firmware/Hiwonder
File Edit View Terminal Tabs Help
ubuntu@ubuntu:~/Desktop$ cd /boot/firmware/Hiwonder/
ubuntu@ubuntu:/boot/firmware/Hiwonder$ sudo vim wifi.yaml
```

- 4) Interface as below:

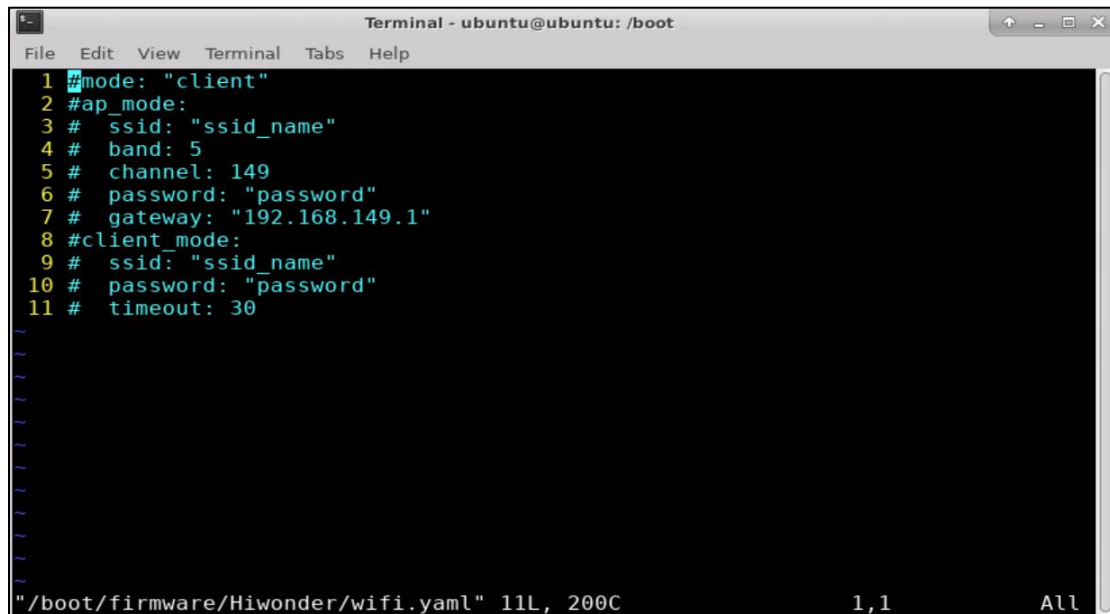


```
Terminal - ubuntu@ubuntu: /boot
File Edit View Terminal Tabs Help
1 #mode: "client"
2 #ap_mode:
3 #   ssid: "ssid_name"
4 #   band: 5
5 #   channel: 149
6 #   password: "password"
7 #   gateway: "192.168.149.1"
8 #client_mode:
9 #   ssid: "ssid_name"
10 #   password: "password"
11 #   timeout: 30
"/boot/firmware/Hiwonder/wifi.yaml" 11L, 200C 1,1 All
```

5) Press the "i" on the keyboard and then the "--INSERT--" mark will be displayed in the lower left corner of the interface. Please refer to the corresponding notes to modify.

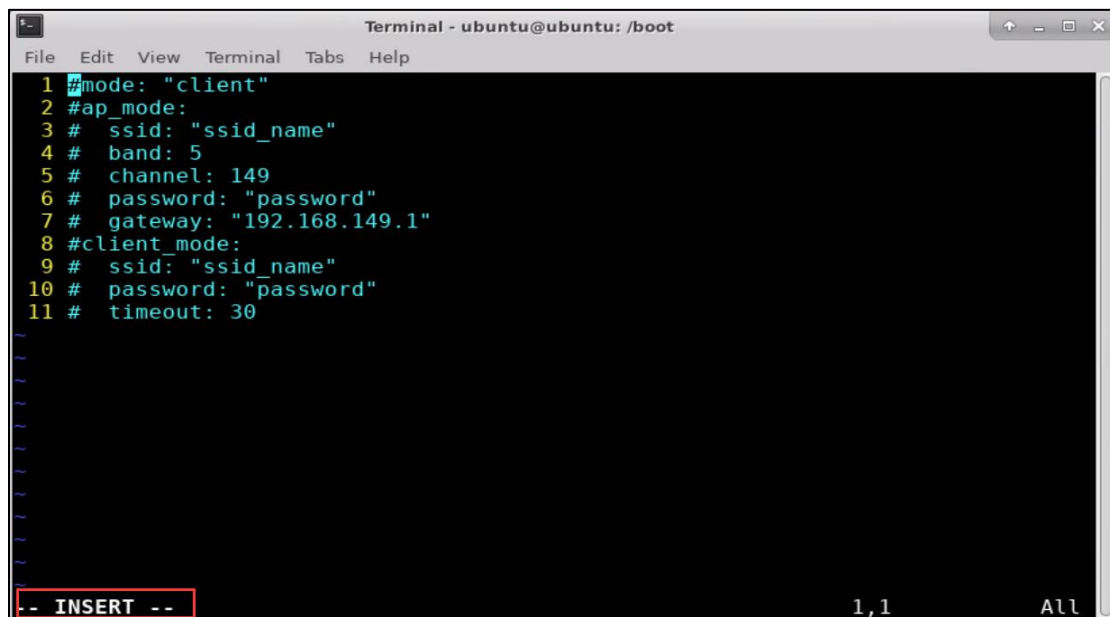


```
Terminal - ubuntu@ubuntu: /boot
File Edit View Terminal Tabs Help
1 #mode: "client"
2 #ap_mode:
3 #   ssid: "ssid_name"
4 #   band: 5
5 #   channel: 149
6 #   password: "password"
7 #   gateway: "192.168.149.1"
8 #client_mode:
9 #   ssid: "ssid_name"
10 #   password: "password"
11 #   timeout: 30
-- INSERT -- 1,1 All
```

6) If you want to modify the Raspberry Pi name as "Hiwonder" and password as "12345678", only need to revise the info as shown in the below figure. Do not forget to delete "#" to make it effective.

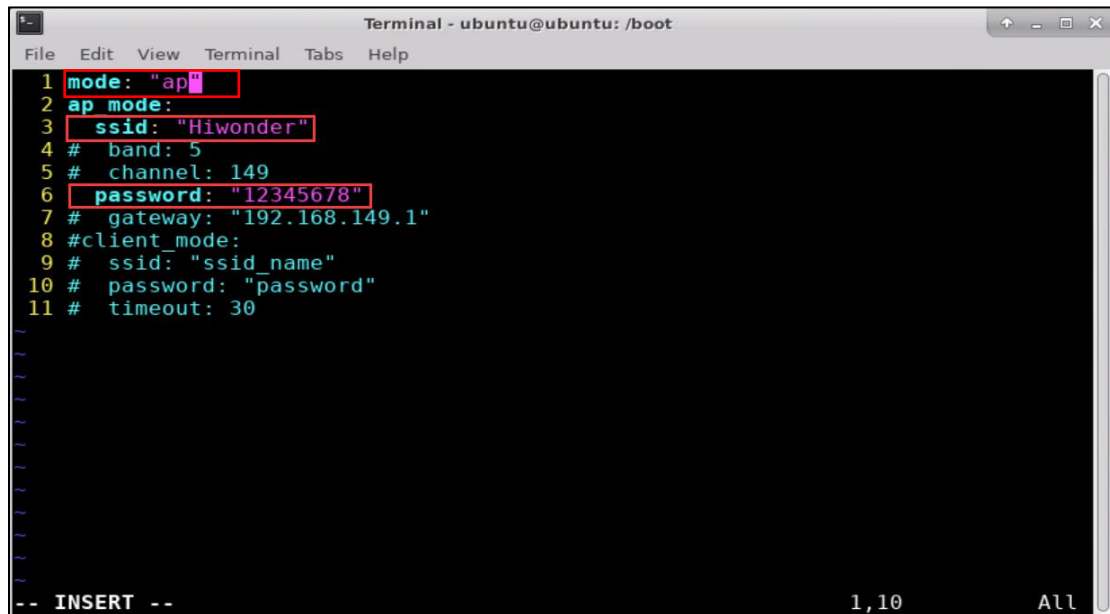


```
Terminal - ubuntu@ubuntu: /boot
File Edit View Terminal Tabs Help
1 mode: "ap"
2 ap_mode:
3 ssid: "Hiwonder"
4 # band: 5
5 # channel: 149
6 password: "12345678"
7 # gateway: "192.168.149.1"
8 #client_mode:
9 # ssid: "ssid_name"
10 # password: "password"
11 # timeout: 30
-- INSERT -- 1,10 All
```

7) If the wireless network card doesn't support 5G WiFi, please change the default value of HW_WIFI_FREQ_BAND from 5 to 2.4, so that the WiFi type is 2.4G. However, the 2.4G transmission rate will be lower than the 5G rate.

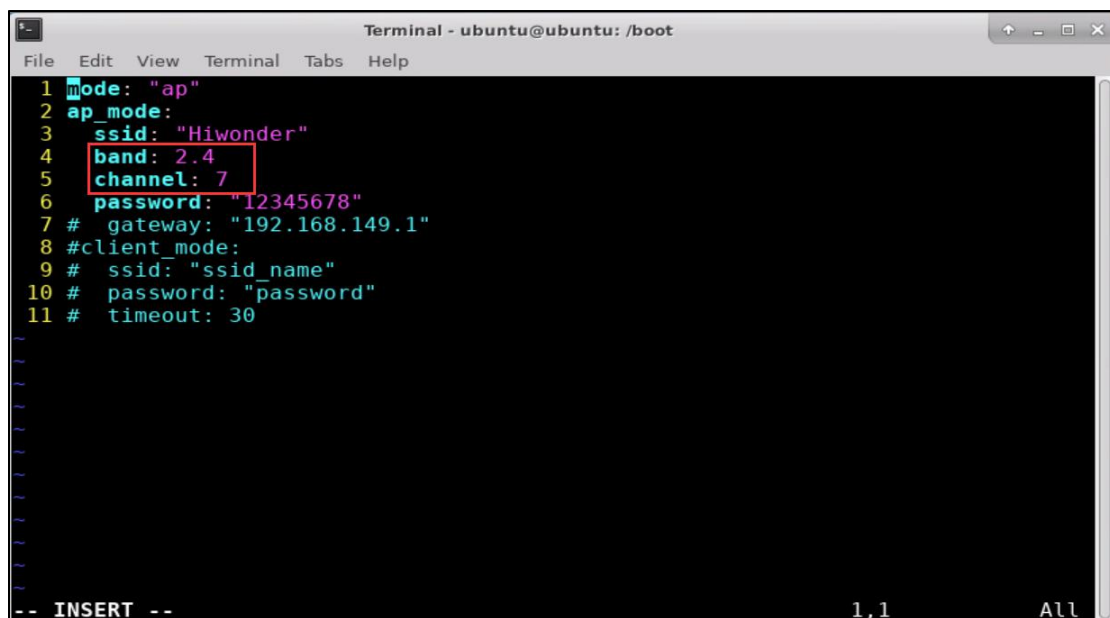


```
Terminal - ubuntu@ubuntu: /boot
File Edit View Terminal Tabs Help
1 mode: "ap"
2 ap_mode:
3 ssid: "Hiwonder"
4 band: 2.4
5 channel: 7
6 password: "12345678"
7 # gateway: "192.168.149.1"
8 #client_mode:
9 # ssid: "ssid_name"
10 # password: "password"
11 # timeout: 30
-- INSERT -- 1,1 All
```

8) After modification, press "ESC" and enter ":wq". Then save and exit the file.

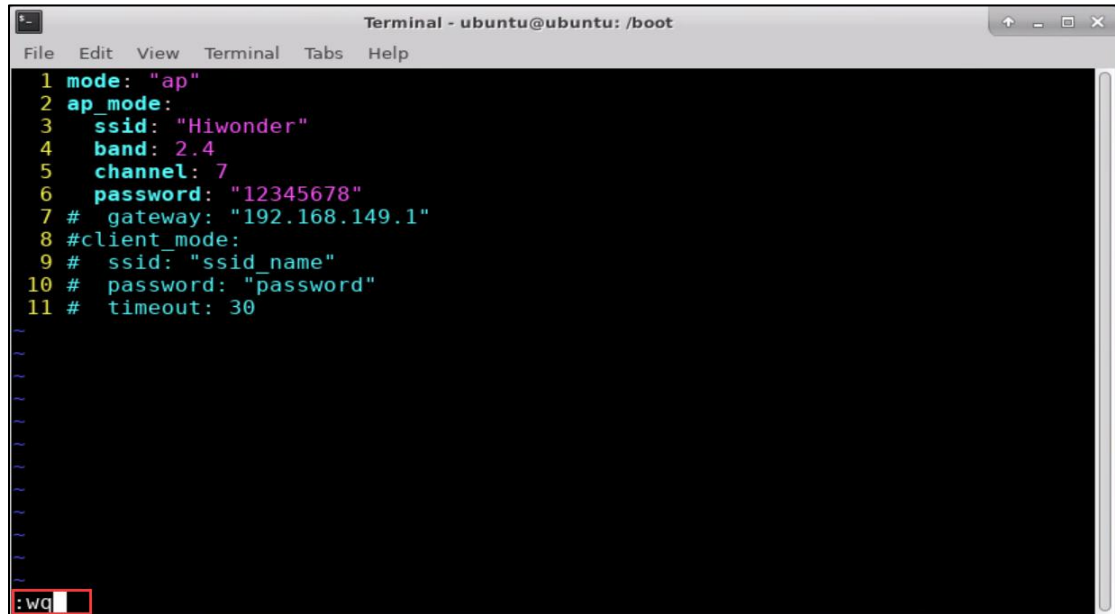

```
Terminal - ubuntu@ubuntu: /boot
File Edit View Terminal Tabs Help
1 mode: "ap"
2 ap_mode:
3   ssid: "Hiwonder"
4   band: 2.4
5   channel: 7
6   password: "12345678"
7 # gateway: "192.168.149.1"
8 #client_mode:
9 #   ssid: "ssid_name"
10 #   password: "password"
11 #   timeout: 30
:wq
```

9) Enter “**sudo reboot**” in the command line, press “Enter ” to restart the file. Then the NoMachine will disconnect automatically.

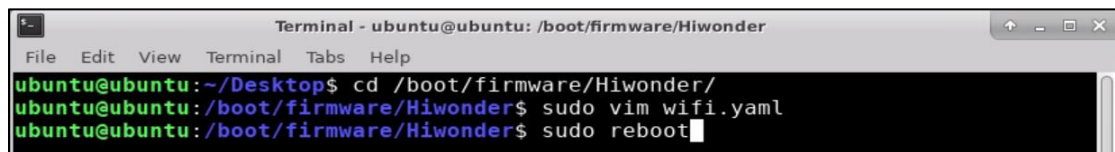

```
Terminal - ubuntu@ubuntu: /boot/firmware/Hiwonder
File Edit View Terminal Tabs Help
ubuntu@ubuntu:~/Desktop$ cd /boot/firmware/Hiwonder/
ubuntu@ubuntu:/boot/firmware/Hiwonder$ sudo vim wifi.yaml
ubuntu@ubuntu:/boot/firmware/Hiwonder$ sudo reboot
```

10) In the Wi-Fi setting area, you can find that the Wi-Fi name will be updated as “Hiwonder”. Enter password “12345678” to connect.

