

BST :- Breadth First Search

Level Order Traversing :-

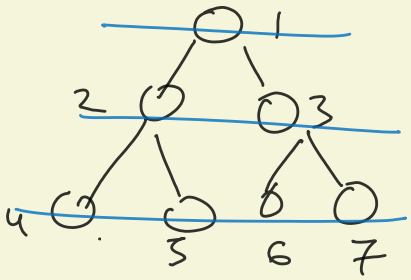


=> 1, 2, 3, 4, 5, 6 7


Queue

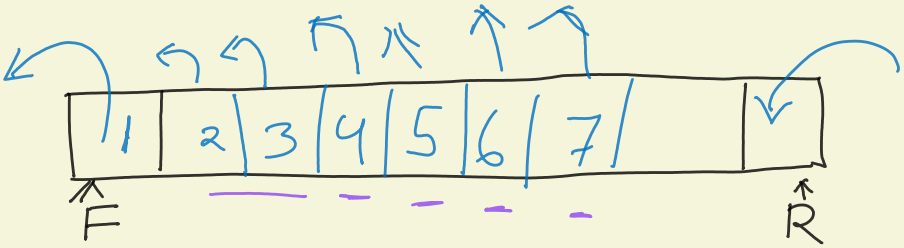


visited =

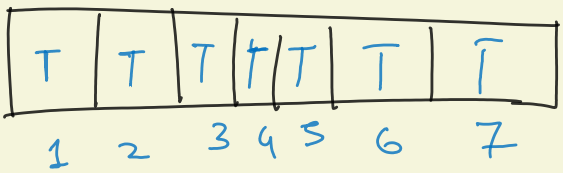


→ print 1 → 2 → 3 → 4 → 5 → 6 → 7
→ visited entry
→ Queue Op

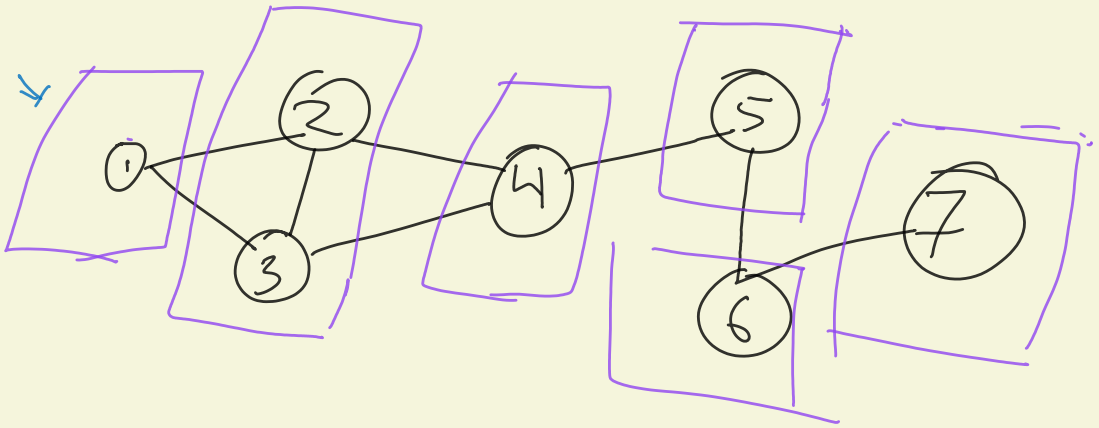

Logic :-

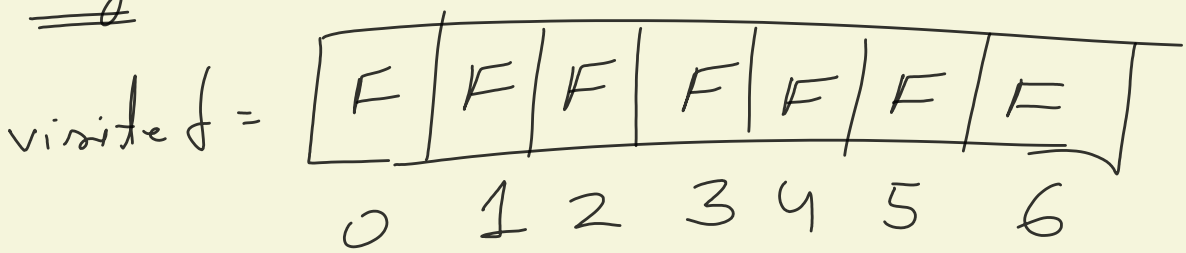

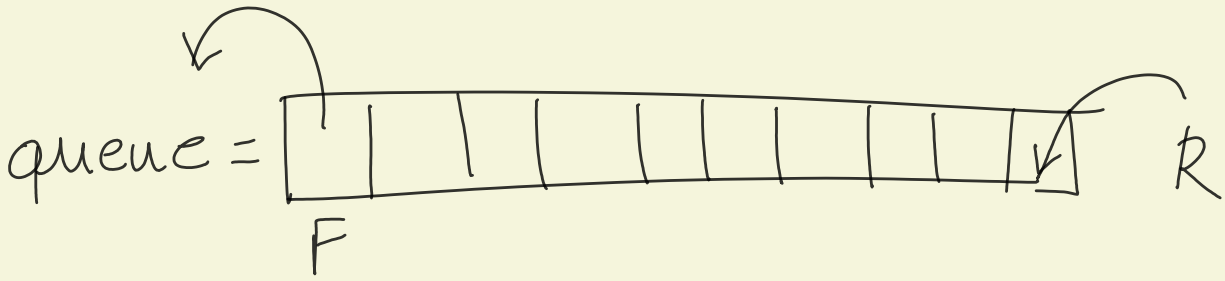


```
item = queue.pop()
print()
for i in mat():
    visited[ i ] = True
    queue.enque( i )
```

note's

- print from queue
- if nabours are not visited
  - visited = True
  - enque the nabour