

WPL LAB 8

Name: Abhinav Singh Bhagtana

Roll no: A-029

Reg no: 230905225

Q1. Develop a web application using Django framework to demonstrate the transfer of

multiple parameters between web pages. User should be presented with a dropdown

list containing car manufacturers, a text box which takes model name of the manufacturer and a submit button. On submitting the web page, the user is forwarded

to a new page. This new page should display the selected car manufacturer name and

the model name.

The image shows a Visual Studio Code editor window with a Django project. The Explorer sidebar on the left displays the project structure, including the `car_project` folder and its subfolders like `car_app`, `migrations`, and `templates`. The main editor area shows the `settings.py` file, which contains the following code:

```
20 # See https://docs.djangoproject.com/en/5.2/howto/deployment/checklist/
21
22 # SECURITY WARNING: keep the secret key used in production secret!
23 SECRET_KEY = "django-insecure-((=ro9y&s24y=kury81%s2i8^32p$x_l5ob)&st1&3qtg7yikv"
24
25 # SECURITY WARNING: don't run with debug turned on in production!
26 DEBUG = True
27
28 ALLOWED_HOSTS = []
29
30
31 # Application definition
32
33 INSTALLED_APPS = [
34     "django.contrib.admin",
35     "django.contrib.auth",
36     "django.contrib.contenttypes",
37     "django.contrib.sessions",
38     "django.contrib.messages",
39     "django.contrib.staticfiles",
40     "car_app",
41 ]
42
43 MIDDLEWARE = [
44     "django.middleware.security.SecurityMiddleware",
45     "django.contrib.sessions.middleware.SessionMiddleware",
46     "django.middleware.common.CommonMiddleware",
47     "django.middleware.csrf.CsrfViewMiddleware",
48     "django.contrib.auth.middleware.AuthenticationMiddleware",
49     "django.contrib.messages.middleware.MessageMiddleware",
50     "django.middleware.clickjacking.XFrameOptionsMiddleware",
51 ]
52
53 ROOT_URLCONF = "car_project.urls"
54
55 TEMPLATES = [
56     /
```

The bottom panel of the editor shows the terminal output, which includes the command `rver` and the following log entries:

```
[23/Mar/2026 08:21:23] "GET / HTTP/1.1" 200 1013
[23/Mar/2026 08:21:26] "POST / HTTP/1.1" 200 490
[23/Mar/2026 08:21:28] "GET / HTTP/1.1" 200 1013
```

The status bar at the bottom indicates the current file is `settings.py` at line 40, column 15, with 4 spaces, UTF-8 encoding, and LF line endings. The Python version is 3.10.12 (venv).

File Edit Selection View ...

Q1

EXPLORER

- Q1
 - .venv
 - car_project
 - car_app
 - __pycache__
 - migrations
 - templates/car_app
 - index.html
 - result.html
 - __init__.py
 - admin.py
 - apps.py
 - forms.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - car_project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

forms.py

```
1 from django import forms
2
3
4 class CarForm(forms.Form):
5     # Define the choices for the dropdown list
6     MANUFACTURER_CHOICES = [
7         ("Toyota", "Toyota"),
8         ("Honda", "Honda"),
9         ("Ford", "Ford"),
10        ("BMW", "BMW"),
11        ("Tata", "Tata"),
12        ("Mahindra", "Mahindra"),
13    ]
14
15    # Dropdown list for the manufacturer
16    manufacturer = forms.ChoiceField(
17        choices=MANUFACTURER_CHOICES, label="Car Manufacturer"
18    )
19
20    # Text box for the model name
21    model_name = forms.CharField(max_length=100, label="Model Name")
22
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python - car_project

```
(.venv) abhinav@abhinav-LQ0-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week
rver
[23/Mar/2026 08:21:23] "GET / HTTP/1.1" 200 1013
[23/Mar/2026 08:21:26] "POST / HTTP/1.1" 200 490
[23/Mar/2026 08:21:28] "GET / HTTP/1.1" 200 1013
```

Ln 22, Col 1 Spaces: 4 UTF-8 LF {} Python 3.10.12 (.venv)

VS Code interface showing a Python project named 'car_project' with a file explorer on the left and a code editor in the center. The code editor displays the 'views.py' file, which contains a Django view function 'car_input' that handles form submissions and renders the 'result.html' template. The terminal at the bottom shows the command prompt and the output of the 'rver' command, indicating the server is running on port 8000.

File Explorer (Left Panel):


- Q1
 - .venv
 - car_project
 - car_app
 - __pycache__
 - migrations
 - templates/car_app
 - index.html
 - result.html
 - __init__.py
 - admin.py
 - apps.py
 - forms.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - car_project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

Code Editor (Center Panel):

```
car_project > car_app > views.py > ...
1 from django.shortcuts import render
2 from .forms import CarForm
3
4
5 def car_input(request):
6     # If this is (method) def is_valid() -> bool data
7     if request.method == 'POST':
8         form = CarForm(request.POST)
9         if form.is_valid():
10             # Extract the cleaned data from the form
11             manufacturer = form.cleaned_data["manufacturer"]
12             model_name = form.cleaned_data["model_name"]
13
14             # Context to pass to the result page
15             context = {"manufacturer": manufacturer, "model_name": model_name}
16             # Forward the user to the result page with the parameters
17             return render(request, "car_app/result.html", context)
18
19     # If a GET (or any other method), create a blank form
20     else:
21         form = CarForm()
22
23     # Render the input page
24     return render(request, "car_app/index.html", {"form": form})
25
```

Terminal (Bottom Panel):

```
python - car_project
(.venv) abhinav@abhinav-LQ0-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week
rver
[23/Mar/2026 08:21:23] "GET / HTTP/1.1" 200 1013
[23/Mar/2026 08:21:26] "POST / HTTP/1.1" 200 490
[23/Mar/2026 08:21:28] "GET / HTTP/1.1" 200 1013
```

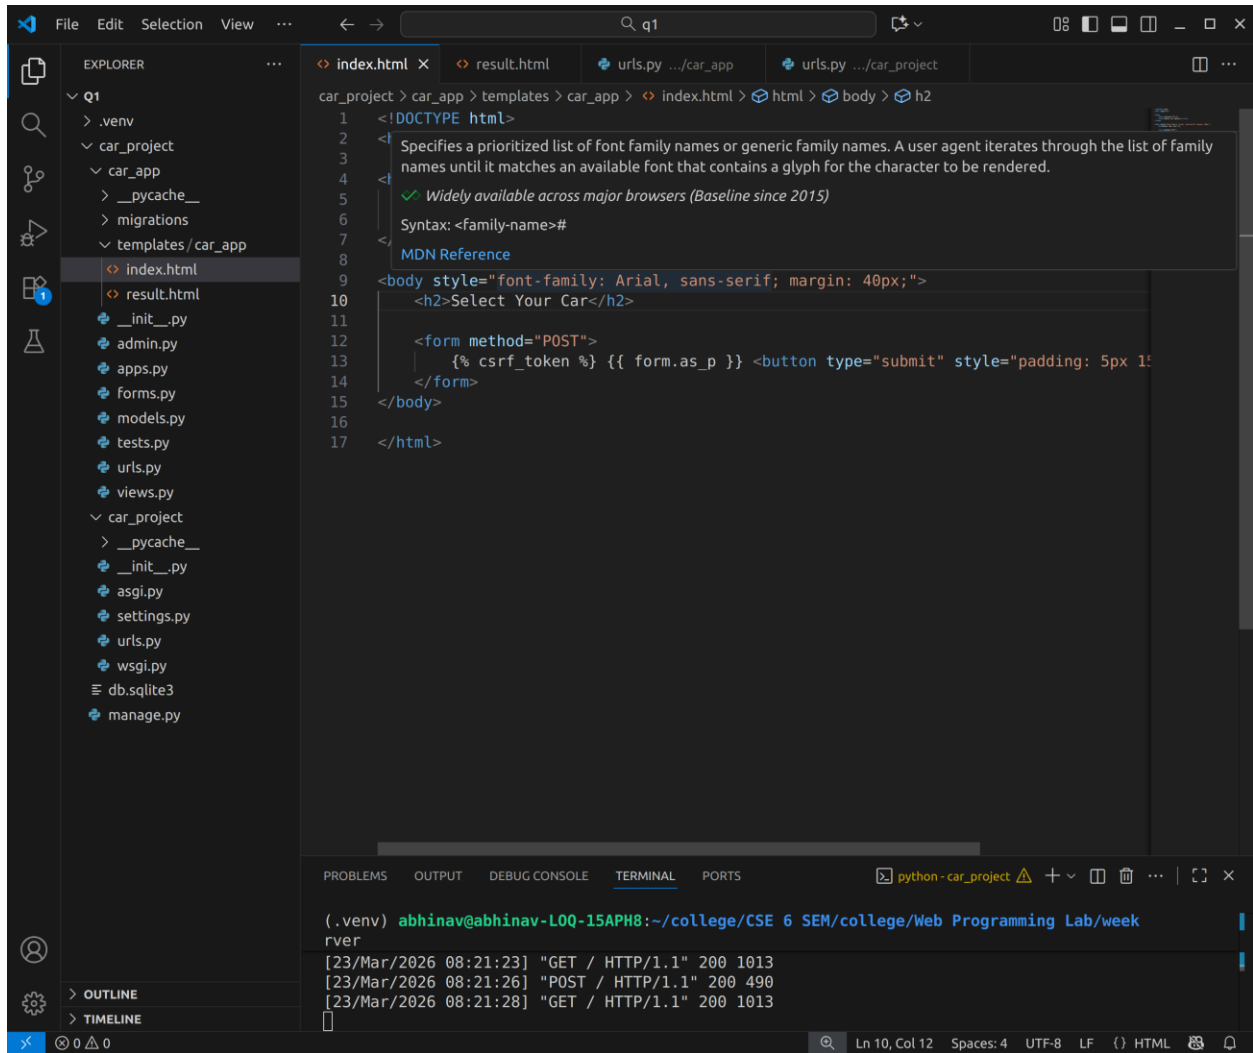

The image shows a Visual Studio Code editor interface. The Explorer sidebar on the left displays a file tree for a project named 'car_project'. The file 'result.html' is selected and open in the main editor. The code in 'result.html' is an HTML template for a 'Car Selection Result' page. It includes a head section with a title and a body section with a success message and a 'Go Back' link. The body is styled with a blue background and rounded corners. The terminal window at the bottom shows the output of a Python server, with logs indicating successful GET and POST requests.

```
car_project > car_app > templates > car_app > result.html > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3
4  <head>
5      <meta charset="UTF-8">
6      <title>Car Selection Result</title>
7  </head>
8
9  <body style="font-family: Arial, sans-serif; margin: 40px;">
10     <h2>Car Details Submitted Successfully!</h2>
11
12     <div style="background-color: #f4f4f4; padding: 20px; border-radius: 5px; width: 60%; margin: 20px auto;">
13         <p><strong>Manufacturer:</strong> {{ manufacturer }}</p>
14         <p><strong>Model Name:</strong> {{ model_name }}</p>
15     </div>
16
17     <br>
18     <a href="/">Go Back</a>
19 </body>
20
21 </html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS python - car_project

```
(.venv) abhinav@abhinav-LQ-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week
rver
[23/Mar/2026 08:21:23] "GET / HTTP/1.1" 200 1013
[23/Mar/2026 08:21:26] "POST / HTTP/1.1" 200 490
[23/Mar/2026 08:21:28] "GET / HTTP/1.1" 200 1013
```

Ln 11, Col 1 Spaces: 4 UTF-8 LF {} HTML

Visual Studio Code interface showing a Django project structure and a terminal window.

EXPLORER

- Q1
 - .venv
 - car_project
 - car_app
 - __pycache__
 - migrations
 - templates/car_app
 - index.html
 - result.html
 - __init__.py
 - admin.py
 - apps.py
 - forms.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - car_project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

urls.py (car_app)

```
1 from django.urls import path
2 from . import views
3
4 urlpatterns = [
5     path("", views.car_input, name="car_input"),
6 ]
7
```

TERMINAL

```
(.venv) abhinav@abhinav-LQ0-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week
rver
[23/Mar/2026 08:21:23] "GET / HTTP/1.1" 200 1013
[23/Mar/2026 08:21:26] "POST / HTTP/1.1" 200 490
[23/Mar/2026 08:21:28] "GET / HTTP/1.1" 200 1013
```

Ln 7, Col 1 Spaces: 4 UTF-8 LF {} Python 3.10.12 (.venv)

The image shows a Visual Studio Code editor window with a Django project named 'car_project'. The Explorer sidebar on the left shows the project structure, including files like 'urls.py', 'wsgi.py', 'db.sqlite3', and 'manage.py'. The main editor area displays the 'urls.py' file, which contains URL configuration for the project. The code includes comments and examples for function and class-based views, as well as including another URLconf. The terminal window at the bottom shows the command prompt for the 'python-car_project' environment, with logs indicating successful GET and POST requests.

```
1 """
2 URL configuration for car_project project.
3
4 The 'urlpatterns' list routes URLs to views. For more information please see:
5     https://docs.djangoproject.com/en/5.2/topics/http/urls/
6 Examples:
7 Function views
8     1. Add an import: from my_app import views
9     2. Add a URL to urlpatterns: path('', views.home, name='home')
10 Class-based views
11     1. Add an import: from other_app.views import Home
12     2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
13 Including another URLconf
14     1. Import the include() function: from django.urls import include, path
15     2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17
18 from django.contrib import admin
19 from django.urls import path, include
20
21 urlpatterns = [
22     path("admin/", admin.site.urls),
23     path("", include("car_app.urls")), # Includes the URLs from car_app
24 ]
25
```

Terminal output:

```
(.env) abhinav@abhinav-LQ0-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week
rver
[23/Mar/2026 08:21:23] "GET / HTTP/1.1" 200 1013
[23/Mar/2026 08:21:26] "POST / HTTP/1.1" 200 490
[23/Mar/2026 08:21:28] "GET / HTTP/1.1" 200 1013
```

website:

Select Your Car

Car Manufacturer:

Model Name:

Car Details Submitted Successfully!


Manufacturer: BMW

Model Name: m340i

[Go Back](#)

Q2. Create a page firstPage.html with two TextBoxes [Name, Roll], DropDownList [Subjects], and a button. Create another page secondPage.html with a label and a

button. When the user clicks the button in first Page, he should be sent to the second page and display the contents passed from first page in the label. The button in second page should navigate the user back to firstPage. Use Django sessions to transfer Information.

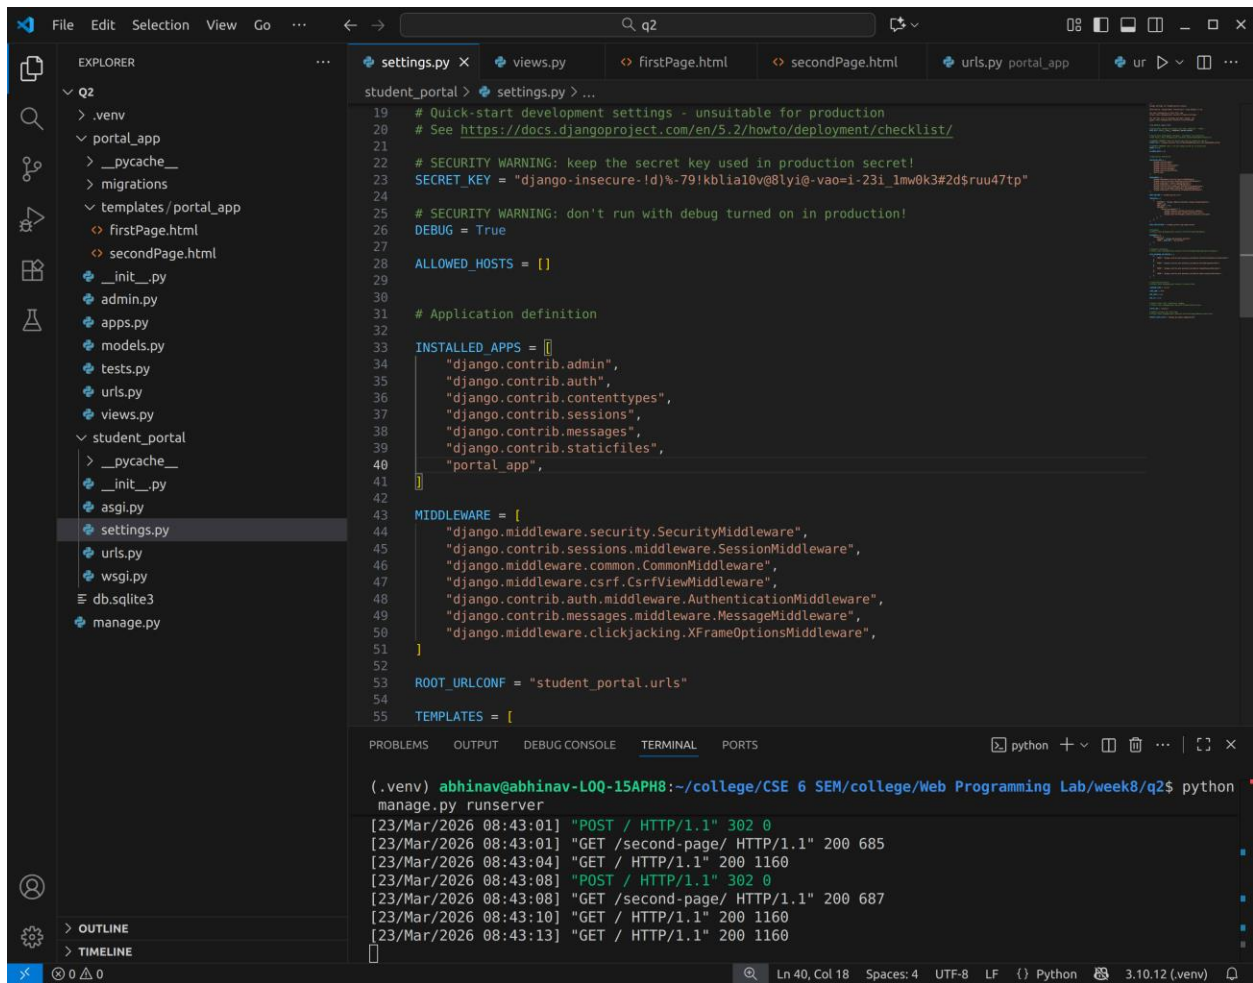

File Edit Selection View Go ... q2

EXPLORER

- Q2
 - .venv
 - portal_app
 - __pycache__
 - migrations
 - templates/portal_app
 - firstPage.html
 - secondPage.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - student_portal
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

views.py


```
portal_app > views.py > second_page
1 from django.shortcuts import render, redirect
2
3
4 def first_page(request):
5     # If the user submits the form
6     if request.method == "POST":
7         # Store the submitted data in Django sessions
8         request.session["name"] = request.POST.get("name")
9         request.session["roll"] = request.POST.get("roll")
10        request.session["subject"] = request.POST.get("subject")
11
12        # Redirect to the second page
13        return redirect("second_page")
14
15    # If it's a normal page load (GET request), show the empty form
16    return render(request, "portal_app/firstPage.html")
17
18
19
20 def second_page(request):
21     # Retrieve the data from the session (with fallbacks if empty)
22     context = {
23         "name": request.session.get("name", "Not Provided"),
24         "roll": request.session.get("roll", "Not Provided"),
25         "subject": request.session.get("subject", "Not Provided"),
26     }
27
28     # Render the second page and pass the session data
29     return render(request, "portal_app/secondPage.html", context)
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) abhinav@abhinav-LQ0-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week8/q2\$ python manage.py runserver

```
[23/Mar/2026 08:43:01] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:01] "GET /second-page/ HTTP/1.1" 200 685
[23/Mar/2026 08:43:04] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:08] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:08] "GET /second-page/ HTTP/1.1" 200 687
[23/Mar/2026 08:43:10] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:13] "GET / HTTP/1.1" 200 1160
```

Ln 28, Col 39 Spaces: 4 UTF-8 LF Python 3.10.12 (.venv)

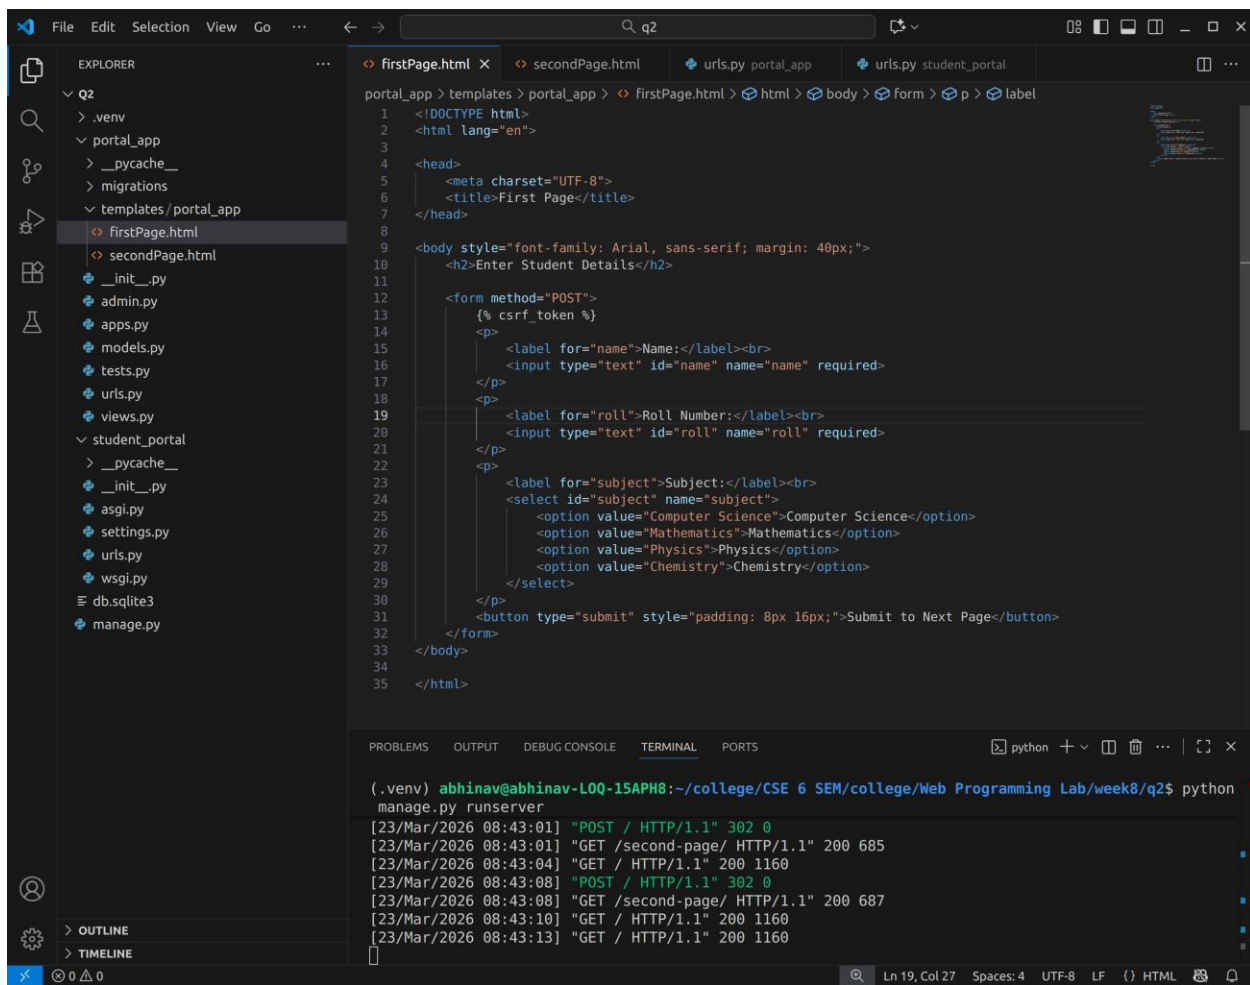

File Edit Selection View Go ... Q2

EXPLORER

- Q2
 - .venv
 - portal_app
 - __pycache__
 - migrations
 - templates/portal_app
 - firstPage.html
 - secondPage.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - student_portal
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

secondPage.html

```
1 <!DOCTYPE html>
2 <html lang="en">
3
4 <head>
5   <meta charset="UTF-8">
6   <title>Second Page</title>
7 </head>
8
9 <body style="font-family: Arial, sans-serif; margin: 40px;">
10   <h2>Student Information</h2>
11
12   <div
13     style="background-color: #e9ecef; padding: 15px; border-radius: 5px; display: inline-block"
14   >
15     <label style="font-size: 18px;">
16       <strong>Name:</strong> {{ name }} |
17       <strong>Roll:</strong> {{ roll }} |
18       <strong>Subject:</strong> {{ subject }}
19     </label>
20   </div>
21
22   <br>
23   <a href="{% url 'first page' %}">
24     <button style="padding: 8px 16px; cursor: pointer;">Go Back to First Page</button>
25   </a>
26 </body>
27
28 </html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) abhinav@abhinav-L0Q-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week8/q2\$ python manage.py runserver

```
[23/Mar/2026 08:43:01] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:01] "GET /second-page/ HTTP/1.1" 200 685
[23/Mar/2026 08:43:04] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:08] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:08] "GET /second-page/ HTTP/1.1" 200 687
[23/Mar/2026 08:43:10] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:13] "GET / HTTP/1.1" 200 1160
```

Ln 17, Col 23 Spaces: 4 UTF-8 LF {} HTML

File Edit Selection View Go ...

q2

EXPLORER

- q2
 - .venv
 - portal_app
 - __pycache__
 - migrations
 - templates/portal_app
 - firstPage.html
 - secondPage.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - student_portal
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

portal_app > urls.py > ...

```
1 from django.urls import path
2 from . import views
3
4 urlpatterns = [
5     path("", views.first_page, name="first_page"),
6     path("second-page/", views.second_page, name="second_page"),
7 ]
8
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) abhinav@abhinav-L0Q-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week8/q2\$ python manage.py runserver

```
[23/Mar/2026 08:43:01] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:01] "GET /second-page/ HTTP/1.1" 200 685
[23/Mar/2026 08:43:04] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:08] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:08] "GET /second-page/ HTTP/1.1" 200 687
[23/Mar/2026 08:43:10] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:13] "GET / HTTP/1.1" 200 1160
```

Ln 8, Col 1 Spaces: 4 UTF-8 LF {} Python 3.10.12 (.venv)

The image shows a Visual Studio Code editor window with a dark theme. The Explorer sidebar on the left displays a project structure for 'Q2'. The main editor area shows the 'urls.py' file for the 'student_portal' app. The terminal at the bottom shows the output of running 'python manage.py runserver', displaying several HTTP requests and responses.

EXPLORER

- Q2
 - .venv
 - portal_app
 - __pycache__
 - migrations
 - templates/portal_app
 - firstPage.html
 - secondPage.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - student_portal
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

urls.py

```
student_portal > urls.py > ...
1 """
2 URL configuration for student_portal project.
3
4 The 'urlpatterns' list routes URLs to views. For more information please see:
5     https://docs.djangoproject.com/en/5.2/topics/http/urls/
6 Examples:
7 Function views
8     1. Add an import:  from my_app import views
9     2. Add a URL to urlpatterns:  path('', views.home, name='home')
10 Class-based views
11     1. Add an import:  from other_app.views import Home
12     2. Add a URL to urlpatterns:  path('', Home.as_view(), name='home')
13 Including another URLconf
14     1. Import the include() function: from django.urls import include, path
15     2. Add a URL to urlpatterns:  path('blog/', include('blog.urls'))
16 """
17
18 from django.contrib import admin
19 from django.urls import path, include
20
21 urlpatterns = [
22     path("admin/", admin.site.urls),
23     path("", include("portal_app.urls")),
24 ]
25
```

TERMINAL

```
(.venv) abhinav@abhinav-L0Q-15APH8:~/college/CSE 6 SEM/college/Web Programming Lab/week8/q2$ python manage.py runserver
[23/Mar/2026 08:43:01] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:01] "GET /second-page/ HTTP/1.1" 200 685
[23/Mar/2026 08:43:04] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:08] "POST / HTTP/1.1" 302 0
[23/Mar/2026 08:43:08] "GET /second-page/ HTTP/1.1" 200 687
[23/Mar/2026 08:43:10] "GET / HTTP/1.1" 200 1160
[23/Mar/2026 08:43:13] "GET / HTTP/1.1" 200 1160
```

website

Enter Student Details

Name:

Abhinav Bhagtana

Roll Number:

5225

Subject:

Computer Science ▾

Submit to Next Page

Student Information

Name: Abhinav Bhagtana | **Roll:** 5225 | **Subject:** Computer Science

Go Back to First Page