

WPL LAB 9

Name: Abhinav Singh Bhagtana

Roll no: A-029

Reg no: 230905225

Q1. Create a Register page and Success page with the following requirements:

i.

Register page should contain four input TextBoxes for UserName, Password, Email id and Contact Number and also a button to submit. Make the username as compulsory field and other fields as optional.

ii.

On button click, Success page is displayed with message "Welcome

{UserName}" and also his Email and Contact Number has to be displayed.

iii. Use secure technique to send details to the Success page (Hint: use csrftoken) 4)

Design a website with two pages.

File Edit Selection View ...

q1

EXPLORER

- q1
 - .venv
 - accounts
 - __pycache__
 - migrations
 - templates/accounts
 - register.html
 - success.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

settings.py

```
20 # See https://docs.djangoproject.com/en/5.2/howto/deployment/checklist/
21
22 # SECURITY WARNING: keep the secret key used in production secret!
23 SECRET_KEY = 'django-insecure-s3y%az!-o01=f+ddr2e&(*9mfl8ci%*t$h190*7p#qxo9_e!'
24
25 # SECURITY WARNING: don't run with debug turned on in production!
26 DEBUG = True
27
28 ALLOWED_HOSTS = []
29
30
31 # Application definition
32
33 INSTALLED_APPS = [
34     'django.contrib.admin',
35     'django.contrib.auth',
36     'django.contrib.contenttypes',
37     'django.contrib.sessions',
38     'django.contrib.messages',
39     'django.contrib.staticfiles',
40     'accounts'
41 ]
42
43 MIDDLEWARE = [
44     'django.middleware.security.SecurityMiddleware',
45     'django.contrib.sessions.middleware.SessionMiddleware',
46     'django.middleware.common.CommonMiddleware',
47     'django.middleware.csrf.CsrfViewMiddleware',
48     'django.contrib.auth.middleware.AuthenticationMiddleware',
49     'django.contrib.messages.middleware.MessageMiddleware',
50     'django.middleware.clickjacking.XFrameOptionsMiddleware',
51 ]
52
53 ROOT_URLCONF = 'project.urls'
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python

^C(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q1\$ python manage.py runserver


Quit the server with CONTROL-C.


WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

```
[25/Mar/2026 08:47:39] "GET / HTTP/1.1" 200 1103
[25/Mar/2026 08:47:47] "POST / HTTP/1.1" 200 466
[25/Mar/2026 08:47:53] "GET / HTTP/1.1" 200 1103
[25/Mar/2026 08:48:57] "POST / HTTP/1.1" 200 475
[25/Mar/2026 08:49:02] "GET / HTTP/1.1" 200 1103
```

Ln 38, Col 31 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

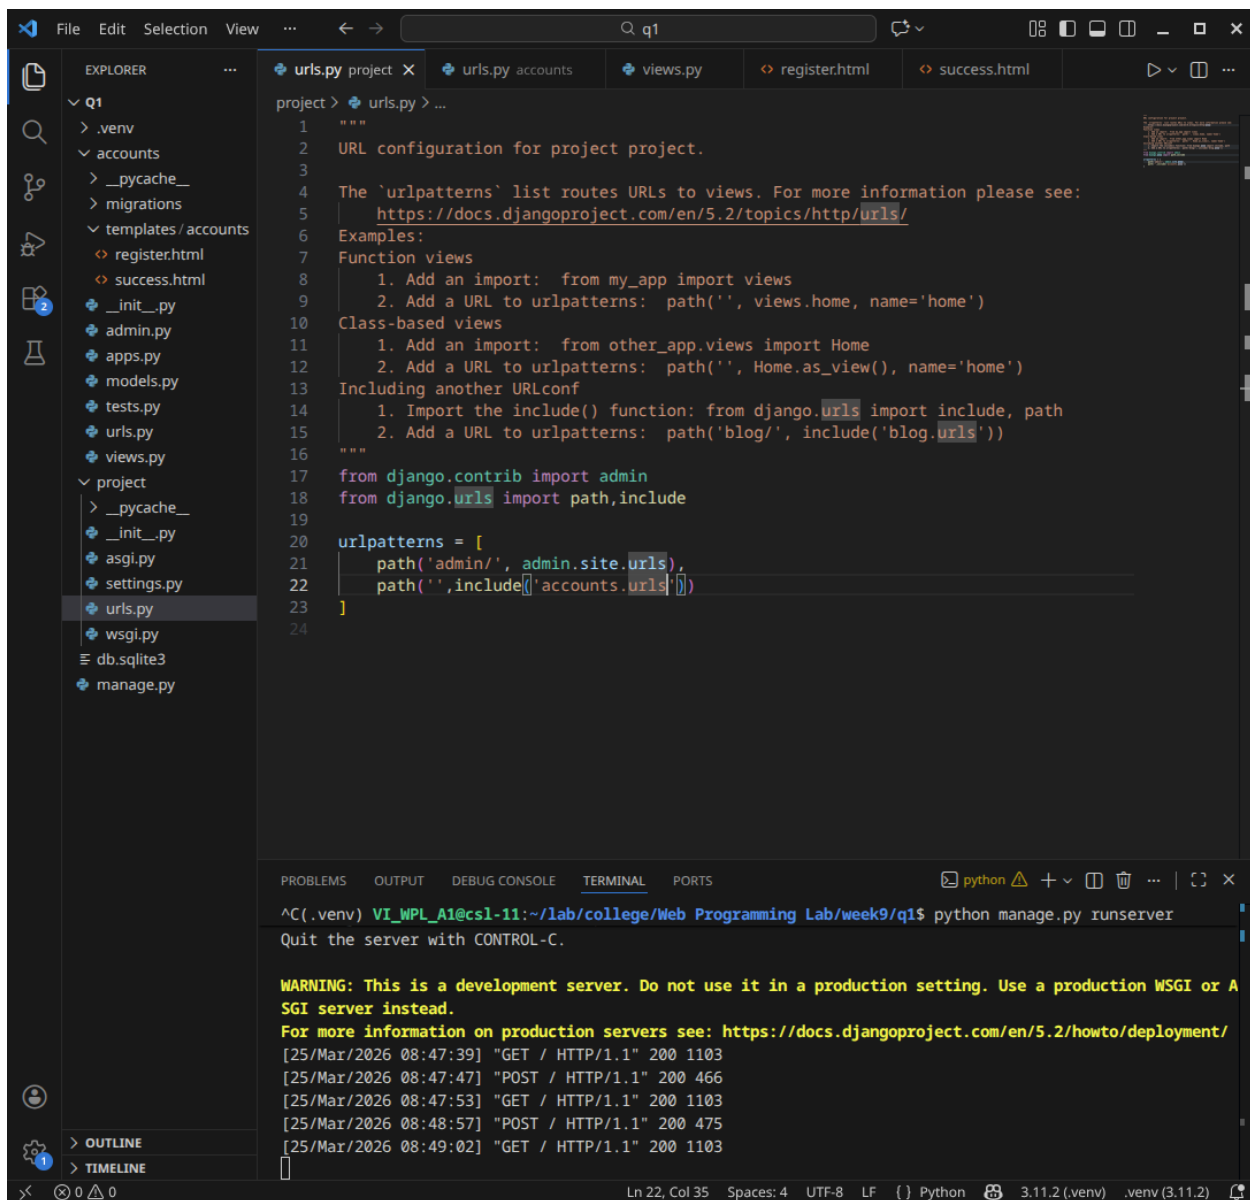

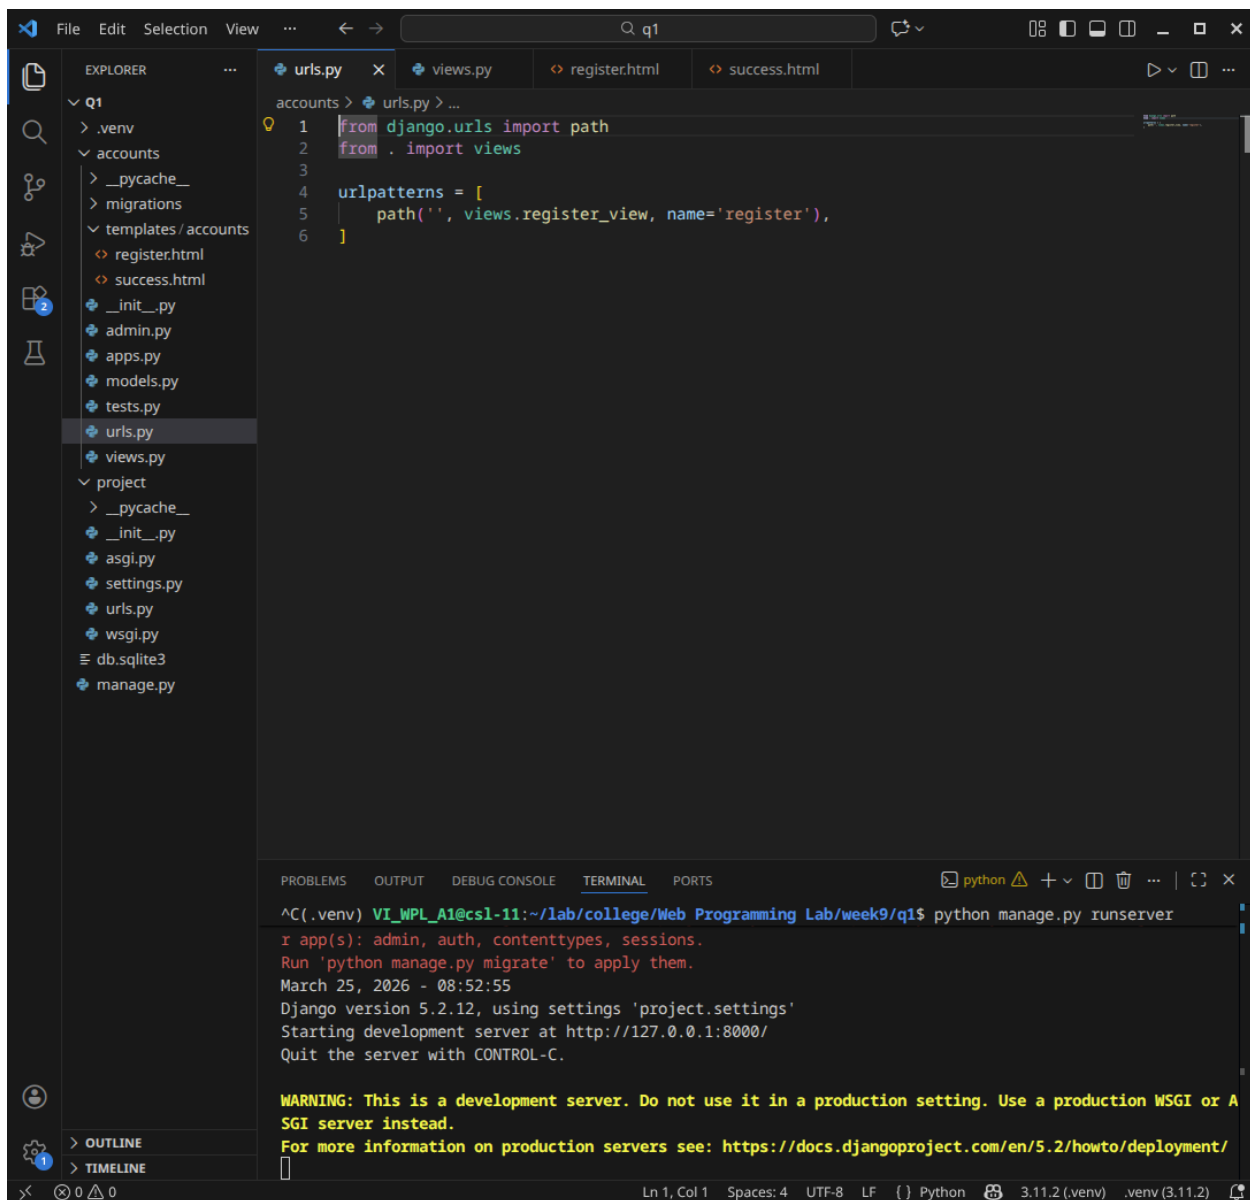

File Edit Selection View ... ← → q1

EXPLORER

- q1
 - .venv
 - accounts
 - __pycache__
 - migrations
 - templates/accounts
 - register.html
 - success.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

accounts > views.py > register_view

```
1 from django.shortcuts import render
2
3 def register_view(request):
4     # Check if the form was submitted via POST (Secure method)
5     if request.method == 'POST':
6         # Safely retrieve data from the POST request
7         username = request.POST.get('username')
8         email = request.POST.get('email', 'Not provided')
9         contact = request.POST.get('contact', 'Not provided')
10
11         # We capture the password here but do not pass it to the success page for security
12         password = request.POST.get('password')
13
14         # Package the data to send to the Success page
15         context = {
16             'username': username,
17             'email': email,
18             'contact': contact,
19         }
20
21         # Render the Success page directly with the submitted data
22         return render(request, 'accounts/success.html', context)
23
24     # If the request is a standard GET request, just display the empty Register form
25     return render(request, 'accounts/register.html')
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python python + - | | |

```
^C(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q1$ python manage.py runserver
r app(s): admin, auth, contenttypes, sessions.
Run 'python manage.py migrate' to apply them.
March 25, 2026 - 08:53:20
Django version 5.2.12, using settings 'project.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CONTROL-C.
```

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

Ln 19, Col 10 Spaces: 4 UTF-8 LF {} Python 3.11.2(.venv) .venv(3.11.2)

EXPLORER

Q1

.venv

accounts

__pycache__

migrations

templates/accounts

register.html

success.html

__init__.py

admin.py

apps.py

models.py

tests.py

urls.py

views.py

project

__pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

db.sqlite3

manage.py

register.html

success.html

accounts > templates > accounts > register.html > html

2

<html lang="en">

7

<body style="font-family: Arial, sans-serif; margin: 40px;">

11

<form method="POST" action="">

13

<div>

14

<label for="username">UserName (Required):</label>

15

<input type="text" id="username" name="username" required>

16

</div>

17

<div>

18

<label for="password">Password:</label>

19

<input type="password" id="password" name="password">

20

</div>

21

<div>

22

<label for="email">Email id:</label>

23

<input type="email" id="email" name="email">

24

</div>

25

<div>

26

<label for="contact">Contact Number:</label>

27

<input type="tel" id="contact" name="contact">

28

</div>

29

<div>

30

<label for="contact">Contact Number:</label>

31

<input type="tel" id="contact" name="contact">

32

</div>

33

<button type="submit" style="padding: 10px 20px;">Submit</button>

34

</form>

35

</body>

36

</html>

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

python

^C(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q1\$ python manage.py runserver

r app(s): admin, auth, contenttypes, sessions.

Run 'python manage.py migrate' to apply them.

March 25, 2026 - 08:53:20

Django version 5.2.12, using settings 'project.settings'

Starting development server at http://127.0.0.1:8000/

Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

Ln 38, Col 8 Spaces: 4 UTF-8 LF {} HTML

```
File Edit Selection View ... q1
accounts > templates > accounts > success.html > html
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <title>Registration Success</title>
6 </head>
7 <body style="font-family: Arial, sans-serif; margin: 40px;">
8
9   <h2 style="color: green;">Welcome {{ username }}!</h2>
10
11   <h3>Your Registration Details:</h3>
12   <ul>
13     <li><strong>Email:</strong> {{ email }}</li>
14     <li><strong>Contact Number:</strong> {{ contact }}</li>
15   </ul>
16
17   <a href="{% url 'register' %}">Register another user</a>
18
19 </body>
20 </html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS python + - | | |

```
^C(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q1$ python manage.py runserver
r app(s): admin, auth, contenttypes, sessions.
Run 'python manage.py migrate' to apply them.
March 25, 2026 - 08:53:20
Django version 5.2.12, using settings 'project.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/5.2/howto/deployment/
```

website

User Registration

UserName (Required):

Password:

Email id:

Contact Number:

Welcome Abhinav!

Your Registration Details:

- **Email:** asdfsdf@gmail.com
- **Contact Number:** 123456789

[Register another user](#)

2) "How is the book ASP.NET with c# by Vipul Prakashan?" Give the user three choice : i) Good
ii) Satisfactory iii) Bad. Provide a VOTE button. After user votes, present the result in
percentage using labels next to the choices

How is the book ASP.NET with c# by Vipul Prakashan?

☐ Good [lblgood]

☐ Satisfactory [lblsatisfactory]

☐ Bad [lblbad]

asp:button#btnvote

Vote

How is the book ASP.NET with c# by Vipul Prakashan?

☒ Good 50%

☐ Satisfactory 25%

☐ Bad 25%

Vote

Q2.

File Edit Selection View ... q2

EXPLORER

- q2
 - .env
 - book_poll
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - poll
 - __pycache__
 - migrations
 - templates/poll
 - vote.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - db.sqlite3
 - manage.py

book_poll > settings.py > ...

```
27
28 ALLOWED_HOSTS = []
29
30
31 # Application definition
32
33 INSTALLED_APPS = [
34     'django.contrib.admin',
35     'django.contrib.auth',
36     'django.contrib.contenttypes',
37     'django.contrib.sessions',
38     'django.contrib.messages',
39     'django.contrib.staticfiles',
40     'poll'
41 ]
42
43 MIDDLEWARE = [
44     'django.middleware.security.SecurityMiddleware',
45     'django.contrib.sessions.middleware.SessionMiddleware',
46     'django.middleware.common.CommonMiddleware',
47     'django.middleware.csrf.CsrfViewMiddleware',
48     'django.contrib.auth.middleware.AuthenticationMiddleware',
49     'django.contrib.messages.middleware.MessageMiddleware',
50     'django.middleware.clickjacking.XFrameOptionsMiddleware',
51 ]
52
53 ROOT_URLCONF = 'book_poll.urls'
54
55 TEMPLATES = [
56     {
57         'BACKEND': 'django.template.backends.django.DjangoTemplates',
58         'DIRS': [],
59         'APP_DIRS': True,
60         'OPTIONS': {
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python

```
(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2$ python manage.py runserver
Django version 5.2.12, using settings 'book_poll.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or
ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/5.2/howto/deployment/

[25/Mar/2026 09:09:01] "GET / HTTP/1.1" 200 1952
[25/Mar/2026 09:09:04] "POST / HTTP/1.1" 200 1936
```

Ln 29, Col 1 Spaces: 4 UTF-8 LF Python 3.11.2 (.venv) .venv (3.11.2)

```
poll > models.py > PollResult > _str_  
1 from django.db import models  
2  
3  
4 class PollResult(models.Model):  
5     # We will use a single row in this table to track all votes for this specific question  
6     good_votes = models.IntegerField(default=0)  
7     satisfactory_votes = models.IntegerField(default=0)  
8     bad_votes = models.IntegerField(default=0)  
9  
10     def __str__(self):  
11         return f'Poll Totals - Good: {self.good_votes}, Sat: {self.satisfactory_votes}, Bad: {self.bad_votes}'
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) VI_MPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2\$ python manage.py runserver

System check identified no issues (0 silenced).

March 25, 2026 - 09:09:00

Django version 5.2.12, using settings 'book.poll.settings'

Starting development server at http://127.0.0.1:8000/

Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

[25/Mar/2026 09:09:01] "GET / HTTP/1.1" 200 1952

[25/Mar/2026 09:09:04] "POST / HTTP/1.1" 200 1936

Ln 10, Col 111 Spaces: 4 UTF-8 LF Python 3.11.2 (.venv) .venv (3.11.2)

```
poll > views.py > vote_view
1 from django.shortcuts import render
2 from .models import PollResult
3
4 def vote_view(request):
5     # Retrieve the poll record, or create it if it doesn't exist yet (id=1)
6     poll, created = PollResult.objects.get_or_create(id=1)
7
8     context = {
9         'voted': False
10    }
11
12    if request.method == 'POST':
13        # Get the user's choice from the radio buttons
14        choice = request.POST.get('choice')
15
16        # Increment the correct database field
17        if choice == 'good':
18            poll.good_votes += 1
19        elif choice == 'satisfactory':
20            poll.satisfactory_votes += 1
21        elif choice == 'bad':
22            poll.bad_votes += 1
23
24        poll.save() # Save the new tally to the database
25
26        # Calculate percentages
27        total_votes = poll.good_votes + poll.satisfactory_votes + poll.bad_votes
28        if total_votes > 0:
29            context['good_pct'] = round((poll.good_votes / total_votes) * 100)
30            context['sat_pct'] = round((poll.satisfactory_votes / total_votes) * 100)
31            context['bad_pct'] = round((poll.bad_votes / total_votes) * 100)
32
33        # Update context to show results in the template
34        context['voted'] = True
35        context['selected_choice'] = choice
36
37    return render(request, 'poll/vote.html', context)
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python python + v trash ... | | x

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2\$ python manage.py runserver

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

[25/Mar/2026 09:09:01] "GET / HTTP/1.1" 200 1952

[25/Mar/2026 09:09:04] "POST / HTTP/1.1" 200 1936

Ln 24, Col 9 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

VS Code interface showing a Django project setup for a poll application.

EXPLORER:

- q2
 - .venv
 - book_poll
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - poll
 - __pycache__
 - migrations
 - templates/poll
 - vote.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - db.sqlite3
 - manage.py


urls.py (book_poll):


```
1 """
2 URL configuration for book_poll project.
3
4 The 'urlpatterns' list routes URLs to views. For more information please see:
5     https://docs.djangoproject.com/en/5.2/topics/http/urls/
6 Examples:
7 Function views
8     1. Add an import: from my_app import views
9     2. Add a URL to urlpatterns: path('', views.home, name='home')
10 Class-based views
11     1. Add an import: from other_app.views import Home
12     2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
13 Including another URLconf
14     1. Import the include() function: from django.urls import include, path
15     2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path, include
19
20 urlpatterns = [
21     path('admin/', admin.site.urls),
22     path('', include('poll.urls'))
23 ]
24
```

TERMINAL:

```
(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2$ python manage.py runserver
For more information on production servers see: https://docs.djangoproject.com/en/5.2/howto/deployment/
[25/Mar/2026 09:09:01] "GET / HTTP/1.1" 200 1952
[25/Mar/2026 09:09:04] "POST / HTTP/1.1" 200 1936
```

STATUS BAR: Ln 22, Col 34 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

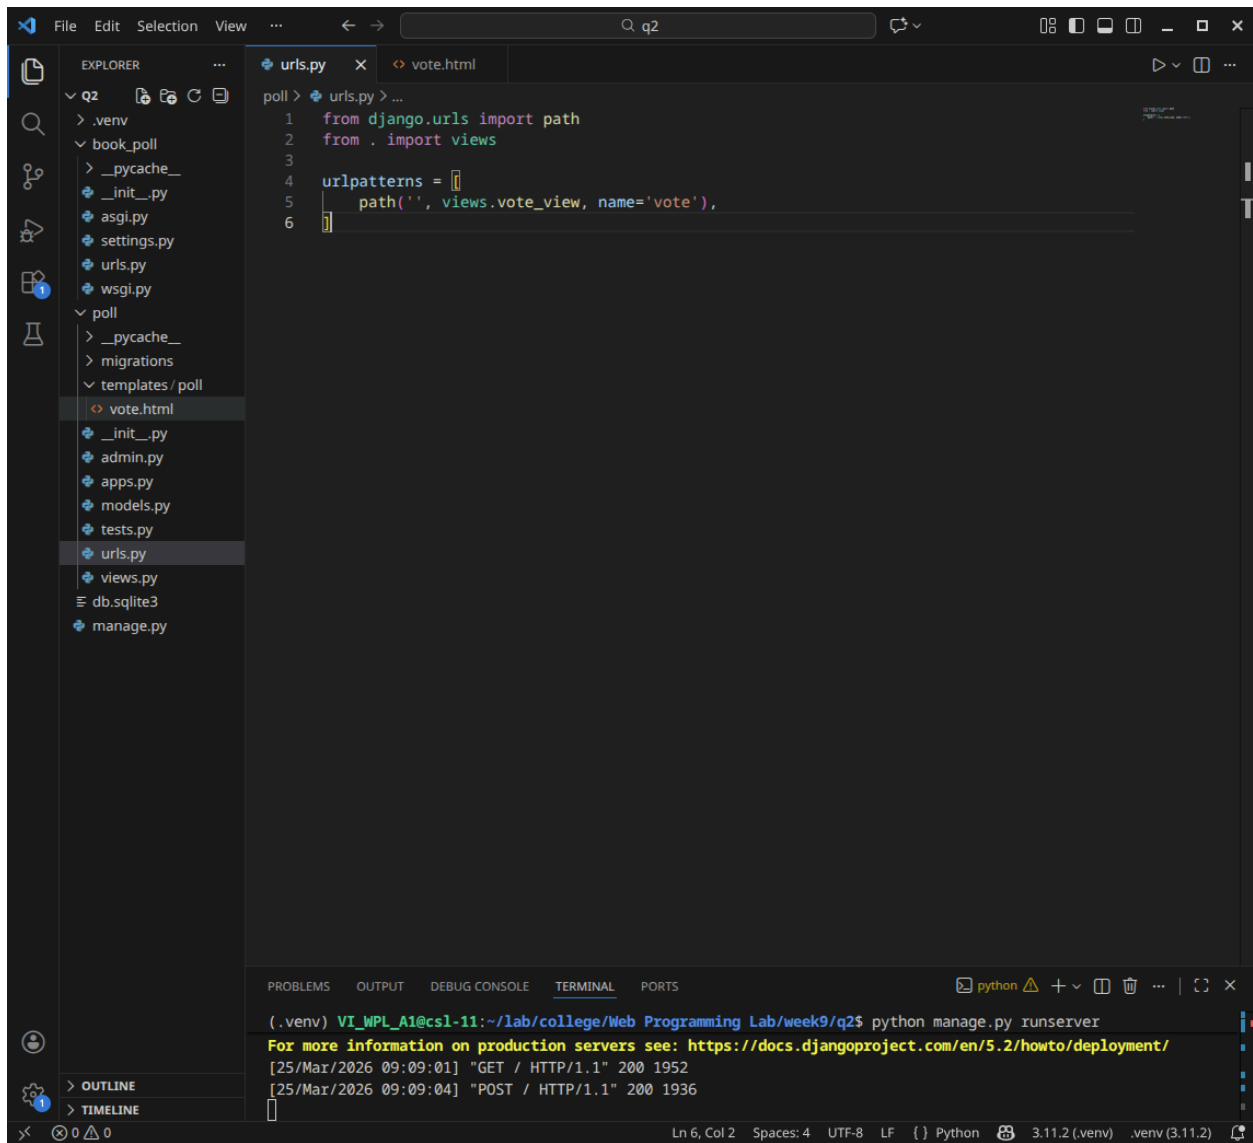

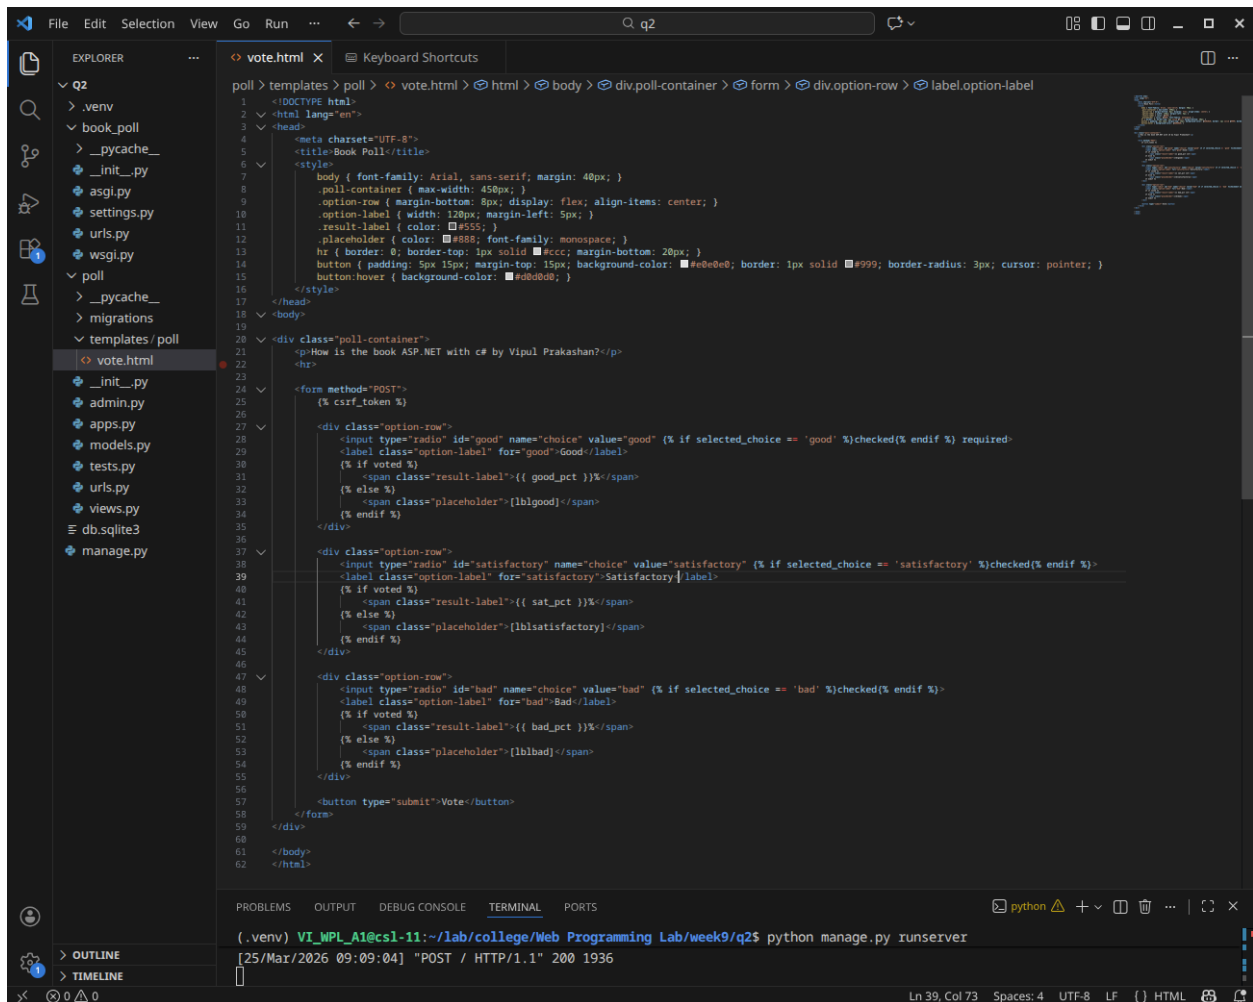

website

How is the book ASP.NET with c# by Vipul Prakashan?

- | | |
|---------------------------------------|------|
| ☒ Good | 100% |
| ☐ Satisfactory | 0% |
| ☐ Bad | 0% |

Vote

How is the book ASP.NET with c# by Vipul Prakashan?

- ☐ Good 50%
- ☒ Satisfactory 50%
- ☐ Bad 0%

Vote

How is the book ASP.NET with c# by Vipul Prakashan?


- ☒ Good 67%
- ☐ Satisfactory 33%
- ☐ Bad 0%


Vote

3) Create a website with two pages. Page 1 has two TextBoxes (name and total marks) and one 'Calculate' Button as shown in the figure. On clicking the 'Calculate' Button, CGPA (total marks/50) along with the name should be displayed in the Page 2. Use Django sessions to store the information.

Name: Alex Total Marks: 450 Calculate Page 1	Welcome Alex Your CGPA is = 9 Page 2
---	---

Q3.

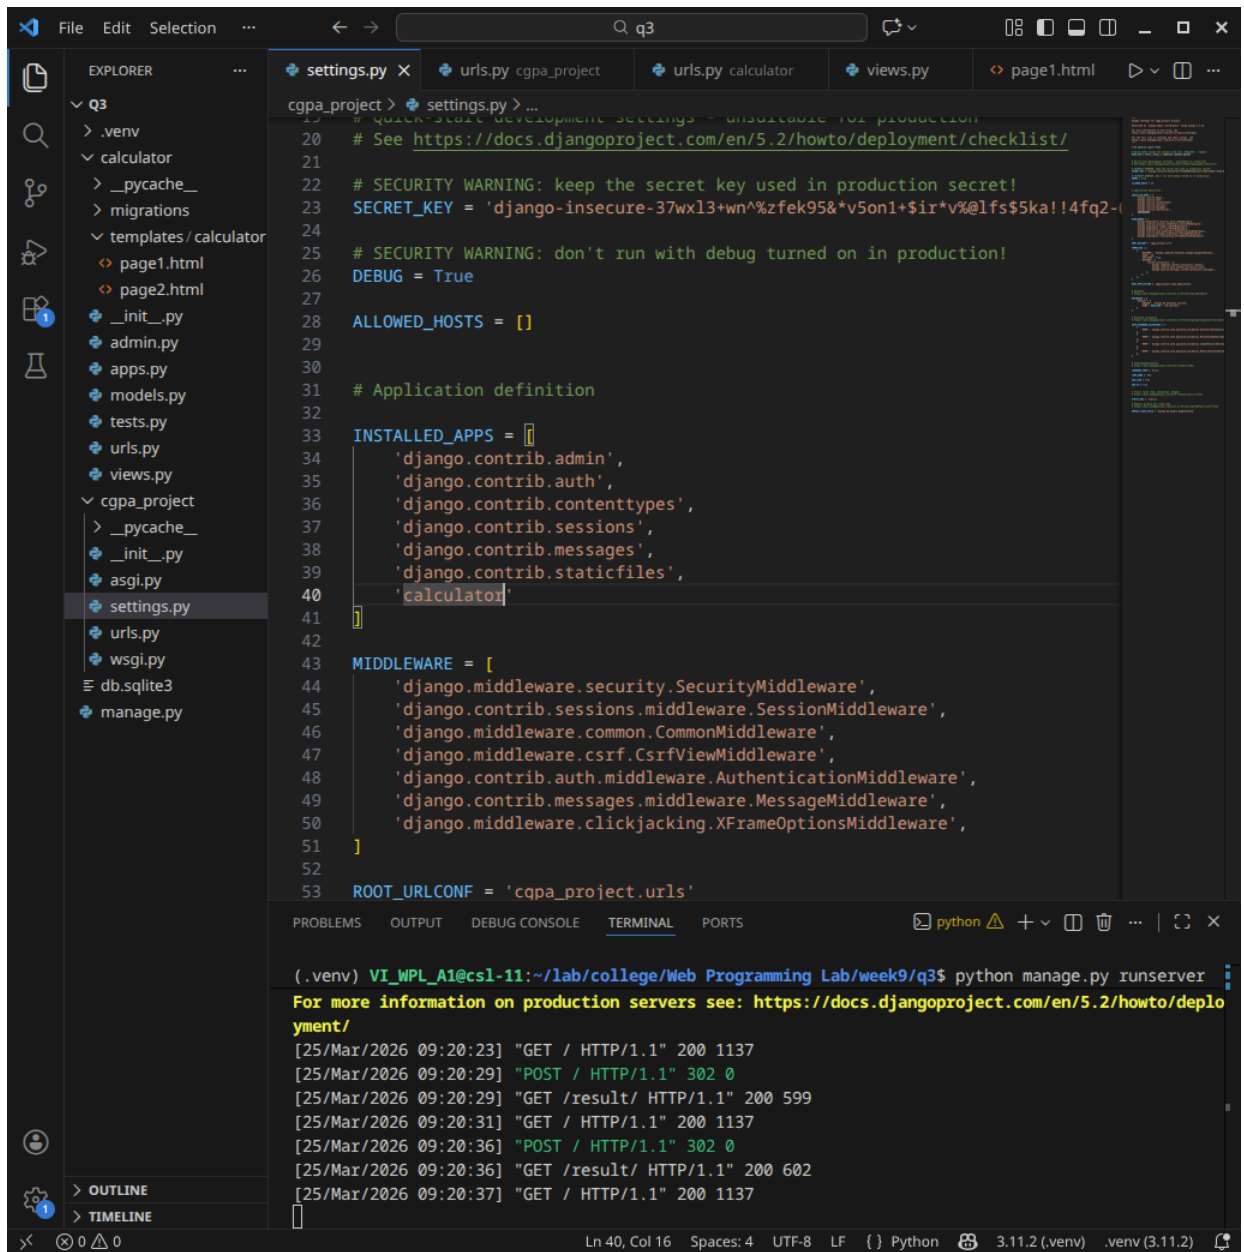

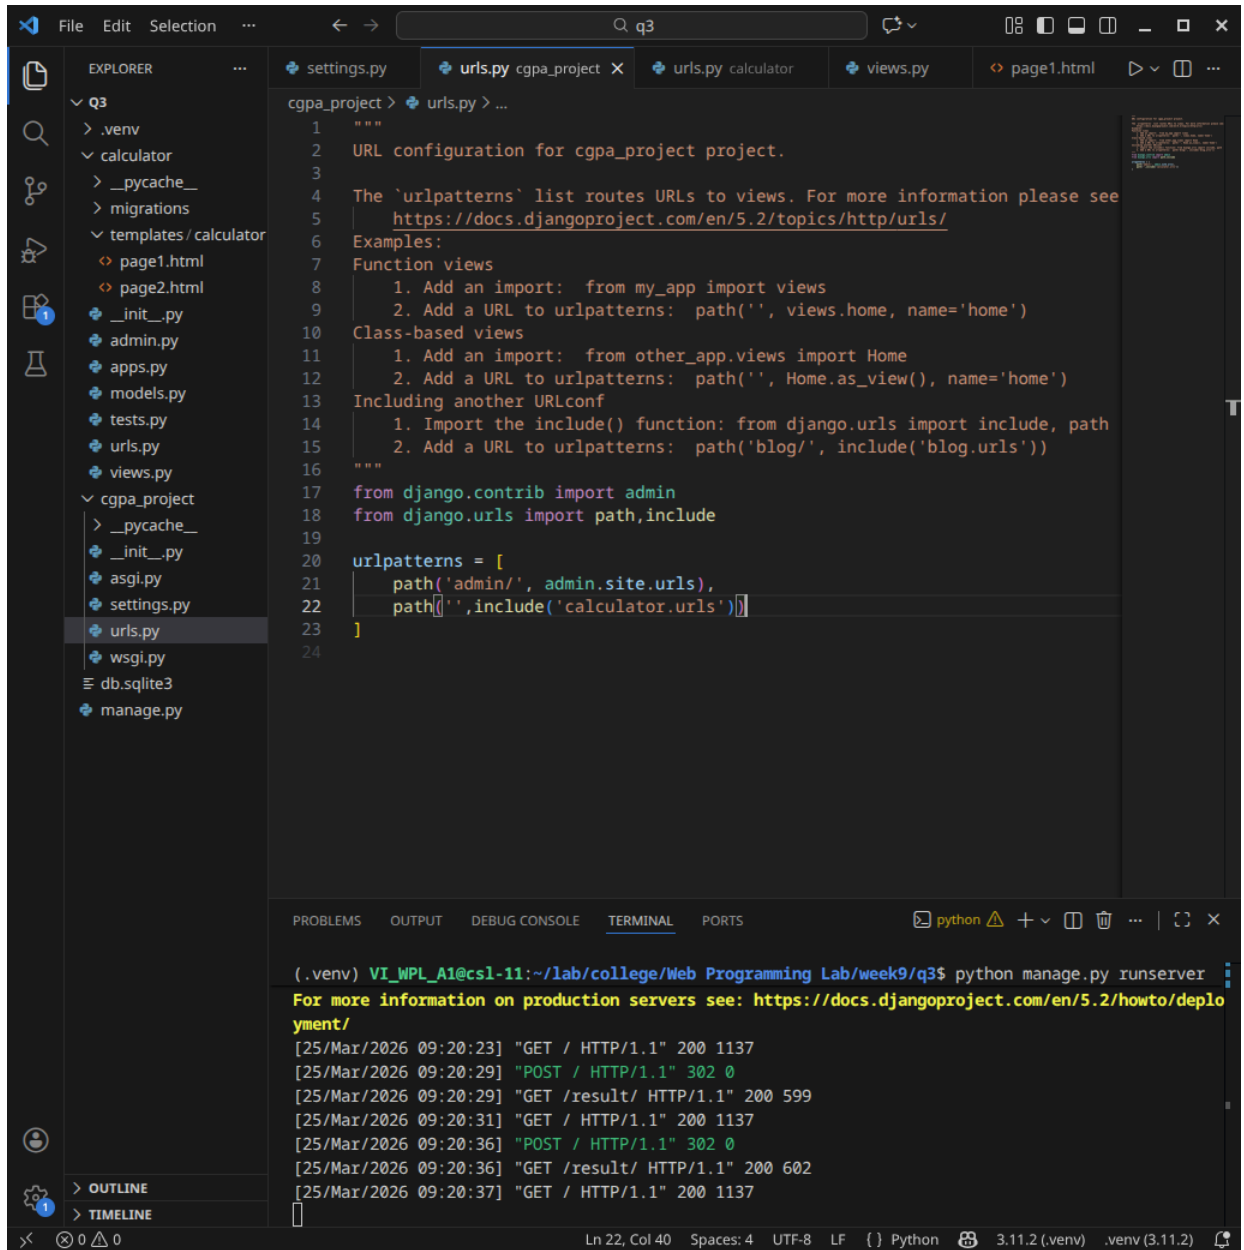

File Edit Selection ...

q3

EXPLORER

- Q3
 - .venv
 - calculator
 - __pycache__
 - migrations
 - templates/calculator
 - page1.html
 - page2.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - cgpa_project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

calculator > urls.py > ...

```
1 from django.urls import path
2 from . import views
3
4 urlpatterns = [
5     path('', views.page1, name='page1'),
6     path('result/', views.page2, name='page2'),
7 ]
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q3\$ python manage.py runserver

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

```
[25/Mar/2026 09:20:23] "GET / HTTP/1.1" 200 1137
[25/Mar/2026 09:20:29] "POST / HTTP/1.1" 302 0
[25/Mar/2026 09:20:29] "GET /result/ HTTP/1.1" 200 599
[25/Mar/2026 09:20:31] "GET / HTTP/1.1" 200 1137
[25/Mar/2026 09:20:36] "POST / HTTP/1.1" 302 0
[25/Mar/2026 09:20:36] "GET /result/ HTTP/1.1" 200 602
[25/Mar/2026 09:20:37] "GET / HTTP/1.1" 200 1137
```

Ln 7, Col 2 (1 selected) Spaces: 4 UTF-8 LF { } Python 3.11.2 (.venv) .venv (3.11.2)

The image shows a Visual Studio Code editor window with a Django project named 'cgpa_project'. The Explorer sidebar on the left shows the project structure, including a 'calculator' app with 'page1.html' and 'page2.html' templates, and a 'views.py' file. The main editor area displays the 'views.py' file, which contains two views: 'page1' and 'page2'. 'page1' handles POST requests, retrieves form data, stores it in the session, and redirects to 'page2'. 'page2' retrieves data from the session, calculates the CGPA, and renders 'page2.html' with the calculated CGPA in the context. The bottom panel shows the 'TERMINAL' tab with the command 'python manage.py runserver' and its output, which includes GET and POST requests and their corresponding status codes and IP addresses.

```
1 from django.shortcuts import render, redirect
2
3 def page1(request):
4     if request.method == 'POST':
5         # 1. Get data from the form
6         name = request.POST.get('name')
7         total_marks = request.POST.get('total_marks')
8
9         # 2. Store the data in Django sessions
10        request.session['student_name'] = name
11        request.session['total_marks'] = total_marks
12
13        # 3. Redirect to Page 2
14        return redirect('page2')
15
16    return render(request, 'calculator/page1.html')
17
18 def page2(request):
19     # 1. Retrieve the data from the session
20     name = request.session.get('student_name', 'Unknown')
21     total_marks = request.session.get('total_marks', 0)
22
23     # 2. Calculate CGPA (Total Marks / 50)
24     try:
25         cgpa = float(total_marks) / 50
26         # Format the number so it shows "9" instead of "9.0" to match your image
27         if cgpa.is_integer():
28             cgpa = int(cgpa)
29     except ValueError:
30         cgpa = 0
31
32     # 3. Pass data to the template
33     context = {
34         'name': name,
35         'cgpa': cgpa
36     }
37
38     return render(request, 'calculator/page2.html', context)
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q3\$ python manage.py runserver

```
[25/Mar/2026 09:20:31] "GET / HTTP/1.1" 200 1137
[25/Mar/2026 09:20:36] "POST / HTTP/1.1" 302 0
[25/Mar/2026 09:20:36] "GET /result/ HTTP/1.1" 200 602
[25/Mar/2026 09:20:37] "GET / HTTP/1.1" 200 1137
```

Ln 38, Col 61 Spaces: 4 UTF-8 LF Python 3.11.2 (.venv) .venv (3.11.2)

VS Code interface showing a web application project named "calculator". The Explorer sidebar on the left displays the file structure, including a "templates/calculator" directory containing "page1.html" and "page2.html". The main editor area shows the content of "page1.html", which is an HTML file with a form. The form includes a text input for "Name" and a number input for "Total Marks", both required. A "Calculate" button is at the bottom of the form. The footer of the page says "Page 1". The CSS in the head defines a box model and a row layout.

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Page 1</title>
5   <style>
6     .box {
7       border: 1px solid black;
8       padding: 30px;
9       width: 300px;
10      margin: 20px;
11    }
12    .row { margin-bottom: 20px; }
13    label { display: inline-block; width: 100px; }
14    .footer { text-align: center; margin-top: 30px; font-weight: bold; }
15  </style>
16 </head>
17 <body>
18
19   <div class="box">
20     <form method="POST">
21       {% csrf_token %}
22
23       <div class="row">
24         <label for="name">Name:</label>
25         <input type="text" id="name" name="name" required>
26       </div>
27
28       <div class="row">
29         <label for="total_marks">Total Marks:</label>
30         <input type="number" id="total_marks" name="total_marks" required>
31       </div>
32
33       <button type="submit">Calculate</button>
34     </form>
35     <div class="footer">Page 1</div>
36   </div>
37
38 </body>
39 </html>
```

The terminal at the bottom shows the command prompt and the output of the "python manage.py runserver" command, indicating that the server is running on port 1137.

```
(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q3$ python manage.py runserver
[25/Mar/2026 09:20:31] "GET / HTTP/1.1" 200 1137
[25/Mar/2026 09:20:36] "POST / HTTP/1.1" 302 0
[25/Mar/2026 09:20:36] "GET /result/ HTTP/1.1" 200 602
[25/Mar/2026 09:20:37] "GET / HTTP/1.1" 200 1137
```

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Page 2</title>
5   <style>
6     .box {
7       border: 1px solid black;
8       padding: 30px;
9       width: 300px;
10      margin: 20px;
11      text-align: center;
12    }
13    .footer { margin-top: 40px; font-weight: bold; }
14  </style>
15 </head>
16 <body>
17   <div class="box">
18     <h3>Welcome {{ name }}</h3>
19     <h3>Your CGPA is = {{ cgpa }}</h3>
20
21     <div class="footer">Page 2</div>
22     <br>
23     <a href="{% url 'page1' %}" style="font-size: 12px;">&larr; Go back to calculate ag
24   </div>
25
26 </body>
27 </html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) VI_WPL_A1@cs1-11:~/lab/college/Web Programming Lab/week9/q3\$ python manage.py runserver

```
[25/Mar/2026 09:20:31] "GET / HTTP/1.1" 200 1137
[25/Mar/2026 09:20:36] "POST / HTTP/1.1" 302 0
[25/Mar/2026 09:20:36] "GET /result/ HTTP/1.1" 200 602
[25/Mar/2026 09:20:37] "GET / HTTP/1.1" 200 1137
```

Website

Name:

Total Marks:

Calculate

Page 1

Welcome abhinav

Your CGPA is = 9

Page 2

[← Go back to calculate again](#)