

WPL LAB 9 ADDITIONAL

Name: Abhinav Singh Bhagtana

Roll no: A-029

Reg no: 230905225

Q1. Create a website with two pages.

First page contains:

RadioButton with HP, Nokia, Samsung, Motorola, Apple as options.

CheckBox with Mobile and Laptop as items.

TextBox to enter quantity.

There is a button with text as "Produce Bill".

On Clicking Produce Bill button, item should be displayed with total amount on another page.

File Edit Selection View ...

q1_add

settings.py x urls.py billing_project urls.py shop views.py home.html bill.html

billings_project > settings.py > ...

```
22 # SECURITY WARNING: keep the secret key used in production secret!
23 SECRET_KEY = 'django-insecure-+ev&x96r*2=i-3tjp5*$apfqy5@)y4f7!lw#synccq_#)*t1p^'
24
25 # SECURITY WARNING: don't run with debug turned on in production!
26 DEBUG = True
27
28 ALLOWED_HOSTS = []
29
30
31 # Application definition
32
33 INSTALLED_APPS = [
34     'django.contrib.admin',
35     'django.contrib.auth',
36     'django.contrib.contenttypes',
37     'django.contrib.sessions',
38     'django.contrib.messages',
39     'django.contrib.staticfiles',
40     'shop'
41 ]
42
43 MIDDLEWARE = [
44     'django.middleware.security.SecurityMiddleware',
45     'django.contrib.sessions.middleware.SessionMiddleware',
46     'django.middleware.common.CommonMiddleware',
47     'django.middleware.csrf.CsrfViewMiddleware',
48     'django.contrib.auth.middleware.AuthenticationMiddleware',
49     'django.contrib.messages.middleware.MessageMiddleware',
50     'django.middleware.clickjacking.XFrameOptionsMiddleware',
51 ]
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q1_add\$ python manage.py runserver

Run 'python manage.py migrate' to apply them.

March 25, 2026 - 09:31:42

Django version 5.2.12, using settings 'billing_project.settings'

Starting development server at http://127.0.0.1:8000/

Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>


[25/Mar/2026 09:31:43] "GET / HTTP/1.1" 200 1731


[25/Mar/2026 09:31:50] "POST /bill/ HTTP/1.1" 200 698


[25/Mar/2026 09:32:01] "GET / HTTP/1.1" 200 1731

[25/Mar/2026 09:32:06] "POST /bill/ HTTP/1.1" 200 699

Ln 40, Col 10 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

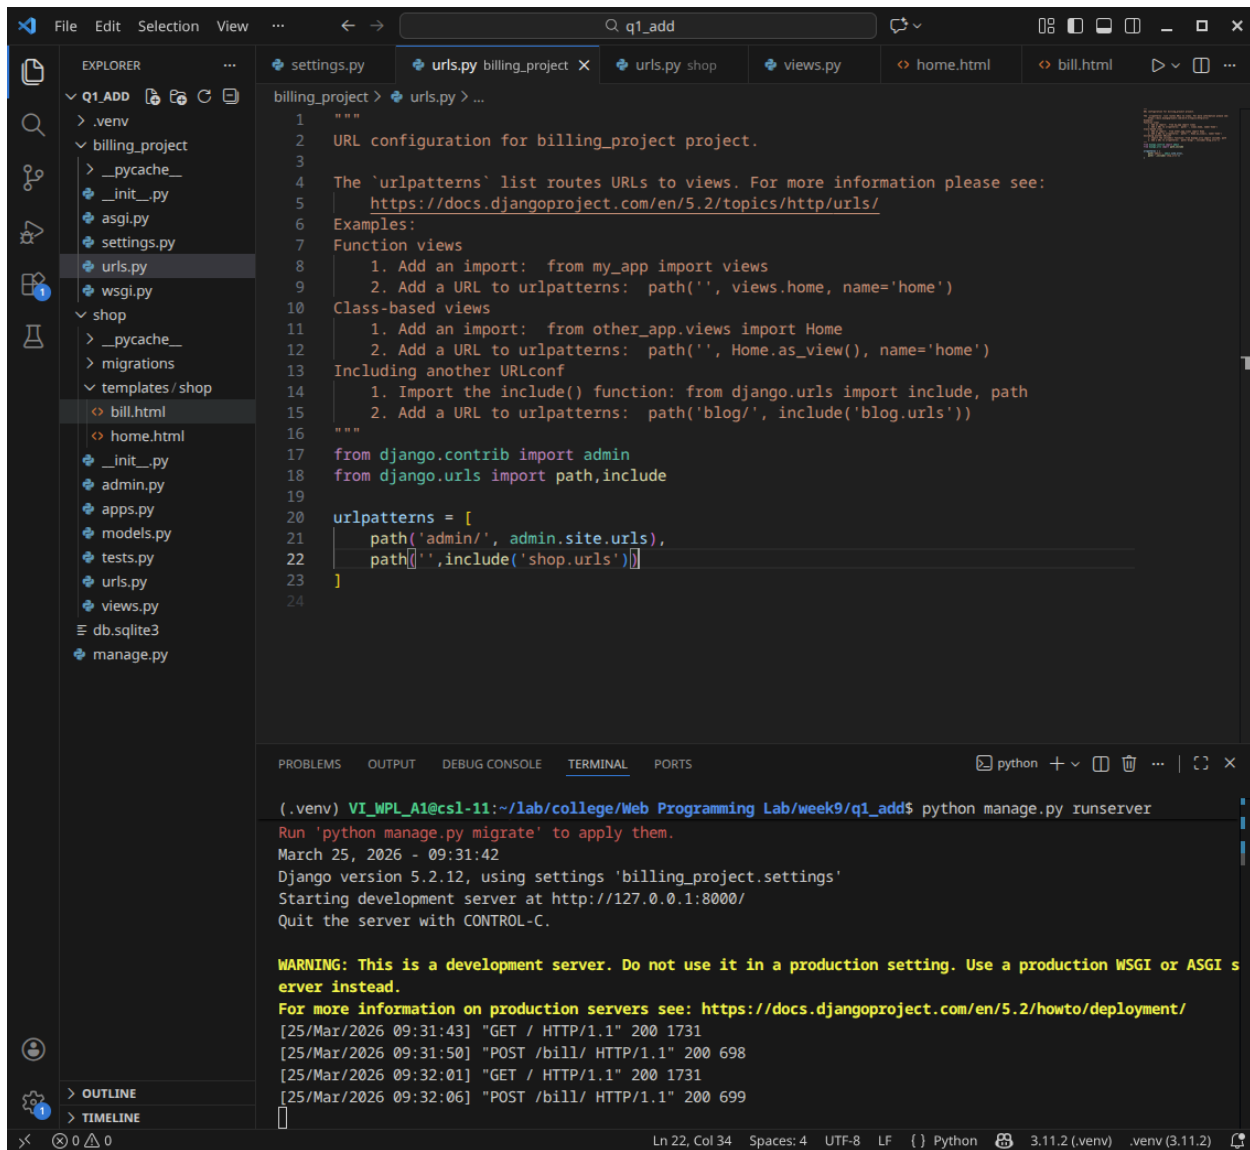

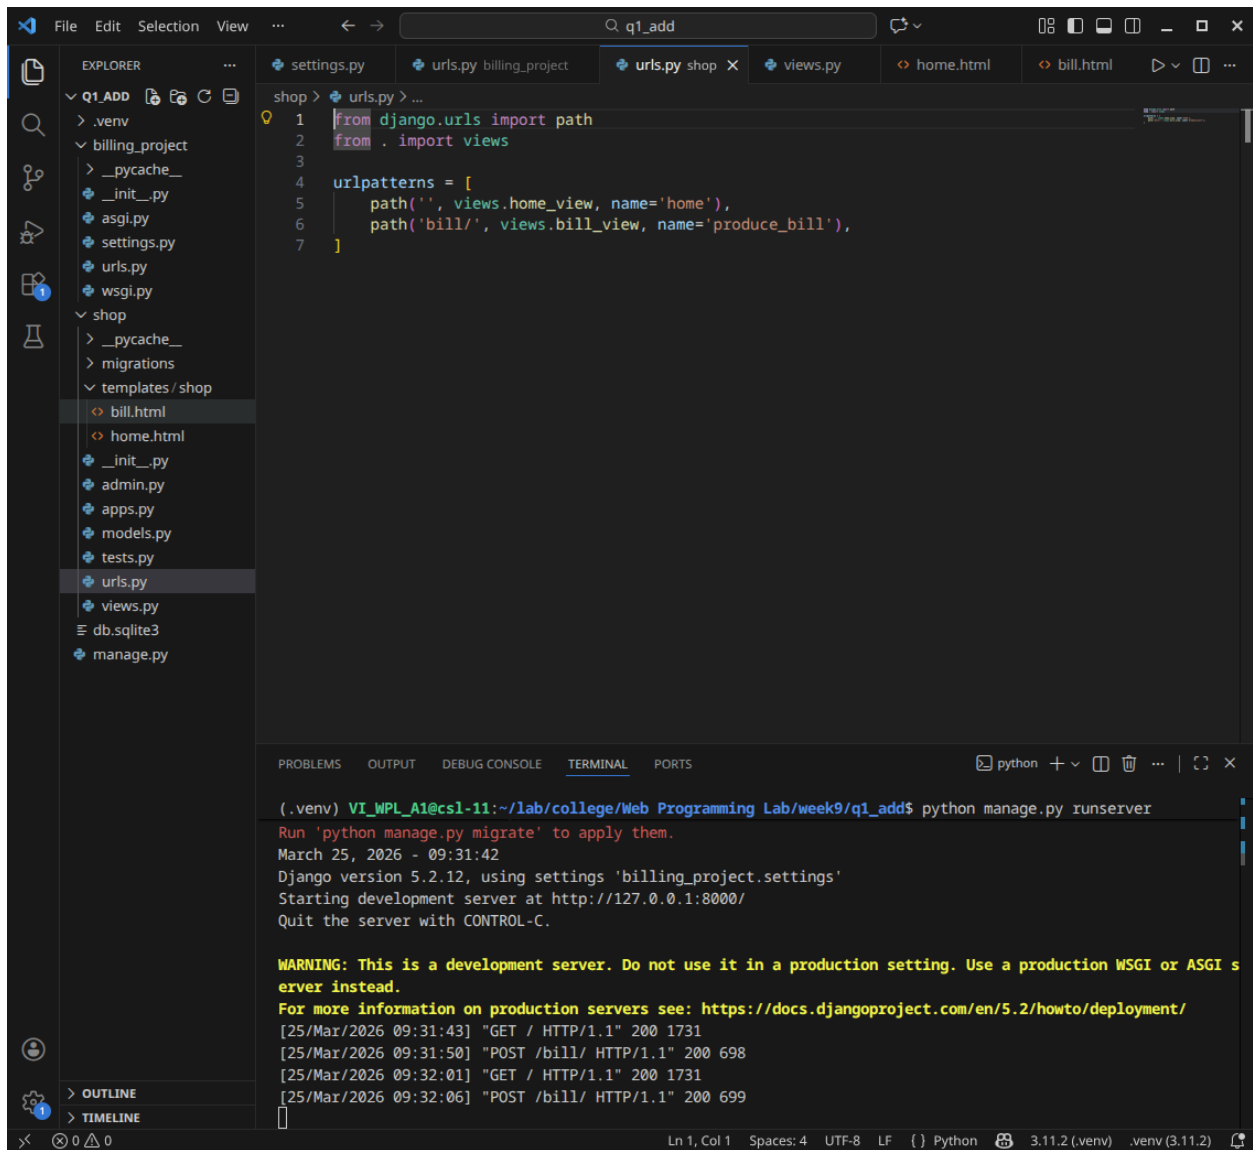

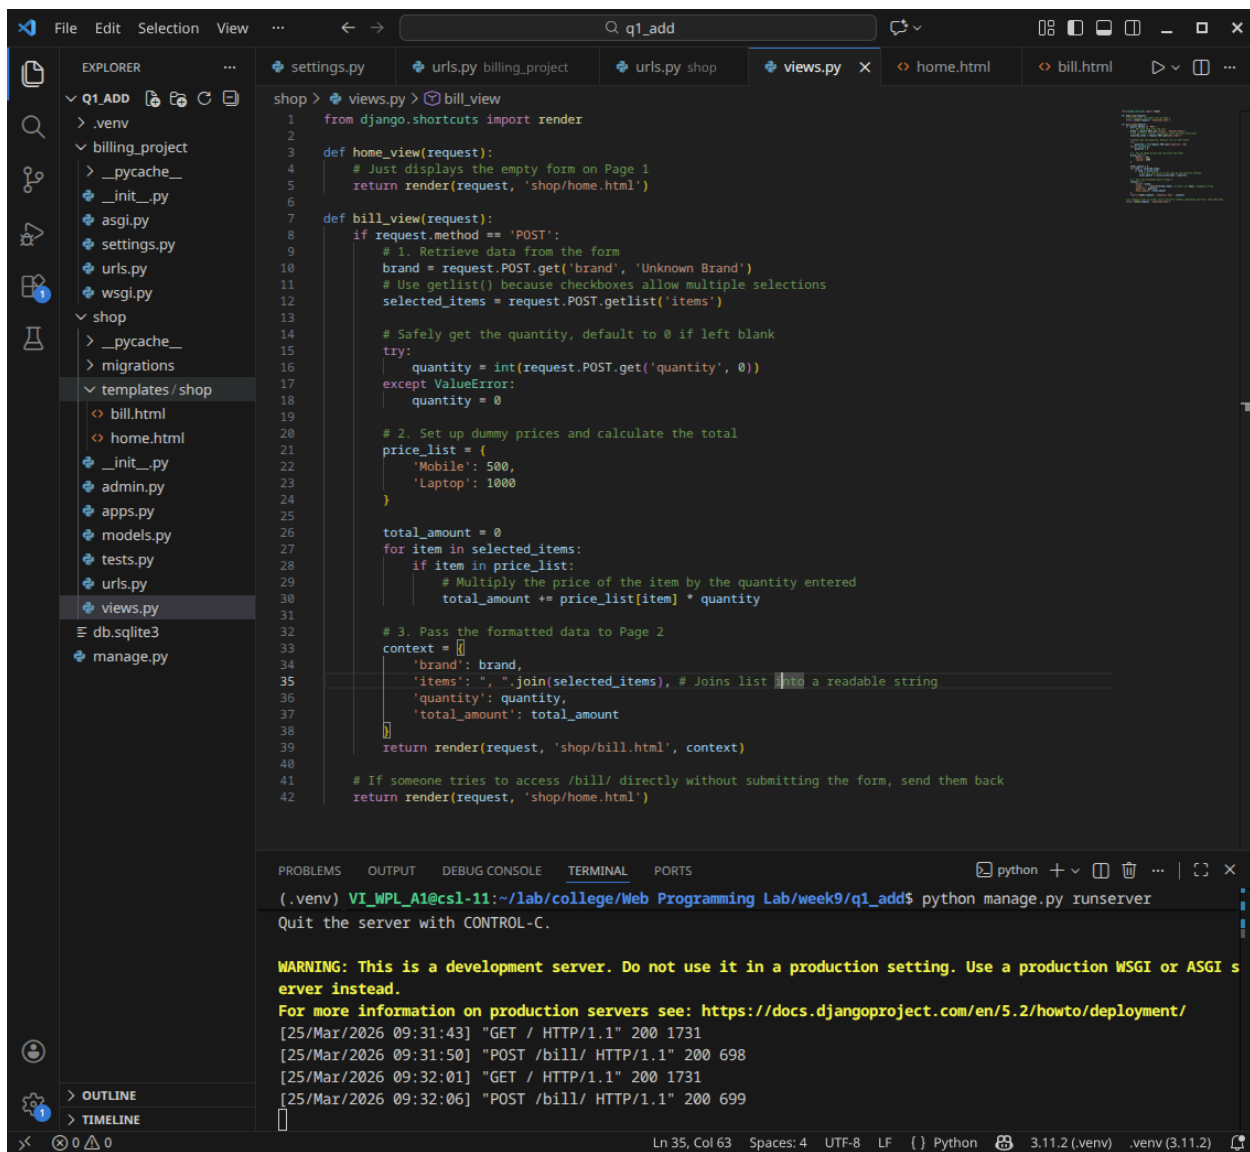

File Edit Selection View ... q1_add

EXPLORER

- Q1_ADD
 - .venv
 - billing_project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - shop
 - __pycache__
 - migrations
 - templates/shop
 - bill.html
 - home.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - db.sqlite3
 - manage.py

shop > templates > shop > home.html > html

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <title>Order Form</title>
6   <style>
7     body { font-family: Arial, sans-serif; margin: 40px; }
8     .form-section { margin-bottom: 20px; }
9   </style>
10 </head>
11 <body>
12
13   <h2>Select Your Products</h2>
14
15   <form action="{% url 'produce_bill' %}" method="POST">
16     {% csrf_token %}
17
18     <div class="form-section">
19       <strong>Brand:</strong><br>
20       <input type="radio" id="hp" name="brand" value="HP" required> <label for="hp">HP</label><br>
21       <input type="radio" id="nokia" name="brand" value="Nokia"> <label for="nokia">Nokia</label><br>
22       <input type="radio" id="samsung" name="brand" value="Samsung"> <label for="samsung">Samsung</label><br>
23       <input type="radio" id="motorola" name="brand" value="Motorola"> <label for="motorola">Motorola</label><br>
24       <input type="radio" id="apple" name="brand" value="Apple"> <label for="apple">Apple</label>
25     </div>
26
27     <div class="form-section">
28       <strong>Products:</strong><br>
29       <input type="checkbox" id="mobile" name="items" value="Mobile"> <label for="mobile">Mobile ($500)</label><br>
30       <input type="checkbox" id="laptop" name="items" value="Laptop"> <label for="laptop">Laptop ($1000)</label>
31     </div>
32
33     <div class="form-section">
34       <label for="quantity"><strong>Quantity:</strong></label><br>
35       <input type="number" id="quantity" name="quantity" min="1" required>
36     </div>
37
38     <button type="submit">Produce Bill</button>
39   </form>
40
41 </body>
42 </html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python + v ... | {} x

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q1_add\$ python manage.py runserver

Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

[25/Mar/2026 09:31:43] "GET / HTTP/1.1" 200 1731

[25/Mar/2026 09:31:50] "POST /bill/ HTTP/1.1" 200 698

[25/Mar/2026 09:32:01] "GET / HTTP/1.1" 200 1731

[25/Mar/2026 09:32:06] "POST /bill/ HTTP/1.1" 200 699

Ln 42, Col 8 Spaces: 4 UTF-8 LF {} HTML



Select Your Products

Brand:

- ☐ HP
- ☐ Nokia
- ☒ Samsung
- ☐ Motorola
- ☐ Apple

Products:

- ☒ Mobile (\$500)
- ☒ Laptop (\$1000)

Quantity:

Produce Bill

Invoice Summary

Brand Selected: Samsung

Item(s): Mobile, Laptop

Quantity per Item: 3

Total Amount: \$4500

[Create another bill](#)

Q2.

2) Write a program to display the following feedback form. The different options for the list box must be ASP-XML, DotNET, JavaPro and Unix,C,C++. When the Submit Form button is clicked after entering the data, a message as seen in the last line of the above figure must be displayed.

The screenshot shows a Microsoft Internet Explorer window titled 'Rachael Software Limited - Feedback Form - Microsoft Internet Explorer powered by 2004 tools.com'. The address bar shows 'http://www.rachael.com'. The page content includes a 'Courseware Feedback Form' with the following fields and options:

- Student name:
- Sex: ☐ Male ☒ Female
- Select course:
- Technical Coverage:
 - ☒ Excellent
 - ☐ Good
 - ☐ Average
 - ☐ Poor
- Suggestions:
-

At the bottom of the form, a message reads: 'Thanks Miss. Niveditha for your feedback.'

File Edit Selection View ... q2_add

EXPLORER

- Q2_ADD
 - .venv
 - course_feedback
 - __pycache__
 - migrations
 - templates/course_fee...
 - feedback_form.html
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - urls.py
 - views.py
 - feedback_project
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - db.sqlite3
 - manage.py

feedback_project > settings.py > ...

```
9 For the full list of settings and their values, see
10 https://docs.djangoproject.com/en/5.2/ref/settings/
11 """
12
13 from pathlib import Path
14
15 # Build paths inside the project like this: BASE_DIR / 'subdir'.
16 BASE_DIR = Path(__file__).resolve().parent.parent
17
18
19 # Quick-start development settings - unsuitable for production
20 # See https://docs.djangoproject.com/en/5.2/howto/deployment/checklist/
21
22 # SECURITY WARNING: keep the secret key used in production secret!
23 SECRET_KEY = 'django-insecure-j*9cm^yzg663tcfxl!aa5%fjaz-a93k$9f3ynouixpfy77d@x$'
24
25 # SECURITY WARNING: don't run with debug turned on in production!
26 DEBUG = True
27
28 ALLOWED_HOSTS = []
29
30
31 # Application definition
32
33 INSTALLED_APPS = [
34     'course_feedback',
35     'django.contrib.admin',
36     'django.contrib.auth',
37     'django.contrib.contenttypes',
38     'django.contrib.sessions',
39     'django.contrib.messages',
40     'django.contrib.staticfiles',
41 ]
42
43 MIDDLEWARE = [
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2_add\$ python manage.py runserver

Starting development server at http://127.0.0.1:8000/
Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

[25/Mar/2026 09:46:15] "GET / HTTP/1.1" 200 2484
[25/Mar/2026 09:46:31] "POST / HTTP/1.1" 200 2562
[25/Mar/2026 09:46:48] "POST / HTTP/1.1" 200 2562

Ln 34, Col 23 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

File Edit Selection View ...

q2_add

feedback_project > urls.py > ...

EXPLORER

Q2_ADD

.venv

course_feedback

__pycache__

migrations

templates/course_fee...

feedback_form.html

__init__.py

admin.py

apps.py

models.py

tests.py

urls.py

views.py

feedback_project

__pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

db.sqlite3

manage.py

1 """

2 URL configuration for feedback_project project.

3

4 The 'urlpatterns' list routes URLs to views. For more information please see:

5 | <https://docs.djangoproject.com/en/5.2/topics/http/urls/>

6 Examples:

7 Function views

8 1. Add an import: from my_app import views

9 2. Add a URL to urlpatterns: path('', views.home, name='home')

10 Class-based views

11 1. Add an import: from other_app.views import Home

12 2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')

13 Including another URLconf

14 1. Import the include() function: from django.urls import include, path

15 2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))

16 """

17 from django.contrib import admin

18 from django.urls import path,include

19

20 urlpatterns = [

21 | path('admin/', admin.site.urls),

22 | path('',include('course_feedback.urls'))

23]

24

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python

+

-

🗑

...

🔍

✕

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2_add\$ python manage.py runserver

Starting development server at http://127.0.0.1:8000/

Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

[25/Mar/2026 09:46:15] "GET / HTTP/1.1" 200 2484

[25/Mar/2026 09:46:31] "POST / HTTP/1.1" 200 2562

[25/Mar/2026 09:46:48] "POST / HTTP/1.1" 200 2562

Ln 22, Col 42 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

File Edit Selection View ...

q2_add

settings.py urls.py feedback_project urls.py course_feedback X views.py feedback_form.ht

EXPLORER

Q2_ADD

> .venv

> course_feedback

> __pycache__

> migrations

> templates/course_fee...

> feedback_form.html

__init__.py

admin.py

apps.py

models.py

tests.py

urls.py

views.py

> feedback_project

> __pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

db.sqlite3

manage.py

course_feedback > urls.py > ...

1 from django.urls import path

2 from . import views

3

4 urlpatterns = []

5 | path('', views.feedback_view, name='feedback'),

6 |]

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python

(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2_add\$ python manage.py runserver

Starting development server at http://127.0.0.1:8000/

Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: <https://docs.djangoproject.com/en/5.2/howto/deployment/>

[25/Mar/2026 09:46:15] "GET / HTTP/1.1" 200 2484

[25/Mar/2026 09:46:31] "POST / HTTP/1.1" 200 2562

[25/Mar/2026 09:46:48] "POST / HTTP/1.1" 200 2562

Ln 6, Col 2 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

File Edit Selection View ...

q2_add

settings.py urls.py feedback_project urls.py course_feedback views.py feedback_form.ht

EXPLORER

Q2_ADD

.venv

course_feedback

__pycache__

migrations

templates/course_fee...

feedback_form.html

__init__.py

admin.py

apps.py

models.py

tests.py

urls.py

views.py

feedback_project

__pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

db.sqlite3

manage.py

course_feedback > views.py > feedback_view

```
1 from django.shortcuts import render
2
3 def feedback_view(request):
4     context = {}
5
6     if request.method == 'POST':
7         # Retrieve data from the submitted form
8         name = request.POST.get('student_name', '')
9         sex = request.POST.get('sex', 'Male')
10
11         # Determine the correct prefix based on the selected radio button
12         prefix = "Mr." if sex == "Male" else "Miss."
13
14         # Create the final message
15         context['message'] = f"Thanks {prefix} {name} for your feedback."
16
17     return render(request, 'course_feedback/feedback_form.html', context)
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

python + - ... | {} x

```
(.venv) VI_WPL_A1@csl-11:~/lab/college/Web Programming Lab/week9/q2_add$ python manage.py runserver
Starting development server at http://127.0.0.1:8000/
Quit the server with CONTROL-C.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI
server instead.
For more information on production servers see: https://docs.djangoproject.com/en/5.2/howto/deployment/
[25/Mar/2026 09:46:15] "GET / HTTP/1.1" 200 2484
[25/Mar/2026 09:46:31] "POST / HTTP/1.1" 200 2562
[25/Mar/2026 09:46:48] "POST / HTTP/1.1" 200 2562
```

Ln 17, Col 74 Spaces: 4 UTF-8 LF {} Python 3.11.2 (.venv) .venv (3.11.2)

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <title>Courseware Feedback Form</title>
6   <style>
7     body { font-family: Arial, sans-serif; margin: 20px; }
8     .maroon-text { color: #800000; }
9     .form-group { margin-bottom: 20px; }
10    .label-block { display: block; margin-bottom: 5px; }
11  </style>
12 </head>
13 <body>
14
15   <h3 class="maroon-text">Courseware Feedback Form</h3>
16
17   <form method="POST">
18     {% csrf_token %}
19
20     <div class="form-group">
21       <span class="maroon-text">Student name:</span>
22       <input type="text" name="student_name" required>
23     </div>
24
25     <div class="form-group maroon-text">
26       <span class="label-block">Sex:</span>
27       <input type="radio" id="male" name="sex" value="Male" checked>
28       <label for="male">Male</label><br>
29       <input type="radio" id="female" name="sex" value="Female">
30       <label for="female">Female</label>
31     </div>
32
33     <div class="form-group">
34       <span class="maroon-text">Select course:</span>
35       <select name="course">
36         <option value="ASP-XML">ASP-XML</option>
37         <option value="DotNET">DotNET</option>
38         <option value="JavaPro">JavaPro</option>
39         <option value="Unix,C,C++">Unix,C,C++</option>
40       </select>
41     </div>
42
43     <div class="form-group maroon-text">
44       <span class="label-block">Technical Coverage:</span>
45       <input type="radio" id="excellent" name="coverage" value="Excellent" checked>
46       <label for="excellent">Excellent</label><br>
47
48       <input type="radio" id="good" name="coverage" value="Good">
49       <label for="good">Good</label><br>
50
51       <input type="radio" id="average" name="coverage" value="Average">
52       <label for="average">Average</label><br>
53
54       <input type="radio" id="poor" name="coverage" value="Poor">
55       <label for="poor">Poor</label>
56     </div>
57
58     <div class="form-group">
59       <span class="maroon-text label-block">Suggestions:</span>
60       <textarea name="suggestions" rows="3" cols="40"></textarea>
61       <button type="submit" style="vertical-align: bottom;">Submit Form</button>
62     </div>
63
64   </form>
65
66   {% if message %}
67   <p class="maroon-text">{{ message }}</p>
68   {% endif %}
69
70 </body>
71 </html>
```

website:

Courseware Feedback Form

Student name:

Sex:

- ☒ Male
☐ Female

Select course:

Technical Coverage:

- ☒ Excellent
☐ Good
☐ Average
☐ Poor

Suggestions:

Submit Form

Thanks Mr. abhinav for your feedback.