
Switch Basic Configuration

Switch Basic Configuration

Initial Bootup Output from the Catalyst 2960 Switch

```
Base ethernet MAC Address: 00:19:30:38:bd:00
Xmodem file system is available.
The password-recovery mechanism is enabled.
Initializing Flash...
flashfs[0]: 598 files, 19 directories
flashfs[0]: 0 orphaned files, 0 orphaned directories
flashfs[0]: Total bytes: 32514048
flashfs[0]: Bytes used: 8210432
flashfs[0]: Bytes available: 24303616
flashfs[0]: flashfs fsck took 9 seconds.
...done Initializing Flash.
Boot Sector Filesystem (bs) installed, fsid: 3
done.
Loading "flash:c2960-lanbasek9-mz.122-25.SEE2/c2960-lanbasek9
-mz.122-25.SEE2.bin"...@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@@@@@@@@@@@@@@@@
File "flash:c2960-lanbasek9-mz.122-25.SEE2/c2960-lanbasek9-mz.
122-25.SEE2.bin" uncompressed and installed, entry point: 0x3000
executing...

!Rest of startup text omitted
```

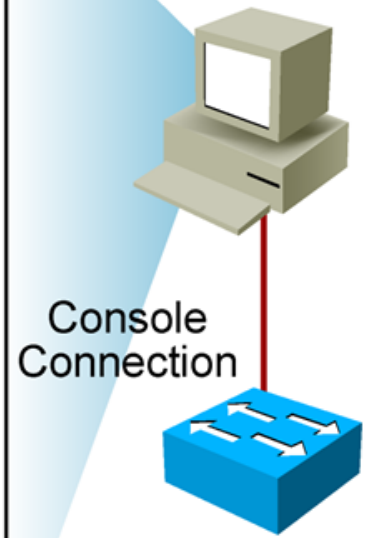

Initial Configuration of the Catalyst 2960 Switch Using Setup

```
--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:
y


At any point you may enter a question mark '?' for help.
Use ctrl-c to abort configuration dialog at any prompt.
Default settings are in square brackets '[]'.

Basic management setup configures only enough connectivity
for management of the system, extended setup will ask you
to configure each interface on the system
Would you like to enter basic management setup? [yes/no]: no
First, would you like to see the current interface summary? [yes]:
no
Configuring global parameters:
..
..text omitted ..
..
[0] Go to the IOS command prompt without saving this config.
[1] Return back to the setup without saving this config.
[2] Save this configuration to nvram and exit.

Enter your selection [2]:
Building configuration...
[OK]
Use the enabled mode 'configure' command to modify this
configuration.
```



Logging In to the Switch and Entering the Privileged EXEC Mode

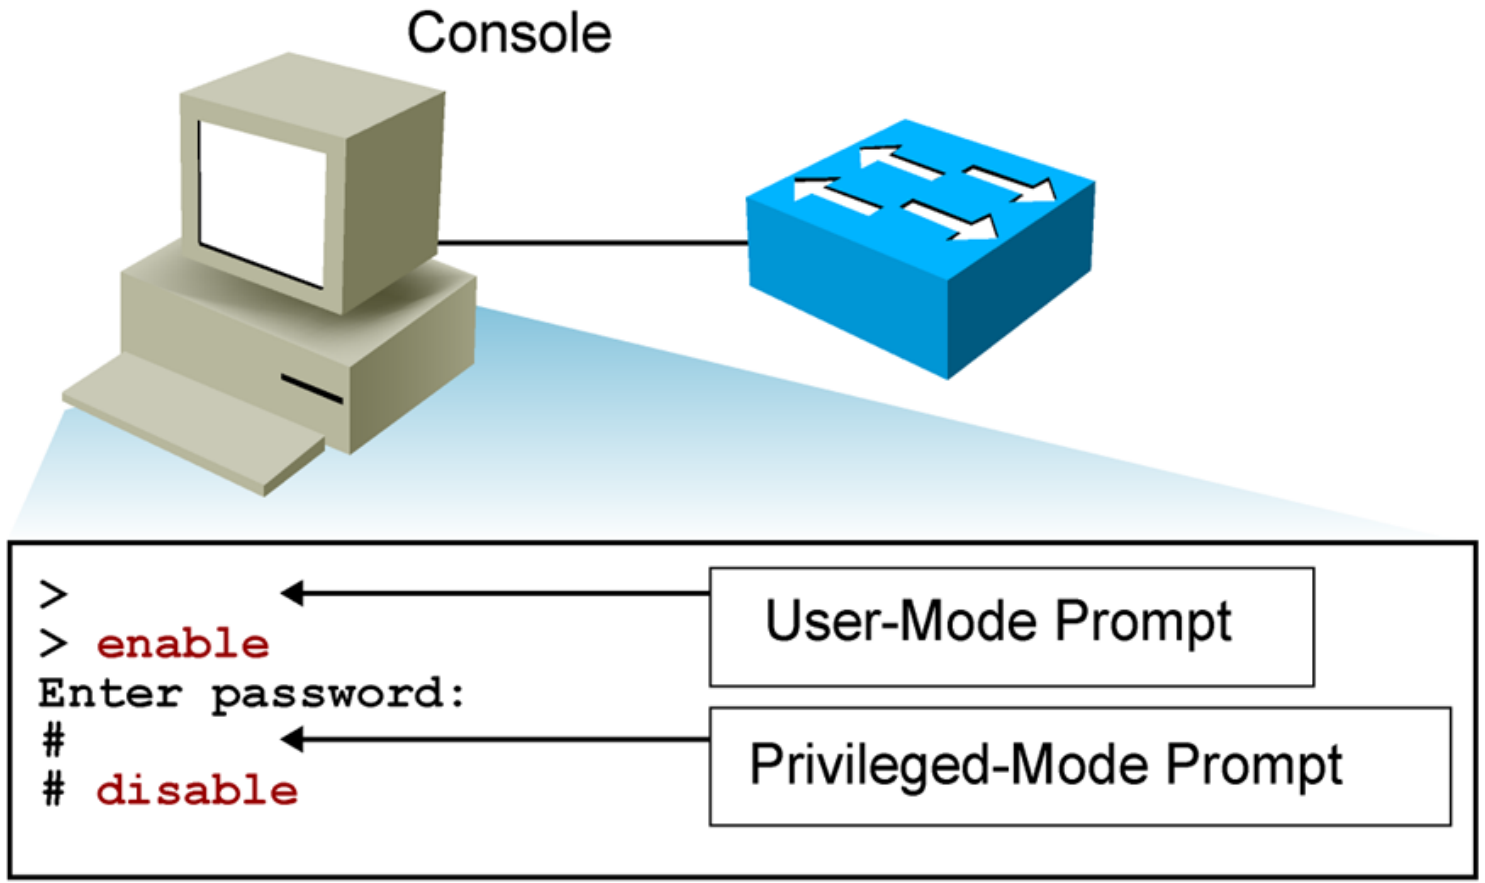

1. Cấu hình cho thiết bị không trôi dòng lệnh

```
Switch(config)# line console 0
Switch(config-line)# logging synchronous
```




2. Đặt tên (hostname) cho thiết bị

```
Switch(config)# hostname <tên_thiết_bị>
```

Ví dụ:

```
Switch(config)# hostname UTH

UTH(config)#
```



3. Cấu hình đặt banner cho thiết bị

```
Switch(config)# banner motd <nội_dung_thông_điệp>
```

Ví dụ:

```
Switch(config)# banner motd ### WELCOME TO COMPUTER NETWORKING CLASS ###
```



4. Cấu hình tắt phân giải tên miền trên thiết bị

```
Switch(config)# no ip domain lookup
```




5. Cấu hình đặt password cho Priviledged mode (enable)

```
Switch(config)# enable password <pass_cần_đặt>
```

Ví dụ:

```
Switch(config)# enable password Lab@123
```



6. Cấu hình đặt password cho cổng Console (quản trị thiết bị)

```
Switch(config)# line console 0
Switch(config-line)# password <pass_cần_đặt>
Switch(config-line)# login
```

Ví dụ:

```
Switch(config)# line console 0
Switch(config-line)# password Lab@123
Switch(config-line)# login
```



7. Lưu cấu hình thiết bị

```
Switch# copy running-config startup-config
Destination filename [startup-config]?
Building configuration…
[OK]
Switch#
```



8. Khởi động lại thiết bị

```
Switch# reload
```




9. Xem lại cấu hình thiết bị

```
Switch# show running-config
```




10. Mã hoá password trên thiết bị (MD7)

```
Switch(config)# service password-encryption
```




11. Cấu hình đặt password MD5 cho Priviledged mode (Enable)

```
Switch(config)# enable secret <pass_cần_đặt>
```

Ví dụ:

```
Switch(config)# enable secret Lab@123
```



12. Cấu hình đặt ip trên cổng của thiết bị

```
Switch(config)# interface vlan 1
Switch(config-if)# ip address <ip_cần_đặt> <subnet_mask_của_ip_cần_đặt>
Switch(config-line)# no shutdown
```

Ví dụ:

```
Switch(config)# interface vlan 1
Switch(config-if)# ip address 192.168.1.154 255.255.255.0
Switch(config-line)# no shutdown
```



13. Xem thông tin ip và trạng thái của cổng trên thiết bị

```
Switch# show ip interface brief
```




14. Cấu hình mô tả thông tin trên cổng của thiết bị

```
Switch(config)# interface <tên_cổng_trên_thiết_bị>
Switch(config-if)# description <nội_dung_thông_điệp>
```

Ví dụ:

```
Switch(config)# interface fastEthernet 0/1
Switch(config-if)# description "Cong nay dang noi voi PC"
```



15. Xem phiên bản của thiết bị

```
Switch# show version

Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 12.2(25)SEE2, RELEASE

SOFTWARE (fc1)
Copyright (c) 1986-2006 by Cisco Systems, Inc.
Compiled Fri 28-Jul-06 11:57 by yenanh
Image text-base: 0x00003000, data-base: 0x00BB7944

ROM: Bootstrap program is C2960 boot loader
BOOTLDR: C2960 Boot Loader (C2960-HBOOT-M) Version 12.2(25r)SEE1, RELEASE SOFTWARE (fc1)

Switch uptime is 24 minutes

System returned to ROM by power-on
System image file is "flash:c2960-lanbasek9-mz.122-25.SEE2/c2960-lanbasek9-mz.122-25.SEE2.bin"

cisco WS-C2960-24TT-L (PowerPC405) processor (revision B0) with 61440K/4088K bytes of memory.

Processor board ID FOC1052W3XC
Last reset from power-on
1 Virtual Ethernet interface
24 FastEthernet interfaces
2 Gigabit Ethernet interfaces
The password-recovery mechanism is enabled.

! Text omitted

Switch#
```

16. Xem bảng MAC Address của thiết bị

```
Switch# show mac-address-table

          Mac Address Table
------------------------------------------
Vlan    Mac Address       Type        Ports
----    -----------       --------    -----
 All    0008.a445.9b40    STATIC      CPU
 All    0100.0ccc.cccc    STATIC      CPU
 All    0100.0ccc.cccd    STATIC      CPU
 All    0100.0cdd.dddd    STATIC      CPU
   1    0008.e3e8.0440    DYNAMIC     Fa0/2
Total Mac Addresses for this criterion: 5

Switch#
```




17. Xóa cấu hình thiết bị

```
Switch# erase startup-config

Erasing the nvram filesystem will remove all configuration files! Continue? [confirm]


[OK]

Erase of nvram: complete

%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram

Switch#
```

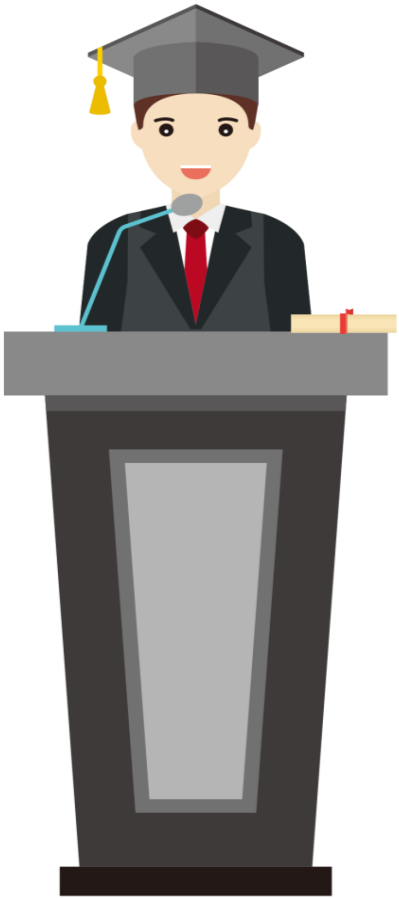

THANK YOU!

