
A neural circuit theory with recurrent normalization explains the dynamics of visual working memory

Qiaorong S. Yu[1], Jonathan A. Winawer[1,2], Stefano Martiniani[3], David J. Heeger[1,2]
[1]Dept of Psychology; [2]Center for Neural Science; [3]Dept of Physics, New York University

Motivation: Visual working memory precision declines with delay, set size, and shorter stimulus duration, but no biologically grounded circuit has explained all of them together.

Conclusion: We developed a neural circuit theory that implements divisive normalization through its recurrence to fit psychophysical measurements of visual working memory dynamics.

ORGaNICs: stochastic neural circuit model[5, 6]

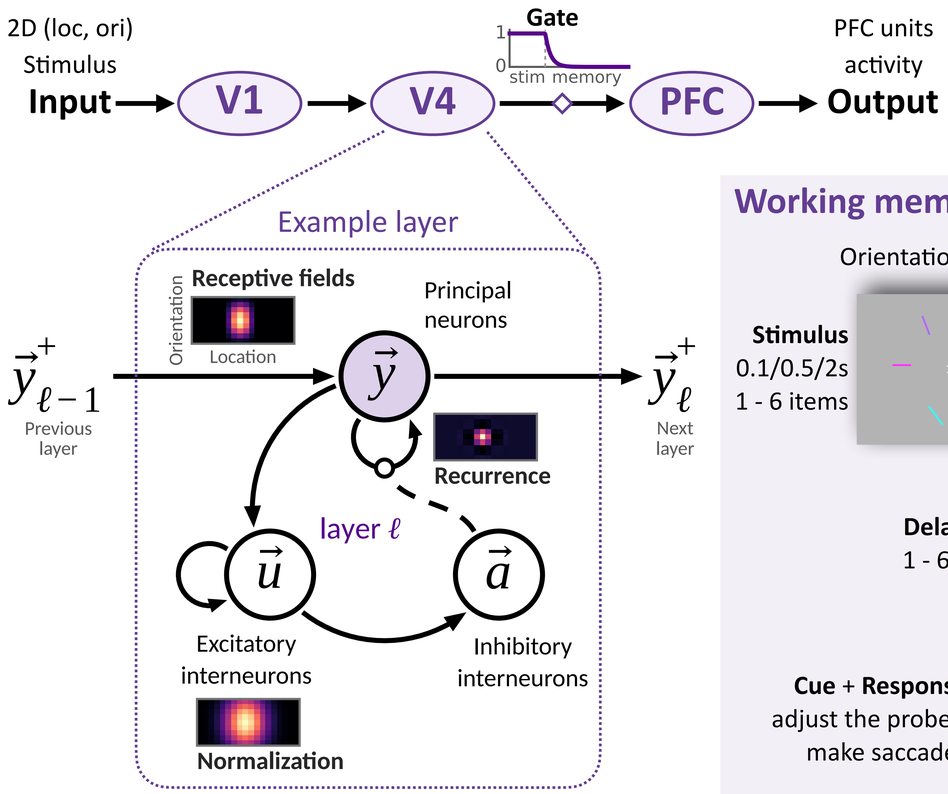

Membrane potential

$$\tau_y \dot{\mathbf{y}} = -\mathbf{y} + b_y \mathbf{z} + \frac{1}{1+\mathbf{a}^+} \odot \mathbf{W}\sqrt{\mathbf{y}^+} + \eta_y$$

$$\tau_u \dot{\mathbf{u}} = -\mathbf{u} + (b_u \sigma)^2 + \mathbf{N}\left[\mathbf{y}^+ \odot (\mathbf{u}^+)^2\right] + \eta_u$$

$$\tau_a \dot{\mathbf{a}} = -\mathbf{a} + \mathbf{u}^+ + \mathbf{a}^+ \odot \mathbf{u}^+ + \alpha \dot{\mathbf{u}} + \eta_a$$

Firing rate

$$\tau_y \dot{\mathbf{y}}^+ = -\mathbf{y}^+ + \lfloor \mathbf{y} \rfloor^2$$


$$\tau_u \dot{\mathbf{u}}^+ = -\mathbf{u}^+ + \sqrt{\lfloor \mathbf{u} \rfloor}$$

$$\tau_a \dot{\mathbf{a}}^+ = -\mathbf{a}^+ + \lfloor \mathbf{a} \rfloor$$


Low-pass filtered noise

$$\tau_\eta \dot{\eta} = -\eta + \rho\sqrt{\tau_\eta}\,\mathcal{N}(0, dt)$$


Model fits experimental measurements of spatial and featural working memory performance

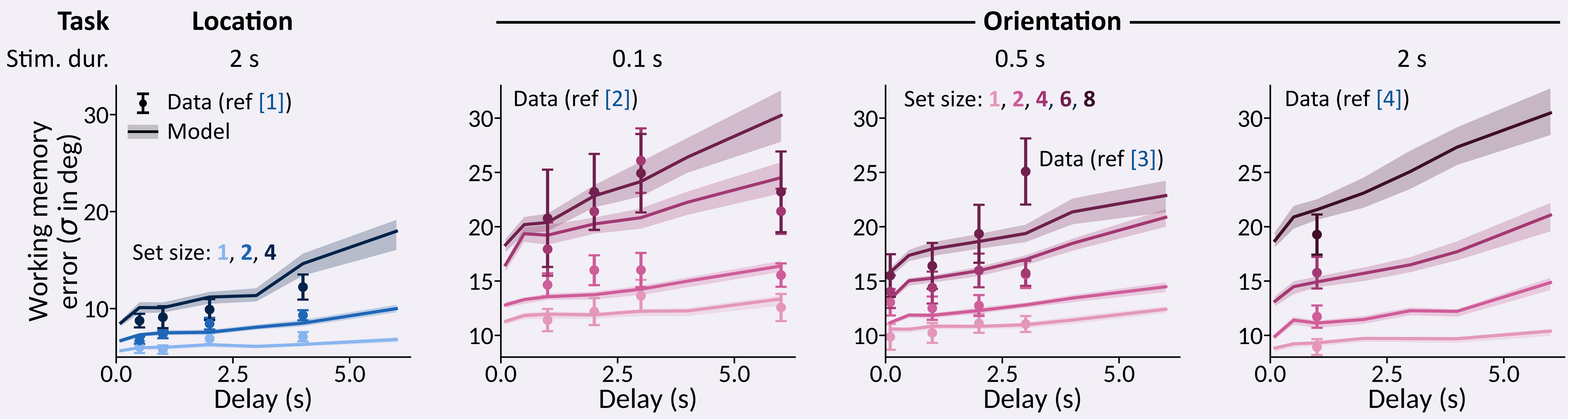

Working memory task

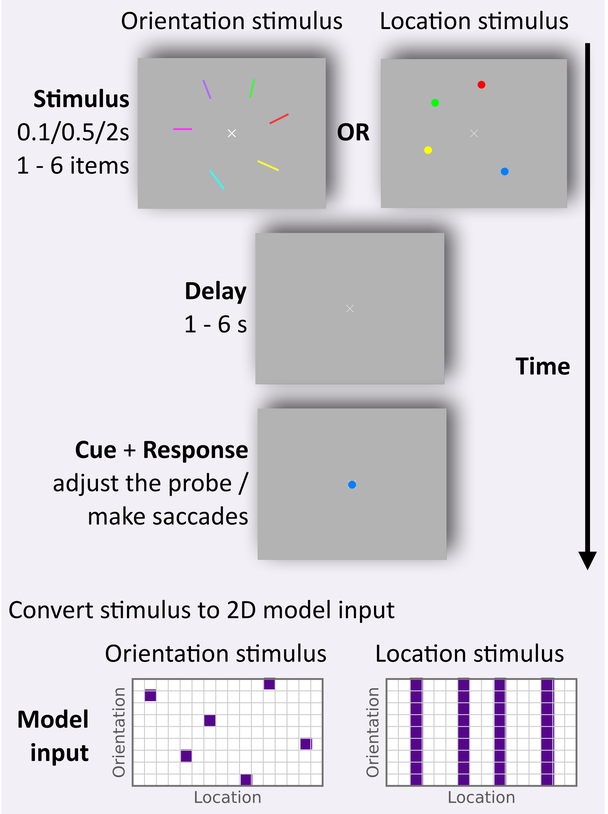

Circuit components explain visual working memory dynamics

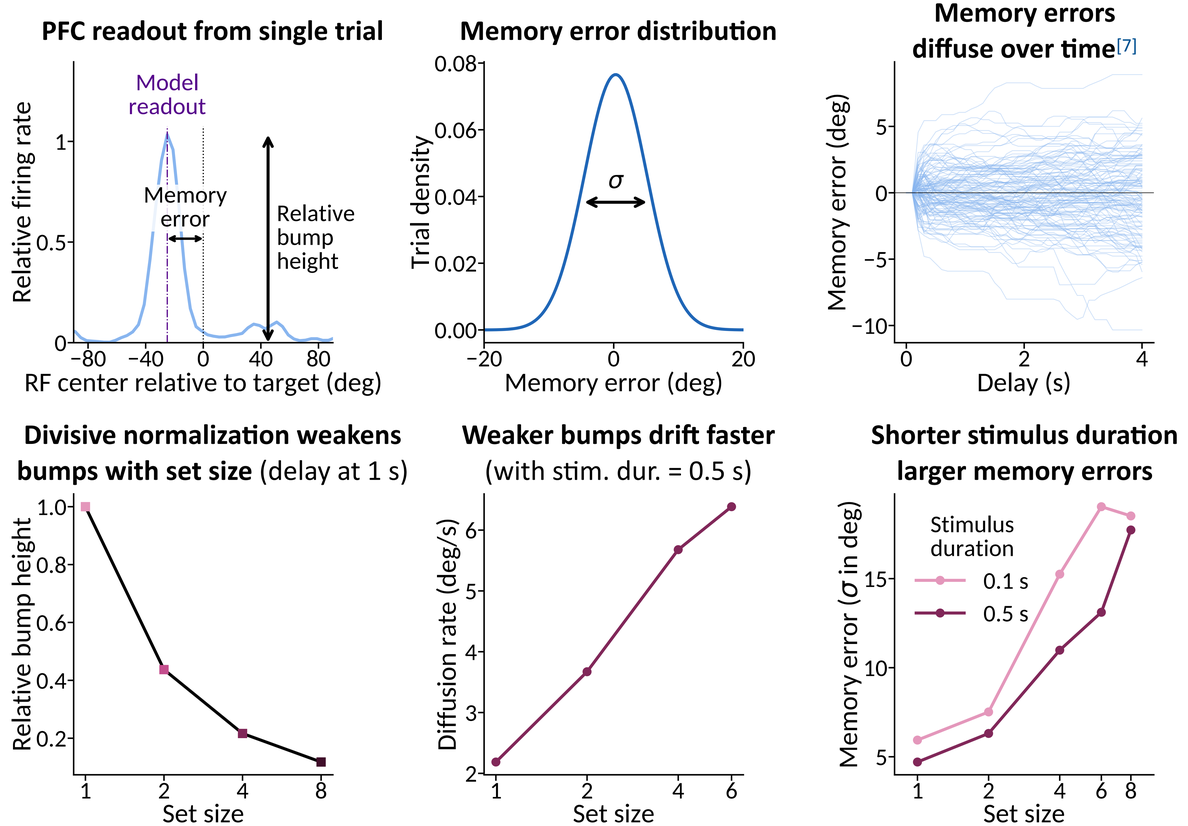

Ref. [1] Schneegans & Bays, *J. Neurosci.*, (2018); [2] Shin et al., *J. Vis.*, (2017); [3] Pertzov et al., J. *Exp. Psychol. Learn. Mem. Cogn.*, (2017); [4] Bays, *J. Neurosci.*, (2014); [5] Heeger & Mackey, *PNAS*, (2019); [6] Pal et al., *eLife*, (2026); [7] Einstein, *Ann. Phys.*, (1905).