

Q1) Amazon S3 Bucket Creation, File Upload and Public Access

Create an Amazon S3 bucket with a unique name such as **my-basic-bucket-** using the AWS Management Console. Open the bucket and upload two files named **index.html** and **error.html**. Verify that both files are successfully uploaded to the bucket.

Configure the bucket and object permissions as required to allow public access to the uploaded files. Copy the **Object URL** of the uploaded **index.html** file and access it through a web browser to verify that the webpage is displayed successfully.

Similarly, copy the **Object URL** of the **error.html** file and verify that it can also be accessed through a web browser. Demonstrate that both files are available publicly using their respective URLs.

Q2) Amazon S3 Bucket Versioning – Upload, Update, Delete and Restore Previous Version

Create an Amazon S3 bucket named using your **PRN number** and enable **Bucket Versioning**. Upload a file named **Q3_.docx** to the bucket and verify that the file is available. Modify the file locally and upload it again using the **same filename** so that Amazon S3 creates a new version of the object. Enable **Show Versions** and verify that multiple versions of the file exist in the bucket.

Access and verify both the **current version** and the **previous version** of the file. Delete the latest version of the object and confirm that the object is no longer represented by that version. Using **S3 Versioning**, restore the previous version of the file by making it the active version again. Verify that the restored version becomes the current accessible version of the object.

Q1) Amazon S3 Bucket Creation, File Upload and Public Access

Create an Amazon S3 bucket with a unique name such as **my-basic-bucket-** using the AWS Management Console. Open the bucket and upload two files named **index.html** and **error.html**. Verify that both files are successfully uploaded to the bucket.

Configure the bucket and object permissions as required to allow public access to the uploaded files. Copy the **Object URL** of the uploaded **index.html** file and access it through a web browser to verify that the webpage is displayed successfully.

Similarly, copy the **Object URL** of the **error.html** file and verify that it can also be accessed through a web browser. Demonstrate that both files are available publicly using their respective URLs.

Step 1: Create an S3 Bucket

An S3 bucket is a storage container used to store files and objects in AWS.

UI Steps

1. Login to AWS Console.
2. Search **S3**.
3. Open **Amazon S3**.
4. Click **Create Bucket**.

Configuration

Field	Value
Bucket Name	my-basic-bucket-UNIQUE
Region	Any Region
Object Ownership	ACLs Disabled
Block Public Access	Uncheck All Options


5. Check:

I acknowledge that the current settings might result in this bucket and the objects within becoming public.

- 6. Click **Create Bucket**.

Screenshot

Bucket Creatio

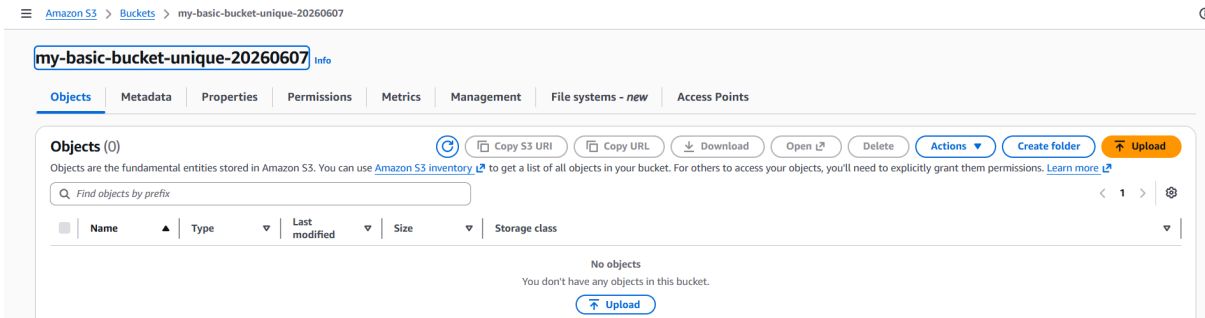

Step 2: Open the Bucket


Access the bucket to upload files.

UI Steps

- 1. Click bucket name: my-basic-bucket-<PRN>
- 2. Open **Objects** tab.

Screenshot

Empty Bucket

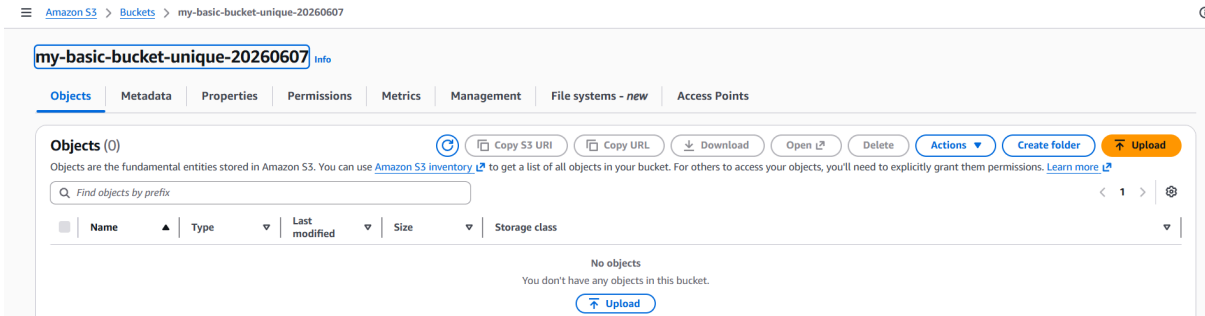

Step 3: Create index.html

This file will act as the main webpage.

File Content

```
<html>
<head>
<title>Home Page</title>
</head>
<body>
<h1>Welcome to S3 Static Website</h1>
<h2>PRN: 260240123060</h2>
</body>
</html>
```

Save as:

index.html

Step 4: Create error.html

This file will be displayed when a page is not found.

File Content

```
<html>
<head>
<title>Error Page</title>
</head>
<body>
<h1>404 Error</h1>
<h2>Requested Page Not Found</h2>
</body>
</html>
```

Save as:

error.html

Step 5: Upload index.html

Upload the main webpage to S3.

UI Steps

1. Open bucket.
2. Click **Upload**.
3. Click **Add Files**.
4. Select:

index.html

5. Click **Upload**.

Screenshot



Upload index.html

Step 6: Upload error.html

Upload the custom error page.

UI Steps

1. Click **Upload**.
2. Click **Add Files**.
3. Select:

error.html

4. Click **Upload**.

Screenshot



Upload error.html

Step 7: Verify Both Files

Confirm successful uploads.

UI Steps


Open **Objects** tab.

Expected:

index.html
error.html

Screenshot

 Both Files Present

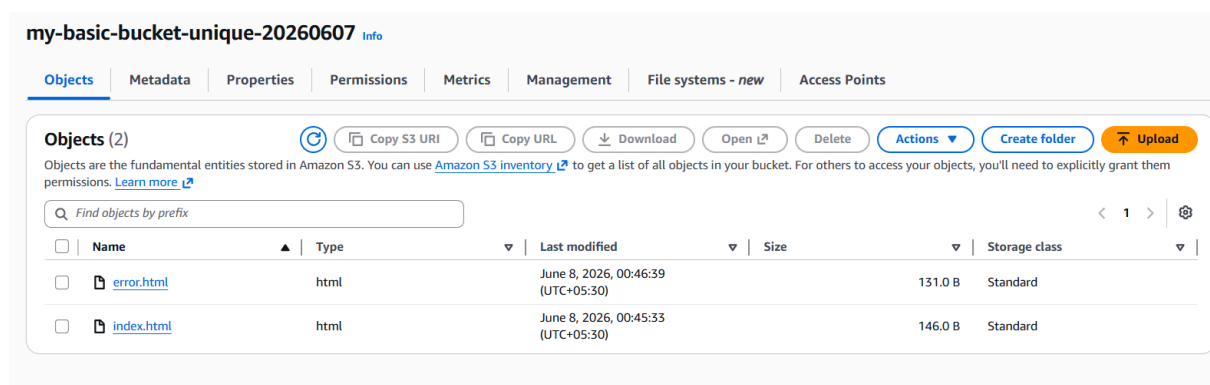

Step 8: Make index.html Public

Allow browser access to the file.

UI Steps

1. Select: index.html
2. Click **Actions**
3. Click **Make Public Using ACL**

OR

1. Open file.
2. Permissions Tab.
3. Grant: Everyone (public access)


Read Object

4. Save.

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "PublicReadAccess",  
      "Effect": "Allow",  
      "Principal": "*",  
      "Action": "s3:GetObject",  
      "Resource": "arn:aws:s3:::my-basic-bucket-unique-20260607/*"  
    }  
  ]  
}
```

Screenshot

 Public Access for index.html

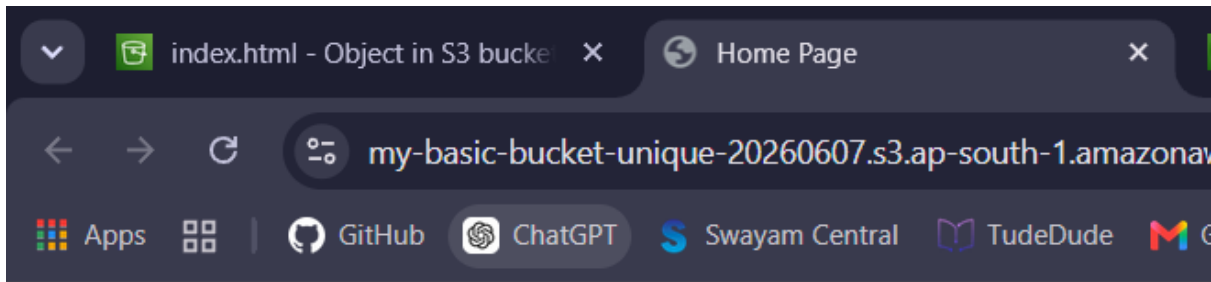

Welcome to S3 Static Website

PRN: 260240123060

index.html

Info

Copy S3 URI

Download

Open ↗

Object actions ▼

Properties

Permissions

Versions

Object overview

Owner

1701ca8c8f28eebc129a2f604909ddff931c049d127c46c31831a13dff5580ba9

AWS Region

Asia Pacific (Mumbai) ap-south-1

Last modified

June 8, 2026, 00:45:33 (UTC+05:30)

Size

146.0 B

Type

html

S3 URI

s3://my-basic-bucket-unique-20260607/index.html

Amazon Resource Name (ARN)

arn:aws:s3::my-basic-bucket-unique-20260607/index.html

Entity tag (Etag)

477f779d204f28feb7d566ccecf57a497

Object URL

https://my-basic-bucket-unique-20260607.s3.ap-south-1.amazonaws.com/index.html

Step 9: Make error.html Public

Allow browser access to the error page.

UI Steps


Repeat the same process for:

error.html

Screenshot



Public Access for error.html

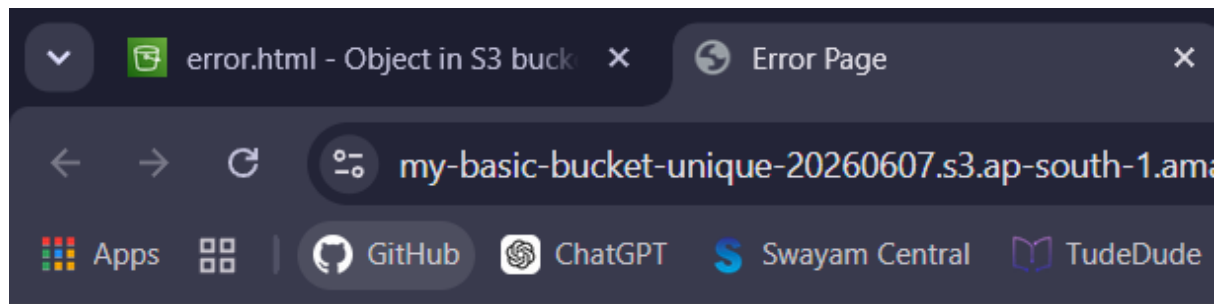

404 Error

Requested Page Not Found

Q2) Amazon S3 Bucket Versioning – Upload, Update, Delete and Restore Previous Version

Create an Amazon S3 bucket named using your **PRN number** and enable **Bucket Versioning**. Upload a file named **Q3_.docx** to the bucket and verify that the file is available. Modify the file locally and upload it again using the **same filename** so that Amazon S3 creates a new version of the object. Enable **Show Versions** and verify that multiple versions of the file exist in the bucket.

Access and verify both the **current version** and the **previous version** of the file. Delete the latest version of the object and confirm that the object is no longer represented by that version. Using **S3 Versioning**, restore the previous version of the file by making it the active version again. Verify that the restored version becomes the current accessible version of the object.

Step 1: Create an S3 Bucket

Creating an S3 bucket to store files and manage versions of objects.

UI Steps

1. Login to AWS Console.
2. Search **S3** in the search bar.
3. Open **Amazon S3**.
4. Click **Create bucket**.

Configuration

Field	Value
Bucket Type	General Purpose
Bucket Name	<PRN_Number>
Region	Any Region

Bucket Versioning Enable

5. Scroll down.
6. Click **Create Bucket**.

Explanation of Attributes

Attribute	Purpose
Bucket Name	Unique storage container
Region	AWS location where data is stored
Versioning	Maintains multiple versions of files

Screenshot

 Bucket Creation

Step 2: Verify Versioning is Enabled

Ensuring S3 can preserve previous versions when a file is modified.

UI Steps


1. Open the created bucket.
2. Select **Properties** tab.
3. Scroll to **Bucket Versioning**.

Expected:

Bucket Versioning: Enabled

Screenshot

Versioning Enabled

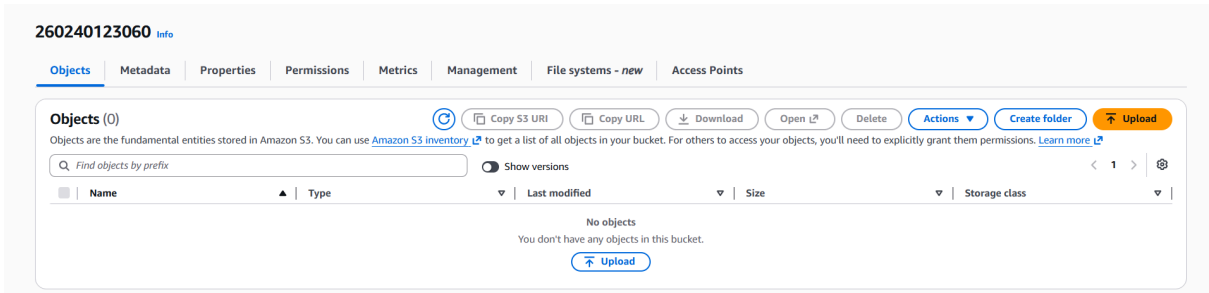

Step 3: Upload Initial File

Uploading the first version of the document.

UI Steps


- 1. Open bucket.
- 2. Go to **Objects** tab.
- 3. Click **Upload**.
- 4. Click **Add Files**.
- 5. Select:Q3_<PRN>.docx
- 6. Click **Upload**.

Verification

File should appear under Objects.

Screenshot

Initial File Upload

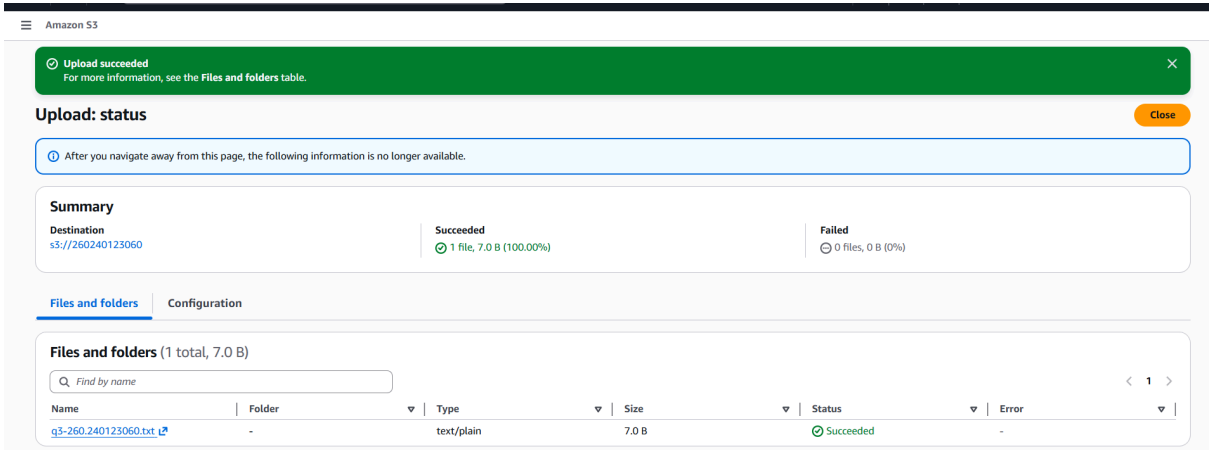

Step 4: Verify Uploaded File

Confirming the object exists inside the bucket.

UI Steps

1. In Objects tab.
2. Verify:Q3_<PRN>.docx

appears.

3. Click the file name.
4. Verify object details.

Screenshot


 File Available in Bucket

Step 5: Modify the File Locally

Creating a second version of the object.

Local Action

1. Open:Q3_<PRN>.docx
2. Add some text such as:Updated Version
3. Save the file.

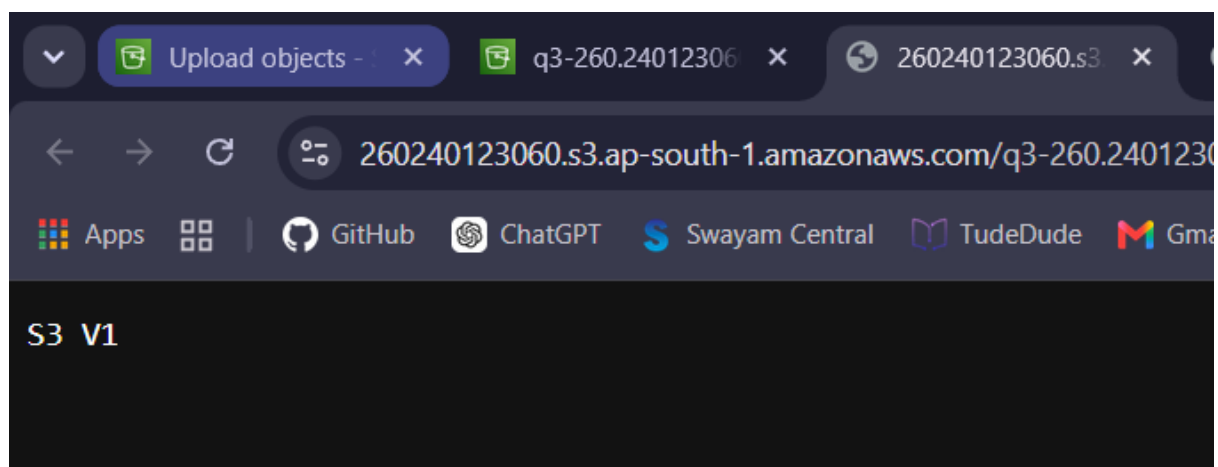

Step 6: Upload Updated File

Uploading the same filename creates a new object version because versioning is enabled.

UI Steps


1. Return to bucket.
2. Click **Upload**.
3. Select the modified file: Q3_<PRN>.docx
4. Click **Upload**.

Expected Result

Object name remains same but Version ID changes.

Screenshot

 Updated File Upload

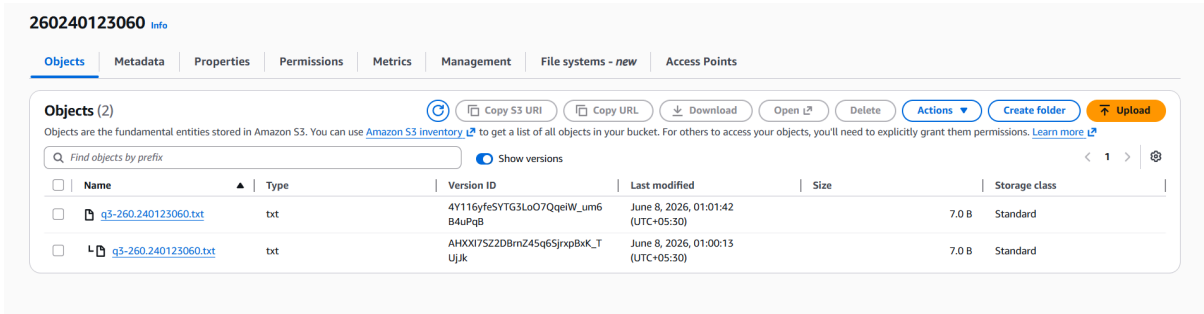

260240123060 [Info](#)

[Objects](#) [Metadata](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [File systems - new](#) [Access Points](#)

Objects (2) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

[Show versions](#) [<](#) [1](#) [>](#) [⚙️](#)

☐	Name	Type	Version ID	Last modified	Size	Storage class
☐	q3-260.240123060.txt	txt	4Y116yfeSYTG3LoO7QqeIW_um6B4uPgB	June 8, 2026, 01:01:42 (UTC+05:30)	7.0 B	Standard
☐	q3-260.240123060.txt	txt	AH0X07S2ZD8mZ45q6SjrxpBxK_TUjJk	June 8, 2026, 01:00:13 (UTC+05:30)	7.0 B	Standard

Step 7: Display Multiple Versions

Viewing all versions maintained by S3.

UI Steps

1. Open bucket.
2. Go to **Objects** tab.
3. Enable:

Show Versions

260240123060 Info							
Objects Metadata Properties Permissions Metrics Management File systems - new Access Points							
Objects (2) Copy S3 URI Copy URL Download Open L2 Delete Actions Create folder Upload							
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more							
Find objects by prefix Show versions							
☐	Name	Type	Version ID	Last modified	Size	Storage class	
☐	q3-260.240123060.txt	txt	4Y116yfeSYTG3LoO7QqeIW_um6B4uPqB	June 8, 2026, 01:01:42 (UTC+05:30)	7.0 B	Standard	
☐	q3-260.240123060.txt	txt	AH0X075ZZD8mZ45q65jrxpBxK_TUjJk	June 8, 2026, 01:00:15 (UTC+05:30)	7.0 B	Standard	

(checkbox near top-right)

Expected Result

You should see:


Q3_<PRN>.docx Version 2

Q3_<PRN>.docx Version 1

Each version has a unique Version ID.

Screenshot

 Multiple Versions Displayed

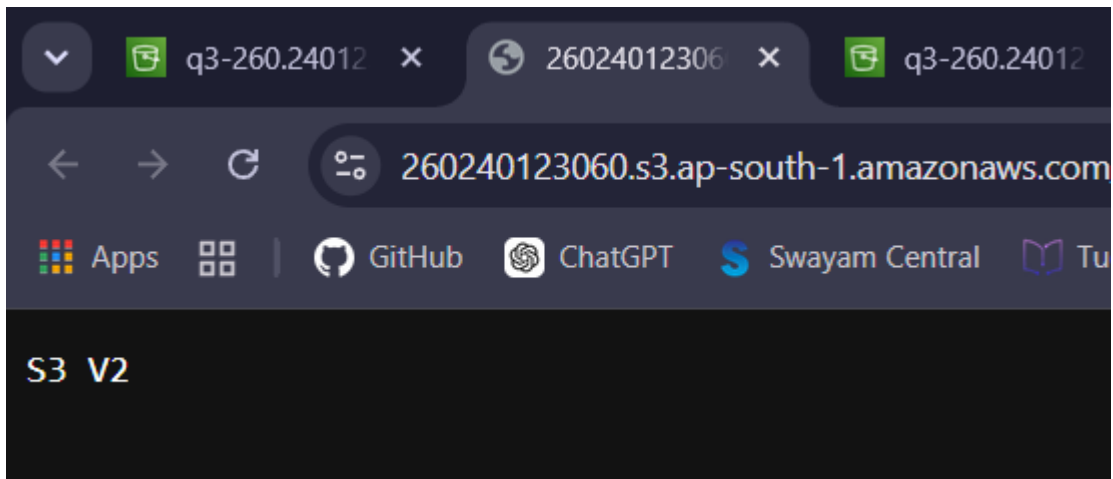

Step 8: Access Current and Previous Versions

Verifying that both versions exist.

UI Steps

1. Click Version 1.
2. Verify Version ID.

Repeat for:

Version 2

Verify different Version ID.

Screenshot

-  Current Version
-  Previous Version

Step 9: Delete Latest Version

Removing the newest version while preserving older versions.

UI Steps

1. Keep **Show Versions** enabled.
2. Select the latest version.
3. Click **Delete**.
4. AWS asks for confirmation.
5. Type: permanently delete
6. Click **Delete Objects**.


Expected Result

Latest version disappears.

Older version remains.


Screenshot

-  Deletion of Latest Version

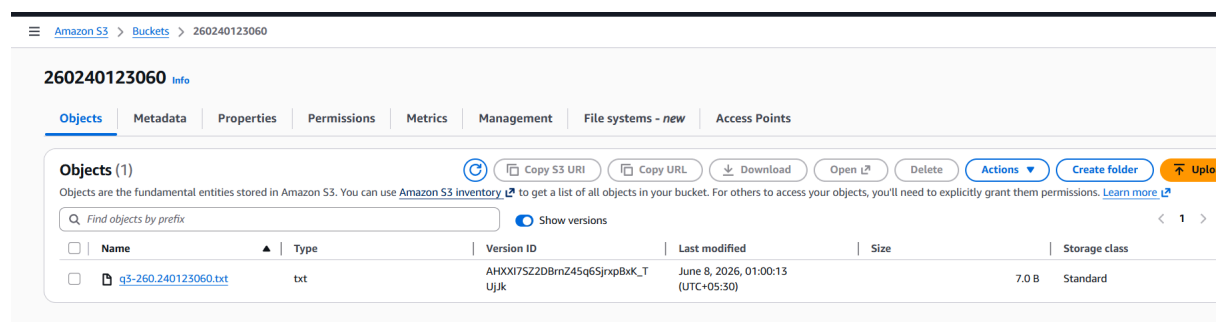

The screenshot shows the Amazon S3 console interface for a bucket named '260240123060'. The 'Objects' tab is selected, and the 'Show versions' toggle is turned on. A table lists the objects, with the latest version (Version ID: AHXX017SZ2DBrnZ45q6SjrxpBxK_T UjJk) highlighted. The 'Delete' button is visible in the top right corner of the object list.

Name	Type	Version ID	Last modified	Size	Storage class
q3-260.240123060.txt	txt	AHXX017SZ2DBrnZ45q6SjrxpBxK_T UjJk	June 8, 2026, 01:00:13 (UTC+05:30)	7.0 B	Standard

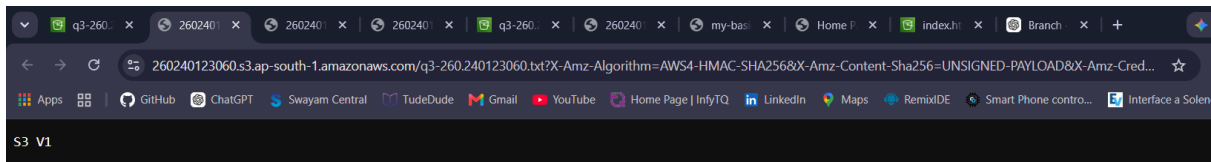

Step 10: Restore Previous Version

Making the older version the active version again.

UI Steps

1. Enable **Show Versions**.
2. Locate the previous version.
3. If a delete marker exists:
 - Select Delete Marker.
 - Click Delete.
4. Otherwise, previous version automatically becomes current after deleting latest version.

Expected Result

Previous version is now active.

Screenshot

 Restoration of Previous Version

Step 11: Verify Restored Version

Confirming successful recovery.

UI Steps

1. Open the object.
2. Verify:
 - File exists.
 - Earlier content is visible.
3. Check Version ID.

Expected Result

The first version becomes the active/current version.

Screenshot

 Successful Access to Restored File

Final Verification

After completion:

Bucket Created



Versioning Enabled



Upload Version 1



Upload Version 2



Show Versions



Delete Latest Version



Restore Previous Version



Verify Recovered File