

Attacker:192.168.74.129

Target:192.168.74.135

Kali ip

```
(root@kali)-[/home/kali/msf]
# ip -br a
lo                UNKNOWN    127.0.0.1/8 ::1/128
eth0              UP        192.168.74.129/24 fe80::1b6d:c5b0:2cd4:70ba/64

(root@kali)-[/home/kali/msf]
# ip route
default via 192.168.74.2 dev eth0 proto dhcp src 192.168.74.129 metric 100
192.168.74.0/24 dev eth0 proto kernel scope link src 192.168.74.129 metric 100
```

ping 192.168.74.135

```
(root@kali)-[/home/kali/msf]
# ping 192.168.74.135
PING 192.168.74.135 (192.168.74.135) 56(84) bytes of data.
64 bytes from 192.168.74.135: icmp_seq=1 ttl=64 time=5.78 ms
64 bytes from 192.168.74.135: icmp_seq=2 ttl=64 time=0.900 ms
64 bytes from 192.168.74.135: icmp_seq=3 ttl=64 time=0.727 ms
64 bytes from 192.168.74.135: icmp_seq=4 ttl=64 time=0.970 ms
64 bytes from 192.168.74.135: icmp_seq=5 ttl=64 time=1.23 ms
64 bytes from 192.168.74.135: icmp_seq=6 ttl=64 time=0.957 ms
64 bytes from 192.168.74.135: icmp_seq=7 ttl=64 time=0.693 ms
^C
— 192.168.74.135 ping statistics —
7 packets transmitted, 7 received, 0% packet loss, time 6036ms
rtt min/avg/max/mdev = 0.693/1.607/5.777/1.709 ms
```

Target ip and arp table

```
root ~
# ip -br -c a
lo                UNKNOWN    127.0.0.1/8 ::1/128
ens33             UP        192.168.74.135/24 fe80::20c:29ff:feda:268/64
docker0          DOWN     172.17.0.1/16 fe80::ec3f:80ff:fef2:7e33/64
br-e32e372c1591  UP        172.18.0.1/16 fe80::585a:1eff:fed7:b2d/64
veth432d389@if2  UP        fe80::acc7:a2ff:fe21:c450/64
vethf581871@if2  UP        fe80::647a:1aff:fe08:8ec6/64

root ~
# arp -a
? (192.168.74.129) at 00:0c:29:a8:bc:a2 [ether] on ens33
? (192.168.74.254) at 00:50:56:fa:26:56 [ether] on ens33
_gateway (192.168.74.2) at 00:50:56:fb:a6:be [ether] on ens33
? (192.168.74.1) at 00:50:56:c0:00:08 [ether] on ens33
? (172.18.0.3) at 8e:92:5b:52:40:90 [ether] on br-e32e372c1591
```

## Configuration Performed

1. Opened the Ettercap configuration file:

```
sudo vim /etc/ettercap/etter.conf
```

2. Verified the following parameters:

```
ec_uid = 0
```

```
ec_gid = 0
```

3. Saved the configuration file and exited.

```
(root@kali)-[/home/kali/msf]
# grep -nE "^[:space:]*ec_(uid|gid)" /etc/ettercap/etter.conf
16:ec_uid = 65534          # nobody is the default
17:ec_gid = 65534          # nobody is the default


(root@kali)-[/home/kali/msf]
# vim /etc/ettercap/etter.conf

(root@kali)-[/home/kali/msf]
# grep -nE "^[:space:]*ec_(uid|gid)" /etc/ettercap/etter.conf
16:ec_uid = 0             # nobody is the default
17:ec_gid = 0             # nobody is the default
```

```
(root@kali)-[/home/kali/msf]
# grep -Ei "ec_uid|ec_gid|plugin_dir|dns" /etc/ettercap/etter.conf
ec_uid = 0                # nobody is the default
ec_gid = 0                # nobody is the default
dns = 53                  # udp      53
mdns = 5353               # udp      5353
# or set the ec_uid to 0, in order to be sure the cleanup script will be
# also, if you create a group called "pfusers" and have EC_GID be that group,
```

## Launch Ettercap


```
sudo ettercap -G
```

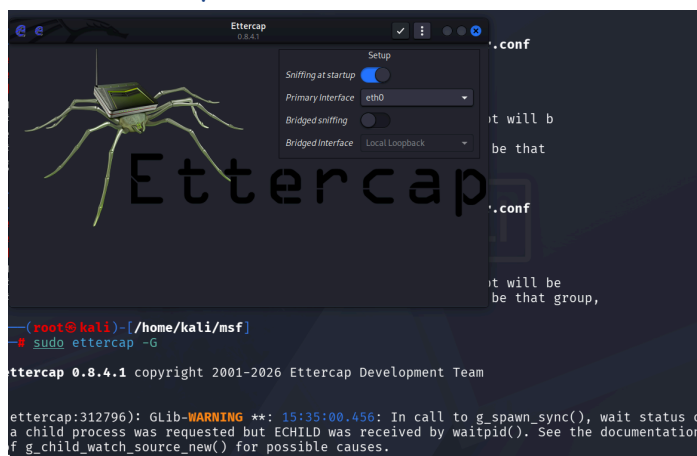

mitm> arp poisoning




ok

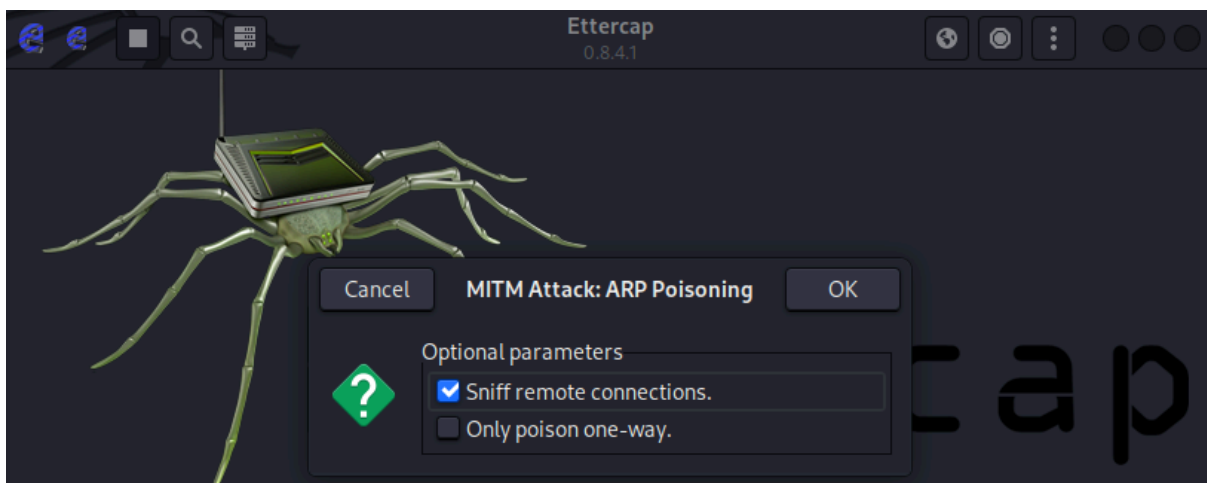

Compare ARP table

```
root ~  
🐧 arp -a  
? (192.168.74.129) at 00:0c:29:a8:bc:a2 [ether] on ens33  
? (192.168.74.254) at 00:50:56:fa:26:56 [ether] on ens33  
_gateway (192.168.74.2) at 00:50:56:fb:a6:be [ether] on ens33  
? (192.168.74.1) at 00:50:56:c0:00:08 [ether] on ens33  
? (172.18.0.3) at 8e:92:5b:52:40:90 [ether] on br-e32e372c1591  
root ~  
🐧 arp -a  
? (192.168.74.129) at 00:0c:29:a8:bc:a2 [ether] on ens33  
? (192.168.74.254) at 00:50:56:fa:26:56 [ether] on ens33  
_gateway (192.168.74.2) at 00:0c:29:a8:bc:a2 [ether] on ens33  
? (192.168.74.1) at 00:0c:29:a8:bc:a2 [ether] on ens33  
? (172.18.0.3) at 8e:92:5b:52:40:90 [ether] on br-e32e372c1591
```



Make sure to stop attack using stop sign

And recheck the table