



Name: Gargi Sukhatankar
Roll No: B027

SAP ID: 60019220125
Branch: CSE(ICB)

EXPERIMENT 12

Aim: Hosting website on google cloud.

Screenshots:

Create Storage bucket with exact name of the domain

Cloud Storage

Create a bucket

Get Started
Name: www.ccltydjsce.xyz

Choose where to store your data
Location: us (multiple regions in United States)
Location type: Multi-region

Choose a storage class for your data
Default storage class: Standard

Choose how to control access to objects

Prevent public access
Restrict data from being publicly accessible via the internet. Will prevent this bucket from being used for web hosting. [Learn more](#)

☒ Enforce public access prevention on this bucket

Access control

☒ **Uniform**
Ensure uniform access to all objects in the bucket by using only bucket-level permissions (IAM). This option becomes permanent after 90 days. [Learn more](#)

☐ **Fine-grained**
Specify access to individual objects by using object-level permissions (ACLs) in addition to your bucket-level permissions (IAM). [Learn more](#)

[Continue](#)

Choose how to protect object data

Soft delete policy: Default
Object versioning: Disabled
Bucket retention policy: Disabled
Object retention: Disabled
Encryption type: Google-managed

Good to know

Location pricing
Storage rates vary depending on the storage class of your data and location of your bucket. [Pricing details](#)

Current configuration: Multi-region / Standard

Item	Cost
us (multiple regions in United States)	\$0.026 per GB-month
With default replication	\$0.020 per GB written

Estimate your monthly cost

Verify the domain name.

www.ccltydjsce.xyz

Public to internet: This bucket is publicly accessible because allUsers or allAuthenticatedUsers have one or more permissions. Remove these principals to stop public access. [Edit access](#) [Dismiss](#)

Location: us-east1 (South Carolina) | Storage class: Standard | Public access: Public to internet | Protection: Soft Delete

Objects | Configuration | Permissions | Protection | Lifecycle | Observability | Inventory Reports | Operations

Folder browser

Buckets > www.ccltydjsce.xyz

[Create folder](#) [Upload](#) [Transfer data](#) [Other services](#)

Filter by name prefix only | Filter | Filter objects and folders | Show Live objects only

Name	Size	Type	Created	Storage class	Last modified	Public access
index.html	108 B	text/html	Apr 11, 2025, 10:34:03 AM	Standard	Apr 11, 2025, 10:34:03 AM	Public to internet
pic/	—	Folder	—	—	—	—



Name: Gargi Sukhatankar

Roll No: B027

SAP ID: 60019220125

Branch: CSE(ICB)

Grant access to "www.ccltydjsce.xyz"

Grant principals access to this resource and add roles to specify what actions the principals can take. Optionally, add conditions to grant access to principals only when a specific criteria is met. [Learn more about IAM conditions](#)

Resource

 www.ccltydjsce.xyz

Add principals

Principals are users, groups, domains, or service accounts. [Learn more about principals in IAM](#)

New principals *
  

Assign roles

Roles are composed of sets of permissions and determine what the principal can do with this resource. [Learn more](#)

Role * Storage Object Viewer	IAM condition (optional)  IAM conditions disabled 
Grants access to view objects and their metadata, excluding ACLs. Can also list the objects in a bucket.	

[+ Add another role](#)

Save

Cancel

Create a storage bucket for the domain name



SHRI VILEPARLE KELAVANI MANDAL'S
DWARKADAS J. SANGHVI COLLEGE OF ENGINEERING
(Autonomous College Affiliated to the University of Mumbai)
NAAC ACCREDITED with "A" GRADE (CGPA : 3.18)



Name: Gargi Sukhatankar

Roll No: B027

SAP ID: 60019220125

Branch: CSE(ICB)

← Create a bucket

• Get Started

Pick a **globally unique**, permanent name. [Naming guidelines](#)

www.ccitydjsce.xyz

Tip: Don't include any sensitive information

i A bucket name can only use dots (.) to form a valid domain name (e.g., example.com). If you haven't verified that you're authorized to use this domain, you'll have to do so to create this bucket. [Learn more](#)

Optimize storage for data-intensive workloads

Good to know

Location pricing

Storage rates vary depending on the storage class of your data and location of your bucket. [Pricing details](#)

Current configuration: Multi-region / Standard

Item	Cost
us (multiple regions in United States)	\$0.026 per GB-month
With default replication	\$0.020 per GB written

Estimate your monthly cost


To verify domain ownership:

1. Open Search Console. You must be signed in with the user account that you will use to manage ownership of your domain.

Open Search Console

★ **Note:** If you have previously verified a property in Search Console, click the drop-down associated with the previous property's name, and click **Add property**.

Click on add property

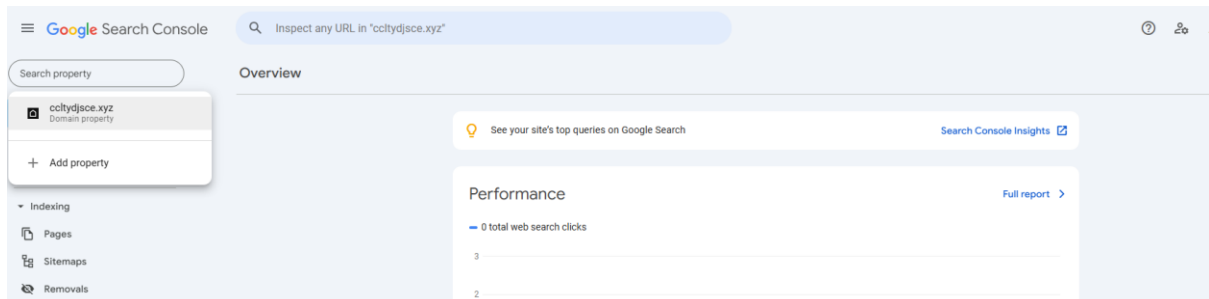

Enter domain name



Name: Gargi Sukhatankar
Roll No: B027

SAP ID: 60019220125
Branch: CSE(ICB)

Select property type



Domain new

- All URLs across all subdomains (m., www. ...)
- All URLs across https or http
- Requires DNS verification

ccltydjsce.xyz

Enter domain or subdomain

CONTINUE



URL prefix

- Only URLs under entered address
- Only URLs under specified protocol
- Allows multiple verification methods

https://www.example.com

Enter URL

CONTINUE

LEARN MORE CANCEL

✓ Ownership auto verified

Verification methods:

Domain name provider, Domain name provider

To stay verified, don't remove the DNS record. To avoid losing verification, you may want to add multiple verification methods from the **Settings > Ownership verification**.

DONE

GO TO PROPERTY

Create bucket



Name: Gargi Sukhatankar
Roll No: B027

SAP ID: 60019220125
Branch: CSE(ICB)

- Choose where to store your data

This choice defines the geographic placement of your data and affects cost, performance, and availability. Cannot be changed later. [Learn more](#)

Location type

- ☐ Multi-region
Highest availability across largest area
- ☐ Dual-region
High availability and low latency across 2 regions
- ☒ Region
Lowest latency within a single region

us-east1 (South Carolina)

- ☐ Add cross-bucket replication via Storage Transfer Service
As data is added or changed, replicate it to another bucket, enabling you to store a copy that follows different bucket settings - e.g., region, storage class, etc. [Learn more](#)

Continue

- Choose a storage class for your data

A storage class sets costs for storage, retrieval, and operations, with minimal differences in uptime. Choose if you want objects to be managed automatically or specify a default storage class based on how long you plan to store your data and your workload or use case. [Learn more](#)

- ☒ Autoclass 
Automatically transitions each object to Standard or Nearline class based on object-level activity, to optimize for cost and latency. Recommended if usage frequency may be unpredictable. Can be changed to a default class at any time. [Pricing details](#)

- ☐ Opt-in to allow object transitions to Coldline and Archive classes



Data in Coldline and Archive classes will have a lower availability SLA. Enabling this option may lead to increased latency of data reads.

Uncheck Enforce public access prevention on this bucket



Name: Gargi Sukhatankar
Roll No: B027

SAP ID: 60019220125
Branch: CSE(ICB)

- Choose how to control access to objects

Prevent public access

Restrict data from being publicly accessible via the internet. Will prevent this bucket from being used for web hosting. [Learn more](#)

☐ Enforce public access prevention on this bucket

Access control

- ☒ **Uniform**
Ensure uniform access to all objects in the bucket by using only bucket-level permissions (IAM). This option becomes permanent after 90 days. [Learn more](#)
- ☐ **Fine-grained**
Specify access to individual objects by using object-level permissions (ACLs) in addition to your bucket-level permissions (IAM). [Learn more](#)

Bucket is created

www.ccltydjsce.xyz

Location: us-east1 (South Carolina) | Storage class: Managed with Autoclass | Public access: Not public | Protection: Soft Delete

Objects | Configuration | Permissions | Protection | Lifecycle | Observability | Inventory Reports | Operations

Folder browser: www.ccltydjsce.xyz

Buckets > www.ccltydjsce.xyz

Create folder | Upload | Transfer data | Other services

Filter by name prefix only | Filter | Filter objects and folders | Show: Live objects only

Name	Size	Type	Created	Storage class	Last modified	Public access	Version history	Encryption	Object retention retain until time
No rows to display									

Upload website files and folders

Objects | Configuration | Permissions | Protection | Lifecycle | Observability | Inventory Reports | Operations

Folder browser: www.ccltydjsce.xyz

Buckets > www.ccltydjsce.xyz

Create folder | Upload | Transfer data | Other services

Filter by name prefix only | Filter | Filter objects and folders | Show: Live objects only

Name	Size	Type	Created	Storage class	Last modified	Public access	Version history
index.html	306 B	text/html	Apr 12, 2025, 12:49:12 PM	Standard	Apr 12, 2025, 12:49:12 PM	Not public	—
pic/	—	Folder	—	—	—	—	—

www.ccltydjsce.xyz | Apr 12, 2025, 12:47:48 PM | Region: us-east1 | Managed with Autoclass | Apr 12, 2025, 12:47:48 PM | Not public | Uniform | Soft Delete | Not enabled

- Pin bucket
- Edit access
- Edit tags
- Edit labels
- Edit website configuration

Grant permission to alluser storage object viewer



Name: Gargi Sukhatankar
Roll No: B027

SAP ID: 60019220125
Branch: CSE(ICB)

Grant access to "www.ccltydjsce.xyz"

Grant principals access to this resource and add roles to specify what actions the principals can take. Optionally, add conditions to grant access to principals only when a specific criteria is met. [Learn more about IAM conditions](#)

Resource

www.ccltydjsce.xyz

Add principals

Principals are users, groups, domains, or service accounts. [Learn more about principals in IAM](#)

New principals * ?

Assign roles

Roles are composed of sets of permissions and determine what the principal can do with this resource. [Learn more](#)

Role * IAM condition (optional) ?
[+ Add IAM condition](#)

Grants access to view objects and their metadata, excluding ACLs. Can also list the objects in a bucket.

[+ Add another role](#)

☒ www.ccltydjsce.xyz

Apr 12, 2025, 12:47:48 PM

Region

us-east1

Managed with Autoclass

Apr 12, 2025, 12:47:48 PM

Not public

Uniform

Soft Delete

Not enabled

www.ccltydjsce.xyz website configuration

Configure index and error pages for the static website associated with [www.ccltydjsce.xyz](#). [Learn more](#)

Index (main) page suffix

Specify a suffix to append to the URL when visitors request your top-level domain or URLs without associated objects. Ex. With the suffix index.html, example.com serves visitors content from the object example.com/index.html (if it exists).

Error (404 not found) page

Specify an object to serve when visitors request a URL that directs to no object or index page. Ex. A user visits example.com/dir - if neither that URL nor example.com/dir/index.html directs to an object, the error page is served.

Cancel

Save



Name: Gargi Sukhatankar

Roll No: B027

SAP ID: 60019220125

Branch: CSE(ICB)

Permissions

[View by principals](#) [View by roles](#)

[Grant access](#) [Remove access](#)

[Filter](#) Enter property name or value


☐ Type	Principal ↑	Name	Role	Inheritance	
☐	allUsers		Storage Object Viewer		✎

Create load balancer

1 Type of load balancer


☒ Application Load Balancer (HTTP/HTTPS)

Choose an Application Load Balancer when you need a flexible feature set for your applications with HTTP and HTTPS traffic.



☐ Network Load Balancer (TCP/UDP/SSL)

Choose a Network Load Balancer when you need TLS offloading at scale, support for UDP, and exposing IP addresses to your applications.



[NEXT](#)

2 Public facing or internal

Public facing (external)

3 Global or single region deployment

Global workloads

4 Load balancer generation

Global external Application Load Balancer

5 Create load balancer

[CONFIGURE](#)

[CANCEL](#)



Name: Gargi Sukhatankar

Roll No: B027

SAP ID: 60019220125

Branch: CSE(ICB)

✓ **Type of load balancer**

Application Load Balancer

✓ **Public facing or internal**

Public facing (external)

✓ **Global or single region deployment**

Global workloads

4 **Load balancer generation**

☐ Global external Application Load Balancer



Load balancer with EXTERNAL_MANAGED load balancing scheme (Recommended)

[Learn more](#)

☒ Classic Application Load Balancer

Previous generation load balancer with EXTERNAL load balancing scheme

[Learn more](#)

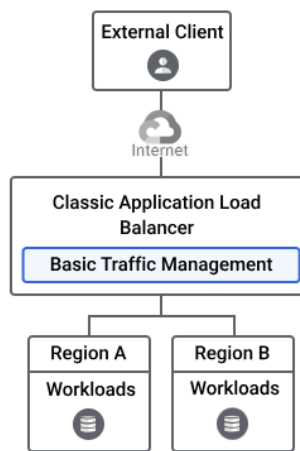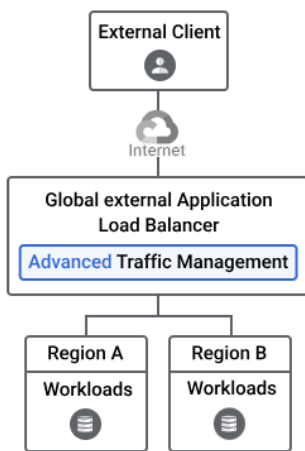

NEXT

Load Balancer name *
ccitydjsce-lb

Lowercase, no spaces.

✓ **Frontend configuration**

• Backend configuration

• Host and path rules

ⓘ Review and finalize (optional)

Frontend configuration

Configure the load balancer's frontend IP address, port, and protocol. Configure an SSL certificate if using HTTPS.

^ **New Frontend IP and port**

Name
ccitydjsce

Lowercase, no spaces.

Description

Protocol
HTTP

Select HTTPS to support clients that support HTTP/2. The load balancer automatically offers HTTP/2 as part of the TLS handshake.

Network Service Tier

Classic HTTP(S) load balancing supports both the Premium and Standard Network Service tiers. IPv6 addresses require Premium tier. Standard tier addresses require selecting a region for the frontend. [Learn more](#)

☒ Premium

Current project-level tier, [change](#)

☐ Standard

IP version
IPv4

IP address
Ephemeral

Port *

80

Classic application load balancing supports all TCP ports. [Learn more](#)

☐ Enable HTTP to HTTPS redirect

Requires a reserved external IP address. Enabling HTTP to HTTPS redirect automatically generates a separate URL map with the HTTP to HTTPS redirection configuration.



SHRI VILEPARLE KELAVANI MANDAL'S
DWARKADAS J. SANGHVI COLLEGE OF ENGINEERING
(Autonomous College Affiliated to the University of Mumbai)
NAAC ACCREDITED with "A" GRADE (CGPA : 3.18)



Name: Gargi Sukhatankar
Roll No: B027

SAP ID: 60019220125
Branch: CSE(ICB)

Load Balancer name *
cclydjsce-lb ⓘ
Lowercase, no spaces.

Frontend configuration

Backend configuration

Host and path rules

Review and finalize (optional) ⓘ

Protocol
HTTPS (includes HTTP/2 and HTTP/3) ▼
Select HTTPS to support clients that support HTTP/2. The load balancer automatically offers HTTP/2 as part of the TLS handshake.

Network Service Tier

Classic HTTP(S) load balancing supports both the Premium and Standard Network Service tiers. IPv6 addresses require Premium tier. Standard tier addresses require selecting a region for the frontend. [Learn more](#) ⓘ

Premium
Current project-level tier, [change](#) ⓘ

Standard

IP version
IPv4 ▼

IP address
cclydjsce ▼

Port *
443
Classic application load balancing supports all TCP ports. [Learn more](#) ⓘ

Certificate *
ccldjsce-cert ▼ ⓘ

ADDITIONAL CERTIFICATES

SSL policy *
GCP default ▼

HTTP/3 (QUIC) negotiation
Automatic (default) ▼

Early data (0-RTT)
Disabled ▼ ⓘ

Client Authentication ▼
Describes how the proxy should authenticate inbound traffic. [Learn more](#) ⓘ

Enable HTTP to HTTPS redirect

Backend

← Create classic Application Load Balancer

Load Balancer name *
cclydjsce-lb ⓘ
Lowercase, no spaces.

Frontend configuration

Backend configuration

Host and path rules

Review and finalize (optional) ⓘ

Backend configuration

Create or select a backend service for incoming traffic. You can add multiple backend services and backend buckets to serve different types of content.

Backend services & backend buckets

Filter Type to filter

No matches for ""

CREATE A BACKEND SERVICE

CREATE A BACKEND BUCKET

CANCEL

OK



Name: Gargi Sukhatankar

Roll No: B027

SAP ID: 60019220125

Branch: CSE(ICB)

Create backend bucket

Backend bucket name *

ccltydjsec



Lowercase, no spaces.

DESCRIPTION

Cloud Storage bucket *

www.ccltydjsce.xyz

BROWSE

Cloud CDN

☐ Enable Cloud CDN



Cloud CDN is a paid product that accelerates web content and applications. [Learn more about features and pricing.](#)

Cache mode

By default, Cloud CDN will cache static content - including web assets and video files - that are not explicitly marked as private for the configured default time to live (TTL), without requiring any changes at your origin.

☒ Cache static content (recommended)

☐ Use origin settings based on Cache-Control headers

Origin must set headers

☐ Force cache all content

Cache all content served by the origin, ignoring any "private", "no-store" or "no-cache" directives.

Client TTL

1 hour



Default TTL

1 hour



Maximum TTL

1 day



Cache key

Default (include query parameters known to Cloud Storage)



Cloud Armor edge security policy



Advanced configurations



CREATE

CANCEL



SHRI VILEPARLE KELAVANI MANDAL'S
DWARKADAS J. SANGHVI COLLEGE OF ENGINEERING
(Autonomous College Affiliated to the University of Mumbai)
NAAC ACCREDITED with "A" GRADE (CGPA : 3.18)



Name: Gargi Sukhatankar

Roll No: B027

SAP ID: 60019220125

Branch: CSE(ICB)

Load balancing

+ CREATE LOAD BALANCER

REFRESH

DELETE



Get started with real-time analytics

Use Network Intelligence Center for comprehensive monitoring and troubleshooting. [Learn more](#)

- ✓ Visualize your network resources
- ✓ Diagnose and prevent connectivity issues
- ✓ View packet loss and latency metrics
- ✓ Keep your firewall rules strict and efficient

TRY NOW

REMIND ME LATER

LOAD BALANCERS

BACKENDS

FRONTENDS

SERVICE LB POLICIES

Filter Enter property name or value

☐	Name	Load balancer type	Access type	Protocols	Region	Backends
☐	ccltydjsce-https-redirect	Application (Classic)	External	HTTP		✓
☐	ccltydjsce-lb	Application (Classic)	External	HTTP and HTTPS		✓ 1 backend bucket

To view or delete load balancing resources like forwarding rules and target proxies, go to the [load balancing components view](#).

Successfully created load balancer.

Copy the IP address of the load balance to the DNS record of the domain name provider

Domain

ccltydjsce.xyz

Connect Domain

Overview

DNS

Products

DNS Records

Forwarding

Nameservers

Premium DNS

Hostnames

DNSSEC

Crypto Wallet

Add a new record

DNS records define how your domain behaves, like showing your website content and delivering your email.

Add New Record

Easily verify domain ownership

Need to verify ownership of your domain to connect to an external service? We've made it easier than ever.

Verify Domain Ownership

Type ?

Name ?

Data ?

TTL ?

Delete

Edit



A

@

34.111.46.83

1 Hour






SHRI VILEPARLE KELAVANI MANDAL'S
DWARKADAS J. SANGHVI COLLEGE OF ENGINEERING
(Autonomous College Affiliated to the University of Mumbai)
NAAC ACCREDITED with "A" GRADE (CGPA : 3.18)



Name: Gargi Sukhatankar
Roll No: B027

SAP ID: 60019220125
Branch: CSE(ICB)

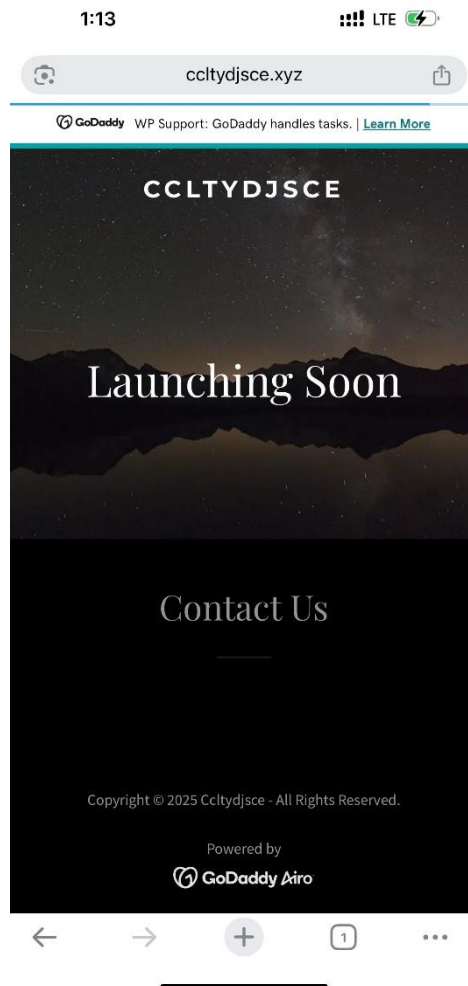

After some time refresh and you will able to use your site with domain name.