



Name :

Roll No. :

Invigilator's Signature :

CS/B.TECH(CSE/IT)NEW/SEM-4/CS-402/2012

2012

FORMAL LANGUAGE & AUTOMATA THEORY

Time Allotted : 3 Hours

Full Marks : 70

The figures in the margin indicate full marks.

*Candidates are required to give their answers in their own words
as far as practicable.*

GROUP – A

(Multiple Choice Type Questions)

1. Choose the correct alternatives for the following :

$$10 \times 1 = 10$$

- i) The basic limitation of FSM is that
- a) it can't remember arbitrary large amount of information
 - b) it sometimes recognize grammar that is not regular
 - c) it sometimes fails to recognize grammar that is regular
 - d) all of these.



- ii) Choose the correct statements :
- a) Moore & Mealy machine are FSM with output capabilities
 - b) Any given Moore machine has an equivalent Mealy machine
 - c) Any given Mealy machine has an equivalent Moore machine
 - d) Moore machine is not an FSM.
- iii) The intersection of CFL & regular language
- a) need not be regular b) need not be CF
 - c) is always regular d) none of these.
- iv) Palindromes can't be recognized by any FSM because
- a) an FSM can't be remember arbitrary large amount of information
 - b) an FSM can't deterministically fix the mid point
 - c) FSM can't find whether 2nd half of the string machines the 1st half or not
 - d) None of these.
- v) Can a DFA simulate NFA ?
- a) no b) yes
 - c) some times d) depends on DFA.



- vi) $(P + Q)^* = ?$
- a) $(P^* + Q^*)$ b) $P^* + Q^*$
- c) $(P^* Q^*)^*$ d) both (a) and (c).
- vii) What is the RE for the language set strings with atleast one 1, one 2 and one 3 ?
- a) $1 + 2 + 3$ b) $11^* 22^* 33^*$
- c) $1^* 2^* 3$ d) both (a) and (b).
- viii) Which of the following sets is regular ?
- a) $\{ a^i : i = n^2, n \geq 1 \}$
- b) $\{ a^p : p \text{ is prime} \}$
- c) $\{ ww : w \text{ is in } (a, b)^+ \}$
- d) $\{ a^{2n} : n \geq 1 \}$.
- ix) The regular expression representing the set of all strings over $\{ x, y \}$ ending with XX beginning with Y is
- a) $XX (X + Y)^* Y$ b) $YY (X + Y)^* X$
- c) $Y (X + Y)^* XX$ d) $Y (XY)^* XX$.
- x) Regular expression $(a/b)(a/b)$ denotes the set
- a) $\{ a, b, ab, aa \}$ b) $\{ a, b, ba, bb \}$
- c) both (a) and (b) d) none of these.



GROUP – B

(Short Answer Type Questions)

Answer any *three* of the following. $3 \times 5 = 15$

2. Show that $L = \{ 0^n 1^n \mid n \geq 1 \}$ is not regular.
3. Write the CFG for the following language
 $L = \{ 0^i 1^j 2^k \mid i = j = k \}$
4. Design a PDA which accepts the language
 $L = \{ w \in (a,b)^* \mid w \text{ has equal no. of } a \text{ \& } b \}$.
5. a) Give DFA which reads strings from $\{a,b\}$ and with aaa. 3
 b) Construct a DFA equivalent to $M = \{ \{q_0, q_1\}, \{0, 1\}, \delta_{q_0}, \{q_0\} \}$, δ is given by the state table.

State /	0	1
q_0	q_0	q_1
q_1	q_1	q_0, q_1

2

6. Find a GNF grammar equivalent to the following CFG :

$$A_1 \rightarrow A_2 A_3$$

$$A_2 \rightarrow A_3 A_1 \mid b$$


$$A_3 \rightarrow A_1 A_2 \mid a$$


GROUP – C

(Long Answer Type Questions)

Answer any *three* of the following. $3 \times 15 = 45$


7. a) Construct a DFA diagram to the NFA given below. 6





b) Convert Mealy Machine to Moore Machine.


6

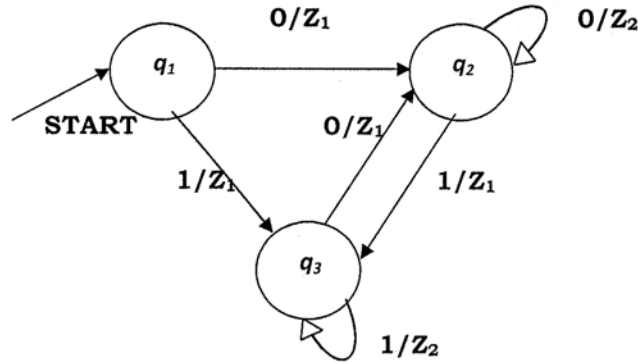


c) What are Kleene Closure and Positive Closure ? Give example for both. 2 + 1


8. a) What are distinguishable and Indistinguishable state ? 3

b) Use Myhill Nerode Theorem to minimize the following finite automata. 12

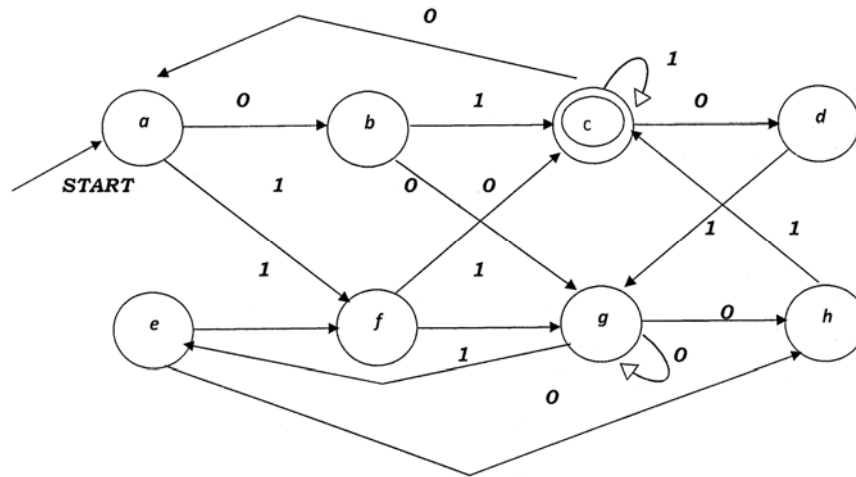



9. a) Give the Regular Expression for the DFA using arden Theorem. 5

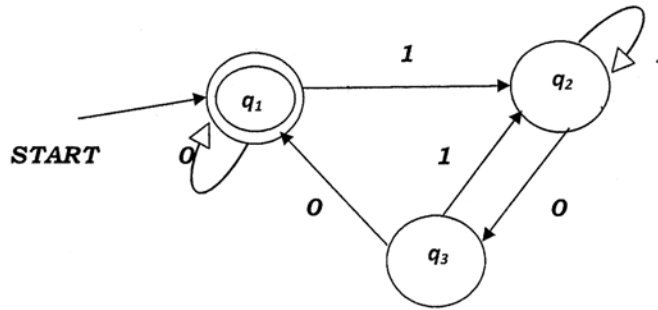

- b) What is Griebach Normal Form (GNF) for Context Free grammar ?

Convert the following grammar into GNF

$$S \rightarrow ABb/a$$

$$A \rightarrow aaA/B$$

$$B \rightarrow bAb$$

1 + 4


- c) Using Pumping Lemma show that $L = \{a^n b^n : n \geq 0\}$ is not regular. 5

10. a) Construct a NFA with ϵ or λ transition for

$$r = (11 + 0)^*(00 + 1)^* \quad 5$$

- b) What is PDA ? 5

- c) Construct PDA for $L = \{wu^R : w \text{ belongs to } (0, 1)^*\}$ 5



11.

PS	NS, Z		
	I_1	I_2	I_3
<i>A</i>	<i>C, O</i>	<i>E, 1</i>
<i>B</i>	<i>C, O</i>	<i>E, ...</i>
<i>C</i>	<i>B, ...</i>	<i>C, O</i>	<i>A, ...</i>
<i>D</i>	<i>B, O</i>	<i>C, ...</i>	<i>E, ...</i>
<i>E</i>	<i>E</i>	<i>A, ...</i>

For the incompletely specified machine shown above find the minimum state reduced machine containing the original one. 8

PS	NS, Z	
	$x = 0$	$x = 1$
<i>A</i>	<i>B, 1</i>	<i>H, 1</i>
<i>B</i>	<i>F, 1</i>	<i>D, 1</i>
<i>C</i>	<i>D, 0</i>	<i>E, 1</i>
<i>D</i>	<i>C, 0</i>	<i>F, 1</i>
<i>E</i>	<i>D, 1</i>	<i>C, 1</i>
<i>F</i>	<i>C, 1</i>	<i>C, 1</i>
<i>G</i>	<i>C, 1</i>	<i>D, 1</i>
<i>H</i>	<i>C, 0</i>	<i>A, 1</i>

Using this table

- Find the equivalence partition. 3
- Find the standard form of the corresponding reduced machine. 3
- What is the minimum length sequence that distinguishes state *A* from state *B*? 1
