

THE JAVASCRIPT HANDBOOK

FLAVIO COPES

Table of Contents

Preface	
Introduction to JavaScript	
ECMAScript	
ES6	
ES2016	
ES2017	
ES2018	
Coding style	
Lexical Structure	
Variables	
Types	
Expressions	
Prototypal inheritance	
Classes	
Exceptions	
Semicolons	
Quotes	
Template Literals	
Functions	
Arrow Functions	
Closures	
Arrays	
Loops	
Events	
The Event Loop	
Asynchronous programming and callbacks	
Promises	
Async and Await	
Loops and Scope	
Timers	

[this](#)

[Strict Mode](#)

[Immediately Invoked Function Expressions \(IIFE\)](#)

[Math operators](#)

[The Math object](#)

[ES Modules](#)

[CommonJS](#)

[Glossary](#)

Preface



JAVASCRIPT HAND BOOK

The JavaScript Handbook follows the 80/20 rule: learn in 20% of the time the 80 % of a topic.

I find this approach gives a well-rounded overview. This book does not try to cover everything under the sun related to JavaScript. If you think some specific topics should be included, tell me.

You can reach me on Twitter [@flaviocopes](https://twitter.com/flaviocopes).

I hope the contents of this book will help you achieve what you want: learn the basics of JavaScript.

This book is written by Flavio. I publish web development tutorials every day on my website flaviocopes.com.

Enjoy!

Introduction to JavaScript

JavaScript is one of the most popular programming languages in the world, and now widely used also outside of the browser. The rise of Node.js in the last few years unlocked backend development, once the domain of Java, Ruby, Python, PHP, and more traditional server-side languages. Learn all about it!

Introduction

JavaScript is one of the most popular programming languages in the world.

Created 20 years ago, it's gone a very long way since its humble beginnings.

Being the first - and the only - scripting language that was supported natively by web browsers, it simply stuck.

In the beginnings, it was not nearly powerful as it is today, and it was mainly used for fancy animations and the marvel known at the time as DHTML.

With the growing needs that the web platform demands, JavaScript had the responsibility to grow as well, to accommodate the needs of one of the most widely used ecosystems of the world.

Many things were introduced in the platform, with browser APIs, but the language grew quite a lot as well.

JavaScript is now widely used also outside of the browser. The rise of *Node.js* in the last few years unlocked backend development, once the domain of Java, Ruby, Python and PHP and more traditional server-side languages.

JavaScript is now also the language powering databases and many more applications, and it's even possible to develop embedded applications, mobile apps, TV sets apps and much more. What started as a tiny language inside the browser is now the most popular language in the world.

A basic definition of JavaScript

JavaScript is a programming language that is:

- **high level**: it provides abstractions that allow you to ignore the details of the machine where it's running on. It manages memory automatically with a garbage collector, so you

can focus on the code instead of managing memory locations, and provides many constructs which allow you to deal with highly powerful variables and objects.

- **dynamic**: opposed to static programming languages, a dynamic language executes at runtime many of the things that a static language does at compile time. This has pros and cons, and it gives us powerful features like dynamic typing, late binding, reflection, functional programming, object runtime alteration, [closures](#) and much more.
- **dynamically typed**: a variable does not enforce a type. You can reassign any type to a variable, for example assigning an integer to a variable that holds a string.
- **weakly typed**: as opposed to strong typing, weakly (or loosely) typed languages do not enforce the type of an object, allowing more flexibility but denying us type safety and type checking (something that TypeScript and Flow aim to improve).
- **interpreted**: its commonly known as an interpreted language, which means that it does not need a compilation stage before a program can run, as opposed to C, Java or Go for example. In practice, browsers do compile JavaScript before executing it, for performance reasons, but this is transparent to you: there is no additional step involved.
- **multi-paradigm**: the language does not enforce any particular programming paradigm, unlike Java for example which forces the use of object oriented programming, or C that forces imperative programming. You can write JavaScript using an object-oriented paradigm, using prototypes and the new (as of ES6) classes syntax. You can write JavaScript in functional programming style, with its first class functions, or even in an imperative style (C-like).

In case you're wondering, *JavaScript has nothing to do with Java*, it's a poor name choice but we have to live with it.

JavaScript versions

Let me introduce the term *ECMAScript* here. We have a complete guide dedicated to [ECMAScript](#) where you can dive into it more; but to start with, you just need to know that ECMAScript (also called ES) is the name of the JavaScript standard.

JavaScript is an implementation of that standard. That's why you'll hear about [ES6](#), [ES2015](#), [ES2016](#), [ES2017](#), [ES2018](#) and so on.

For a very long time, the version of JavaScript that all browser ran was ECMAScript 3. Version 4 was canceled due to feature creep (they were trying to add too many things at once), while ES5 was a huge version for JS.

[ES2015](#), also called [ES6](#), was huge as well.

Since then, the ones in charge decided to release one version per year, to avoid having too much time idle between releases, and have a faster feedback loop.

Currently, the latest approved JavaScript version is [ES2017](#).

ECMAScript

ECMAScript is the standard upon which JavaScript is based, and it's often abbreviated to ES. Discover everything about ECMAScript, and the last features added in ES6, 7, 8



Whenever you read about [JavaScript](#) you'll inevitably see one of these terms:

- ES3
- ES5
- ES6
- ES7
- ES8
- ES2015
- ES2016
- ES2017
- ECMAScript 2017
- ECMAScript 2016

- ECMAScript 2015

What do they mean?

They are all referring to a standard, called ECMAScript.

ECMAScript is the standard upon which JavaScript is based, and it's often abbreviated to ES.

Beside JavaScript, other languages implemented ECMAScript, including:

- ~~ActionScript~~ (the Flash scripting language), which is losing popularity since Flash will be officially discontinued in 2020
- ~~JScript~~ (the Microsoft scripting dialect); since at the time JavaScript was supported only by Netscape and the browser wars were at their peak, Microsoft had to build its own version for Internet Explorer

but of course JavaScript is the most popular and widely used implementation of ES.

Why this weird name? Ecma International is a Swiss standards association who is in charge of defining international standards.

When JavaScript was created, it was presented by Netscape and Sun Microsystems to Ecma and they gave it the name ECMA-262 alias ECMAScript.

[This press release by Netscape and Sun Microsystems](#) (the maker of Java) might help figure out the name choice, which might include legal and branding issues by Microsoft which was in the committee, [according to Wikipedia](#).

After IE9, Microsoft stopped branding its ES support in browsers as JScript and started calling it JavaScript (at least, I could not find references to it any more)

So as of 201x, the only popular language supporting the ECMAScript spec is JavaScript.

Current ECMAScript version

The current ECMAScript version is ES2018.

It was released in June 2018.

When is the next version coming out?

Historically JavaScript editions have been standardized during the summer, so we can expect ECMAScript 2019 to be released in summer 2019, but this is just speculation.

What is TC39

TC39 is the committee that evolves JavaScript.

The members of TC39 are companies involved in JavaScript and browser vendors, including Mozilla, Google, Facebook, Apple, Microsoft, Intel, PayPal, Salesforce and others.

Every standard version proposal must go through various stages, [which are explained here](#).

ES Versions

I found it puzzling why sometimes an ES version is referenced by edition number and sometimes by year, and I am confused by the year by chance being -1 on the number, which adds to the general confusion around JS/ES.

Before ES2015, ECMAScript specifications were commonly called by their edition. So ES6 is the official name for the ECMAScript specification update published in 2009.

Why does this happen? During the process that led to ES2015, the name was changed from ES6 to ES2015, but since this was done late, people still referenced it as ES6, and the community has not left the edition naming behind- *the world is still calling ES releases by edition number*.

This table should clear things a bit:

Edition	Official name	Date published
ES9	ES2019	June 2018
ES8	ES2017	June 2017
ES7	ES2016	June 2016
ES6	ES2015	June 2015
ES5.1	ES5.1	June 2011
ES5	ES5	December 2009
ES4	ES4	Abandoned
ES3	ES3	December 1999
ES2	ES2	June 1998
ES1	ES1	June 1997

ES Next

ES.Next is a name that always indicates the next version of JavaScript.

So at the time of writing, ES9 has been released, and ES.Next is ES10.

ES6

ECMAScript is the standard upon which JavaScript is based, and it's often abbreviated to ES. Discover everything about ECMAScript, and the last features added in ES6, aka ES2015.

ECMAScript 2015, also known as ES6, is a fundamental version of the ECMAScript standard.

Published 4 years after the latest standard revision, ECMAScript 5.1, it also marked the switch from edition number to year number.

So it should not be named as ES6 (although everyone calls it as such) but ES2015 instead.

ES6 was 10 years in the making, from 1989 to 2009, and as such it was also a fundamental and very important revision of the language, but now much time has passed that it's not worth discussing how pre-ES6 code evolved.

Since this long time passed between ES5.1 and ES6, the release is full of important new features and major changes in suggested best practices in developing JavaScript programs. To understand how fundamental ES2015 is, just keep in mind that with this version, the specification document went from 250 pages to ~600.

The most important changes in ES2015 include:

- [Arrow functions](#)
- [Promises](#)
- [Generators](#)
- [let and const](#)
- [Classes](#)
- [Modules](#)
- [Multiline strings](#)
- [Template literals](#)
- [Default parameters](#)
- [The spread operator](#)
- [Destructuring assignments](#)
- [Enhanced object literals](#)
- [The for...of loop](#)
- [Map and Set](#)

Each of them has a dedicated section in this article.

Arrow Functions

Arrow functions since their introduction changed how most JavaScript code looks (and works).

Visually, it's a simple and welcome change, from

```
const Foo = function() { Foo() };  
//  
|
```

to

```
const Foo = () => {  
//  
|
```

And if the function body is a one-liner, just:

```
const Foo = () => doSomething();
```

Also, if you have a single parameter, you could write

```
const Foo = param => doSomething(param)
```

This is not a breaking change, regular functions will continue to work just as before.

A new `this` scope

The `this` scope with arrow functions is inherited from the context.

With regular functions `this` always refers to the nearest function, while with arrow functions this problem is removed, and you won't need to write `var that = this` ever again.

Promises

Promises (check the [full guide to promises](#)) allow us to eliminate the famous "callback hell", although they introduce a bit more complexity (which has been solved in ES2017 with `async`, a higher level construct).

Promises have been used by JavaScript developers well before ES2015, with many different libraries/implementations (e.g. jQuery, q, deferred.js, vow.js), and the standard put a common ground across differences.

By using promises you can rewrite this code

```

setTimeout(function() {
  console.log('I decided to run after 1s')
  setTimeout(function() {
    console.log('I decided to run after 2s')
  }, 2000)
}, 1000)

```

```

//
//

```

```

const wait = () => new Promise((resolve, reject) => {
  setTimeout(resolve, 1000)
})

wait().then(() => {
  console.log('I decided to run after 1s')
  return wait()
})

.then(() => console.log('I decided to run after 2s'))

```

Generators

Generators are a special kind of function with the ability to pause itself, and resume later, allowing other code to run in the meantime.

The code decides that it has to wait, so it lets other code "in the queue" to run, and keeps the right to resume its operations "when the thing it's waiting for" is done.

All this is done with a single, simple keyword: `yield`. When a generator contains that keyword, the execution is halted.

A generator can contain many `yield` keywords, thus halting itself multiple times, and it's identified by the `function` keyword, which is not to be confused with the pointer dereference operator used in lower level programming languages such as C, C++ or Go.

Generators enable whole new paradigms of programming in JavaScript, allowing:

- 2-way communication while a generator is running
- long-lived while `loops` which do not freeze your program

Here is an example of a generator which explains how it all works:

```

function* fibonacci(n) {
  var doubleThat = 1;
  var another = yield (doubleThat);
  return (that + doubleThat + another);
}

```

We initialize it with

```
const calc = calculator(10)
```

Then we start the iterator on our generator:

```
calc.next()
```

This first iteration starts the iterator. The code returns this object:

```
{
  done: false,
  value: 5
}
```

What happens is: the code runs the function, with `input = 10` as it was passed in the generator constructor. It runs until it reaches the `yield`, and returns the content of `yield : input / 2 = 5`. So we got a value of 5, and the indication that the iteration is not done (the function is just paused).

In the second iteration we pass the value `7`:

```
calc.next(7)
```

and what we got back is

```
{
  done: false,
  value: 14
}
```

`7` was placed as the value of `doubleThat`. Important you might read like `input / 2` was the argument, but that's just the return value of the first iteration. We now skip that, and use the new input value, `7`, and multiply it by 2.

We then reach the second `yield`, and that returns `doubleThat`, so the returned value is `14`.

In the next, and last, iteration, we pass in 100

```
calc.next(100)
```

and in return we got

```

    }
    done: true
    value: 10000
  }
}

```

As the iteration is done (no more `yield` keywords found) and we just return `10000` (double that - another) which amounts to $10 \cdot 14 = 100$.

let and const

`var` is traditionally function scoped.

`let` is a new variable declaration which is block scoped.

This means that declaring `let` variables in a `for` loop, inside an `if` or in a plain block is not going to let that variable "escape" the block, while `var`'s are hoisted up to the function definition.

`const` is just like `let`, but immutable.

In JavaScript moving forward, you'll see little to no `var` declarations any more, just `let` and `const`.

`const` in particular, maybe surprisingly, is very widely used nowadays with immutability being very popular.

Classes

Traditionally JavaScript is the only mainstream language with prototype-based inheritance. Programmers switching to JS from class-based language found it puzzling, but ES2015 introduced classes, which are just syntactic sugar over the inner working, but changed a lot how we build JavaScript programs.

Now inheritance is very easy and resembles other object-oriented programming languages:

```

class Person {
  constructor(name) {
    this.name = name
  }

  hello() {
    return `HELLO, I am - ${this.name} -`
  }
}

```



```

class Actor extends Person {
  hello() {
    (console.log, hello()) => "I am an actor";
  }
}

let tomCruise = new Actor("Tom Cruise");
tomCruise.hello();

```

(the above program prints "Hello, I am Tom Cruise, I am an actor!")

Classes do not have explicit class variable declarations, but you must initialize any variable in the constructor.

Constructor

Classes have a special method called `constructor` which is called when a class is initialized via `new`.

Super

The parent class can be referenced using `super()`.

Getters and setters

A getter for a property can be declared as:

```

class Person {
  get fullName() {
    return `${this.firstName} ${this.lastName}`;
  }
}

```

Setters are written in the same way:

```

class Person {
  set age(years) {
    this.theAge = years;
  }
}

```

Modules

Before ES2015, there were at least 3 major modules competing standards, which fragmented the community:

- AMD
- RequireJS
- CommonJS

ES2015 standardized these into a common format.

Importing modules

Importing is done via the `import ... from ...` construct:

```
import { myModule };
import React from 'react';
import { React, Component } from 'react';
import React as MyLibrary from 'react';
```

Exporting modules

You can write modules and export anything to other modules using the `export` keyword:

```
export var foo = 1;
export function bar() { return 100; }
```

Template Literals

Template literals are a new syntax to create strings:

```
const string = `a string`;
```

They provide a way to embed expressions into strings, effectively interpolating the values, by using the `${a_variable}` syntax:

```
const var = 'test';
const string = `const ${var} / / const string test`;
```

You can perform more complex expressions as well:

```
const string = `const ${1 + 2 + 2}`;
const string2 = `const ${true} + 'a' = 'a'`;
```

and strings can span over multiple lines

```
const strings = [
  'hi!',
  'hello!',
  'bye!',
  'goodbye!'
];
```

Compare how we used to do multiline strings pre-E62015

Monday: 1st
 Tuesday: 2nd
 Wednesday: 3rd

[See this post for an in-depth guide on template literals](#)

Default parameters

Functions now support default parameters:

```

c++11 Foo::Foo(){} //OK = 0, call Foo::Foo() { } == { }
Foo { }

```

The spread operator

You can expand an array, an object or a string using the spread operator ...

Lets start with an array example. Given

Cont. 2-12, cont.

you can create a new array using

You can also create a copy of an array using

Volume 4, Number 1

This works for objects as well. Clone an object with

```
const odd001 = [...odd000, 1]
```

Using strings, the spread operator creates an array with each char in the string:

```
const key = "key"
const arrayized = [...key] // ['k', 'e', 'y']
```

This operator has some pretty useful applications. The most important one is the ability to use an array as function argument in a very simple way:

```
const f = (foo, bar) => {}
const a = [3, 2]
f(...a)
```

(in the past you could do this using `f.apply(null, a)` but that's not as nice and readable)

Destructuring assignments

Given an object, you can extract just some values and put them into named variables:

```
const person = {
  firstName: 'Jon',
  lastName: 'Doe',
  actor: true,
  age: 30, // hide it!
}

const {firstName: name, age} = person
```

`name` and `age` contain the desired values

The syntax also works on arrays:

```
const a = [1, 2, 3, 4, 5]
[first, second, ..., fifth] = a
```

Enhanced Object Literals

In ES2015 Object Literals gained superpowers.

Simpler syntax to include variables

Instead of doing

```
const something = {y: 'y'}
const x = {}
something = something
}
```

you can do

```
const something = {y: 'y'}
const x = {}
something
```

Prototype

A prototype can be specified with

```
const anObject = {y: 'y'}
const x = {}
__proto__: anObject
}
```

super()

```
const anObject = {y: 'y', test: () => 'zoo'}
const x = {}
__proto__: anObject
test() {
  return super.test() + 'y'
}
x.test() // zoo
```

Dynamic properties

```
const x = {
  [Symbol()]: 'y'
}
x[Symbol()] // y
```

For-of loop

ES5 back in 2009 introduced `forEach()` loops. While nice, they offered no way to break, like `for` loops always did.

ES2015 introduced the `for-of` loop, which combines the conciseness of `forEach` with the ability to break:

```
//Iterate over the values
for (const V of ['a', 'b', 'c']) {
  console.log(V);
}

//Get the index as well, using .entries()
for (const [i, V] of ['a', 'b', 'c'].entries()) {
  console.log(i, V);
}
```

Map and Set

`Map` and `Set` (and their respective garbage collected `WeakMap` and `WeakSet`) are the official implementations of two very popular data structures.

ES2016

ECMAScript is the standard upon which JavaScript is based, and it's often abbreviated to ES. Discover everything about ECMAScript, and the last features added in ES2016, aka ES7.

ES7, officially known as ECMAScript 2016, was finalized in June 2016.

Compared to ES6, ES7 is a tiny release for JavaScript, containing just two features:

- `Array.prototype.includes()`
- Exponentiation Operator

`Array.prototype.includes()`

This feature introduces a more readable syntax for checking if an array contains an element.

With ES6 and lower, to check if an array contained an element you had to use `indexOf`, which checks the index in the array, and returns `-1` if the element is not there.

Since `-1` is evaluated as a true value, you could not do for example

```
if ([1,2,3].indexOf(3)) {
  console.log('not found')
}
```

With this feature introduced in ES7 we can do

```
if ([1,2,3].includes(3)) {
  console.log('not found')
}
```

Exponentiation Operator

The exponentiation operator `**` is the equivalent of `Math.pow()`, but brought into the language instead of being a library function.

```
Math.pow(2, 3) == 2 ** 3
```

This feature is a nice addition for math-intensive JS applications:

The `--` operator is standardized across many languages including Python, Ruby, MATLAB, Lua, Perl and many others.

ES2017

ECMAScript is the standard upon which JavaScript is based, and it's often abbreviated to ES. Discover everything about ECMAScript, and the last features added in ES2017, aka ES8.

ECMAScript 2017, edition 8 of the ECMA-262 Standard (also commonly called ES2017 or ES8), was finalized in June 2017.

Compared to ES6, ES8 is a tiny release for JavaScript, but still it introduces very useful features:

- String padding
- Object values
- Object entries
- Object.getOwnPropertyDescriptors()
- Trailing commas in function parameter lists and calls
- Async functions
- Shared memory and atomics

String padding

The purpose of string padding is to add characters to a string, so it reaches a specific length.

ES2017 introduces two string methods: `padStart()` and `padEnd()`.

```
padStart(targetLength [, padString])
padEnd(targetLength [, padString])
```

Sample usage:

padStart()	
'test'.padStart(4)	'test'
'test'.padStart(5)	'_test'
'test'.padStart(8)	'____test'
'test'.padStart(8, 'abcd')	'abcdtest'
padEnd()	
'test'.padEnd(4)	'test'

<code>'test'.padEnd(5)</code>	<code>'test_'</code>
<code>'test'.padEnd(8)</code>	<code>'test___'</code>
<code>'test'.padEnd(8, 'abcd')</code>	<code>'testabcd'</code>

(In the table, `_` = space)

Object.values()

This method returns an array containing all the object own property values.

Usage:

```
const person = { name: 'Fred', age: 37 }
Object.values(person) // [[ 'Fred', 37 ]]
```

`Object.values()` also works with arrays:

```
const people = [ 'Fred', 'Tom' ]
Object.values(people) // [ 'Fred', 'Tom' ]
```

Object.entries()

This method returns an array containing all the object own properties, as an array of `[key, value]` pairs.

Usage:

```
const person = { name: 'Fred', age: 37 }
Object.entries(person) // [[ 'name', 'Fred'], ['age', 37 ]]
```

`Object.entries()` also works with arrays:

```
const people = [ 'Fred', 'Tom' ]
Object.entries(people) // [[ 0, 'Fred'], [ 1, 'Tom' ]]
```

getOwnPropertyDescriptors()

This method returns all own (non-inherited) properties descriptors of an object.

Any object in JavaScript has a set of properties, and each of these properties has a descriptor.

A descriptor is a set of attributes of a property, and it's composed by a subset of the following:

- **value**: the value of the property
- **writable**: true if the property can be changed
- **get**: a getter function for the property, called when the property is read
- **set**: a setter function for the property, called when the property is set to a value
- **configurable**: if false, the property cannot be removed nor any attribute can be changed, except its value
- **enumerable**: true if the property is enumerable

`Object.getOwnPropertyDescriptors(obj)` accepts an object and returns an object with the set of descriptors.

In what way is this useful?

ES2015 gave us `Object.assign()`, which copies all enumerable own properties from one or more objects, and return a new object.

However there is a problem with that, because it does not correctly copies properties with non-default attributes.

If an object for example has just a setter, it's not correctly copied to a new object, using

`Object.assign()`.

For example with:

```
const person1 = {
  set name(newValue) {
    console.log(newValue)
  }
}
```

This won't work:

```
const person2 = {}
Object.assign(person2, person1)
```

But this will work:

```
const person3 = {}
Object.defineProperty(person3, 'name', Object.getPrototypeOf(person1).getOwnPropertyDescriptor('name'))
```

As you can see with a simple console test:

```
person1.name = 'a'
```

```

const obj = {
  person2: { name: 'A' },
  person3: { name: 'B' },
};

```

`person2` misses the setter, it was not copied over.

The same limitation goes for shallow cloning objects with `Object.create()`.

Trailing commas

This feature allows to have trailing commas in function declarations, and in functions calls.

```

const doSomething = (var1, var2) => {
  // ...
}

doSomething('test1', 'test2')

```

This change will encourage developers to stop the ugly "comma at the start of the line" habit.

Async functions

Check the dedicated post about [async/await](#).

ES2017 introduced the concept of async functions, and it's the most important change introduced in this ECMAScript edition.

Async functions are a combination of promises and generators to reduce the boilerplate around promises, and the "don't break the chain" limitation of chaining promises.

Why they are useful

It's a higher level abstraction over promises.

When Promises were introduced in ES2015, they were meant to solve a problem with asynchronous code, and they did, but over the 2 years that separated ES2015 and ES2017, it was clear that *promises could not be the final solution*. Promises were introduced to solve the famous *callback hell* problem, but they introduced complexity on their own, and syntax complexity. They were good primitives around which a better syntax could be exposed to the developers: enter async functions.

A quick example

Code making use of asynchronous functions can be written as:

```
function doSomethingAsync() {
  return new Promise(resolve => {
    setTimeout(() => resolve('I did something'), 3000)
  })
}

async function doSomething() {
  console.log(await doSomethingAsync())
}

console.log('Before')
doSomething()
console.log('After')
```

The above code will print the following to the browser console:

```
Before
After
I did something //after 3s
```

Multiple async functions in series

Async functions can be chained very easily, and the syntax is much more readable than with plain promises:

```
function doSomethingAsync() {
  return new Promise(resolve => {
    setTimeout(() => resolve('I did something'), 3000)
  })
}

async function watchSomeoneDoingSomething() {
  const something = await Promise.resolve(something)
  return something + ' and I watched'
}

async function watchSomeoneWatchingSomeoneDoingSomething() {
  const something = await watchSomeoneDoingSomething()
  return something + ' and I watched as well'
}

watchSomeoneWatchingSomeoneDoingSomething().then(res => {
  console.log(res)
})
```

Shared Memory and Atomics

`WebWorkers` are used to create multithreaded programs in the browser.

They offer a messaging protocol via events. Since ES2017, you can create a shared memory array between `webworkers` and their creator, using a `sharedArrayBuffer`.

Since it's unknown how much time writing to a shared memory portion takes to propagate, `Atomics` are a way to enforce that when reading a value, any kind of writing operation is completed.

Any more detail on this can be found in the [spec proposal](#), which has since been implemented.

ES2018

ECMAScript is the standard upon which JavaScript is based, and it's often abbreviated to ES. Discover everything about ECMAScript, and the last features added in ES2018, aka ES9

ES2018 is the latest version of the [ECMAScript](#) standard.

What are the new things introduced in it?

Rest/Spread Properties

ES8 introduced the concept of a rest element when working with array destructuring:

```
const numbers = [1, 2, 3, 4, 5]
[first, second, ...others] = numbers
```

and spread elements:

```
const numbers = [1, 2, 3, 4, 5]
const sum = (a, b, c, d, e) => a + b + c + d + e
const sum = sum(...numbers)
```

ES2018 introduces the same but for objects.

Rest properties

```
const { first, second, ...others } = { first: 1, second: 2, third: 3, fourth: 4, fifth: 5 }

first // 1
second // 2
others // { third: 3, fourth: 4, fifth: 5 }
```

Spread properties allow to create a new object by combining the properties of the object passed after the spread operator:

```
const items = { first, second, ...others }
items // { first: 1, second: 2, third: 3, fourth: 4, fifth: 5 }
```

Asynchronous iteration

The new construct `for-await-of` allows you to use an async iterable object as the loop iteration.

```
for await (const line of readLines(fileName)) {
  console.log(line)
}
```

Since this uses `await`, you can use it only inside `async` functions, like a normal `await` (see [async/await](#)).

Promise.prototype.finally()

When a promise is fulfilled, successfully it calls the `then()` methods, one after another.

If something fails during this, the `then()` methods are jumped and the `catch()` method is executed.

`finally()` allow you to run some code regardless of the successful or not successful execution of the promise:

```
fetch('file.json')
  .then(data => data.json())
  .catch(error => console.error(error))
  .finally(() => console.log('finished'))
```

Regular Expression improvements

RegExp lookahead assertions: match a string depending on what precedes it

This is a lookahead: you use `<=>` to match a string that's followed by a specific substring:

```
/Roger(?=waters)/
/roger(<=>waters)/.test('Roger is my dog') //false
/roger(<=>waters)/.test('Roger is my dog and Roger Waters is a famous musician') //true
```

`<?!>` performs the inverse operation, matching if a string is not followed by a specific substring:

```
/Roger(?!waters)/
/roger(<?!waters)/.test('Roger is my dog') //true
/roger(<?!waters)/.test('Roger Waters is a famous musician') //false
```


Lookaheads use the `>` symbol. They were already available:

Lookbehinds, a new feature, uses `<`:

```
//<=>Roger Waters/
//<=>Roger Waters/ test('Riv Waters is my dog') //false
//(<=>Roger) Waters/ test('Roger is my dog and Roger Waters is a famous musician') //true
```

A lookbehind is negated using `<=>`:

```
//<=>Roger Waters/
//<=>Roger Waters/ test('Riv Waters is my dog') //true
//(<=>Roger) Waters/ test('Roger is my dog and Roger Waters is a famous musician') //false
```

Unicode property escapes `\p{...}` and `\P{...}`

In a regular expression pattern you can use `\d` to match any digit, `\s` to match any character that's not a white space, `\w` to match any alphanumeric character, and so on.

This new feature extends this concept to all Unicode characters, introducing `\p{...}` and its negation `\P{...}`.

Any [unicode](#) character has a set of properties. For example `script` determines the language family, `ascii` is a boolean that's true for ASCII characters, and so on. You can put this property in the graph parentheses, and the regex will check for that to be true:

```
//\p{ASCII}=3/u test('abc') //
//\p{ASCII}=3/u test('ABC') //
//\p{ASCII}=3/u test('123') //
```

`ASCII_Hex_Digit` is another boolean property, that checks if the string only contains valid hexadecimal digits:

```
//\p{ASCII_Hex_Digit}=3/u test('0123456789ABCDEF') //
//\p{ASCII_Hex_Digit}=3/u test('x')
```

There are many other boolean properties, which you just check by adding their name in the graph parentheses, including `Uppercase`, `Lowercase`, `White_Space`, `Alphabetic`, `Emoji` and more:

```
//\p{Lowercase}=3/u test('a') //
//\p{Uppercase}=3/u test('A') //
```

```

/^\p{Bidi}=$/u.test('') //
/^\p{Bidi}=$/u.test(' ') //

```

In addition to those binary properties, you can check any of the unicode character properties to match a specific value. In this example, I check if the string is written in the greek or latin alphabet:

```

/^\p{Script=Greek}=$/u.test('ἑλλάς') //
/^\p{Script=Latin}=$/u.test('hell') //

```

Read more about all the properties you can use [directly on the proposal](#).

Named capturing groups

In ES2018 a [capturing group](#) can be assigned to a name, rather than just being assigned a slot in the result array:

```

const re = /(?<year>\d{4})-(?<month>\d{2})-(?<day>\d{2})/
const result = re.exec('2015-01-01')

// result.groups.year === '2015'
// result.groups.month === '01'
// result.groups.day === '01'

```

The `s` flag for regular expressions

The `s` flag, short for *single line*, causes the `.` to match new line characters as well. Without it, the dot matches regular characters but not the new line.

```

/hi.welcome/.test('hi\nwelcome') // false
/hi.welcome/s.test('hi\nwelcome') // true

```

Coding style

This JavaScript Coding Style is the set of conventions I use every day when using JavaScript. It's a live document, with the main set of rules I follow

A coding style is an agreement with yourself and your team, to keep consistency on a project.

And if you don't have a team, it's an agreement with you, to always keep your code up to your standards.

Having fixed rules on your code writing format helps a lot in order to have a more readable and managed code.

Popular Style Guides

There are a quite a few of them around, here are the 2 most common ones in the JavaScript world:

- [The Google JavaScript Style Guide](#)
- [The Airbnb JavaScript Style Guide](#)

It's up to you to follow one of those, or create your own style guide.

Be consistent with the project you work on

Even if you prefer a set of styles, when working on a project you should use that project style.

An Open Source project on GitHub might follow a set of rules, another project you work on with a team might follow an entirely different one.

[Prettier](#) is an awesome tool that enforces code formatting, use it.

My own preferences

My own take on JavaScript style is:

Always use the latest ES version. Use Babel if old browser support is necessary.

Indentation: use spaces instead of tabs, indent using 2 spaces.

Semicolons: don't use semicolons.

Line length: try to put lines at 80 chars, if possible.

Inline Comments: use inline comments in your code. Use block comments only to document.

No dead code: Don't leave old code commented, "just in case" it will be useful later. Keep only the code you need now, version control/your notes app is meant for this.

Only comment when useful: Don't add comments that don't help understand what the code is doing. If the code is self-explaining through the use of good variable and function naming, and JSDoc function comments, don't add a comment.

Variable declarations: always declare variables to avoid polluting the global object. Never use `var`. Default to `const`, only use `let` if you reassign the variable.

Constants: declare all constants in CAPS. Use `_` to separate words in a `VARIABLE_NAME`.

Functions: use arrow functions unless you have a specific reason to use regular functions, like in object methods or constructors, due to how `this` works. Declare them as `const`, and use implicit returns if possible.

```
const test = (a, n) => a + n;

const another = a => a + 1;
```

Feel free to use nested functions to hide helper functions to the rest of the code.

Names: function names, variable names and method names always start with a lowercase letter (unless you identify them as private, read below), and are camelCased. Only constructor functions and class names should start capitalized. If you use a framework that requires specific conventions, change your habits accordingly. File names should all be lowercase, with words separated by `-`.

Statement-specific formats and rules:

`if`

```
if (condition) {
  statements
}

if (condition) {
  statements;
} else {
  statements;
}

if (condition) {
  statements;
} else if (condition) {
```

```

    statements
  } else {
    statements
  }

```

for

Always initialize the length in the initialization to cache it, don't insert it in the condition.

Avoid using `for in` except with used in conjunction with `hasOwnProperty()`. Prefer `for of` (see [JavaScript Loops](#)).

```

for (initialization; condition; update) {
  statements
}

```

while

```

while (condition) {
  statements
}

```

do

```

do {
  statements
} while (condition);

```

switch

```

switch (expression) {
  case expression:
    statements
  default:
    statements
}

```

try

```

try {
  statements
} catch (variable) {
  statements
}

try {
  statements
} catch (variable) {

```

```

statements
{
    ...
    statements
}

```

Whitespace: use whitespace wisely to improve readability; put a whitespace after a keyword followed by a `{`; before & after a binary operation (`+`, `*`, `/`, `-`, `&&`, `&`); inside the `for` statement, after each `,` to separate each part of the statement; after each `,`.

Newlines: use new lines to separate blocks of code that perform logically related operations.

Quotes: favor single quotes `'` instead of double quotes `"`. Double quotes are a standard in HTML attributes, so using single quotes helps remove problems when dealing with HTML strings. Use `<template literal>` when appropriate instead of variable interpolation.

Lexical Structure

A deep dive into the building blocks of JavaScript: unicode, semicolons, white space, case sensitivity, comments, literals, identifiers and reserved words.

Unicode

JavaScript is written in [Unicode](#). This means you can use Emojis as variable names, but more importantly, you can write identifiers in any language, for example Japanese or Chinese, [with some rules](#).

Semicolons

JavaScript has a very C-like syntax, and you might see lots of code samples that feature semicolons at the end of each line:

Semicolons aren't mandatory, and JavaScript does not have any problem in code that does not use them, and lately many developers, especially those coming from languages that do not have semicolons, started avoiding using them.

You just need to avoid doing strange things like typing statements on multiple lines

```
var a = 1;
var a;
```

or starting a line with parentheses (`{` or `}`) and you'll be safe 99.9% of the times (and your linter will warn you).

It goes to personal preference, and lately I have decided to never add useless semicolons, so on this site you'll never see them.

White space

JavaScript does not consider white space meaningful. Spaces and line breaks can be added in any fashion you might like, even though this is *in theory*.

In practice, you will most likely keep a well defined style and adhere to what people commonly use, and enforce this using a linter or a style tool such as [Prettier](#).

For example I like to always 2 characters to indent

Case sensitive

JavaScript is case sensitive. A variable named `something` is different from `Something`.

The same goes for any identifier.

Comments

You can use two kind of comments in JavaScript:

```
//
```

```
/*
```

The first can span over multiple lines and needs to be closed:

The second comments everything that's on its right, on the current line.

Literals and Identifiers

We define as **literal** a value that is written in the source code, for example a number, a string, a boolean or also more advanced constructs, like **Object Literals** or **Array Literals**:

```

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
25
```


The dollar sign is commonly used to reference [DOM](#) elements.

Reserved words

You can't use as identifiers any of the following words:

```
break
do
instanceof
typeof
case
else
for
new
catch
finally
return
void
continue
for
switch
while
debugger
function
int
let
null
parseFloat
if
throw
delete
in
try
class
enum
extends
super
const
export
import
implements
let
abstract
async
await
yield
```

because they are reserved by the language.

Variables

A variable is a literal assigned to an identifier, so you can reference and use it later in the program. Learn how to declare one with JavaScript

Introduction to JavaScript Variables

A variable is a literal assigned to an identifier, so you can reference and use it later in the program.

Variables in [JavaScript](#) do not have any type attached. Once you assign a specific literal type to a variable, you can later reassign the variable to host any other type, without type errors or any issue.

This is why JavaScript is sometimes referenced as "untyped".

A variable must be declared before you can use it. There are 3 ways to do it, using `var`, `let` or `const`, and those 3 ways differ in how you can interact with the variable later on:

Using `var`

Until ES2015, `var` was the only construct available for defining variables:

```
var a = 1
```

If you forget to add `var`, you will be assigning a value to an undeclared variable, and the results might vary.

In modern environments, with strict mode enabled, you will get an error. In older environments (or with strict mode disabled) this will simply initialize the variable and assign it to the global object.

If you don't initialize the variable when you declare it, it will have the `undefined` value until you assign a value to it.

```
var a; // undefined, because "a" does not exist
```

You can redeclare the variable many times, overriding it:

```
var a = 1
```

```
var a = 1
```

You can also declare multiple variables at once in the same statement:

```
var a = 1, b = 2
```

The **scope** is the portion of code where the variable is visible.

A variable initialized with `var` outside of any function is assigned to the global object, has a global scope and is visible everywhere. A variable initialized with `var` inside a function is assigned to that function, its local and is visible only inside it, just like a function parameter.

Any variable defined into a function with the same name of a global variable takes precedence over the global variable, shadowing it.

It's important to understand that a block (identified by a pair of curly braces) does not define a new scope. A new scope is only created when a function is created, because `var` has not block scope, but function scope.

Inside a function, any variable defined in it is visible throughout all the function code, even if the variable is declared at the end of the function it can still be referenced in the beginning, because JavaScript before executing the code actually moves all variables on top (something that is called **hoisting**). To avoid confusion, always declare variables at the beginning of a function.

Using `let`

`let` is a new feature introduced in ES2015 and it's essentially a block-scoped version of `var`. Its scope is limited to the block, statement or expression where it's defined, and all the contained inner blocks.

Modern JavaScript developers might choose to only use `let` and completely discard the use of `var`.

```
// If let seems an obscure term, just read: let color = 'red'; // let the color be red and  
// all has much more sense
```

Defining `let` outside of any function - contrary to `var` - does not create a global variable:

Using `const`

Variables declared with `var` or `let` can be changed later on in the program, and reassigned. A once a `const` is initialized, its value can never be changed again, and it can't be reassigned to a different value.

```
const a = 'test';
```

We can't assign a different literal to the `a` `const`. We can however mutate `a` if it's an object that provides methods that mutate its contents.

`const` does not provide immutability, just makes sure that the reference can't be changed.

`const` has block scope, same as `let`.

Modern JavaScript developers might choose to always use `const` for variables that don't need to be reassigned later in the program.

Why? Because one should always use the simplest constraint available to avoid making errors down the road.

Types

You might sometimes read that JS is untyped, but that's incorrect. It's true that you can assign all sorts of different types to a variable, but JavaScript has types. In particular, it provides primitive types, and object types.

Primitive types

Primitive types are

- Numbers
- Strings
- Booleans

And two special types:

- null
- undefined


Let's see them in detail in the next sections.

Numbers


Internally, JavaScript has just one type for numbers: every number is a float.

A numeric literal is a number represented in the source code, and depending on how it's written, it can be an integer literal or a floating point literal.

Integers:

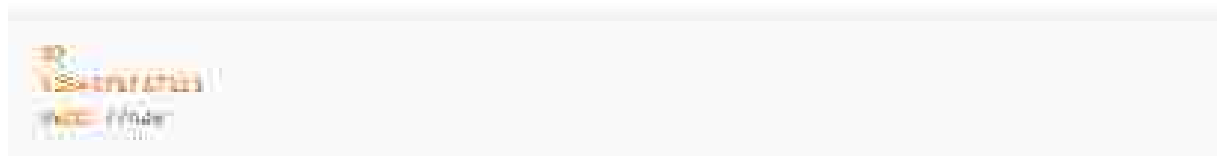

Floats:

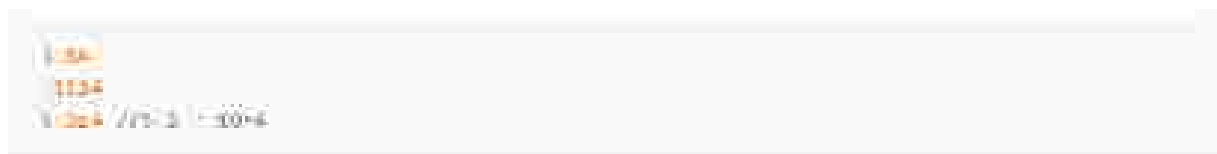

Strings

A string type is a sequence of characters. It's defined in the source code as a string literal, which is enclosed in quotes or double quotes.

```
"A string"  
"Another string"
```

Strings can span across multiple lines by using the backslash.

```
"A \\  
string"
```

A string can contain escape sequences that can be interpreted when the string is printed, like `\n` to create a new line. The backslash is also useful when you need to enter, for example, a quote in a string enclosed in quotes, to prevent the char to be interpreted as a closing quote:

```
"It's a developer"
```

Strings can be joined using the `+` operator:

```
"A" + " string"
```

Template strings

Introduced in ES2015, template strings are string literals that allow a more powerful way to define strings.

```
`A string`
```

You can perform string substitution, embedding the result of any JS expression:

```
`A string with ${someVar}`  
`A string with: ${someVar} - another string ${E144}`  
`A string with: ${1000 / 1000} and 42`
```

You can have multiline strings easily:

```
`A string  
with  
${someVar}`
```


Booleans

JavaScript defines two reserved words for booleans: `true` and `false`. Many comparison operations: `==`, `===`, `<`, `>` (and so on) return either one or the other.

`if`, `while` statements and other control structures use booleans to determine the flow of the program.

They don't just accept `true` or `false`, but also accept `truthy` and `falsey` values.

False values, values interpreted as false, are

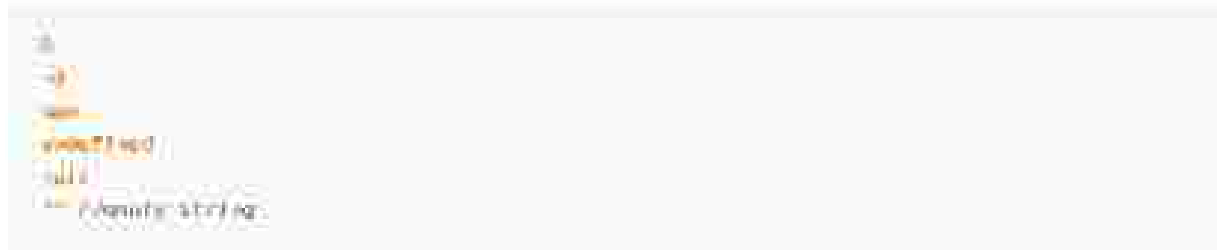

All the rest is considered a `truthy` value.

null

`null` is a special value that indicates the absence of a value.

It's a common concept in other languages as well, can be known as `nil` or `none`. In Python, for example.

undefined

`undefined` indicates that a variable has not been initialized and the value is absent.

It's commonly returned by functions with no `return` value. When a function accepts a parameter but that's not set by the caller, it's `undefined`.

To detect if a value is `undefined`, you use the construct

```
typeof variable === 'undefined'
```

Object types

Anything that's not a primitive type is an object type.

Functions, arrays and what we call objects are object types. They are special on their own, but they inherit many properties of objects, like having properties and also having methods that can act on those properties.

Expressions

Expressions are units of code that can be evaluated and resolve to a value. Expressions in JS can be divided in categories.

Arithmetic expressions

Under this category go all expressions that evaluate to a number:

```
1 / 2
3 - 4
4 * 5
1 + 2
```

String expressions

Expressions that evaluate to a string:

```
'a' - 'string'
'a' -> 'string'
```

Primary expressions

Under this category go variable references, literals and constants:

```
1
0.5
'constant'
true
false
this //the current object
undefined
//check if is a variable, or a constant
```

but also some language keywords:

```
function
class
function //the generator function
yield //the generator subexpression
yield //delegate to another generator or iterator
```

```

//array function //array function declaration
//arr //array function implementation for sum of arr
//return //return
// //printing

```

Array and object initializers expressions

```

// //array & object
// //object {a:1,b:2}
// {a:1,b:2}
// {a:1,b:2}
// {a:1,b:2}

```

Logical expressions

Logical expressions make use of logical operators and resolve to a boolean value:

```

a && b
a || b
!a

```

Left-hand-side expressions

```

new //create an instance of a constructor
super //calls the super constructor
//obj //expression using the super constructor

```

Property access expressions

```

object.property //reference a property (or method) of an object
object[property]
object["property"]

```

Object creation expressions

```

new object()
new a()
new Rectangle("name", 1, {a: +1})

```

Function definition expressions

```
function() {}  
function(a, b) { return a * b; }  
(a, b) => a * b  
a => a * 2  
(1) => { return 1 }
```

Invocation expressions

The syntax for calling a function or method

```
a.x()   
window.resize()
```

Prototypal inheritance

JavaScript is quite unique in the popular programming languages landscape because of its usage of prototypal inheritance. Let's find out what that means

JavaScript is quite unique in the popular programming languages landscape because of its usage of prototypal inheritance.

While most object-oriented languages use a class-based inheritance model, JavaScript is based on the prototype inheritance model.

What does this mean?

Every single JavaScript object has a property, called `__proto__`, which points to a different object.

This different object is the object prototype.

Our object uses that object prototype to inherit properties and methods.

Say you have an object created using the object literal syntax:

```
const car = {}
```

or one created with the `new object` syntax:

```
const car = new Object()
```

in any case, the prototype of `car` is `Object`:

If you initialize an array, which is an object:

```
const list = []  
//or  
const list = new Array()
```


the prototype is `Array`.

You can verify this by checking the `__proto__` getter:

```
car.__proto__ => Object.prototype //true  
car.__proto__ => new Object().__proto__ //true  
list.__proto__ => Object.prototype //false  
list.__proto__ => Array.prototype //true  
list.__proto__ => new Array().__proto__ //true
```

I use the `__proto__` property here, which is non-standard but widely implemented in browsers. A more reliable way to get a prototype is to use `Object.getPrototypeOf()` (see [MDN](#)).

All the properties and methods of the prototype are available to the object that has that prototype:

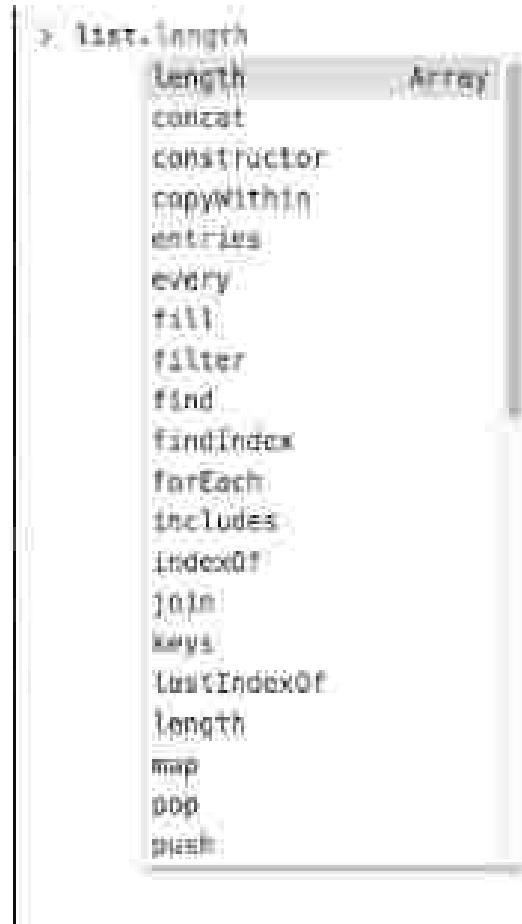

`Object.prototype` is the base prototype of all the objects:

```
Object.prototype.__proto__ => Object.prototype
```

If you wonder what's the prototype of the `Object.prototype`, there is no prototype. It's a special snowflake.

The above example you saw is an example of the prototype chain at work.

I can make an object that extends `Array` and any object I instantiate using it, will have `Array` and `Object` in its prototype chain and inherit properties and methods from all the ancestors:

In addition to using the `new` operator to create an object, or using the literals syntax for objects and arrays, you can instantiate an object using `Object.create()`:

The first argument passed is the object used as prototype:

```
const car = Object.create({})  
const list = Object.create(Array)
```

You can check the prototype of an object using the `isPrototypeOf()` method:

```
Array.isPrototypeOf(list) // true
```

Pay attention because you can instantiate an array using

```
const list = Object.create(Array.prototype)
```

and in this case `Array.isPrototypeOf(list)` is false, while
`Array.prototype.isPrototypeOf(list)` is true.

Classes

In 2015 the ECMAScript 6 (ES6) standard introduced classes. Learn all about them.

In 2015 the ECMAScript 6 (ES6) standard introduced classes.

Before that, JavaScript only had a quite unique way to implement inheritance. Its [prototypal inheritance](#), while in my opinion great, was different from any other popular programming language.

People coming from Java or Python or other languages had a hard time understanding the intricacies of prototypal inheritance, so the ECMAScript committee decided to introduce a syntactic sugar on top of them, and resemble how classes-based inheritance works in other popular implementations.

This is important: JavaScript under the hood is still the same, and you can access an object prototype in the usual way.

A class definition

This is how a class looks:

```
class Person {
  constructor(name) {
    this.name = name
  }

  hello() {
    return `Hello, I am ${this.name}`
  }
}
```

A class has an identifier, which we can use to create new objects using `new ClassIdentifier()`.

When the object is initialized, the `constructor` method is called, with any parameters passed.

A class also has as many methods as it needs. In this case `hello` is a method and can be called on all objects derived from this class.

```
const Flavio = new Person('Flavio')
Flavio.hello()
```


Classes inheritance

A class can extend another class, and objects initialized using that class inherit all the methods of both classes.

If the inherited class has a method with the same name as one of the classes higher in the hierarchy, the closest method takes precedence:

```
class Programmer extends Person {
  hello() {
    return super.hello() + " I am a programmer."
  }
}

const Flavio = new Programmer('Flavio')
Flavio.hello()
```

(the above program prints *"Hello, I am Flavio. I am a programmer."*)

Classes do not have explicit class variable declarations, but you must initialize any variable in the constructor.

Inside a class, you can reference the parent class calling `super()`.

Static methods

Normally methods are defined on the instance, not on the class.

Static methods are executed on the class instead:

```
class Person {
  static genericHello() {
    return 'hello'
  }
}

Person.genericHello() // hello
```

Private methods

JavaScript does not have a built-in way to define private or protected methods.

There are workarounds, but I won't describe them here.

Getters and setters

You can add methods prefixed with `get` or `set` to create a getter and setter, which are two different pieces of code that are executed based on what you are doing: accessing the variable, or modifying its value.

```
class Person {
  constructor(name) {
    this.name = name
  }

  set name(value) {
    this.name = value
  }

  get name() {
    return this.name
  }
}
```

If you only have a getter, the property cannot be set, and any attempt at doing so will be ignored:

```
class Person {
  constructor(name) {
    this.name = name
  }

  get name() {
    return this.name
  }
}
```

If you only have a setter, you can change the value but not access it from the outside:

```
class Person {
  constructor(name) {
    this.name = name
  }

  set name(value) {
    this.name = value
  }
}
```


Exceptions

When the code runs into an unexpected problem, the JavaScript idiomatic way to handle this situation is through exceptions

When the code runs into an unexpected problem, the JavaScript idiomatic way to handle this situation is through exceptions.

Creating exceptions

An exception is created using the `throw` keyword:

```
throw value
```

where `value` can be any JavaScript value including a string, a number or an object.

As soon as JavaScript executes this line, the normal program flow is halted and the control is held back to the nearest exception handler.

Handling exceptions

An exception handler is a `try / catch` statement.

Any exception raised in the lines of code included in the `try` block is handled in the corresponding `catch` block:

```
try {  
  // lines of code  
} catch (e) {  
  //  
}
```

 in this example is the exception value.

You can add multiple handlers that can catch different kinds of errors:

finally

To complete this statement JavaScript has another statement called `finally`, which contains code that is executed regardless of the program flow, if the exception was handled or not, if there was an exception or if there wasn't:

```
try {
  //lines of code
} catch (e) {}
finally {}
}
```

You can use `finally` without a `catch` block, to serve as a way to clean up any resource you might have opened in the `try` block, like files or network requests:

```
try {
  //lines of code
} finally {}
}
```

Nested try blocks

`try` blocks can be nested, and an exception is always handled in the nearest catch block:

```
try {
  //lines of code

  try {
    //inner lines of code
  } finally {}
  //outer lines of code
}
} catch (e) {}
}
```

If an exception is raised in the inner `try`, it's handled in the outer `catch` block.

Semicolons

JavaScript semicolons are optional. I personally like avoiding using semicolons in my code, but many people prefer them.

Semicolons in JavaScript divide the community. Some prefer to use them always, no matter what. Others like to avoid them.

After using semicolons for years, in the fall of 2017 I decided to try avoiding them as needed, and I did set up Prettier to automatically remove semicolons from my code, unless there is a particular code construct that requires them.

Now I find it natural to avoid semicolons; I think the code looks better and it's cleaner to read.

This is all possible because JavaScript does not strictly require semicolons. When there is a place where a semicolon was needed, it adds it behind the scenes.

The process that does this is called Automatic Semicolon Insertion.

It's important to know the rules that power semicolons, to avoid writing code that will generate bugs because does not behave like you expect.

The rules of JavaScript Automatic Semicolon Insertion

The JavaScript parser will automatically add a semicolon when, during the parsing of the source code, it finds these particular situations:

1. when the next line starts with code that breaks the current one (code can span on multiple lines)
2. when the next line starts with a `}`, closing the current block
3. when the end of the source code file is reached
4. when there is a `return` statement on its own line
5. when there is a `break` statement on its own line
6. when there is a `throw` statement on its own line
7. when there is a `continue` statement on its own line

Examples of code that does not do what you think

Based on those rules, here are some examples:

Take this

```
const key = 'key'
const you = 'you'
const keyYou = key + ' ' + you

['key', 'you'].forEach((letter) => console.log(letter))
```

You'll get the error `Uncaught TypeError: Cannot read property 'forEach' of undefined` because based on rule 1 JavaScript tries to interpret the code as

```
const key = 'key'
const you = 'you'
const keyYou = key + ' ' + you
['key', 'you'].forEach((letter) => console.log(letter))
```

Such piece of code:

```
(a = a).toString()
```

prints `NaN`

```
const a = 1
const b = 2
const c = a + b
(a = a).toString()
```

instead raises a `TypeError: a is not a function` exception, because JavaScript tries to interpret it as

```
const a = 1
const b = 2
const c = a + b(a = a).toString()
```

Another example Based on rule 4:

```
{() => {
  return
}}
console.log(1+1)
()
```

You'd expect the return value of this immediately-invoked function to be an object that contains the `color` property, but it's not. Instead, it's `undefined`, because JavaScript inserts a semicolon after `return`.

Instead you should put the opening bracket right after `return`:

```
((() => {
  return {
    color: 'white'
  }
}))
```

You'd think this code shows '0' in an alert:

```
1 - 1
2 - 1 - 1 == 0 * alert(0) + alert(1)
```

but it shows 2 instead, because JavaScript per rule 1 interprets it as:

```
1 - 1 - 1 - 1 == 0 * alert(0) + alert(1)
```

Conclusion

Be careful. Some people are very opinionated on semicolons. I don't care honestly, the tool gives us the option not to use it, so we can avoid semicolons.

I'm not suggesting anything, other than picking your own decision.

We just need to pay a bit of attention, even if most of the times those basic scenarios never show up in your code.

Pick some rules:

- be careful with `return` statements. If you return something, add it on the same line as the `return` (same for `break`, `throw`, `continue`)
- never start a line with parentheses, those might be concatenated with the previous line to form a function call, or array element reference

And ultimately, always test your code to make sure it does what you want.

Quotes

An overview of the quotes allowed in JavaScript and their unique features

JavaScript allows you to use 3 types of quotes:

- single quotes
- double quotes
- backticks

The first 2 are essentially the same:

```
const test = 'test'
const test = "test"
```

There's little to no difference in using one or the other. The only difference lies in having to escape the quote character you use to delimit the string:

```
const test = 'test'
const test = "test'"
const test = "'test'"
const test = 'test\'test'
const test = "test'test"
```

There are various style guides that recommend always using one style vs the other.

I personally prefer single quotes all the time, and use double quotes only in HTML.

Backticks are a recent addition to JavaScript, since they were introduced with ES6 in 2015.

They have a unique feature: they allow multiline strings.

Multiline strings are also possible using regular strings, using escape characters.

```
const multilineString = "A string with \n multiline \n lines"
```

Using backticks, you can avoid using an escape character.

```
const multilineString = `A string
with multiline lines`
```

Not just that. You can interpolate variables using the ``${}`` syntax.

```
const multilineString = `A string`
```

10/21/14

Those are called Template Literals

Template Literals

Introduced in ES2015, aka ES6, Template Literals offer a new way to declare strings, but also some new interesting constructs which are already widely popular.

Introduction to Template Literals

Template Literals are a new ES2015 / ES6 feature that allow you to work with strings in a novel way compared to ES5 and below.

The syntax at a first glance is very simple, just use backticks instead of single or double quotes:

```
const a_string = `something`
```

They are unique because they provide a lot of features that normal strings built with quotes, in particular:

- they offer a great syntax to define multiline strings
- they provide an easy way to interpolate variables and expressions in strings
- they allow to create DSLs with template tags

Lets dive into each of these in detail.

Multiline strings

Pre-ES6, to create a string spanned over two lines you had to use the `\` character at the end of a line:

```
const string = `first part \n
second part`
```

This allows to create a string on 2 lines, but its rendered on just one line:

```
first part second part
```

To render the string on multiple lines as well, you explicitly need to add `\n` at the end of each line, like this:

```
const string = `first part \n
second part`
```

```
const str = `line`
```

or

```
const str = `first line` +  
            `second line`
```

Template literals make multiline strings much simpler.

Once a template literal is opened with the backtick, you just press enter to create a new line, with no special characters, and it's rendered as-is:

```
const str = `my  
line  
  
string  
is awesome!`
```

Keep in mind that space is meaningful, so doing this:

```
const str = `first  
second`
```

is going to create a string like this:

```
first  
  second
```

an easy way to fix this problem is by having an empty first line, and appending the trim() method right after the closing backtick, which will eliminate any space before the first character:

```
const str =  
  `first  
  second` .trim()
```

Interpolation

Template literals provide an easy way to interpolate variables and expressions into strings.

You do so by using the `${...}` syntax:

```
const var = `test`
```

```
const string = `something ${2+2} | ${2000+10} |`
```

inside the ``` | ``` you can add anything, even expressions:

```
const string = `something ${1+2+3}`
const string2 = `something ${foo() * 2} | ${1} |`
```

Template tags

Tagged templates is one features that might sound less useful at first for you, but it's actually used by lots of popular libraries around, like [Styled Components](#) or [Apollo](#), the [GraphQL](#) client's server lib, so it's essential to understand how it works.

In [Styled Components](#) template tags are used to define CSS strings:

```
const Button = styled.button`
  font-size: 1.5em;
  background-color: black;
  color: white;
`
```

In [Apollo](#) template tags are used to define a GraphQL query schema:

```
const query = gql`
  query {
    ...
  }
`
```

The `styled.button` and `gql` template tags highlighted in those examples are just functions:

```
function gql(literals, ...expressions) {
  |
}
```

this function returns a string, which can be the result of any kind of computation.

`literals` is an array containing the template literal content tokenized by the expressions interpolations.

`expressions` contains all the interpolations.

If we take an example above:

```
const string = something ${1 + 1 + 1}
```

`literals` is an array with two items. The first is `something`, the string until the first interpolation, and the second is an empty string, the space between the end of the first interpolation (we only have one) and the end of the string.

`expressions` in this case is an array with a single item, `1`.

A more complex example is

```
const string = something
  another ${' ' +
    'the ${1 + 1 + 1}'}
  test
```

in this case `literals` is an array where the first item is:

```
something
another
```

the second is:

```
'the ' +
```

and the third is

```
test
```

`expressions` in this case is an array with two items, `x` and `1`.

The function that is passed those values can do anything with them, and this is the power of this kind feature.

The most simple example is replicating what the string interpolation does, by simply joining `literals` and `expressions`:

```
const interpolated = interpolate`${1 + 1 + 1}`
```

and this is how `interpolate` works:

```
function interpolate(literals, expressions) {
  let string =
```

```
for (const [i, val] of expressions) {  
  string += literals[i] + val  
}  
string += literals[literals.length - 1]  
return string  
}
```


Functions

Learn all about functions, from the general overview to the tiny details that will improve how you use them



Introduction

Everything in JavaScript happens in functions.

A function is a block of code, self contained, that can be defined once and run any times you want.

A function can optionally accept parameters, and returns one value.

Functions in JavaScript are objects, a special kind of objects: function objects. Their superpower lies in the fact that they can be invoked.

In addition, functions are said to be first class functions because they can be assigned to a value, and they can be passed as arguments and used as a return value.

Syntax

Let's start with the "old", pre-ES6/ES2015 syntax. Here's a function declaration:

```
function doSomething(foo) {
  // do something
}
```

(now, in post-ES6/ES2015-world, referred as a regular function)

Functions can be assigned to variables (this is called a function expression):

```
const doSomething = function() {
  // do something
}
```

Named function expressions are similar, but play nicer with the stack call trace, which is useful when an error occurs - it holds the name of the function:

```
const doSomething = function doSomething(foo) {
  // do something
}
```

ES6/ES2015 introduced arrow functions, which are especially nice to use when working with inline functions, as parameters or callbacks:

```
const doSomething = foo => {
  // do something
}
```

Arrow functions have an important difference from the other function definitions above, we'll see which one later as it's an advanced topic.

Parameters

A function can have one or more parameters.

```
const doSomething = () => {
  // do something
}

const doSomethingElse = foo => {
  // do something
}

const doSomethingElseAgain = (foo, bar) => {
  // do something
}
```

```
|
```

Starting with ES6/ES2015, functions can have default values for the parameters:

```
const doSomething = (foo = 1, bar = 'hey') => {
  //do something
}
```

This allows you to call a function without filling all the parameters:

```
doSomething()
doSomething()
```

ES2018 introduced trailing commas for parameters, a feature that helps reducing bugs due to missing commas when moving around parameters (e.g. moving the last in the middle):

```
const doSomething = (foo = 1, bar = 'hey',) => {
  //do something
}

doSomething(1, 'foo')
```

You can wrap all your arguments in an array, and use the spread operator when calling the function:

```
const doSomething = (foo = 1, bar = 'hey') => {
  //do something
}

const args = [1, 'foo']
doSomething(...args)
```

With many parameters, remembering the order can be difficult. Using objects, destructuring allows to keep the parameter names:

```
const doSomething = ({ foo = 1, bar = 'hey' }) => {
  //do something
  console.log(foo) // 1
  console.log(bar) // 'hey'
}

const args = { foo: 1, bar: 'foo' }
doSomething(args)
```

Return values

Every function returns a value, which by default is `undefined`.

```
>
  const dosomething = (foo = 1, bar = 'hey') => {
    //do something
  }
< undefined
> dosomething()
< undefined
```

Any function is terminated when its lines of code end, or when the execution flow finds a `return` keyword.

When JavaScript encounters this keyword it exits the function execution and gives control back to its caller.

If you pass a value, that value is returned as the result of the function:

```
const dosomething = () => {
  return 'test'
}
const result = dosomething() // result === 'test'
```

You can only return one value.

To *simulate* returning multiple values, you can return an object literal, or an array, and use a [destructuring assignment](#) when calling the function.

Using arrays:

```

> const dosomething = () => {
  return ['Roger', 6]
}
const [ name, age ] = dosomething()
< undefined
> name
< "Roger"

> age
< 6

```

Using objects

```

> const dosomething = () => {
  return { name: 'Roger', age: 6 }
}
const { name, age } = dosomething()
< undefined
> name
< "Roger"

> age
< 6

```

Nested functions

Functions can be defined inside other functions:

```

const dosomething = () => {
  const dosomethingelse = () => {}
  dosomethingelse()
  return 'test'
}

```

The nested function is scoped to the outside function, and cannot be called from the outside.

Object Methods

When used as object properties, functions are called methods.

```
const car = {
  brand: 'Ford',
  model: 'Musta',
  start: function() {
    console.log('Started')
  },
}

car.start()
```

this in Arrow Functions

There's an important behavior of Arrow Functions vs regular Functions when used as object methods. Consider this example:

```
const car = {
  brand: 'Ford',
  model: 'Musta',
  start: function() {
    console.log('Started')(this.brand) // this.model()
  },
  stop: () => {
    console.log('Stopped')(this.brand) // this.model()
  },
}
```

The `stop()` method does not work as you would expect.

```
> const car = {
  brand: 'Ford',
  model: 'Fiesta',
  start: function() {
    console.log(`Started ${this.brand} ${this.model}`)
  },
  stop: () => {
    console.log(`Stopped ${this.brand} ${this.model}`)
  }
}

car.start()
car.stop()

Started Ford Fiesta
Stopped undefined undefined
```

This is because the handling of `this` is different in the two functions declarations style. `this` in the arrow function refers to the enclosing function context, which in this case is the `window` object:

```
const car = {
  brand: 'Ford',
  model: 'Fiesta',
  start: function() {
    console.log(this)
    console.log(`Started ${this.brand} ${this.model}`)
  },
  stop: () => {
    console.log(this)
    console.log(`Stopped ${this.brand} ${this.model}`)
  }
}

car.start()
car.stop()

▶ {brand: "Ford", model: "Fiesta", start: f, stop: f}
Started Ford Fiesta

▶ Window {postMessage: f, blur: f, focus: f, close: f, ...}
Stopped undefined undefined
```

`this`, which refers to the host object using `function()`

This implies that arrow functions are not suitable to be used for object methods and constructors (arrow function constructors will actually raise a `TypeError` when called).

IIFE, Immediately Invocated Function Expressions

An IIFE is a function that's immediately executed right after its declaration:

```
(function dosomething() {
  console.log('did something')
})()
```

You can assign the result to a variable:

```
const something = (function dosomething() {
  return 'did something'
})()
```

They are very handy, as you don't need to separately call the function after its definition.

Function Hoisting

JavaScript before executing your code reorders it according to some rules.

Functions in particular are moved at the top of their scope. This is why it's legal to write

```
dosomething()
function dosomething() {
  console.log('did something')
}
```

```
> dosomething()
function dosomething() {
  console.log('did something')
}
did something
```

Internally, JavaScript moves the function before its call, along with all the other functions found in the same scope.


```
function dosomething() {
  console.log('did something')
}
dosomething()
```

Now, if you use named function expressions, since you're using [variables](#) something different happens. The variable declaration is hoisted, but not the value, so not the function.

```
dosomething()
const dosomething = function dosomething() {
  console.log('did something')
}
```

Not going to work:

```
dosomething()
const dosomething = function dosomething() {
  console.log('did something')
}
```

► Uncaught ReferenceError: dosomething is not defined
at <anonymous>:1:1

This is because what happens internally is:

```
const dosomething
dosomething()
dosomething = function dosomething() {
  console.log('did something')
}
```

The same happens for `let` declarations. `var` declarations do not work either, but with a different error:

```
> dosomething()
const dosomething = function dosomething() {
  console.log('did something')
}
```

❶ ▶ Uncaught ReferenceError: dosomething is not defined
at <anonymous>:1:1

```
> dosomething2()
var dosomething2 = function dosomething() {
  console.log('did something')
}
```

❷ ▶ Uncaught TypeError: dosomething2 is not a function
at <anonymous>:1:1

This is because `var` declarations are hoisted and initialized with `undefined` as a value, while `const` and `let` are hoisted but not initialized.

Arrow Functions

Arrow Functions are one of the most impactful changes in ES6/ES2015, and they are widely used nowadays. They slightly differ from regular functions. Find out how

Arrow functions were introduced in ES6 / ECMAScript 2015, and since their introduction they changed forever how JavaScript code looks (and works).

In my opinion this change was so welcoming that you now rarely see in modern codebases the usage of the `function` keyword.

Visually, it's a simple and welcome change, which allows you to write functions with a shorter syntax, from:

```
const myFunction = function foo() {
  // ...
}
```

to

```
const myFunction = () => {
  // ...
}
```

If the function body contains just a single statement, you can omit the parentheses and write all on a single line:

```
const myFunction = () => doSomething();
```

Parameters are passed in the parentheses:

```
const myFunction = (param1, param2) => doSomething(param1, param2);
```

If you have one (and just one) parameter, you could omit the parentheses completely:

```
const myFunction = param => doSomething(param);
```

Thanks to this short syntax, arrow functions encourage the use of small functions.

Implicit return

Arrow functions allow you to have an implicit return: values are returned without having to use the `return` keyword.

It works when there is a on-line statement in the function body.

```
const myFunction = () => {test}

myFunction() //test
```

Another example, returning an object (remember to wrap the curly brackets in parentheses to avoid it being considered the wrapping function body brackets):

```
const myFunction = () => ({value: 'test'})

myFunction() // {value: 'test'}
```

How this works in arrow functions

`this` is a concept that can be complicated to grasp, as it varies a lot depending on the context and also varies depending on the mode of JavaScript (strict mode or not).

It's important to clarify this concept because arrow functions behave very differently compared to regular functions.

When defined as a method of an object, in a regular function `this` refers to the object, so you can do:

```
const car = {
  model: 'Fiesta',
  manufacturer: 'Ford',
  fullname: function() {
    return `${this.manufacturer} ${this.model}`
  }
}
```

calling `car.fullname()` will return `"Ford Fiesta"`.

The `this` scope with arrow functions is inherited from the execution context. An arrow function does not bind `this` at all, so its value will be looked up in the call stack, so in this code `car.fullname()` will not work, and will return the string `"undefined undefined"`.

```
const car = {
  model: 'Fiesta',
  manufacturer: 'Ford',
  fullname: () => {
```

```
const obj = {  
  method: function() {  
    // ...  
  }  
};
```

Due to this, arrow functions are not suited as object methods.

Arrow functions cannot be used as constructors as well, when instantiating an object will raise a `TypeError`.

This is where regular functions should be used instead, when dynamic context is not needed.

This is also a problem when handling events. DOM Event listeners set `this` to be the target element, and if you rely on `this` in an event handler, a regular function is necessary:

```
const div = document.querySelector('div')  
div.addEventListener('click', () => {  
  // this === window  
})
```

```
const div = document.querySelector('div')  
div.addEventListener('click', function() {  
  // this === div  
})
```

Closures

A gentle introduction to the topic of closures, key to understanding how JavaScript functions work



If you've ever written a [function](#) in JavaScript, you already made use of closures.

It's a key topic to understand, which has implications on the things you can do.

When a function is run, it's executed with the scope that was in place when it was defined, and not with the state that's in place when it is executed.

The scope basically is the set of variables which are visible.

A function remembers its [Lexical Scope](#), and it's able to access variables that were defined in the parent scope.

In short, a function has an entire baggage of variables it can access.

Let me immediately give an example to clarify this.

```
const bark = (dog => {  
  let say = "bark" + bark();  
  return => console.log(say)();  
})  
  
bark("dog")
```

This logs to the console `Roger barked!`, as expected.

What if you want to return the action instead:

```
const createBark = dog => {
  const say = () => {dog.bark()}
  return () => console.log(say)
}

const bark = createBark('Roger')

bark()
```

This snippet also logs to the console `Roger barked!`.

Let's make one last example, which reuses `createBark` for two different dogs:

```
const createBark = dog => {
  const say = () => {dog.bark()}
  return () => {
    console.log(say)
  }
}

const rogerBark = createBark('Roger')
const sydBark = createBark('Syd')

rogerBark()
sydBark()
```

This prints:

```
Roger barked!
Syd barked!
```

As you can see, the state of the variable `say` is linked to the function that's returned from `createBark()`.

Also notice that we redefine a new `say` variable the second time we call `createBark()`, but that does not affect the state of the first `createBark()` scope.

This is how a closure works: the function that's returned keeps the original state in its scope.

Arrays

JavaScript arrays over time got more and more features, sometimes it's tricky to know when to use some construct vs another. This post aims to explain what you should use, as of 2018



JavaScript arrays over time got more and more features, sometimes it's tricky to know when to use some construct vs another. This post aims to explain what you should use in 2018.

Initialize array

```
const a = []  
const a = [1, 2, 3]  
const a = Array.of(1, 2, 3)  
const a = Array(1).fill(1) //fill an array of 1 items of value 1
```

Don't use the old syntax (just use it for typed arrays)

```
const a = new Array() //deprecated  
const a = new Array(1, 2, 3) //deprecated
```


Get length of the array

```
const l = a.length
```

Iterating the array

Every

```
a.every(f)
```

Iterates `a` until `f()` returns false

Some

```
a.some(f)
```

Iterates `a` until `f()` returns true

Iterate the array and return a new one with the returned result of a function

```
const b = a.map(f)
```

Iterates `a` and builds a new array with the result of executing `f()` on each `a` element

Filter an array

```
const b = a.filter(f)
```

Iterates `a` and builds a new array with elements of `a` that returned true when executing `f()` on each `a` element

Reduce

```
a.reduce((accumulator, currentValue, currentIndex, array) => {  
  // ...  
})
```

```
[1, 161112/Value]
```

`reduce()` executes a callback function on all the items of the array and allows to progressively compute a result. If `initialValue` is specified, `accumulator` in the first iteration will equal to that value.

Example:

```
[1, 2].reduce((accumulator, currentValue, currentIndex, array) => {
  return accumulator + currentValue
}, 1)

// iteration 1: 1 + 1 => return 2
// iteration 2: 2 + 2 => return 4
// iteration 3: 4 + 2 => return 6
// iteration 4: 6 + 1 => return 7

// return value is 7
```

forEach

```
[1, 2].forEach()
```

```
a.forEach(f)
```

Iterates `f` on `a` without a way to stop

Example:

```
a.forEach(v => {
  console.log(v)
})
```

for..of

```
[1, 2].for..of
```

```
for (let v of a) {
  console.log(v)
}
```

for

```
for (let i = 0; i < a.length; i++) {
  // do it
}
```

```
1
```

Iterates `a`, can be stopped using `return` or `break` and an iteration can be skipped using `continue`.

@@iterator

```
1 ES5
```

Getting the iterator from an array returns an iterator of values:

```
const a = [5, 12, 3]
let it = a[Symbol.iterator]()

console.log(it.next().value) // 5
console.log(it.next().value) // 12
console.log(it.next().value) // 3
```

`.entries()`: returns an iterator of key/value pairs

```
let it = a.entries()

console.log(it.next().value) // 0, 5
console.log(it.next().value) // 1, 12
console.log(it.next().value) // 2, 3
```

`.keys()`: allows to iterate on the keys:

```
let it = a.keys()

console.log(it.next().value) // 0
console.log(it.next().value) // 1
console.log(it.next().value) // 2
```

`.next()` returns `undefined` when the array ends. You can also detect if the iteration ended by looking at `it.next()` which returns a `value` `done` pair. `done` is always `false` until the last element, which returns `true`.

Adding to an array

Add at the end

```
a.push()
```

Add at the beginning

```
a.unshift(0);
a.unshift(0, 1);
```

Removing an item from an array

From the end

```
a.pop();
```

From the beginning

```
a.shift();
```

At a random position

```
a.splice(0, 0) // get the first 0 items
a.splice(1, 0) // get the 0 items starting from index 1
```

Do not use `remove()` as it leaves behind undefined values.

Remove and insert in place

```
a.splice(0, 0, 1, 'A', 'B') // remove 0 items starting from
// index 0, add 3 items
// 1, 'A', 'B' starting from index 0
```

Join multiple arrays

```
const a = [1, 2]
const b = [3, 4]
a.concat(b) // 1, 2, 3, 4
```

Lookup the array for a specific element

ES5

```
a.indexOf()
```

Returns the index of the first matching item found, or -1 if not found

```
a.lastIndexOf()
```

Returns the index of the last matching item found, or -1 if not found

ES6

```
a.find(element, index, array) => {
  //return true or false
}
```

Returns the first item that returns true. Returns undefined if not found

A commonly used syntax is:

```
a.find(x => x.id === my_id)
```

The above line will return the first element in the array that has `id === my_id`

`findIndex` returns the index of the first item that returns true, and if not found, it returns `undefined`.

```
a.findIndex(element, index, array) => {
  //return true or false
}
```

ES7

```
a.includes(value)
```

Returns true if `a` contains `value`.

```
a.includes(value, i)
```

Returns true if `a` contains `value` after the position `i`.

Get a portion of an array

```
a.slice()
```

Sort the array

Sort alphabetically (by ASCII value - @-0A-Za-z)

```
const a = [5, 3, 1, 34, 11]
a.sort() //5, 10, 11, 3, 34

const b = [5, 'a', '27', 11, 34, 11]
b = a.sort() //5, 11, 3, 3, 27, 34
```

Sort by a custom function

```
const a = [5, 34, 7, 2, 11]
a.sort((a, b) => a - b) //5, 2, 7, 34, 11
```

Reverse the order of an array

```
a.reverse()
```

Get a string representation of an array

```
a.toString()
```

Returns a string representation of an array

```
a.join()
```

Returns a string concatenation of the array elements. Pass a parameter to add a custom separator.

```
a.join(' - ')
```

Copy an existing array by value

```
const b = Array.from(a)
const b = Array.of(...a)
```

Copy just some values from an existing array

```
const b = Array.from(a, x => x % 2 === 0)
```

Copy portions of an array into the array itself, in other positions

```
const a = [1, 2, 3, 4]
a.copyWithin(0, 2, 3, 4, 4)
const b = [1, 2, 3, 4, 5]
b.copyWithin(0, 2) // [2, 3, 4, 5]
// 2 is where to start copying into,
// 2 is where to start copying from
const c = [1, 2, 3, 4, 5]
c.copyWithin(0, 1, 4) // [2, 3, 4, 5, 5]
// 1 is the end index
```

Loops

JavaScript provides many way to iterate through loops. This tutorial explains all the various loop possibilities in modern JavaScript



Introduction

JavaScript provides many way to iterate through loops. This tutorial explains each one with a small example, and the main properties.

for

```
const list = ['a', 'b', 'c']
for (let i = 0; i < list.length; i++) {
  console.log(list[i]) //value
  console.log(i) //index
}
```

- You can interrupt a `for` loop using `break`
- You can fast forward to the next iteration of a `for` loop using `continue`

forEach

Introduced in ES5, Given an array, you can iterate over its properties using `list.forEach()`:

```
const list = [ 'a', 'b', 'c' ]
list.forEach((item, index) => {
  console.log(item) //value
  console.log(index) //index
})

//index 0 value a
list.forEach(item => console.log(item))
```

unfortunately you cannot break out of this loop

do...while

```
const list = [ 'a', 'b', 'c' ]
let i = 0
do {
  console.log(list[i]) //value
  console.log(i) //index
  i = i + 1
} while (i < list.length)
```

You can interrupt a `while` loop using `break`:

```
do {
  if (something) break
} while (true)
```

and you can jump to the next iteration using `continue`:

```
do {
  if (something) continue

  //do something else
} while (true)
```

while

```
const list = [ 'a', 'b', 'c' ]
let i = 0
while (i < list.length) {
```

```

console.log(1st[0]) //value
console.log(1) //index
i += 1
}

```

You can interrupt a `while` loop using `break`:

```

while (X !== Y) {
  if (something) break
}

```

and you can jump to the next iteration using `continue`:

```

while (X !== Y) {
  if (something) continue

  //do something else
}

```

The difference with `do...while` is that `do...while` always execute its cycle at least once.

for...in

Iterates all the enumerable properties of an object, giving the property names:

```

for (let property in object) {
  console.log(property) //property name
  console.log(object[property]) //property value
}

```

for...of

[ES2015](#) introduced the `for...of` loop, which combines the conciseness of `forEach` with the ability to break:

```

//iterate over the value
for (const value of ['a', 'e', 'c']) {
  console.log(value) //value
}

//get the index as well, using .entries()
for (const [index, value] of ['a', 'e', 'c'].entries()) {
  console.log(index) //index
  console.log(value) //value
}

```

Notice the use of `const`. This loop creates a new scope in every iteration, so we can safely use that instead of `let`.

`for...in` VS `for...of`

The difference with `for...in` is:

- `for...of` iterates over the property values
- `for...in` iterates the property names

Events

JavaScript in the browser uses an event-driven programming model. Everything starts by following an event. This is an introduction to JavaScript events and how event handling works



Introduction

JavaScript in the browser uses an event-driven programming model.

Everything starts by following an event.

The event could be the DOM is loaded, or an asynchronous request that finishes fetching, or a user clicking an element or scrolling the page, or the user types on the keyboard.

There are a lot of different kind of events.

Event handlers

You can respond to any event using an Event Handler, which is just a function that's called when an event occurs.

You can register multiple handlers for the same event, and they will all be called when that event happens.

JavaScript offer three ways to register an event handler:

Inline event handlers

This style of event handlers is very rarely used today, due to its constraints, but it was the only way in the JavaScript early days:

```
onmouseover="alert('Hello!'); onmouseout="alert('Bye!');"
```

DOM on-event handlers

This is common when an object has at most one event handler, as there is no way to add multiple handlers in this case:

```
HTML.onload = () => {
  // Do your thing
}
```

It's most commonly used when handling [XHR](#) requests:

```
const xhr = new XMLHttpRequest()
xhr.onreadystatechange = () => {
  // Do something
}
```

You can check if an handler is already assigned to a property using `if ('onsomething' in window) {}`.

Using `addEventListener()`

This is the *modern* way. This method allows to register as many handlers as we need, and it's the most popular you will find:

```
HTML.addEventListener('load', () => {
  // Do your thing
})
```

This method allows to register as many handlers as we need, and it's the most popular you will find.

Note that IE8 and below did not support this, and instead used its own (attractive) old API. Keep it in mind if you need to support older browsers.

Listening on different elements

You can listen on `window` to intercept "global" events, like the usage of the keyboard, and you can listen on specific elements to check events happening on them, like a mouse click on a button.

This is why `addEventListener` is sometimes called on `window`, sometimes on a DOM element.

The Event object

An event handler gets an `Event` object as the first parameter:

```
const link = document.getElementById('my-link');
link.addEventListener('click', event => {
  // do things
});
```

This object contains a lot of useful properties and methods, like:

- `target`, the DOM element that originated the event
- `type`, the type of event
- `stopPropagation()`, called to stop propagating the event in the DOM

(see the full [list](#)).

Other properties are provided by specific kind of events, as `Event` is an interface for different specific events:

- [MouseEvent](#)
- [KeyboardEvent](#)
- [DragEvent](#)
- [TouchEvent](#)
- ... and others

Each of those has a MDN page linked, so you can inspect all their properties.

For example when a `KeyboardEvent` happens, you can check which key was pressed, in a readable format (`escape`, `enter` and so on) by checking the `key` property:

```
document.addEventListener('keydown', event => {
  // use event.key
```

```
document.log(event.key)
})
```

On a mouse event we can check which mouse button was pressed:

```
const div = document.getElementById("div")
div.addEventListener("mousedown", event => {
  // mouse button pressed
  document.log(event.button) // 0:left, 1:right
})
```

Event bubbling and event capturing

Bubbling and capturing are the 2 models that events use to propagate.

Suppose you DOM structure is:

```
<div id="container">
  <button>Click me</button>
</div>
```

You want to track when users click on the button, and you have 2 event listeners, one on `button` and one on `container`. Remember, a click on a child element will always propagate to its parents, unless you stop the propagation (see later).

Those event listeners will be called in order, and this order is determined by the event bubbling/capturing model used.

Bubbling means that the event propagates from the item that was clicked (the child) up to all its parent tree, starting from the nearest one.


In our example, the handler on `button` will fire before the `container` handler.

Capturing is the opposite: the outer event handlers are fired before the more specific handler, the one on `button`.

By default all events bubble.

You can choose to adopt event capturing by applying a third argument to `addEventListener`, setting it to `true`:

```
document.getElementById("container").addEventListener(
  "click",
  () => {
    //captured
  },
  true)
```



Note that first all capturing event handlers are run,


Then all the bubbling event handlers.

The order follows this principle: the DOM goes through all elements starting from the `Window` object, and goes to find the item that was clicked. While doing so, it calls any event handler associated to the event (capturing phase).

Once it reaches the target, it then repeats the journey up to the parents tree until the `Window` object, calling again the event handlers (bubbling phase).

Stopping the propagation

An event on a DOM element will be propagated to all its parent elements tree, unless it's stopped.

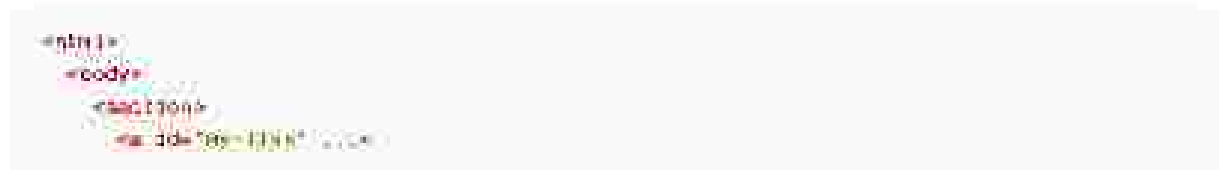

A click event on `a` will propagate to `section` and then `body`.

You can stop the propagation by calling the `stopPropagation()` method of an Event, usually at the end of the event handler:



Popular events

Here's a list of the most common events you will likely handle.

Load

`load` is fired on `window` and the `body` element when the page has finished loading.

Mouse events

`click` fires when a mouse button is clicked. `dblclick` when the mouse is clicked two times. Of course in this case `click` is fired just before this event. `mousedown`, `mousemove`, and `mouseup` can be used in combination to track drag-and-drop events. Be careful with `mousemove`, as it fires many times during the mouse movement (see throttling later)

Keyboard events

`keydown` fires when a keyboard button is pressed (and any time the key repeats while the button stays pressed). `keyup` is fired when the key is released.

Scroll

The `scroll` event is fired on `window` every time you scroll the page. Inside the event handler you can check the current scrolling position by checking `window.scrollY`.

Keep in mind that this event is not a one-time thing. It fires a lot of times during scrolling, not just at the end or beginning of the scrolling, so don't do any heavy computation or manipulation in the handler - use *throttling* instead.

Throttling

As we mentioned above, `mousemove` and `scroll` are two events that are not fired one-time per event, but rather they continuously call their event handler function during all the duration of the action.

This is because they provide coordinates so you can track what's happening.

If you perform a complex operation in the event handler, you will affect the performance and cause a sluggish experience to your site users.

Libraries that provide throttling like [Lodash](#) implement it in 100+ lines of code, to handle every possible use case. A simple and easy to understand implementation is this, which uses `setTimeout` to cache the scroll event every 100ms:

```
let cached = null
window.addEventListener('scroll', event => {
  if (!cached) {
    setTimeout(() => {
      //you can access the original event at cached
      cached = null
    }, 100)
  }
  cached = event
})
```


The Event Loop

The Event Loop is one of the most important aspects to understand about JavaScript. This post explains it in simple terms.

Introduction

The Event Loop is one of the most important aspects to understand about JavaScript.

I've programmed for years with JavaScript, yet I've never fully understood how things work under the hood. It's completely fine to not know this concept in detail, but as usual, it's helpful to know how it works, and also you might just be a little curious at this point.

This post aims to explain the inner details of how JavaScript works with a single thread, and how it handles asynchronous functions.

Your JavaScript code runs single threaded. There is just one thing happening at a time.

This is a limitation that's actually very helpful, as it simplifies a lot how you program without worrying about concurrency issues.

You just need to pay attention to how you write your code and avoid anything that could block the thread, like synchronous network calls or infinite loops.

In general, in most browsers there is an event loop for every browser tab, to make every process isolated and avoid a web page with infinite loops or heavy processing to block your entire browser.

The environment manages multiple concurrent event loops, to handle API calls for example. [Web Workers](#) run in their own event loop as well.

You mainly need to be concerned that your code will run on a single event loop, and write code with this thing in mind to avoid blocking it.

Blocking the event loop

Any JavaScript code that takes too long to return back control to the event loop will block the execution of any JavaScript code in the page, even block the UI thread, and the user cannot click around, scroll the page, and so on.

Almost all the *IO* primitives in JavaScript are non-blocking. Network requests, [Node.js](#) filesystem operations, and so on. Being blocking is the exception, and this is why JavaScript is based so much on callbacks, and more recently on [promises](#) and [async/await](#).

The call stack

The callstack is a LIFO queue (Last In, First Out).

The event loop continuously checks the call stack to see if there's any function that needs to run.

While doing so, it adds any function call it finds to the call stack and executes each one in order.

You know the error stack trace you might be familiar with, in the debugger or in the browser console? The browser looks up the function names in the call stack to inform you which function originates the current call!

```

> const bar = () => {
  throw new DOMException()
}

const baz = () => console.log('baz')

const foo = () => {
  console.log('foo')
  bar()
  baz()
}

foo()
foo

```

✖ ▼ Uncaught DOMException

bar	@ VM570:2
foo	@ VM570:9
(anonymous)	@ VM570:13



A simple event loop explanation

Lets pick an example:

```

const bar = () => console.log('bar')

const baz = () => console.log('baz')

const foo = () => {
  console.log('foo')
  bar()
  baz()
}

foo()

```

This code prints

```
foo
bar
baz
```


as expected.

When this code runs, first `foo()` is called. Inside `foo()` we first call `bar()`, then we call `baz()`.

At this point the call stack looks like this:



The event loop on every iteration looks if there's something in the call stack, and executes it.

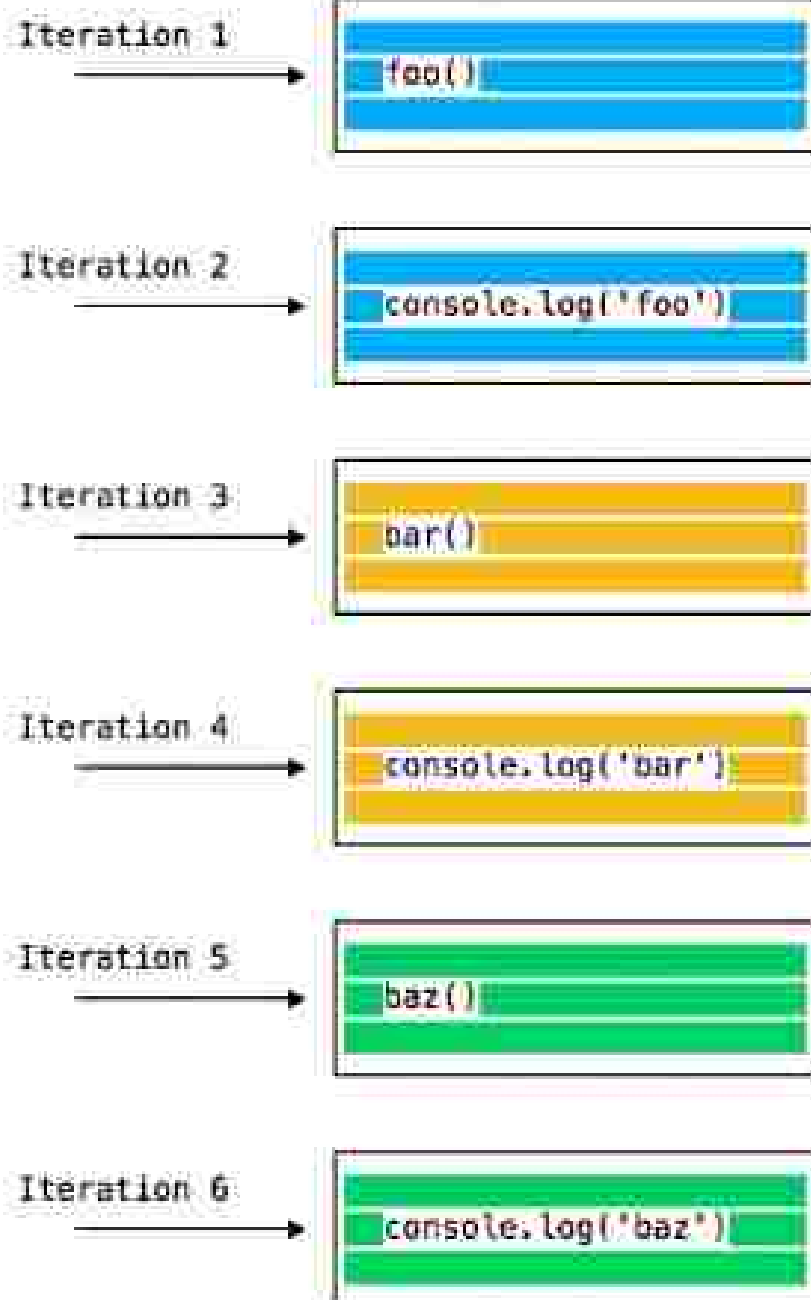

until the call stack is empty.

Queuing function execution

The above example looks normal, there's nothing special about it. JavaScript finds things to execute, runs them in order,

Let's see how to defer a function until the stack is clear.

The use case of `setTimeout(() => { () }, 0)` is to call a function, but execute it once every other function in the code has executed.

Take this example:

```
const bar = () => console.log('bar')

const baz = () => console.log('baz')

const foo = () => {
  console.log('foo')
  setTimeout(bar, 0)
  baz()
}


foo()
```

This code prints, maybe surprisingly:


```
foo
baz
bar
```

When this code runs, first `foo()` is called. Inside `foo()` we first call `setTimeout`, passing `bar` as an argument, and we instruct it to run immediately as fast as it can, passing `0` as the timer. Then we call `baz()`.

At this point the call stack looks like this:

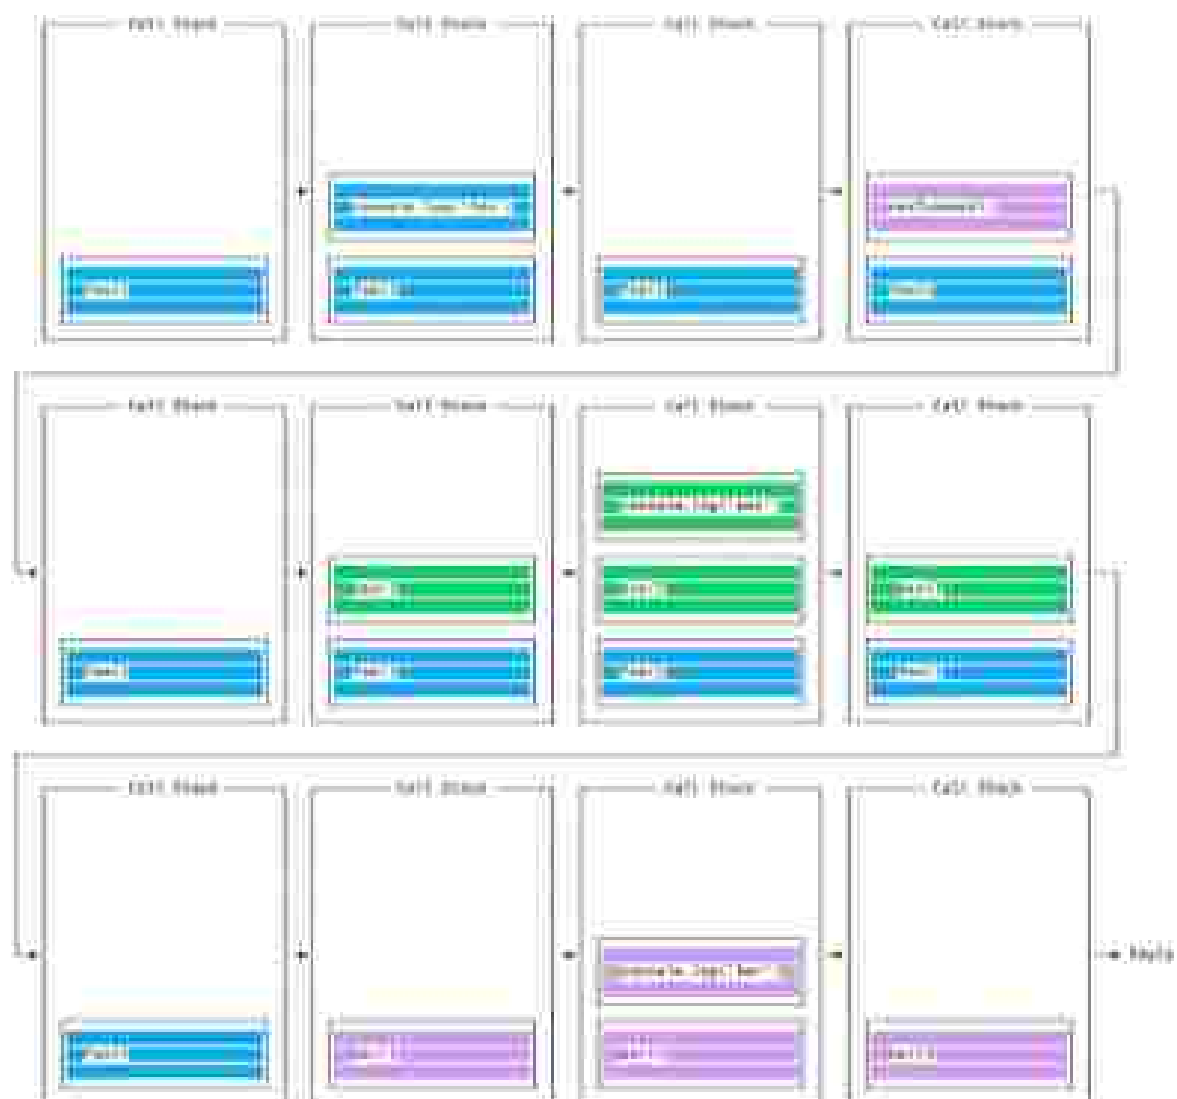

Here is the execution order for all the functions in our program:

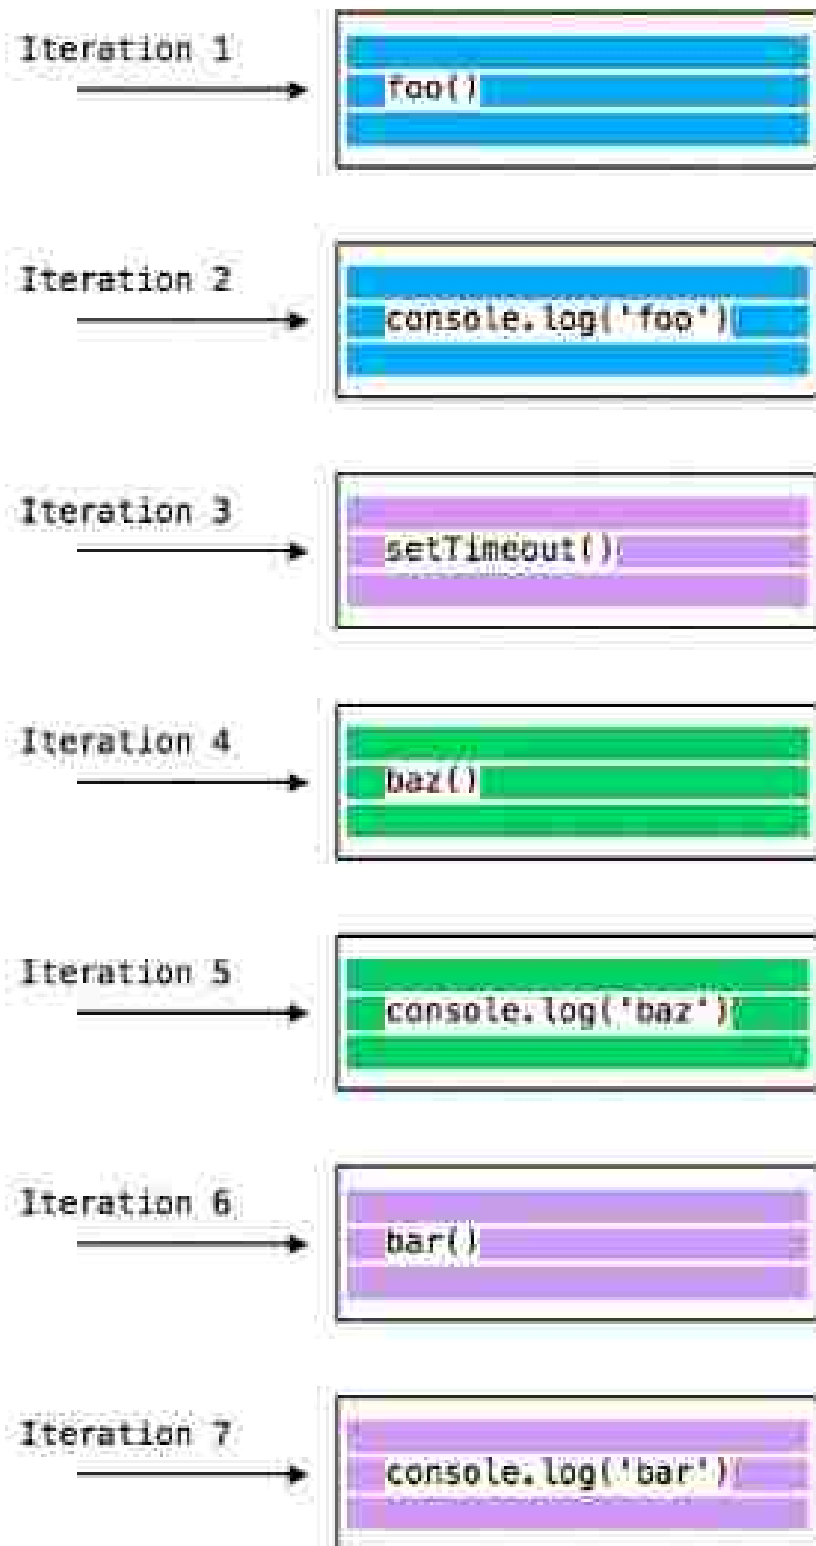

Why is this happening?

The Message Queue

When `setTimeout()` is called, the Browser or Node.js start the `timer`. Once the timer expires, in this case immediately as we put 0 as the timeout, the callback function is put in the Message Queue.

The Message Queue is also where user-initiated events like click or keyboard events, or `fetch` responses are queued before your code has the opportunity to react to them. Or also `DOM` events like `onload`.

The loop gives priority to the call stack, and it first processes everything it finds in the call stack, and once there's nothing in there, it goes to pick up things in the event queue.

We don't have to wait for functions like `setTimeout`, `fetch` or other things to do their own work, because they are provided by the browser, and they live on their own threads. For example, if you set the `setTimeout` timeout to 2 seconds, you don't have to wait 2 seconds - the wait happens elsewhere.

ES6 Job Queue

[ECMAScript 2015](#) introduced the concept of the Job Queue, which is used by Promises (also introduced in ES6/ES2015). It's a way to execute the result of an async function as soon as possible, rather than being put at the end of the call stack.

Promises that resolve before the current function ends will be executed right after the current function.

I find nice the analogy of a rollercoaster ride at an amusement park: the message queue puts you back in queue with after all the other people in the queue, while the job queue is the fastpass ticket that lets you take another ride right after you finished the previous one.

Example:

```
const bar = () => console.log('bar')

const baz = () => console.log('baz')

const foo = () => {
  console.log('foo')
  setTimeout(bar, 0)
  => Promise((resolve, reject) => {
    // resolver should be right after bar, before bar
  }).then(resolve => console.log(resolve))
  baz()
}

foo()
```

This prints

```
foo
bar
should be right after bar, before bar
bar
```

That's a big difference between Promises (and `Async/await`, which is built on promises) and plain old asynchronous functions through `setTimeout()` or other platform APIs.

Asynchronous programming and callbacks

JavaScript is synchronous by default, and is single threaded. This means that code cannot create new threads and run in parallel. Find out what asynchronous code means and how it looks like



Asynchronicity in Programming Languages

Computers are asynchronous by design.

Asynchronous means that things can happen independently of the main program flow.

In the current consumer computers, every program runs for a specific time slot, and then it stops its execution to let another program continue its execution. This thing runs in a cycle so fast that's impossible to notice, and we think our computers run many programs simultaneously, but this is an illusion (except on multiprocessor machines).

Programs internally use *interrupts*, a signal that's emitted to the processor to gain the attention of the system.

I won't go into the internals of this, but just keep in mind that it's normal for programs to be asynchronous, and halt their execution until they need attention, and the computer can execute other things in the meantime. When a program is waiting for a response from the network, it cannot halt the process or until the request finishes.

Normally, programming languages are synchronous, and some provide a way to manage asynchronicity, in the language or through libraries. C, Java, C#, PHP, Go, Ruby, Swift, Python, they are all synchronous by default. Some of them handle async by using threads, spawning a new process.

JavaScript

JavaScript is synchronous by default and is single threaded. This means that code cannot create new threads and run in parallel.

Lines of code are executed in series, one after another, for example:

```
const a = 1
const b = 2
const c = a + b
console.log(c)
setTimeout(() => {})
```

But JavaScript was born inside the browser, its main job, in the beginning, was to respond to user actions, like `onClick`, `onmouseover`, `onchange`, `onsubmit` and so on. How could it do this with a synchronous programming model?

The answer was in its environment. The browser provides a way to do it by providing a set of APIs that can handle this kind of functionality.

More recently, Node.js introduced a non-blocking I/O environment to extend this concept to file access, network calls and so on.

Callbacks

You can't know when a user is going to click a button, so what you do is, you define an event handler for the click event. This event handler accepts a function, which will be called when the event is triggered:

```
document.getElementById('button').addEventListener('click', () => {
  console.log('Clicked')
})
```

This is the so-called **callback**.

A **callback** is a simple function that's passed as a value to another function, and will only be executed when the event happens. We can do this because JavaScript has first-class functions, which can be assigned to variables and passed around to other functions (called higher-order functions).

It's common to wrap all your client code in a `load` event listener on the `window` object, which runs the callback function only when the page is ready:

```

window.addEventListener('load', () => {
  //function loaded
  //run code you want
})
    
```

Callbacks are used everywhere, not just in DOM events.

One common example is by using timers:

```

setTimeout(() => {
  // Runs after 2 seconds
}, 2000)
    
```

XHR requests also accept a callback, in this example by assigning a function to a property that will be called when a particular event occurs (in this case, the state of the request changes):

```

const xhr = new XMLHttpRequest()
xhr.onreadystatechange = () => {
  if (xhr.readyState === 4) {
    if (xhr.status === 200) console.log(xhr.responseText) : console.error('error')
  }
  xhr.open('GET', 'https://paulthedev.com')
  xhr.send()
}
    
```

Handling errors in callbacks

How do you handle errors with callbacks? One very common strategy is to use what Node.js adopted: the first parameter in any callback function is the error object; error-first callbacks.

If there is no error, the object is `null`. If there is an error, it contains some description of the error and other information.

```

fs.readFile('files/1.txt', (err, data) => {
  if (err != null) {
    // Handle error
  }
})
    
```

```

//handle error
callback(log(err))
return

//if we succeed, access data
callback(log(data))
}
}

```

The problem with callbacks

Callbacks are great for simple cases!

However every callback adds a level of nesting, and when you have lots of callbacks, the code starts to be complicated very quickly:

```

//button.addEventListener('load', () => {
//  //get element by id('button').addEventListener('click', () => {
//    setTimeout(() => {
//      items.forEach(item => {
//        //your code here
//      })
//    }, 1000)
//  })
//})

```

This is just a simple 4-level code, but I've seen much more levels of nesting and it's not fun.

How do we solve this?

Alternatives to callbacks

Starting with ES6, JavaScript introduced several features that help us with asynchronous code that do not involve using callbacks:

- `Promises` (ES6)
- `Async/Await` (ES8)

Promises

Promises are one way to deal with asynchronous code in JavaScript, without writing too many callbacks in your code.

Introduction to promises

A promise is commonly defined as a proxy for a value that will eventually become available.

Promises are one way to deal with asynchronous code, without writing too many callbacks in your code.

Although being around since years, they have been standardized and introduced in [ES2015](#), and now they have been superseded in [ES2017](#) by [async functions](#).

Async functions use the promises API as their building block, so understanding them is fundamental even if in newer code you'll likely use async functions instead of promises.

How promises work, in brief

Once a promise has been called, it will start in pending state. This means that the caller function continues the execution, while it waits for the promise to do its own processing, and give the caller function some feedback.

At this point, the caller function waits for it to either return the promise in a resolved state, or in a rejected state, but as you know [JavaScript](#) is asynchronous, so the function continues its execution while the promise does its work.

Which JS API use promises?

In addition to your own code and libraries code, promises are used by standard modern Web APIs such as:

- the [Battery API](#)
- the [Fetch API](#)
- [Service Workers](#)

It's unlikely that in modern JavaScript you'll find yourself not using promises, so let's start diving right into them.

Creating a promise

The Promise API exposes a Promise constructor, which you initialize using `new Promise()`:

```
let done = true;

const isItDoneYet = new Promise(
  (resolve, reject) => {
    if (done) {
      const workDone = 'here is the thing I built';
      resolve(workDone);
    } else {
      const why = 'still working on something else';
      reject(why);
    }
  }
);
```

As you can see the promise checks the `done` global constant, and if that's true, we return a resolved promise, otherwise a rejected promise.

Using `resolve` and `reject` we can communicate back a value, in the above case we just return a string, but it could be an object as well.

Consuming a promise

In the last section, we introduced how a promise is created.

Now let's see how the promise can be consumed or used.

```
const isItDoneYet = new Promise(
  // ...
);

const checkIfItDone = () => {
  isItDoneYet
    .then((ok) => {
      console.log(ok);
    })
    .catch((err) => {
      console.error(err);
    })
};
```

Running `checkItIsBelow()` will execute the `isItBelow()` promise and will wait for it to resolve, using the `then` callback, and if there is an error, it will handle it in the `catch` callback.

Chaining promises

A promise can be returned to another promise, creating a chain of promises.

A great example of chaining promises is given by the [Fetch API](#), a layer on top of the XMLHttpRequest API, which we can use to get a resource and queue a chain of promises to execute when the resource is fetched.

The Fetch API is a promise-based mechanism, and calling `fetch()` is equivalent to defining our own promise using `new Promise()`.

Example of chaining promises

```
const status = (response) => {
  if (response.status >= 200 && response.status < 300) {
    return Promise.resolve(response)
  }
  return Promise.reject(new Error(response.statusText))
}

const json = (response) => response.json()

fetch('todos.json')
  .then(status)
  .then(json)
  .then(data => { console.log('Request succeeded with JSON response', data) })
  .catch(error => { console.log('Request failed', error) })
```

In this example, we call `fetch()` to get a list of TODO items from the `todos.json` file found in the domain root, and we create a chain of promises.

Running `fetch()` returns a `Response`, which has many properties, and within those we reference:

- `status`, a numeric value representing the HTTP status code
- `statusText`, a status message, which is `OK` if the request succeeded

`response` also has a `json()` method, which returns a promise that will resolve with the content of the body processed and transformed into JSON.

So given those promises, this is what happens: the first promise in the chain is a function that we defined, called `status()`, that checks the response status and if it's not a success response (between 200 and 299), it rejects the promise.

This operation will cause the promise chain to skip all the chained promises listed and will skip directly to the `catch()` statement at the bottom, logging the `request failed` text along with the error message.

If that succeeds instead, it calls the `json()` function we defined. Since the previous promise, when successful, returned the `response` object, we get it as an input to the second promise.

In this case, we return the `data` JSON processed, so the third promise receives the JSON directly:

```
then((data) => {
  console.log('Request succeeded with JSON response', data);
})
```

and we simply log it to the console:

Handling errors

In the example, in the previous section, we had a `catch` that was appended to the chain of promises.

When anything in the chain of promises fails and raises an error or rejects the promise, the control goes to the nearest `catch()` statement down the chain.

```
function(resolve, reject) => {
  try {
    // ...
  } catch(err) => { console.error(err) }

  // ...

  function(resolve, reject) => {
    reject('Error')
  }

  // ...
  catch(err) => { console.error(err) }
```

Cascading errors

If inside the `catch()` you raise an error, you can append a second `catch()` to handle it, and so on.

```

    all(promises)(resolve, reject) => {
      throw new Error('Error')
    }
    catch(err) => { throw new Error('Error') }
    catch(err) => { console.log(err) }
  }

```

Orchestrating promises

Promise.all()

If you need to synchronize different promises, `Promise.all()` helps you define a list of promises, and execute something when they are all resolved.

Example:

```

const P1 = fetch('/something.js.json')
const P2 = fetch('/something.js.json')

Promise.all([P1, P2]).then((res) => {
  console.log('array of results', res)
})
catch(err) => {
  console.error(err)
}

```

The ES2015 [destructuring assignment](#) syntax allows you to also do:

```

Promise.all([P1, P2]).then(([res1, res2]) => {
  console.log('results', res1, res2)
})

```

You are not limited to using `then` of course, any promise is good to go.

Promise.race()

`Promise.race()` runs when the first of the promises you pass to it resolves, and it runs the attached callback just once, with the result of the first promise resolved.

Example:

```

const first = new Promise((resolve, reject) => {
  setTimeout(resolve, 500, 'first')
})
const second = new Promise((resolve, reject) => {

```

```
    setTimeout(resolve, 1000, 'second')
  })

  Promise.race([first, second]).then(result => {
    console.log(result) // second
  })
```

Common errors

Uncaught TypeError: undefined is not a promise

If you get the `Uncaught TypeError: undefined is not a promise` error in the console, make sure you use `new Promise()` instead of just `Promise()`

Async and Await

Discover the modern approach to asynchronous functions in JavaScript. JavaScript evolved in a very short time from callbacks to Promises, and since ES2017 asynchronous JavaScript is even simpler with the `async/await` syntax.

Introduction

JavaScript evolved in a very short time from callbacks to `promises` (ES2015), and since ES2017 asynchronous JavaScript is even simpler with the `async/await` syntax.

Async functions are a combination of promises and `generators`, and basically, they are a higher level abstraction over promises. Let me repeat `async/await` is built on promises.

Why were `async/await` introduced?

They reduce the boilerplate around promises, and the "don't break the chain" limitation of chaining promises.

When Promises were introduced in ES2015, they were meant to solve a problem with asynchronous code, and they did, but over the 2 years that separated ES2015 and ES2017, it was clear that *promises could not be the final solution*.

Promises were introduced to solve the famous *callback hell* problem, but they introduced complexity on their own, and syntax complexity.

They were a good primitives around which a better syntax could be exposed to the developers, so when the time was right we got `async` functions.

They make the code look like it's synchronous, but it's asynchronous and non-blocking behind the scenes.

How it works

An `async` function returns a promise, like in this example:

```
const doSomethingAsync = () => {
  return new Promise((resolve) => {
    setTimeout(() => resolve('I did something!'), 1000);
  });
}
```

```
|
```

When you want to call this function you prepend `await`, and the calling code will stop until the promise is resolved or rejected. One caveat: the client function must be defined as `async`. Here's an example:

```
const doSomething = async () => {
  console.log(await doSomethingAsync())
}
```

A quick example

This is a simple example of `async/await` used to run a function asynchronously:

```
const doSomethingAsync = () => {
  return new Promise((resolve) => {
    setTimeout(() => resolve('I did something'), 1000)
  })
}

const doSomething = async () => {
  console.log(await doSomethingAsync())
}

console.log('before')
doSomething()
console.log('after')
```

The above code will print the following to the browser console:

```
before
after
I did something //after 1s
```

Promise all the things

Prepending the `async` keyword to any function means that the function will return a promise:

Even if it's not doing so explicitly, it will internally make it return a promise:

This is why this code is valid:

```
const aFunction = async () => {
  return 'test'
}
```



```
aFunction().then(alert) // This will alert 'test'
```

and it's the same as:

```
const aFunction = async () => {
  return Promise.resolve('test')
}

aFunction().then(alert) // This will alert 'test'
```

The code is much simpler to read

As you can see in the example above, our code looks very simple. Compare it to code using plain promises, with chaining and callback functions.

And this is a very simple example, the major benefits will arise when the code is much more complex.

For example here's how you would get a JSON resource, and parse it, using promises:

```
const getFirstUserData = () => {
  return fetch('/users.json') // get users list
    .then(response => response.json()) // parse JSON
    .then(users => users[0]) // pick first user
    .then(user => fetch(`/users/${user.name}`)) // get user data
    .then(userResponse => response.json()) // parse JSON
}

getFirstUserData()
```

And here is the same functionality provided using `await/async`:

```
const getFirstUserData = async () => {
  const response = await fetch('/users.json') // get users list
  const users = await response.json() // parse JSON
  const user = users[0] // pick first user
  const userResponse = await fetch(`/users/${user.name}`) // get user data
  const userData = await userResponse.json() // parse JSON
  return userData
}

getFirstUserData()
```

Multiple async functions in series

Async functions can be chained very easily, and the syntax is much more readable than with plain promises:

```
const promiseToDoSomething = () => {
  return new Promise(resolve => {
    setTimeout(() => resolve('I did something'), 1000)
  })
}

const watchOverSomeoneDoingSomething = async () => {
  const something = await promiseToDoSomething()
  return something = 'and I watched!'
}

const watchOverSomeoneWatchingSomeoneDoingSomething = async () => {
  const something = await watchOverSomeoneDoingSomething()
  return something = 'and I watched as well!'
}

watchOverSomeoneWatchingSomeoneDoingSomething().then((res) => {
  console.log(res)
})
```

Will print:

```
I did something and I watched and I watched as well
```

Easier debugging

Debugging promises is hard because the debugger will not step over asynchronous code.

Async/await makes this very easy because to the compiler it's just like synchronous code.

Loops and Scope

There is one feature of JavaScript that might cause a few headaches to developers, related to loops and scoping. Learn some tricks about loops and scoping with `var` and `let`.

There is one feature of `JavaScript` that might cause a few headaches to developers, related to loops and scoping.

Take this example:

```
const operations = []

for (var i = 0; i < 5; i++) {
  operations.push(() => {
    console.log(i)
  })
}

for (const operation of operations) {
  operation()
}
```

It basically iterates and for 5 times it adds a function to an array called `operations`. This function simply console logs the loop index variable.

Later it runs these functions.

The expected result here should be:

```
0
1
2
3
4
```

but actually what happens is this:

```
5
5
5
5
5
```

Why is this the case? Because of the use of `var`.

Since `var` declarations are hoisted, the above code equals to

```

var i;
const operations = [];

for (i = 0; i < 5; i++) {
  operations.push(() => {
    console.log(i)
  })
}

for (const operation of operations) {
  operation()
}

```

so, in the `for-of` loop, `i` is still visible, it's equal to 5 and every reference to `i` in the function is going to use this value.

So how should we do to make things work as we want?

The simplest solution is to use `let` declarations. Introduced in ES2015, they are a great help in avoiding some of the weird things about `var` declarations.

Simply changing `var` to `let` in the loop variable is going to work fine:

```

const operations = []

for (let i = 0; i < 5; i++) {
  operations.push(() => {
    console.log(i)
  })
}

for (const operation of operations) {
  operation()
}

```

Here's the output:

```

0
1
2
3
4

```

How is this possible? This works because on every loop iteration `i` is created as a new variable each time, and every function added to the `operations` array gets its own copy of `i`.

Keep in mind you cannot use `const` in this case, because there would be an error as `for` tries to assign a new value in the second iteration:

Another way to solve this problem was very common in pre-ES6 code, and it is called Immediately Invoked Function Expression (IIFE).

In this case you can wrap the entire function and bind `i` to it. Since in this way you're creating a function that immediately executes, you return a new function from it, so we can execute it later.

```
const operations = []

for (let i = 0; i < 10; i++) {
  operations.push(() => {
    return () => console.log(i)
  })
}

for (const operation of operations) {
  operation()
}
```

Timers

When writing JavaScript code, you might want to delay the execution of a function. Learn how to use `setTimeout` and `setInterval` to schedule functions in the future.



setTimeout()

When writing JavaScript code, you might want to delay the execution of a function.

This is the job of `setTimeout`. You specify a callback function to execute later, and a value expressing how later you want it to run, in milliseconds:

```
setTimeout(() => {
  // runs after 2 seconds
}, 2000)

setTimeout(() => {
  // runs after 50 milliseconds
}, 50)
```

This syntax defines a new function. You can call whatever other function you want in there, or you can pass an existing function name, and a set of parameters:

```
const myFunction = (firstParam, secondParam) => {
  // do something
}

// runs after 2 seconds
setTimeout(myFunction, 2000, firstParam, secondParam)
```

`setTimeout` returns the timer id. This is generally not used, but you can store this id, and clear it if you want to delete this scheduled function execution.

```
const id = setTimeout(() => {
  // should run after 2 seconds
}, 2000)

// I changed my mind
clearTimeout(id)
```

Zero delay

If you specify the timeout delay to `0`, the callback function will be executed as soon as possible, but after the current function execution.

```
setTimeout(() => {
  console.log('after')
}, 0)

console.log('before')
```

will print `before` `after` -

This is especially useful to avoid blocking the CPU on intensive tasks and let other functions be executed while performing a heavy calculation, by queuing functions in the scheduler.

Some browsers (IE and Edge) implement a `setImmediate()` method that does this same exact functionality, but it's not standard and [unavailable on other browsers](#). But it's a standard function in Node.js.

setInterval()

`setInterval` is a function similar to `setTimeout`, with a difference: instead of running the callback function once, it will run it forever, at the specific time interval you specify (in milliseconds).

```
setInterval(() => {
  // runs every 2 seconds
}, 2000)
```

The function above runs every 2 seconds unless you tell it to stop, using `clearInterval`, passing it the interval id that `setInterval` returned.

```
const id = setInterval(() => {
```

```
// TIMEOUT 2 SECONDS
let id = setInterval(() => {
  // ...
}, 2000);

clearInterval(id);
```

It's common to call `clearInterval` inside the `setInterval` callback function, to let it auto-determine if it should run again or stop. For example this code runs something unless `App.somethingWait` has the value `arrived`:

```
const interval = setInterval(() => {
  if (App.somethingWait === 'arrived') {
    clearInterval(interval);
    return;
  }
  // ...
}, 2000);
```


Recursive setTimeout

`setInterval` starts a function every `n` milliseconds, without any consideration about when a function finished its execution.

If a function takes always the same amount of time, it's all fine:



Maybe the function takes different execution times, depending on network conditions for example:

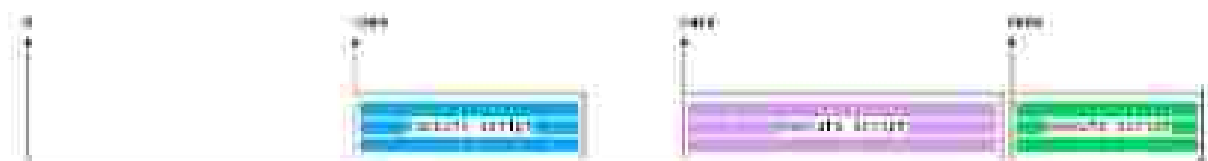

And maybe one long execution overlaps the next one:




To avoid this, you can schedule a recursive `setTimeout` to be called when the callback function finishes:


```
const myFunction = () => {
  // do something
}

setTimeout(myFunction, 1000)

setInterval(
  myFunction(),
  1000)
```

to achieve this scenario:

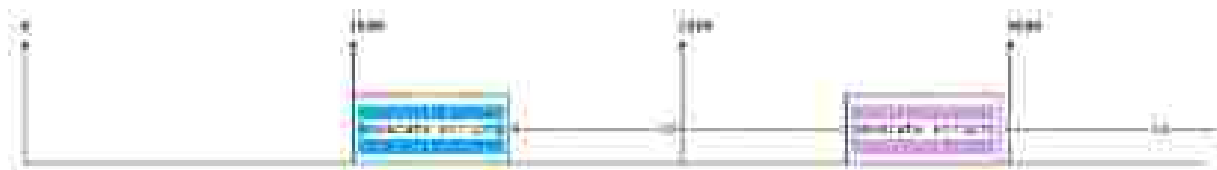

`setTimeout` and `setInterval` are available in `Node.js`, through the `Timers` module.

`Node.js` also provides `setImmediate()`, which is equivalent to using `setTimeout(() => {}, 0)`, mostly used to work with the `Node.js` Event Loop.

this

`this` is a value that has different values depending on where it's used. Not knowing this tiny detail of JavaScript can cause a lot of headaches, so it's worth taking 5 minutes to learn all the tricks.



`this` is a value that has different values depending on where it's used.

Not knowing this tiny detail of JavaScript can cause a lot of headaches, so it's worth taking 5 minutes to learn all the tricks.

this in strict mode

Outside any object, `this` in strict mode is always `undefined`.

Notice I mentioned strict mode. If strict mode is disabled (the default state if you don't explicitly add `'use strict'` on top of your file), you are in the so-called *sloppy mode*, and `this` - unless some specific cases mentioned here below - has the value of the global object.

Which means `window` in a browser context.

this in methods

A method is a function attached to an object.

You can see it in various forms.

Here's one:

```
const car = {
  make: 'Ford',
  model: 'Musta',

  drive() {
    console.log(`Driving a ${this.make} ${this.model} car`)
  }
}

car.drive()
// Driving a Ford Musta car
```

In this case, using a regular function, `this` is automatically bound to the object:

Note: the above method declaration is the same as `drive: function() { ... }`, but shorter:

```
const car = {
  make: 'Ford',
  model: 'Musta',

  drive: function() {
    console.log(`Driving a ${this.make} ${this.model} car`)
  }
}
```

The same works in this example:

```
const car = {
  make: 'Ford',
  model: 'Musta'
}

car.drive = function() {
  console.log(`Driving a ${this.make} ${this.model} car`)
}

car.drive()
// Driving a Ford Musta car
```

An arrow function does not work in the same way, as it's lexically bound:

```
const car = {
  make: 'Ford',
  model: 'Musta',

  drive: () => {
    console.log(`Driving a ${this.make} ${this.model} car`)
  }
}
```

```
car.drive()
// Driving a Ford Fiesta car
```

Binding arrow functions

You cannot bind a value to an arrow function, like you do with normal functions.

It's simply not possible due to the way they work. `this` is lexically bound, which means its value is derived from the context where they are defined.

Explicitly pass an object to be used as `this`

JavaScript offers a few ways to map `this` to any object you want.

Using `bind()`, at the function declaration step

```
const car = {
  make: 'Ford',
  model: 'Fiesta'
}

const drive = function() {
  console.log('Driving a ' + this.make + ' ' + this.model + ' car')
}

bind(car)

drive()
// Driving a Ford Fiesta car
```

You could also bind an existing object method to remap its `this` value:

```
const car = {
  make: 'Ford',
  model: 'Fiesta',

  drive() {
    console.log('Driving a ' + this.make + ' ' + this.model + ' car')
  }
}

const anotherCar = {
  make: 'Audi',
  model: 'A8'
}

car.drive.bind(anotherCar)()
// Driving a Audi A8 car
```

Using `call()` or `apply()`, at the function invocation step:

```

const car = {
  make: 'Ferrari',
  model: 'F430'
}

const drive = function() {
  console.log(`Driving a ${this.make} ${this.model} car at 300km/h`);
}

drive.call(car, 300)
// Driving a first Ferrari car at 300 km/h

drive.apply(car, [300])
// Driving a first Ferrari car at 300 km/h

```

The first parameter you pass to `call()` or `apply()` is always bound to `this`. The difference between `call()` and `apply()` is just that the second one wants an array as the arguments list, while the first accepts a variable number of parameters, which passes as function arguments.

The special case of browser event handlers

In event handlers callbacks, `this` refers to the HTML element that received the event:

```

document.querySelector('#button').addEventListener('click', function() {
  console.log(this); // HTMLButtonElement
});

```

You can bind it using:

```

document.querySelector('#button').addEventListener(
  'click',
  function() {
    console.log(this); // And now it's equal to your context
  }.bind(this)
);

```

Strict Mode

Strict Mode is an ES5 feature, and it's a way to make JavaScript behave in a better way. And in a different way, as enabling Strict Mode changes the semantics of the JavaScript language. It's really important to know the main differences between JavaScript code in strict mode, and normal JavaScript, which is often referred as sloppy mode.



Strict Mode is an ES5 feature, and it's a way to make JavaScript behave in a better way.

And in a different way, as enabling Strict Mode changes the semantics of the JavaScript language.

It's really important to know the main differences between JavaScript code in strict mode, and "normal" JavaScript, which is often referred as sloppy mode.

Strict Mode mostly removes functionality that was possible in ES3, and deprecated since ES5 (but not removed because of backwards compatibility requirements).

How to enable Strict Mode

Strict mode is optional. As with every breaking change in JavaScript, we can't simply change how the language behaves by default, because that would break gazillions of JavaScript around, and JavaScript puts a lot of effort into making sure 1996 JavaScript code still works today. It's a key of its success.

So we have the `'use strict'` directive we need to use to enable Strict Mode.

You can put it at the beginning of a file, to apply it to all the code contained in the file:

```
'use strict'

const name = 'Flavio'
const hello = () => 'hey'
```

You can also enable Strict Mode for an individual function, by putting `'use strict'` at the beginning of the function body:

```
function hello() {
  'use strict'

  return 'hey'
}
```

This is useful when operating on legacy code, where you don't have the time to test or the confidence to enable strict mode on the whole file.

What changes in Strict Mode

Accidental global variables

If you assign a value to an undeclared variable, JavaScript by default creates that variable on the global object.

```
if (function() {
  variable = 'hey'
  function() {}
}) {
  // 'hey'
}
```

Turning on Strict Mode, an error is raised if you try to do what we did above:

```

(function() {
  'use strict';
  variable = 'hey';
})();
//use strict
myname = 'Flavio'
})();

```

```

> (function() {
  'use strict';
  variable = 'hey';
})();
▶ Uncaught ReferenceError: variable is not defined
    at <anonymous>:3:12
    at <anonymous>:4:3

> (() => {
  'use strict';
  myname = 'Flavio';
})();
▶ Uncaught ReferenceError: myname is not defined
    at <anonymous>:3:10
    at <anonymous>:4:3

```

Assignment errors

JavaScript silently falls some conversion errors.

In Strict Mode, those silent errors now raise issues:

```

const number = 1;
'use strict';
number = 3;
();

```



```

> undefined = 1
< 1
>
  (() => {
    'use strict'
    undefined = 1
  })()

```

▶ Uncaught TypeError: Cannot assign to read only property 'undefined' of object '#<Window>'
 at <anonymous>:4:13
 at <anonymous>:5:3

The same applies to Infinity, NaN, eval, arguments and more.

In JavaScript you can define a property of an object to be notwritable, by using

```

const car = {}
Object.defineProperty(car, 'color', { value: 'blue', writable: false })

```

In strict mode, you can't override this value, while in sloppy mode that's possible:

```

const car = {}
Object.defineProperty(car, 'color', { value: 'blue', writable: false })
> {color: "blue"}
> car.color = 'red'
< "red"
>
  (() => {
    'use strict'
    car.color = 'yellow'
  })()

```

▶ Uncaught TypeError: Cannot assign to read only property 'color' of object '#<Object>'
 at <anonymous>:4:13
 at <anonymous>:5:3

The same works for getters:

```

const car = {
  get color() {
    return 'blue'
  }
}
car.color = 'red'
// Uncaught TypeError: Cannot assign to read only property 'color' of object '#<Object>'

```

```
car.color = 'yellow' //TypeError: Cannot set property color of #000000 which has no
// > getter
}
})
```

Sloppy mode allows to extend a non-extensible object

```
const car = { color: 'blue' };
//> [[Prototype]]: Object(Extensions(Car))
car.model = 'Fiesta';
//> true

function() {
  "use strict";
  car.color = 'green' //TypeError: Cannot add property color, object is not extensible
}
})
```

Also, sloppy mode allows to set properties on primitive values, without failing, but also without doing anything at all:

```
true.false = '1'
//>
//>
//>
{ name:
  'car' } //> true
var test = 'test' //undefined
test.testing = true //true
test.testing //undefined
```

Strict mode fails in all those cases:

```
function() {
  "use strict";
  true.false = '1'
  //TypeError: Cannot create property 'false' on boolean 'true'
}
{ name:
  'car' } //TypeError: Cannot create property 'name' on object '5'
test.testing = true //TypeError: Cannot create property 'testing' on string 'test'
}
})
```

Deletion errors

In sloppy mode, if you try to delete a property that you cannot delete, JavaScript simply returns false, while in Strict Mode, it raises a `TypeError`:

```
delete Object.prototype
```

```

function() {
  "use strict";
  Object.prototype.__proto__ = function() {
    return null;
  }
}

```

Function arguments with the same name

In normal functions, you can have duplicate parameter names:

```

function(a, a, n) {
  console.log(a, n);
}
// a, a, n

(function(a, a, n) {
  "use strict";
  console.log(a, n);
})(1, 2, 3);
// Uncaught SyntaxError: Duplicate parameter name not allowed in this context

```

Note that arrow functions always raise a `SyntaxError` in this case:

```

(a, a, n) => {
  console.log(a, n);
}
// Uncaught SyntaxError: Duplicate parameter name not allowed in this context

```

Octal syntax

Octal syntax in Strict Mode is disabled. By default, prepending a `0` to a number compatible with the octal numeric format makes it (sometimes confusingly) interpreted as an octal number:

```

() => {
  console.log(07);
}
// 7

() => {
  "use strict";
  console.log(07);
}
// Uncaught SyntaxError: Octal literals are not allowed in strict mode

```

You can still enable octal numbers in Strict Mode using the `0xxx` syntax:

```
function foo() {  
  "use strict";  
  console.log(0100);  
}
```

Removed with

Strict Mode disables the `with` keyword, to remove some edge cases and allow more optimization at the compiler level.

Immediately-Invoked Function Expressions (IIFE)

An Immediately-Invoked Function Expression is a way to execute functions immediately, as soon as they are created. IIFEs are very useful because they don't pollute the global object, and they are a simple way to isolate variables declarations.



An Immediately-Invoked Function Expression (IIFE for friends) is a way to execute functions immediately, as soon as they are created.

IIFEs are very useful because they don't pollute the global object, and they are a simple way to isolate variables declarations.

This is the syntax that defines an IIFE:

```
(function() {  
  //  
})()
```

IIFEs can be defined with arrow functions as well:

```

    i() => {
      // ...
    }
  }()

```

We basically have a function defined inside parentheses, and then we append `()` to execute that function: (<https://flaviocopes.com/function-iife/>)

Those wrapping parentheses are actually what make our function, internally, be considered an expression. Otherwise, the function declaration would be invalid, because we didn't specify any name:

```

>> function() {
    /* */
}
A SyntaxError: function statement requires a name [Learn More]
>> {function() {
    /* */
  }}()
← undefined

```

Function declarations want a name, while function expressions do not require it.

You could also put the invoking parentheses *inside* the expression parentheses, there is no difference, just a styling preference:

```

(function() {
  // ...
})();

i() => {
  // ...
}()

```

Alternative syntax using unary operators

There is some weirder syntax that you can use to create an IIFE, but it's very rarely used in the real world, and it relies on using any unary operator:

```

~(function() {
  // ...
})();

!function() {
  // ...
}()

```

```
(function() {  
  // ...  
})()  
  
(function() {  
  // ...  
})()
```

(does not work with arrow functions)

Named IIFE

An IIFE can also be named regular functions (not arrow functions). This does not change the fact that the function does not "leak" to the global scope, and it cannot be invoked again after its execution:

```
(function myName() {  
  // ...  
})()
```

IIFEs starting with a semicolon

You might see this in the wild:

```
;(function() {  
  // ...  
})()
```

This prevents issues when blindly concatenating two JavaScript files. Since JavaScript does not require semicolons, you might concatenate with a file with some statements in its last line that causes a syntax error.

This problem is essentially solved with "smart" code bundlers like [webpack](#).

Math operators

Performing math operations and calculus is a very common thing to do with any programming language. JavaScript offers several operators to help us work with numbers.

Performing math operations and calculus is a very common thing to do with any programming language.

JavaScript offers several operators to help us work with numbers.

Operators

Arithmetic operators

Addition (+)

```
const three = 1 + 2;
const four = three + 1;
```

The `+` operator also serves as string concatenation if you use strings, so pay attention:

```
const three = 1 + 2;
three = 1 + 2;
"three" = 1 + 2;
```

Subtraction (-)

```
const two = 4 - 2;
```

Division (<https://flaviocopes.com/>)

Returns the quotient of the first operator and the second

```
const result = 10 / 2; // result === 5;
const result = 10 / 0; // result === Infinity
```

If you divide by zero, JavaScript does not raise any error but returns the `Infinity` value (or `-Infinity` if the value is negative).


```
1 / 0 // Infinity
1 / 0.0000000000000001
```

Remainder (%)

The remainder is a very useful calculation in many use cases:

```
const result = 5 % 2 // result === 1
const result = 5 % 3 // result === 2
```

A remainder by zero is always `NaN`, a special value that means "Not a Number".

```
1 % 0 // NaN
1 % 0 // NaN
```

Multiplication (*)

```
1 * 2 // 2
-1 * 2 // -2
```

Exponentiation (**)

Raise the first operand to the power second operand

```
2 ** 2 // 4
2 ** 3 // 8
2 ** 4 // 16
2 ** 5 // 32
2 ** 6 // 64
2 ** 7 // 128
```

Unary operators

Increment (++)

Increment a number. This is a unary operator, and if put before the number, it returns the value incremented.

If put after the number, it returns the original value, then increments it.

```
let x = 0
x++
x // 1
++x
x // 2
```

Decrement (--)

Works like the increment operator, except it decrements the value.

```
int x = 0;
x-- / 0
x = 1;
--x / 0
```

Unary negation (-)

Return the negation of the operand

```
int x = 1;
-x / -1
x = 2
```

Unary plus (+)

If the operand is not a number, it tries to convert it. Otherwise if the operand is already a number, it does nothing.

```
int x = 1;
+x / 1

x = "1";
+x / 1

x = "1a";
+x / NaN
```

Assignment shortcuts

The regular assignment operator, `=`, has several shortcuts for all the arithmetic operators which let you combine assignment, assigning to the first operand the result of the operations with the second operand.

They are:

- `+=` addition assignment
- `-=` subtraction assignment
- `*=` multiplication assignment

- $/$ = division assignment
- $\%$ = remainder assignment
- $^$ = exponentiation assignment

Examples

```
const A = 0
A = 1 // A = 1
A = 2 // A = 2
A = 3 // A = 3
A = 1 // A = 1
A = 2 // A = 2
```

Precedence rules

Every complex statement will introduce precedence problems

Take this

```
const A = 1 + 2 * 3 / 4 % 5
```

The result is 2.5, but why? What operations are executed first, and which need to wait?

Some operations have more precedence than the others. The precedence rules are listed in this table

Operator	Description
$++$ $--$ $+$ $-$	unary operators, increment and decrement
$*$ $/$ $\%$	multiply/divide
$+$ $-$	addition/subtraction
$=$ $+=$ $-=$ $*$ $/$ $\%$ $++$ $--$	assignments

Operations on the same level (like $+$ and $-$) are executed in the order they are found

Following this table, we can solve this calculation:

```
const A = 1 + 2 * 3 / 4 % 5
const A = 1 + 6 / 4 % 5
const A = 1 + 1.5 % 5
const A = 1 + 0.5
const A = 1.5
```


The Math object

The Math object contains lots of utilities math-related. This tutorial describes them all

The Math object contains lots of utilities math-related.

It contains constants and functions:

Constants

Item	Description
<code>Math.E</code>	The constant e, base of the natural logarithm (means ≈ 2.71828)
<code>Math.LN10</code>	The constant that represents the base e (natural) logarithm of 10
<code>Math.LN2</code>	The constant that represents the base e (natural) logarithm of 2
<code>Math.LOG10E</code>	The constant that represents the base 10 logarithm of e
<code>Math.LOG2E</code>	The constant that represents the base 2 logarithm of e
<code>Math.PI</code>	The π constant (≈ 3.14159)
<code>Math.SQRT1_2</code>	The constant that represents the reciprocal of the square root of 2
<code>Math.SQRT2</code>	The constant that represents the square root of 2

Functions

All those functions are static. Math cannot be instantiated.

Math.abs()

Returns the absolute value of a number

```
Math.abs(2.3) // 2.3
Math.abs(-2.3) // 2.3
```

Math.acos()

Returns the arccosine of the operand

The operand must be between -1 and 1

```
Math.acos(0.4) // 0.9161502354007481
```

Math.asin()

Returns the arcsine of the operand

The operand must be between -1 and 1

```
Math.asin(0.4) // 0.4107593365591123
```

Math.atan()

Returns the arctangent of the operand

```
Math.atan(55) // 1.6927466800114421
```

Math.atan2()

Returns the arctangent of the quotient of its arguments

```
Math.atan2(4,3) // 0.9272952147019565
```

Math.ceil()

Rounds a number up

```
Math.ceil(3.1) // 4  
Math.ceil(2) // 2  
Math.ceil(2.1) // 3  
Math.ceil(2.500001) // 3
```

Math.cos()

Return the cosine of an angle expressed in radians

```
Math.cos(0) // 1  
Math.cos(Math.PI) // -1
```

Math.exp()

Return the value of Math.E multiplied per the exponent thats passed as argument

```
Math.round(1.5) // 2
Math.round(2.5) // 3
Math.round(3.5) // 4
```

Math.floor()

Rounds a number down

```
Math.floor(1.5) // 1
Math.floor(2.5) // 2
Math.floor(3.5) // 3
Math.floor(4.5) // 4
```

Math.log()

Return the base e (natural) logarithm of a number

```
Math.log(10) // 2.302585092994046
Math.log(Math.E) // 1
```

Math.max()

Return the highest number in the set of numbers passed

```
Math.max(1, 2, 3, 4, 5) // 5
Math.max(1) // 1
```

Math.min()

Return the smallest number in the set of numbers passed

```
Math.min(1, 2, 3, 4, 5) // 1
Math.min(1) // 1
```

Math.pow()

Return the first argument raised to the second argument

```
Math.pow(2, 3) // 8
Math.pow(2, -3) // 0.125
Math.pow(2, 0) // 1
Math.pow(2, -1) // 0.5
```

Math.random()

Returns a pseudorandom number between 0.0 and 1.0

```
Math.random() // 0.5155158243127963  
Math.random() // 0.25160089329094325
```

Math.round()

Rounds a number to the nearest integer

```
Math.round(1.5) // 2  
Math.round(1.4) // 1
```

Math.sin()

Calculates the sin of an angle expressed in radians

```
Math.sin(0) // 0  
Math.sin(Math.PI/2) // 1.1244467961073832e-16
```

Math.sqrt()

Return the square root of the argument

```
Math.sqrt(1) // 1  
Math.sqrt(1.5) // 1.224744871391589  
Math.sqrt(17) // 4.123105625617661
```

Math.tan()

Calculates the tangent of an angle expressed in radians

```
Math.tan(0) // 0  
Math.tan(Math.PI/2) // 1.1244467961073832e-16
```


ES Modules

ES Modules is the ECMAScript standard for working with modules. While Node.js has been using the CommonJS standard since years, the browser never had a module system, as every major decision such as a module system must be first standardized by ECMAScript and then implemented.



Introduction to ES Modules

ES Modules is the ECMAScript standard for working with modules.

While Node.js has been using the CommonJS standard since years, the browser never had a module system, as every major decision such as a module system must be first standardized by ECMAScript and then implemented by the browser.

This standardization process completed with ES6 and browsers started implementing this standard trying to keep everything well aligned, working all in the same way, and now ES Modules are supported in Chrome, Safari, Edge and Firefox (since version 60).

Modules are very cool, because they let you encapsulate all sorts of functionality, and expose this functionality to other JavaScript files, as libraries.

JavaScript modules via script tag

Loading JavaScript module scripts using `<script type="module">`
Includes support for the `nomodule` attribute.



The ES Modules Syntax

The syntax to import a module is:

INFO: **680-900-7700** | **Fax:** **781-326-9000**

while CommonJS uses

```
const package = require('module-name')
```

A module is a JavaScript file that exports one or more value (objects, functions or variables), using the `export` keyword. For example, this module exports a function that returns a string uppercase:

Public case 1

```
tolower: tolower (str) => str.toLowerCase()
```

In this example, the module defines a single, default export, so it can be an anonymous function. Otherwise it would need a name to distinguish it from other exports.

Now, any other JavaScript module can import the functionality offered by `uppercase.js` by importing it.

An HTML page can add a module by using a `<script>` tag with the special `type="module"` attribute:

```
<script type="module" src="index.js"></script>
```

Note: this module import behaves like a `defer` script load. See [efficiently load JavaScript with `defer` and `async`](#).

It's important to note that any script loaded with `type="module"` is loaded in [strict mode](#).

In this example, the `uppercase.js` module defines a default export, so when we import it, we can assign it a name we prefer:

```
import toUpperCase from './uppercase.js'
```

and we can use it

```
toUpperCase('test') // 'TEST'
```

You can also use an absolute path for the module import, to reference modules defined on another domain:

```
import toUpperCase from 'https://www.kyleshannon.com/js/ditch/js/uppercase.js'
```

This is also valid import syntax:

```
import { foo } from './uppercase.js'
import { foo } from '../uppercase.js'
```

This is not:

```
import { foo } from 'uppercase.js'
import { foo } from 'utils/uppercase.js'
```

It's either absolute, or has a `./` or `../` before the name.

Other import/export options

We saw this example above:

```
export default str => str.toLowerCase()
```

This creates one default export. In a file however you can export more than one thing, by using this syntax:

```
const a = 1
const b = 2
const c = 3

export { a, b, c }
```

Another module can import all those exports using

```
import * from 'module'
```

You can import just a few of those exports, using the [destructuring assignment](#):

```
import { a } from 'module'
import { a, c } from 'module'
```

You can rename any import, for convenience, using `as`:

```
import { a, b as two } from 'module'
```

You can import the default export, and any non-default export by name, like in this common `React` import:

```
import React, { Component } from 'react'
```

You can check an ES Modules example on <https://glitch.com/edit/#!/florio-es-modules-example?path=index.html>

CORS

Modules are fetched using [CORS](#). This means that if you reference scripts from other domains, they must have a valid CORS header that allows cross-site loading (like `Access-Control-Allow-Origin: *`).

What about browsers that do not support modules?

Use a combination of `type="module"` and `<nomodule>`:

```
<script type="module" src="module.js"></script>  
<script nomodule="fallback.js"></script>
```

Conclusion


ES Modules are one of the biggest features introduced in modern browsers. They are part of ES6 but the road to implement them has been long.

We can now use them! But we must also remember that having more than a few modules is going to have a performance hit on our pages, as it's one more step that the browser must perform at runtime.

[Webpack](#) is probably going to still be a huge player even if ES Modules land in the browser, but having such a feature directly built in the language is huge for a unification of how modules work in the client-side and on Node.js as well.

CommonJS

The CommonJS module specification is the standard used in Node.js for working with modules. Modules are very cool, because they let you encapsulate all sorts of functionality, and expose this functionality to other JavaScript files, as libraries.

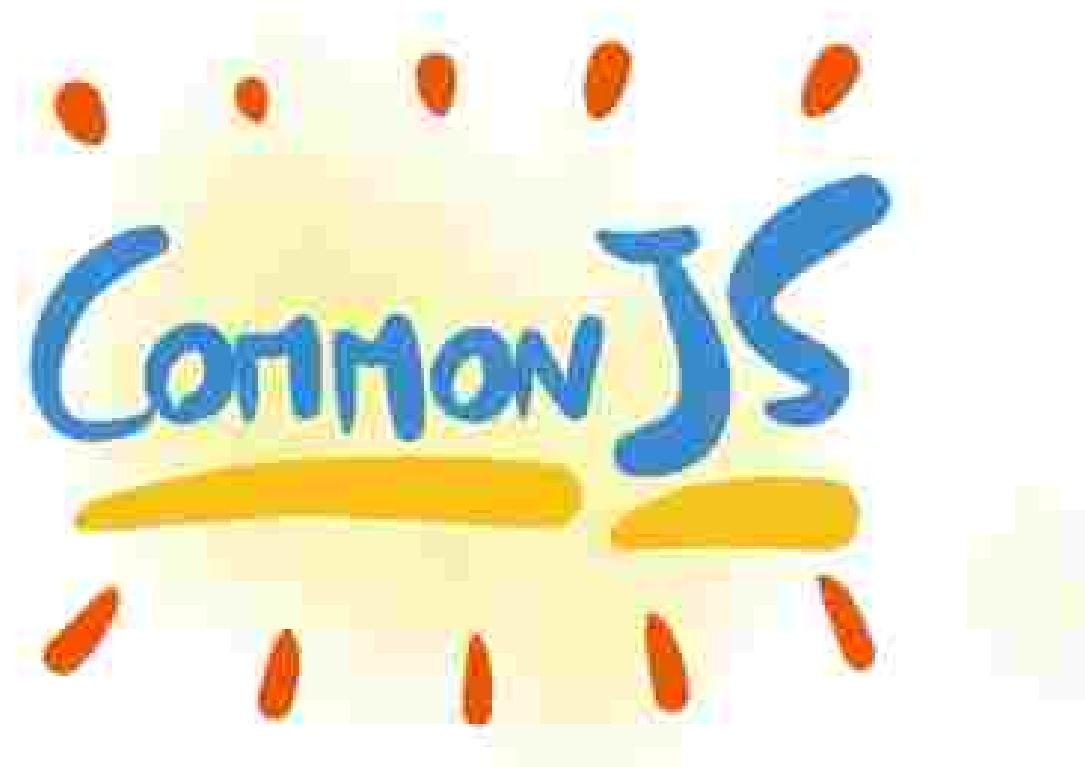

The CommonJS module specification is the standard used in Node.js for working with modules.

```
// Client-side JavaScript that runs in the browser uses another standard, called ES Modules
```

Modules are very cool, because they let you encapsulate all sorts of functionality, and expose this functionality to other JavaScript files, as libraries. They let you create clearly separate and reusable snippets of functionality, each testable on its own.

The huge [npm](#) ecosystem is built upon this CommonJS format.

The syntax to import a module is:

```
const package = require('module-name');
```

In CommonJS, modules are loaded synchronously, and processed in the order the JavaScript runtime finds them. This system was born with server-side JavaScript in mind, and is not suitable for the client-side (this is why ES Modules were introduced).

A JavaScript file is a module when it exports one or more of the symbols it defines, being them variables, functions, objects:

`uppercase.js`

```
exports.uppercase = str => str.toUpperCase()
```

Any JavaScript file can import and use this module:

```
const uppercaseModule = require('uppercase.js')
uppercaseModule.uppercase('test')
```

A simple example can be found in [this Github](#).

You can export more than one value:

```
exports.a = 1
exports.b = 2
exports.c = 3
```

and import them individually using the [destructuring assignment](#):

```
const { a, b, c } = require('./uppercase.js')
```

or just export one value using:

```
module.exports = value
```

and import it using

```
const value = require('./example.js')
```

Glossary

A guide to a few terms used in frontend development that might be alien to you

Asynchronous

Code is asynchronous when you initiate something, forget about it, and when the result is ready you get it back without having to wait for it. The typical example is an AJAX call, which might take even seconds and in the meantime you complete other stuff, and when the response is ready, the callback function gets called. Promises and `async/await` are the modern way to handle async.

Block

In JavaScript a block is delimited curly braces `{ }`. An `if` statement contains a block, a `for` loop contains a block.

Block Scoping

With Function [Scoping](#), any variable defined in a block is visible and accessible from inside the whole *block*, but not outside of it.

Callback

A callback is a function that's invoked when something happens. A click event associated to an element has a callback function that's invoked when the user clicks the element. A fetch request has a callback that's called when the resource is downloaded.

Declarative

A declarative approach is when you tell the machine what you need to do, and you let it figure out the details. React is considered declarative, as you reason about abstractions rather than editing the DOM directly. Every high level programming language is more declarative than a

low level programming language like Assembler, JavaScript is more declarative than C. HTML is declarative.

Fallback

A fallback is used to provide a good experience when a user hasn't access to a particular functionality. For example a user that browses with JavaScript disabled should be able to have a fallback to a plain HTML version of the page. Or for a browser that has not implemented an API, you should have a fallback to avoid completely breaking the experience of the user.

Function Scoping

With Function [Scoping](#), any variable defined in a function is visible and accessible from inside the whole function.

Immutability

A variable is immutable when its value cannot change after its created. A mutable variable can be changed. The same applies to objects and arrays.

Lexical Scoping

Lexical [Scoping](#) is a particular kind of scoping where variables of a parent function are made available to inner functions as well. The [scope](#) of an inner function also includes the scope of a parent function.

Polyfill

A polyfill is a way to provide new functionality available in modern JavaScript or a modern browser API to older browsers. A polyfill is a particular kind of [stub](#).

Pure function

A function that has no side effects (does not modify external resources), and its output is only determined by the arguments. You could call this function 1M times, and given the same set of arguments, the output will always be the same.

Reassignment

JavaScript with `var` and `let` declaration allows you to reassign a variable indefinitely. With `const` declarations you effectively declare an **immutable** value for strings, integers, booleans, and an object that cannot be reassigned (but you can still modify it through its methods).

Scope

Scope is the set of variables that's visible to a part of the program.

Scoping

Scoping is the set of rules that's defined in a programming language to determine the value of a variable.

Shim

A shim is a little wrapper around a functionality, or API. It's generally used to abstract something, pre-fill parameters or add a **polyfill** for browsers that do not support some functionality. You can consider it like a compatibility layer.

Side effect

A side effect is when a function interacts with some other function or object outside it. Interaction with the network, or the file system, or with the UI, are all side effects.

State

State usually comes into play when talking about Components. A component can be **stateful** if it manages its own data, or **stateless** if it doesn't.

Stateful

A stateful component, function or class manages its own state (data). It could store an array, a counter or anything else.

Stateless

A stateless component, function or class is also called *dumb* because it's incapable of having its own data to make decisions, so its output or presentation is entirely based on its arguments. This implies that *pure functions* are stateless.

Strict mode

Strict mode is an ECMAScript 5.1 new feature, which causes the JavaScript runtime to catch more errors, but it helps you improve the JavaScript code by denying undeclared variables and other things that might cause overlooked issues like duplicated object properties and other subtle things. Hint: use it. The alternative is "sloppy mode" which is not a good thing even looking at the name we gave it.

Tree Shaking

Tree shaking means removing "dead code" from the bundle you ship to your users. If you add some code that you never use in your import statements, that's not going to be sent to the users of your app, to reduce file size and loading time.