


L3

Control flow (if-else & loops)

Let's suppose you want the computer to decide whether someone will pass or fail in exam based on marks entered.

How do you think we can do it ?

33% ✓✓

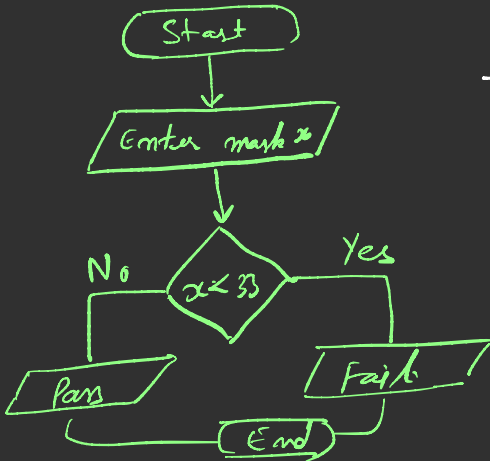

What are conditionals statements and their use ?

If

if (condition is true) ; x

$$\underline{10 > 2} \quad T$$

$$7 < 6 \quad F$$

char a = 'A'

char b = 'B'

$$\underline{a == b} \quad F$$

$$\underline{a != b} \quad T$$

If - Else

WAP to give grade to a student based on the marks.

91 +

A

51 < F

81 +

B

71 +

C

61 +

D

51 +

E

If - else - if Ladder

Max of 2 numbers


WAP to input 2 numbers a & b
print max of a and b

Max of 3 numbers

Ternary Operator

Watermelon problem Codeforces

<https://codeforces.com/problemset/problem/4/A>

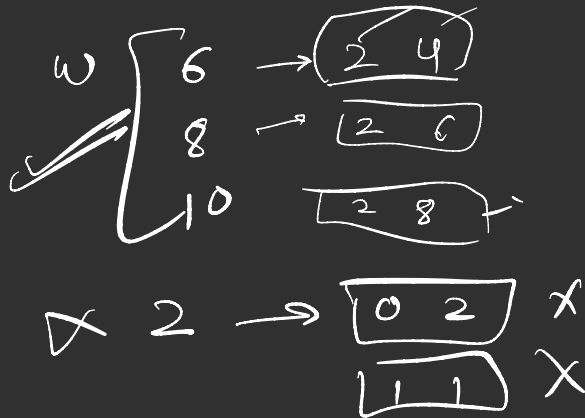

What is Switch Case ?

Day of week using Switch Case

Why to use Loops ?

For Loop

initialization
①

condition check
②

update
④

```
for (int i=0; i < 3; i++)
```

body
③ {
:
}

```
cout << "Frax";
```

1	2	3	4	2	3	4	234
1st iteration				second			

While Loop

Do-While Loop

How to find number is Prime or not ?

Homework Questions

1. Program to check whether a number is negative, positive or zero.
2. Program to check whether a number is divisible by 5 and 11 or not.
3. Program to check whether a number is even or odd.
4. Program to find sum of all even numbers between 1 to n.
5. Program to find sum of all odd numbers between 1 to n.
6. Program to find HCF (GCD) of two numbers.
7. Program to find LCM of two numbers.

Thank You!

Please practice more questions and examples as above !!