

L8

Array Problem Solving

For Discord email - support@learnyard.com

Reverse an array

Two pointer

↓
2 variable

↓
Differently
in array

5 4 2 1
~~1~~⁰ ~~2~~¹ ~~3~~² ~~4~~³ ~~5~~⁴


While



l r i j r l

→ ←

5 4 3 2 1

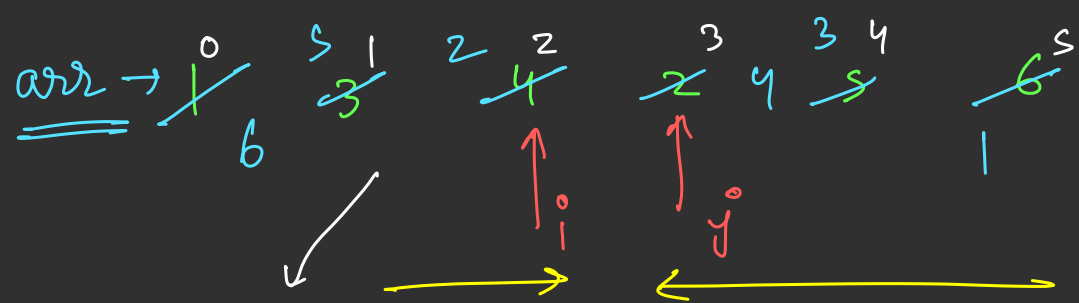


6 5 2 4 3 1

swap $arr[i]$ and $arr[j]$

temp = $arr[i]$

$arr[i] = arr[j]$ $arr[j] = temp$

6 5 2 4 3 1

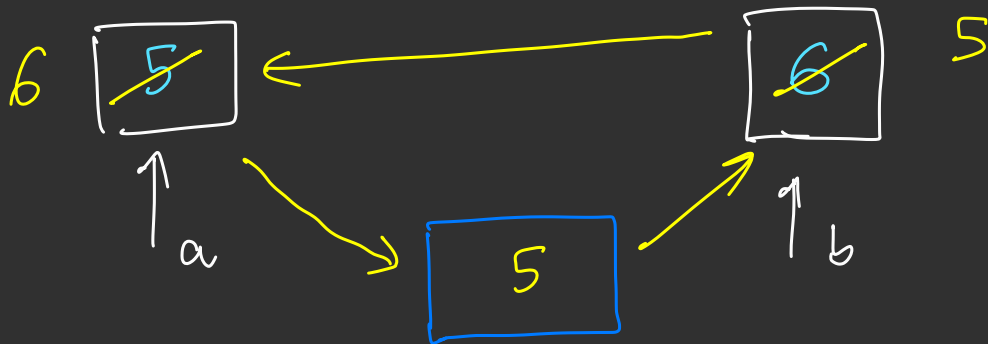

temp = a

a = b

b = temp

a = 6
b = 5

$i = 0, j = n - 1$ (last index)

while ($i < j$)
{

int temp = arr[i];

arr[i] = arr[j];


arr[j] = temp.

$i++$

$j--$

}

for loop

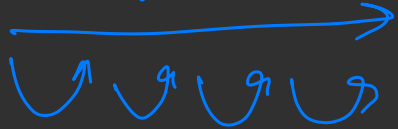

Practice and Homework Questions

Homework questions -

- 1 <https://leetcode.com/problems/max-consecutive-ones/>
 - 2 <https://leetcode.com/problems/two-sum/>
 - 3 <https://leetcode.com/problems/two-sum-ii-input-array-is-sorted/>
 - 4 <https://leetcode.com/problems/3sum/description/>
 - 5 <https://leetcode.com/problems/4sum/description/>
 - 6 <https://leetcode.com/problems/sort-colors/>
 - 7 <https://www.geeksforgeeks.org/first-element-occurring-k-times-array/>
- <https://practice.geeksforgeeks.org/problems/max-distance-between-same-elements/1>

Thank You!

Please practice more questions and examples as above !!