



AWS
User Groups
Kolkata

Agentic AI with Amazon Q Business

- Biraj Bhushan Choudhury
- Sr Product manager Hyland Software



COMMUNITY DAY
KOLKATA



Introduction





Connectors – Ingest Data




**Built-in connectors
bring enterprise data**

Unify content from all your enterprise sources together in a few clicks!

Adobe Experience Manager	Google Drive PREVIEW
Alfresco	Google Calendar
Amazon Simple Storage Service (Amazon S3)	Jira
Asana PREVIEW	Microsoft Exchange
Atlassian Confluence	Microsoft OneDrive
Amazon Aurora (MySQL-Compatible Edition, PostgreSQL-Compatible Edition)	Microsoft SharePoint
Box	Microsoft Teams
DB2	Microsoft Yammer
Dropbox	Microsoft SQL Server
Custom Connector	Salesforce
GitHub	ServiceNow
Gmail	Slack NEW
	Smartsheet
	Web Crawler
	Zendesk

Derive Insights

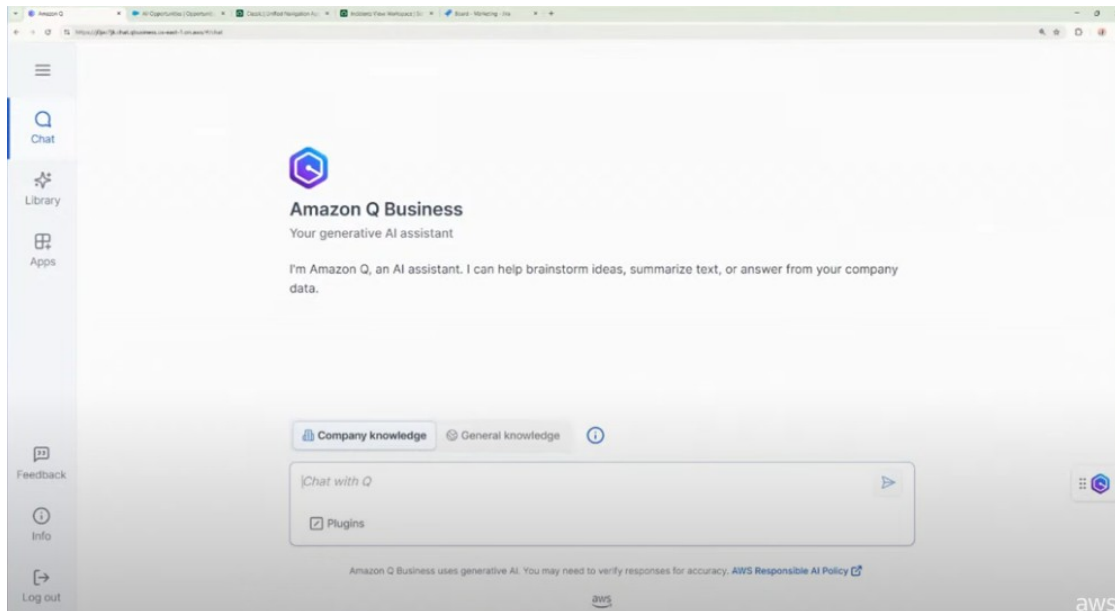

To file an insurance claim due to flood damage, the client should take the following steps:

First, the client should report the claim to their insurance company as soon as possible, and no later than 30 days after discovering the damage. ^[1] The client can file the claim by calling the insurance company's 24-hour claims hotline or by filing the claim online through their account. ^[1] When filing the claim, the client should provide details about the date, location, and nature of the loss, as well as submit any relevant photos, reports, receipts, and other evidence to support the claim. ^[1]

The client's homeowners insurance policy typically does not cover flood damage, so the client would need to have a separate flood insurance policy, such as through the National Flood Insurance Program (NFIP), to be covered for flood-related losses. ^[2] The NFIP flood insurance policy has its own deductible, which is typically \$1,000 or higher, that the client would need to meet before the insurance benefits are paid out. ^[2]

Once the claim is filed, the insurance company will investigate the claim, determine the covered damages, and calculate the appropriate claim payment amount based on the policy limits and coverage. ^[3] The client may need to work with an insurance adjuster who will inspect the damages and gather evidence to support the claim. ^[3]

Sources ^



^[1] 3_Claims.html

^[2] 4_Hurricane_and_Flood.html

^[3] 2_Claims_Handling.html



Plugins – Performing actions

Execute actions using plugins

Create a Jira ticket

Project: Project B

Priority - optional: High

Summary - optional: To set up the VPN connection, the customer needs to first create the VPN components including a customer gateway and VPN gateway or transit gateway. The customer gateway represents their on-premises device and network and needs to be created by providing information like the external IP address or certificate. Then a VPN connection can be established between the customer gateway and VPN

☐ Bug ☐ Enhancement

Cancel Create

Allow end users to perform actions on SaaS applications

"Summarize conversation and create ticket in Jira"





Create a AWS Q Business Application

Amazon Q Business > Applications



Amazon Q Business <

Applications

Documentation

Q Business applications may securely transmit data across Regions within your geography for processing.
For more information, access [Amazon Q Business Documentation](#)

Applications Info

▼ How it works

Show tips



Create generative AI application

Name your application, grant access, and experience how Q can accelerate your team's productivity.



Enhance application - *optional*

Connect to data sources, configure guardrails, plugins, Q App controls, and more.



Customize web experience - *optional*

Customize the end-user web experience and verify readiness to share.

Applications (0)

Find applications by name

Actions ▼

Customize web experience

Deploy web experience

Create application

< 1 >

Name	Application status	Index type	Index name	Creation time	Deployment status	Access URL
------	--------------------	------------	------------	---------------	-------------------	------------

No applications

Create an application so that you can connect data, define access, and generate answers.

Create application

Access Management method And Service Roles



AWS
User Groups
Kolkata

Create application

What kind of application do you want to build?

Application name

QBusiness-application

You can include hyphens (-), but not spaces. Maximum of 1000 alphanumeric characters.

Outcome

APIs are created for all applications.

Web experience

Access Q as a managed web experience



Access management method

Choose how to grant access to users of the application.

☒ AWS IAM Identity Center (recommended)

Use IAM Identity Center as your AWS gateway to the Identity Provider of your choice.

☐ AWS IAM Identity Provider

Use an identity provider (IdP) to manage your user identities outside of AWS, but grant the user identities permissions to use AWS resources in your account.

Access management method

Choose how to grant access to users of the application.

☒ AWS IAM Identity Center (recommended)

Use IAM Identity Center as your AWS gateway to the Identity Provider of your choice.

☐ AWS IAM Identity Provider

Use an identity provider (IdP) to manage your user identities outside of AWS, but grant the user identities permissions to use AWS resources in your account.

Advanced IAM Identity Center settings - optional

☒ Application connected to an account instance of IAM Identity Center

IAM Identity Center

Manage access to Application by assigning users and groups in IAM Identity Center to this application. [Learn more](#)

arn:aws:iam::instance/soins

Quick start user - optional

Select a user to access the application. You can always edit user access after the application is created.

Select user

To add new users or view a full list of users and groups, use [Add new users and groups](#)

Choose a user

AllUsers

Select subscription

For information on what's included in the tiers of user subscriptions, access [Amazon Q Business pricing](#)

Q Business Pro

Application details

Default values have been selected. Expand to edit. Allowing and users to send queries directly to the LLM is On by default, update in Admin controls and guardrails after creation.

Application service access

Create a new service linked role

Encryption

Amazon Q Business owned key

Web experience service access

Create role: QBusiness-WebExperience-pleb6

Cancel

Create and open web experience

Create



Add Data Sources



Add Amazon S3 [Info](#)

Provide details so that Amazon Q Business can index your Amazon S3 bucket repository of documents.

Name and description

Data source name

For easy identification please ensure the data source name is unique within the index. The given name may be referenced by users when creating Amazon Q Apps.

workshop-s3-ds-01

Description - optional

This text is viewed only by Amazon Q Business administrators and can be edited later.

My data source connector for my documents

Create Service Role for the Data Source



AWS
User Groups
Kolkata

IAM role [Info](#)

i IAM roles used for applications can't be used for data sources. If you are unsure if an existing role is used for an application, choose "Create a new role" to avoid an error.

IAM role

Amazon Q Business requires an IAM role to access repository credentials and application content.

Choose an option



Point to the Data Source and Set Sync intervals



AWS
User Groups
Kolkata

Sync scope [Info](#)

Enter the data source location [Info](#)

Locate the S3 bucket where your data is stored.

[Browse S3](#)

Maximum file size [Info](#)

Choose the maximum total document size (up to 50MB) that AmazonQ will crawl. The extracted text size from a document can be a maximum of 5MB.

MB

You can enter a whole number between 1 and 50. (Default value: 50MB)

Access control list (ACL) configuration file location - optional [Info](#)

Locate the ACL configuration file.

[Browse S3](#)

► Metadata files folder location - optional [Info](#)

Locate the folder that has your metadata JSON.

▼ Filter patterns - optional

Add a pattern to include only certain folders, or to exclude folders, file types or specific files in your repository. All paths are relative to the data source location S3 bucket. You can have a combined total of 100 patterns.

[Include patterns](#)

[Exclude patterns](#)

Type

Prefix

[Add](#)

Include prefix patterns:

► Advanced Settings - optional [Info](#)



Access your AI Assistant

Conversations

Recent chats

find contracts with renewal dates

April 5, 2025

Amazon Q Business

Create Amazon Q App

- Service Level Agreement guarantees 99.95% monthly uptime with 24/7 support and specific response times (1 hour for critical issues, 4 hours for major issues)
- Annual subscription fee of \$20,000 with optional Enhanced Threat Intelligence
- Provider implements AES-256 encryption, multi-factor authentication, and daily data backups
- Initial term is 1 year with automatic renewal unless terminated with 60 days' notice
- Contract renewal date is set for March 31, 2026

Security incident handling procedures require the Provider to notify the Customer within 4 hours of a breach, initiate root cause analysis within 12 hours, and implement mitigation actions within 24 hours.

The agreement is governed by California law, with disputes to be resolved through binding arbitration in San Francisco. The Provider's liability is capped at the annual subscription fee, and both parties are bound by confidentiality obligations.

Sources

GlobalTechContract.pdf

<https://aws-q-data-source.s3.amazonaws.com/GlobalTechContract.pdf>

Company knowledge

General knowledge

Ask a followup question

Plugins



Add Calendar Plugin

Add plugin [Info](#)



Google Calendar [Info](#)

Provide the details to connect to Google Calendar. For instructions, [view documentation](#) 

Actions supported (2)

Find Events

List Calendar

Plugin name

Name

Plugin names can only include letters (A-Z and a-z), numbers (0-9), and dashes (-), with no spaces added.

Domain URL [Info](#)

The My Domain URL of your Google Calendar organization.

URL

Example: <https://www.googleapis.com/calendar/v3>.



Add Google Calendar Plugin

Example: <https://www.googleapis.com/calendar/v3>.

OAuth2.0 Authorization [Info](#)

You can use an AWS Secrets Manager secret to store your authentication credentials.

AWS Secrets Manager secret

Choose an existing secret that starts with 'QBusiness-' or create a new one.

☒ Create and use a new secret

☐ Use an existing secret

Service access [Info](#)

Amazon Q Business requires permissions to use other services on your behalf.

Choose a method to authorize Amazon Q Business

☒ Create and use a new service role

☐ Use an existing service role

Service role name

QBusiness-Plugin-lihon

Maximum 64 characters. Use alphanumeric and '+', '@', '-' characters.

Tags - optional (0) [Info](#)

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Create new AWS Secrets Manager secret

Secret name
Give your secret a name. The prefix 'QBusiness-Google_calendar-' is added for you.

QBusiness-Google_calendar-demo

Client ID
The client ID generated when you create your OAuth 2.0 application in Google Calendar.

☐ Show client ID

Client secret
The client secret generated when you create your OAuth 2.0 application in Google Calendar.

☐ Show client secret

Redirect URL
The URL to which user needs to be redirected after authentication.

<https://7j7gzpre.chat.qbusiness.us-east-1.on.aws/oauth/callback>

[Cancel](#) [Create](#)

Add Google Calendar Plugin

To obtain a **Client ID** and **Client Secret** for integrating Google Calendar with your application, follow these steps:

Access Google Cloud Console

Create a New Project

Enable Google Calendar API

Configure OAuth Consent Screen

Create OAuth Client ID:

- Navigate to **APIs & Services > Credentials**.
- Click **"Create Credentials"** and select **"OAuth client ID"**.
- Choose **Application Type** (e.g., **Web application**).
- Specify **Authorized JavaScript origins** and **Authorized redirect URIs** relevant to your application.
- Click **"Create"**.

Obtain Client ID and Client Secret



Add Jira Cloud Plugin

Add plugin [Info](#)



Jira Cloud [Info](#)

Provide the details to connect to Jira Cloud. For instructions, [view documentation](#) .

Actions supported (9)

Read Issue

Delete Issue

Delete Sprint

Create Issue

Read Sprint

Search Issues

Move Issue to Sprint

Change Issue Status

Create Sprint

Plugin name

Name

Plugin names can only include letters (A-Z and a-z), numbers (0-9), and dashes (-), with no spaces added.

Domain URL [Info](#)

The My Domain URL of your Jira Cloud organization.

URL

Example: <https://api.atlassian.com/ex/jira/yourInstanceId>.



Add Jira Cloud Plugin

Enter domain URL

Example: `https://api.atlassian.com/ex/jira/yourInstanceId`.

OAuth2.0 Authorization [Info](#)

You can use an AWS Secrets Manager secret to store your authentication credentials.

AWS Secrets Manager secret

Choose an existing secret that starts with 'QBusiness-' or create a new one.

☒ Create and use a new secret

☐ Use an existing secret

Service access [Info](#)

Amazon Q Business requires permissions to use other services on your behalf.

Choose a method to authorize Amazon Q Business

☒ Create and use a new service role

☐ Use an existing service role

Service role name

QBusiness-Plugin-dxdah

Maximum 64 characters. Use alphanumeric and '+, @, _' characters.

Tags - optional [Info](#)

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Create new AWS Secrets Manager secret

Secret name
Give your secret a name. The prefix 'QBusiness-Jira_cloud-' is added for you.

QBusiness-Jira_cloud-demo

Client ID
The client ID generated when you create your OAuth 2.0 application in Jira Cloud.

☐ Show client ID

Client secret
The client secret generated when you create your OAuth 2.0 application in Jira Cloud.

☐ Show client secret

Redirect URL
The URL to which user needs to be redirected after authentication.

`https://7j7gzpre.chat.qbusiness.us-east-1.on.aws/oauth/callback`

[Cancel](#) [Create](#)

Add Jira Cloud Plugin

To obtain a **Client ID** and **Client Secret** for integrating **Jira Cloud** with your application:

Access Atlassian Developer Console

Create a New App

Configure App Permissions

- Go to "**Permissions**" and select the **scopes** needed for your integration (e.g., read:jira-user, read:jira-work) and Save the changes.

Set Up Authorization:

- Go to "**Authorization**".
- Specify **Redirect URLs** that your application will use (e.g., <https://yourapp.com/callback>).
- Save the settings.

Obtain Client ID and Client Secret:

Execute Actions



Search events in my calendar for contract discussion with GlobalTechContract



Please authorize your access

Cancel

Authorize

 **Company knowledge**

 General knowledge



|Take any supported actions in Google Calendar



 Google Calendar ×

☒ Plugins

Execute Google Calendar Action



Search events in my calendar for contract discussion with GlobalTechContract



Please authorize your access

Cancel

Authorize

Company knowledge

General knowledge

Take any supported actions in Google Calendar

Google Calendar

☒ Plugins



Execute Google Calendar Action



Search for events in my calendar regarding contract discussion with ShieldTechGlobal



I've found an event in your primary calendar related to the contract discussion with ShieldTechGlobal. Here are the details:

- Event: Contract discussion with ShieldTechGlobal
- Date: January 5, 2026
- Duration: All day event (ends on January 6, 2026)



Company knowledge



General knowledge



Take any supported actions in Google Calendar



Plugins

Execute Jira Cloud Action



Create a ask within Jira titled Contract discussion with ShieldTechGlobal with summary of the card as description



Please authorize your access

Cancel

Authorize

 Company knowledge

 General knowledge



Take any supported actions in Google Calendar



☒ Plugins

Amazon Q Business uses generative AI. You may need to verify responses for accuracy. [AWS Responsible AI Policy](#)



Execute Jira Cloud Action



AWS Q Business is requesting access to
your Atlassian account.

Use app on

birajchoudhury.atlassian.net

 In Jira, it would like to:

Delete

> Sprints

View

> Sprints, Boards and backlogs, Projects, jira-work

Update

> Sprints, jira-work

Manage

> jira-project

By accepting this app, you:

- Grant the app access to your data in all places you can access where the app is installed.
- Agree to Biraj Choudhury's [privacy policy](#).

1 user has consented to using AWS Q Business.

Accept

Cancel

Execute Jira Cloud Action



Jira Cloud

Summary* ⓘ

Contract discussion with ShieldTechGlobal

Issue Type* ⓘ

Task

Project Key* ⓘ

CDD

Description* ⓘ

Software development agreement executed on March 31, 2025, between SecureSoft Solutions Inc. and ShieldTech Global LLC. The contract outlines a 20-week development project with five distinct phases:

View more fields

Cancel Submit

Company knowledge General knowledge ⓘ

Take any supported actions in Jira Cloud

Plugins

Questions

Thank You