




Computer Networks

Lecturer: ZHANG Ying

Fall semester 2022

Chapter 5

Network Layer – Control Plane

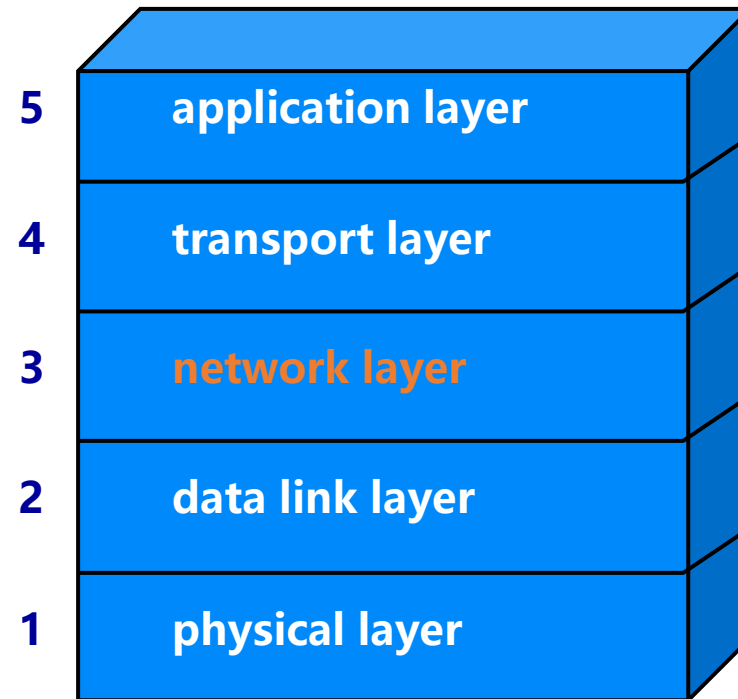

Network-layer functions

- **forwarding**: move packets from router's input to appropriate router output
- **routing**: determine route taken by packets from source to destination

data plane


control plane

Two approaches to structuring network control plane:

- per-router control (traditional)
- logically centralized control (software defined networking)


Per-router control plane

Individual routing algorithm components *in each and every router* interact in the control plane

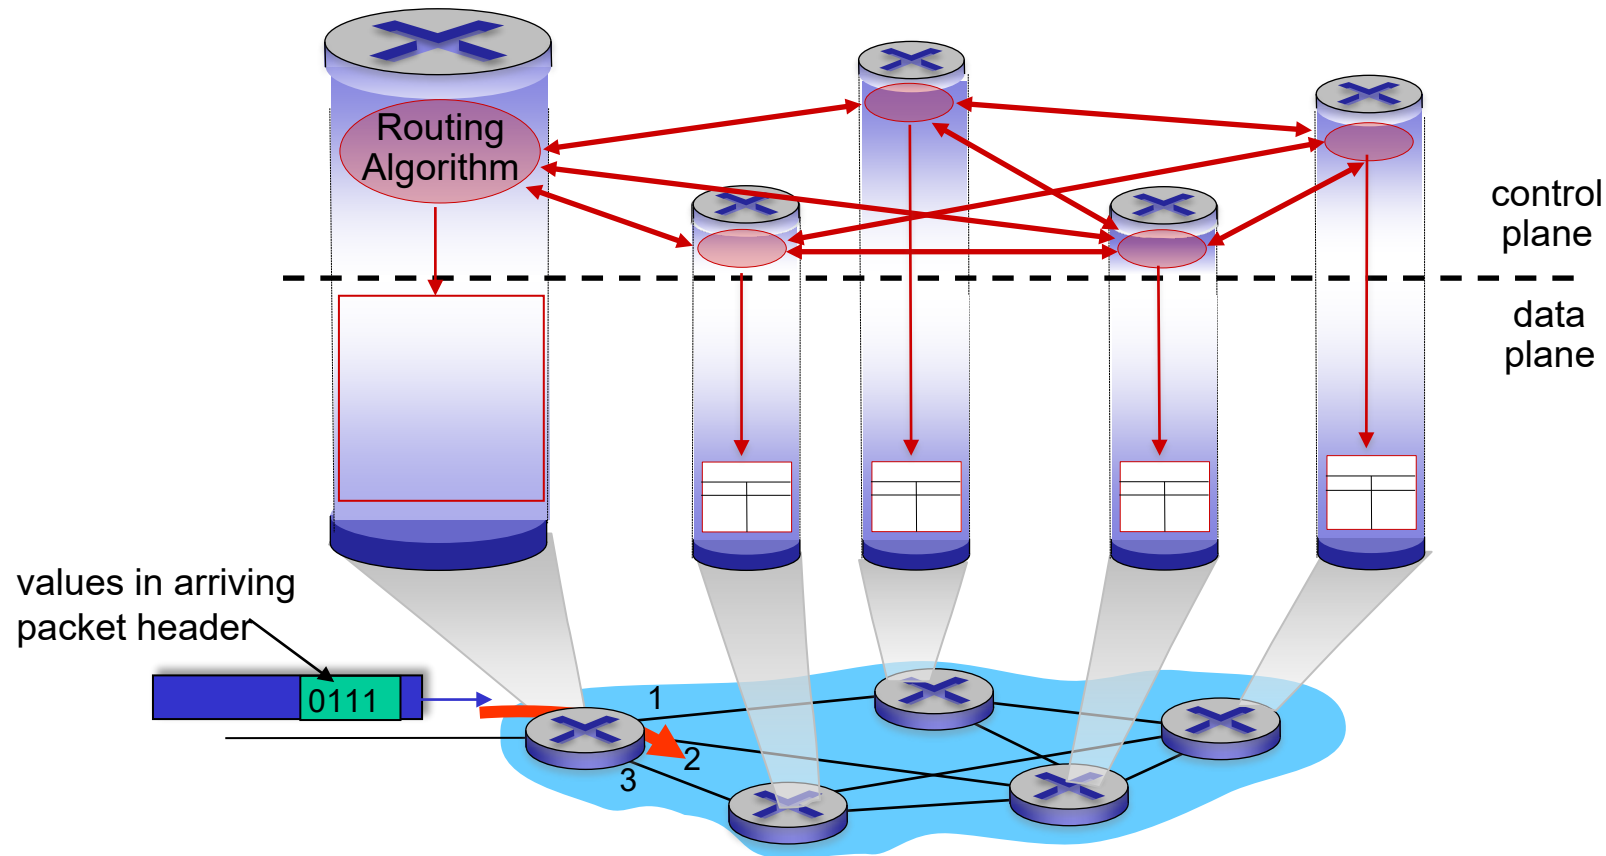

Software-Defined Networking (SDN) control plane

Remote controller computes, installs forwarding tables in routers

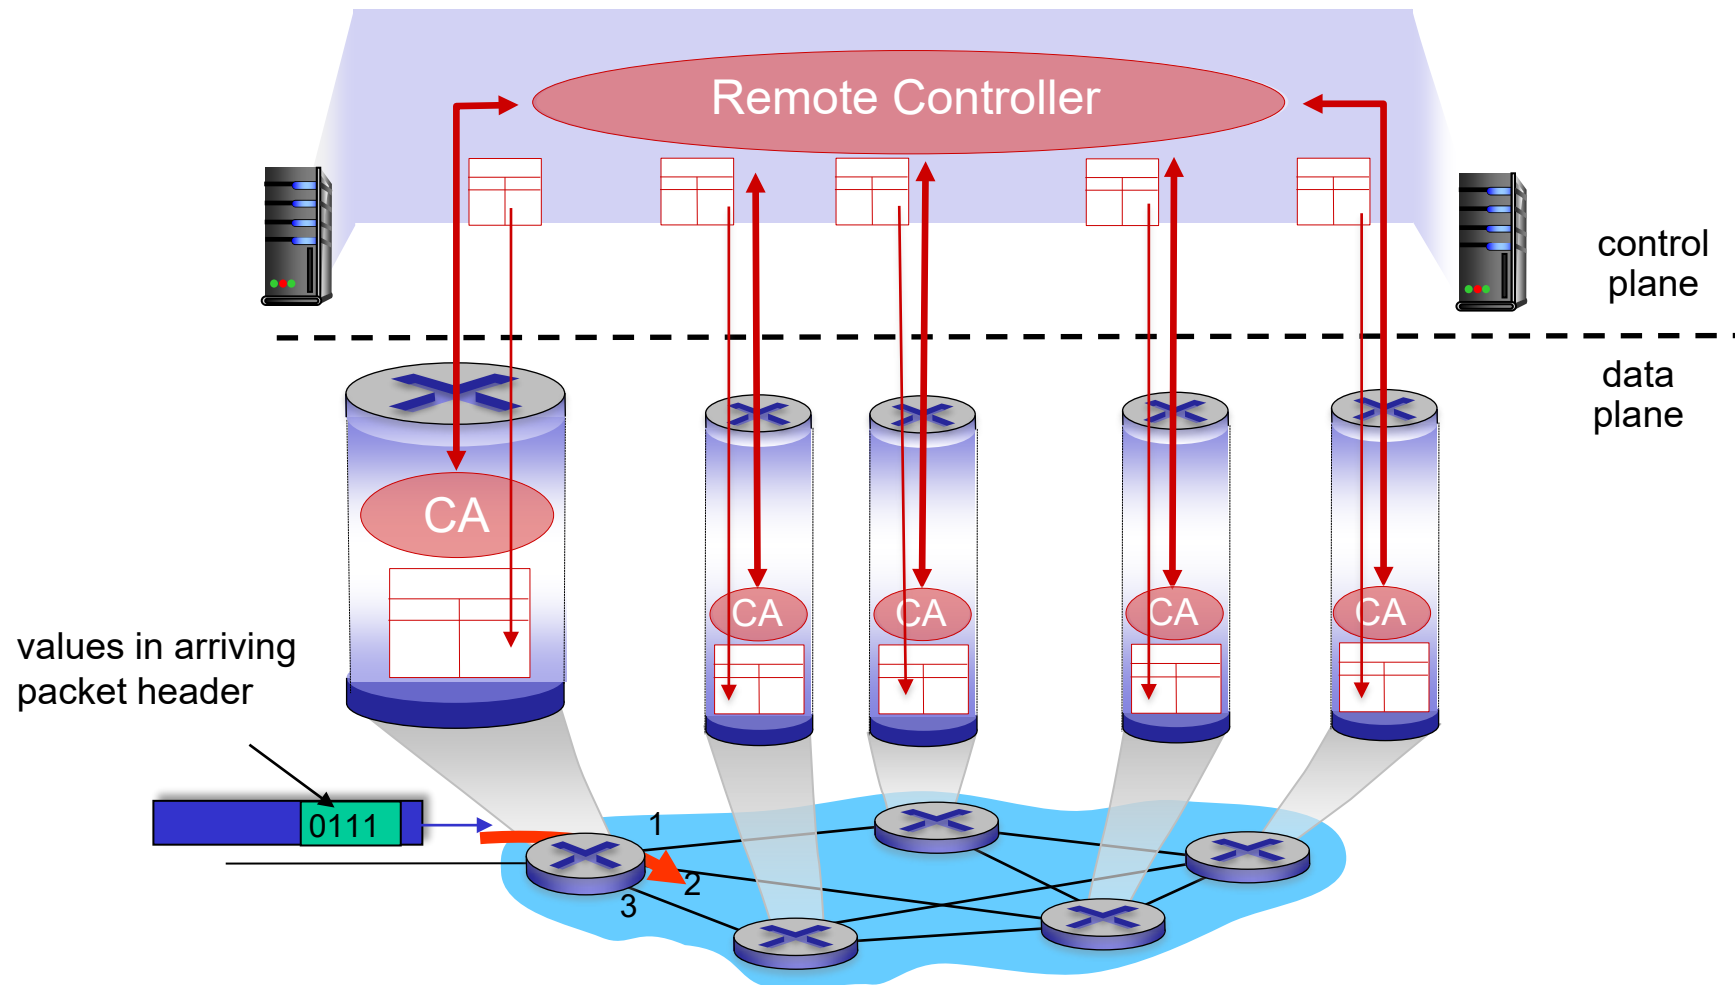

Network layer: “control plane” roadmap


- introduction
- routing protocols
 - link state
 - distance vector




Routing protocols

Routing protocol goal: determine “good” paths (equivalently, routes), from sending hosts to receiving host, through network of routers

- **path:** sequence of routers packets traverse from given initial source host to final destination host
- **“good”:** least “cost”, “fastest”, “least congested”
- routing: a “top-10” networking challenge!

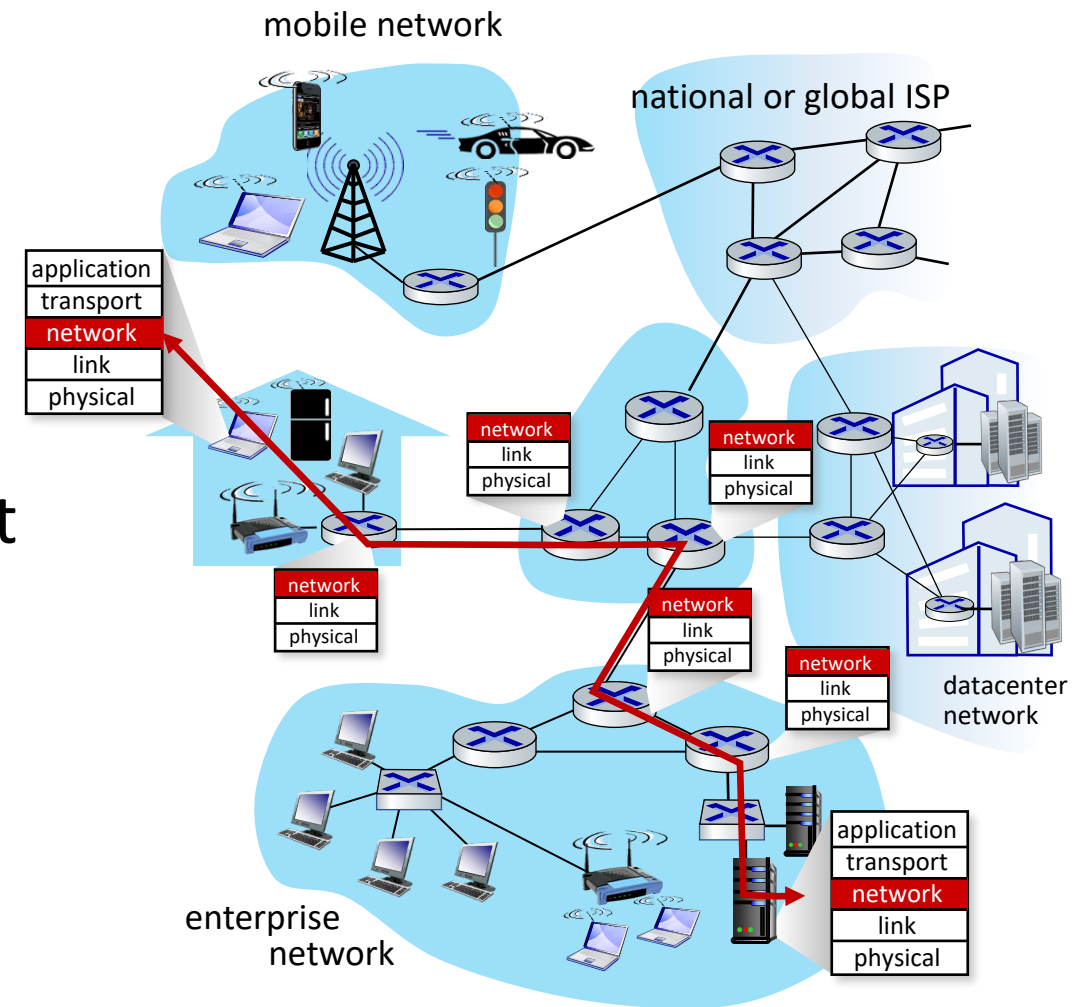

Graph abstraction: link costs

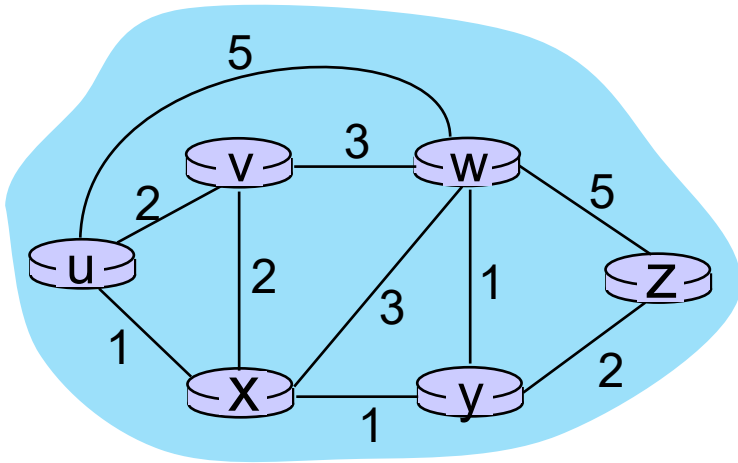

$c_{a,b}$: cost of *direct* link connecting a and b

e.g., $c_{w,z} = 5$, $c_{u,z} = \infty$


cost defined by network operator:
could always be 1, or inversely related
to bandwidth, or inversely related to
congestion

graph: $G = (N, E)$

N : set of routers = $\{ u, v, w, x, y, z \}$

E : set of links = $\{ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) \}$

Routing algorithm classification

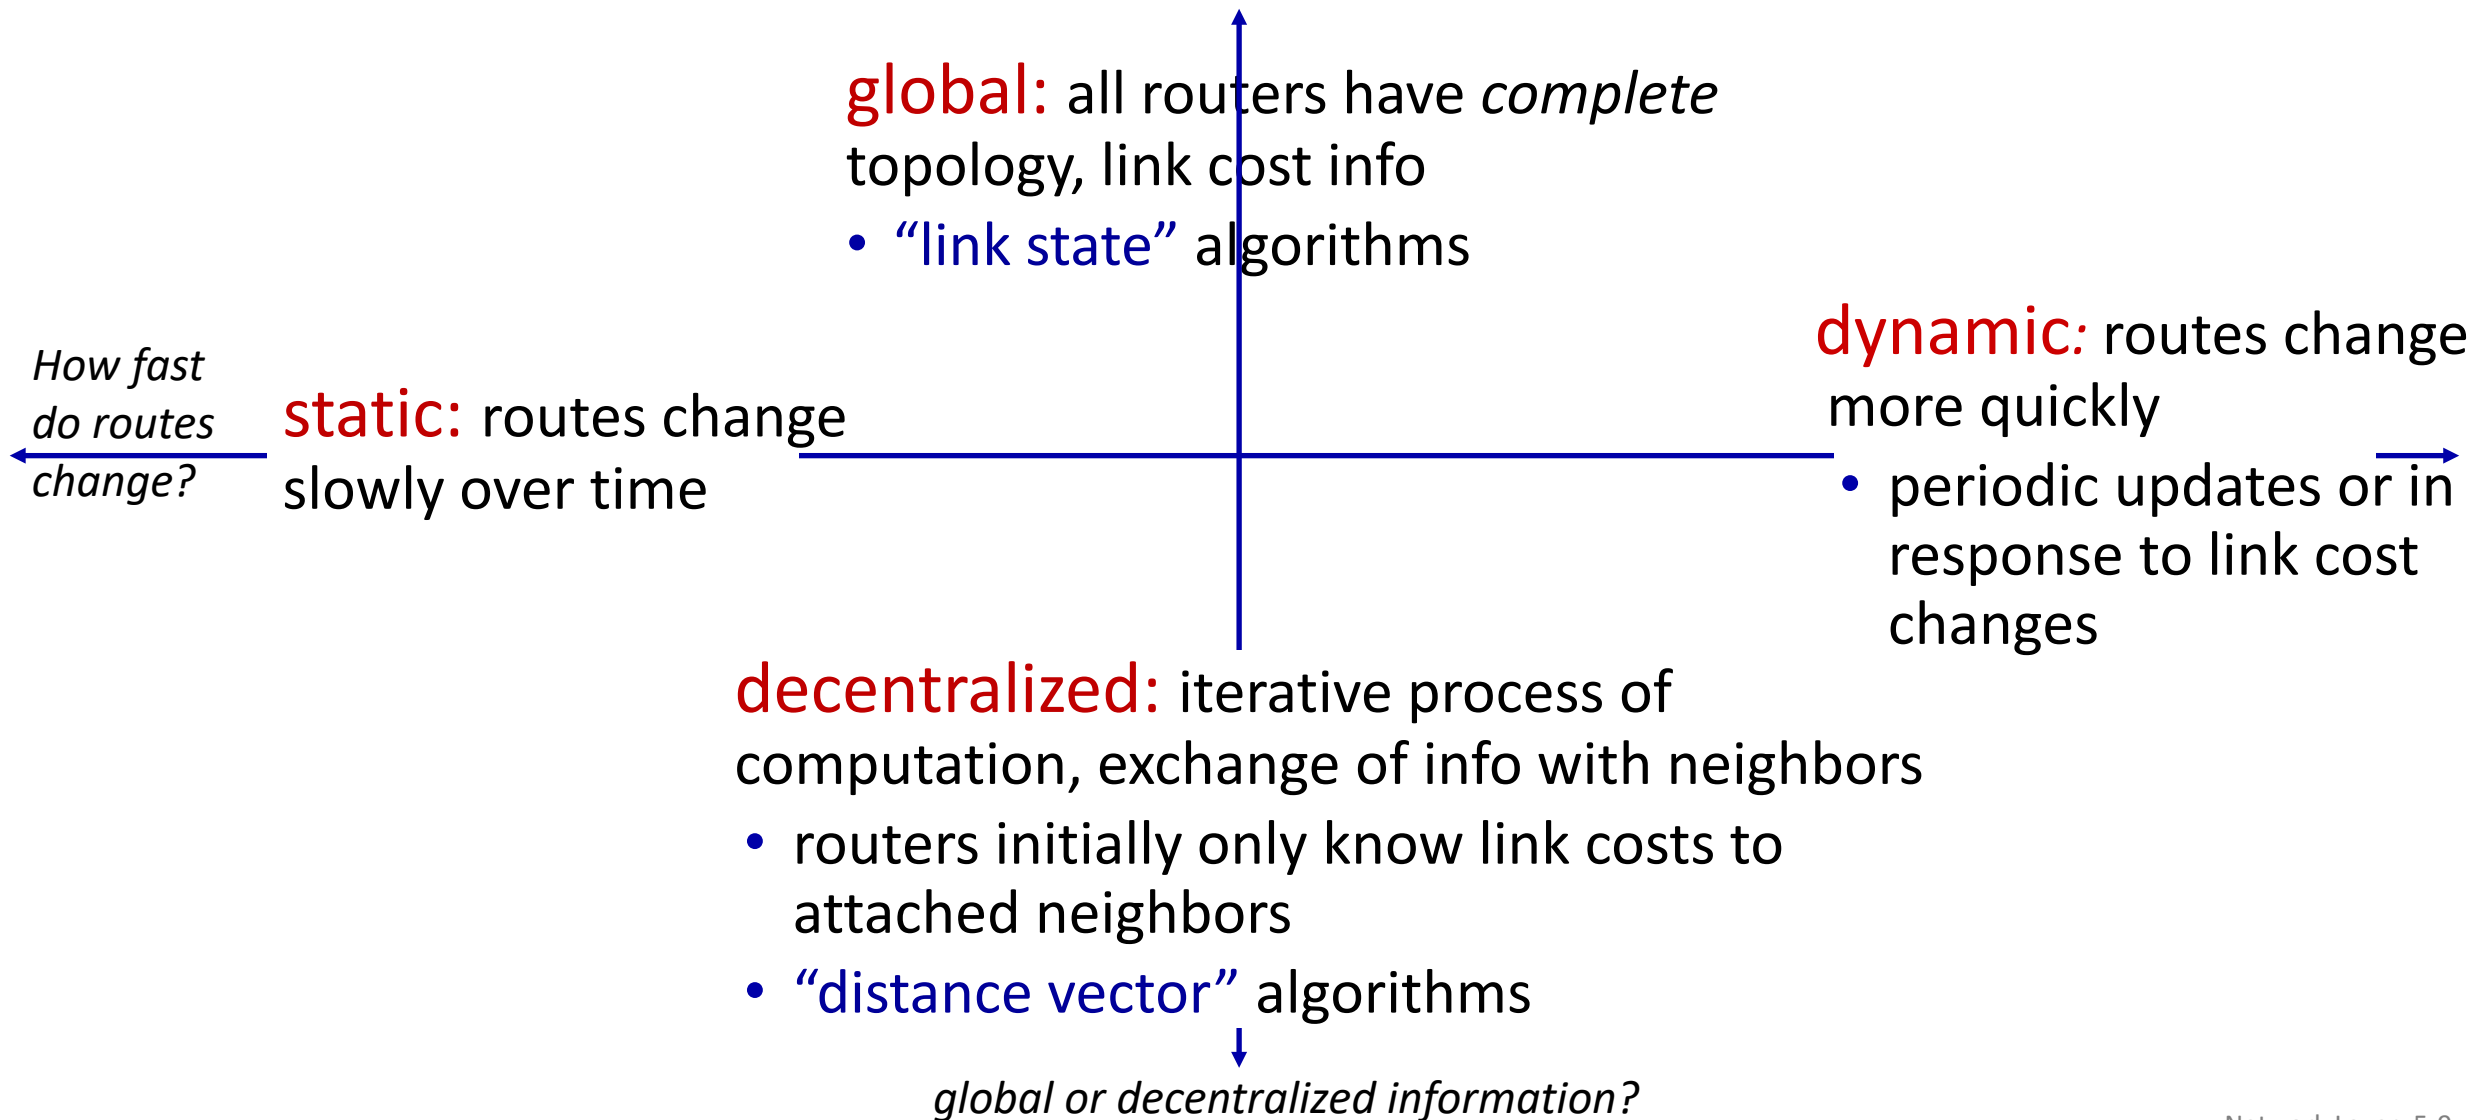

Network layer: “control plane” roadmap

- introduction
- routing protocols
 - link state
 - distance vector



Dijkstra's link-state routing algorithm

- **centralized:** network topology, link costs known to *all* nodes
 - accomplished via “link state broadcast”
 - all nodes have same info
- computes least cost paths from one node (“source”) to all other nodes
 - gives *forwarding table* for that node
- **iterative:** after k iterations, know least cost path to k destinations

notation

- $c_{x,y}$: direct link cost from node x to y ; $= \infty$ if not direct neighbors
- $D(v)$: *current* estimate of cost of least-cost-path from source to destination v
- $p(v)$: predecessor node along path from source to v
- N' : set of nodes whose least-cost-path *definitively* known

Dijkstra's link-state routing algorithm

1 *Initialization:*

2 $N' = \{u\}$ /* compute least cost path from u to all other nodes */

3 for all nodes v

4 if v adjacent to u /* u initially knows direct-path-cost only to direct neighbors */

5 then $D(v) = c_{u,v}$ /* but may not be *minimum* cost! */

6 else $D(v) = \infty$

7



8 *Loop*

9 find w not in N' such that $D(w)$ is a minimum

10 add w to N'

11 update $D(v)$ for all v adjacent to w and not in N' :

12 **$D(v) = \min (D(v), D(w) + c_{w,v})$**


13 /* new least-path-cost to v is either old least-cost-path to v or known

14 least-cost-path to w plus direct-cost from w to v */

15 *until all nodes in N'*

Dijkstra's algorithm: an example

Step	N'	^v D(v),p(v)	^w D(w),p(w)	^x D(x),p(x)	^y D(y),p(y)	^z D(z),p(z)
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					

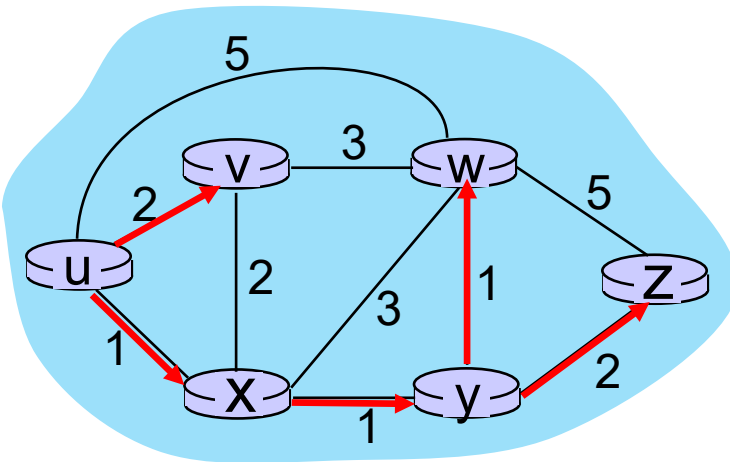

Initialization (step 0): For all a : if a adjacent to then $D(a) = c_{u,a}$


find a not in N' such that $D(a)$ is a minimum

add a to N'


update $D(b)$ for all b adjacent to a and not in N' :

$$D(b) = \min (D(b), D(a) + c_{a,b})$$

Dijkstra's algorithm: an example

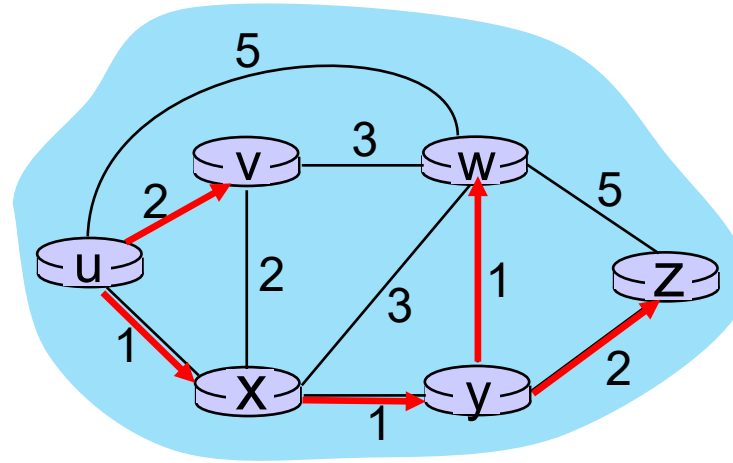

resulting least-cost-path tree from u:

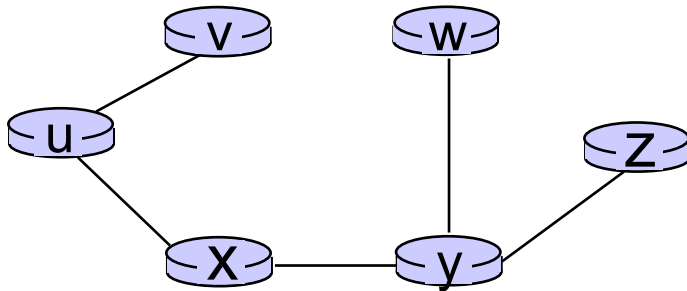

resulting forwarding table in u:


destination	outgoing link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

route from u to v directly

route from u to all other destinations via x

Dijkstra's algorithm: another example

Step	N'	$D(v), p(v)$	$D(w), p(w)$	$D(x), p(x)$	$D(y), p(y)$	$D(z), p(z)$
0	u	7, u	3, u	5, u	∞	∞
1	uw	6, w		5, u	11, w	∞
2	uwX	6, w			11, w	14, x
3	uwXv				10, v	14, x
4	uwXvy					12, y
5	uwXvyZ					

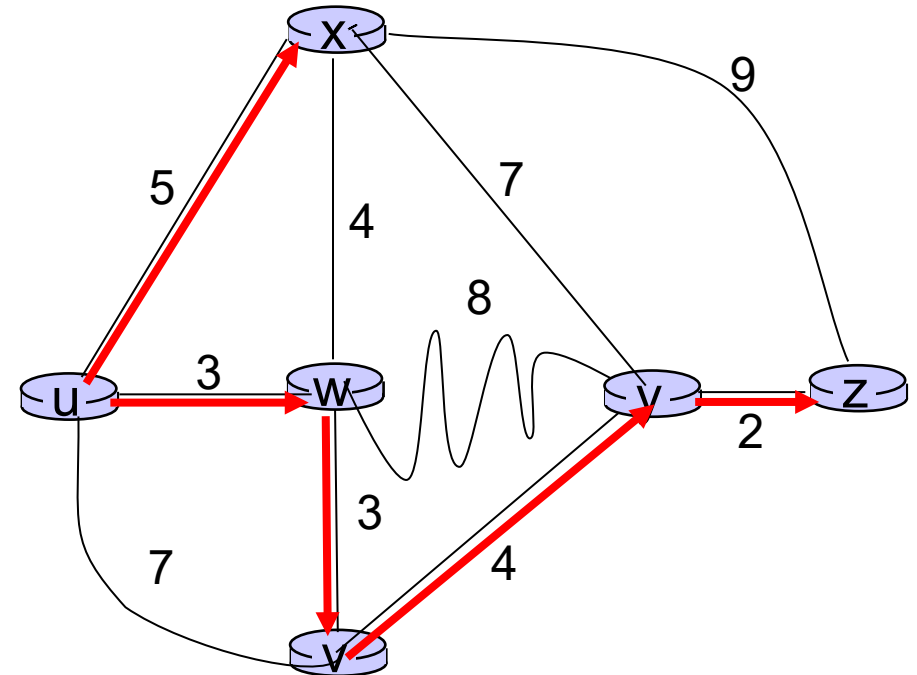

notes:

- construct least-cost-path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)

Dijkstra's algorithm: discussion

algorithm complexity: n nodes

- each of n iteration: need to check all nodes, w , not in N
- $n(n+1)/2$ comparisons: $O(n^2)$ complexity
- more efficient implementations possible: $O(n \log n)$

message complexity:

- each router must *broadcast* its link state information to other n routers
- efficient (and interesting!) broadcast algorithms: $O(n)$ link crossings to disseminate a broadcast message from one source
- each router's message crosses $O(n)$ links: overall message complexity: $O(n^2)$

Network layer: “control plane” roadmap

- introduction
- routing protocols
 - link state
 - distance vector



Distance vector algorithm

Based on *Bellman-Ford* (BF) equation (dynamic programming):

Bellman-Ford equation

Let $D_x(y)$: cost of least-cost path from x to y .

Then:

$$D_x(y) = \min_v \{ c_{x,v} + D_v(y) \}$$


\min taken over all neighbors v of x

direct cost of link from x to v

v 's estimated least-cost-path cost to y

Bellman-Ford Example

Suppose that u 's neighboring nodes, x, v, w , know that for destination z :

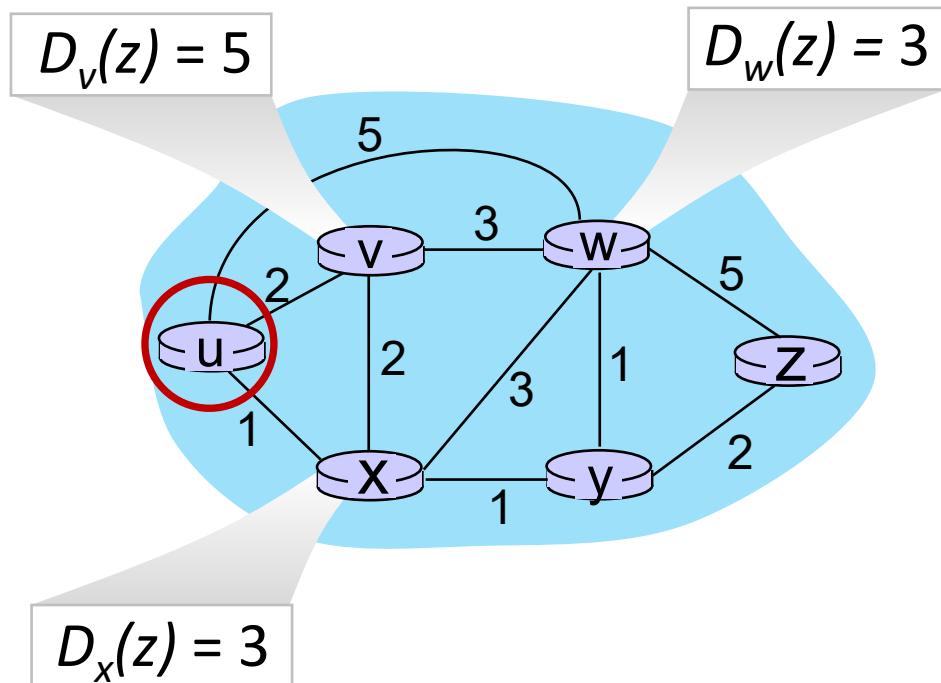

Bellman-Ford equation says:

$$\begin{aligned} D_u(z) &= \min \{ c_{u,v} + D_v(z), \\ &\quad c_{u,x} + D_x(z), \\ &\quad c_{u,w} + D_w(z) \} \\ &= \min \{ 2 + 5, \\ &\quad 1 + 3, \\ &\quad 5 + 3 \} = 4 \end{aligned}$$

node achieving minimum (x) is next hop on estimated least-cost path to destination (z)

Distance vector algorithm

key idea:


- from time-to-time, each node sends its own distance vector estimate to neighbors
- when x receives new DV estimate from any neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v \{c_{x,v} + D_v(y)\} \text{ for each node } y \in N$$

- under minor, natural conditions, the estimate $D_x(y)$ converge to the actual least cost $d_x(y)$

Distance vector algorithm:

each node:

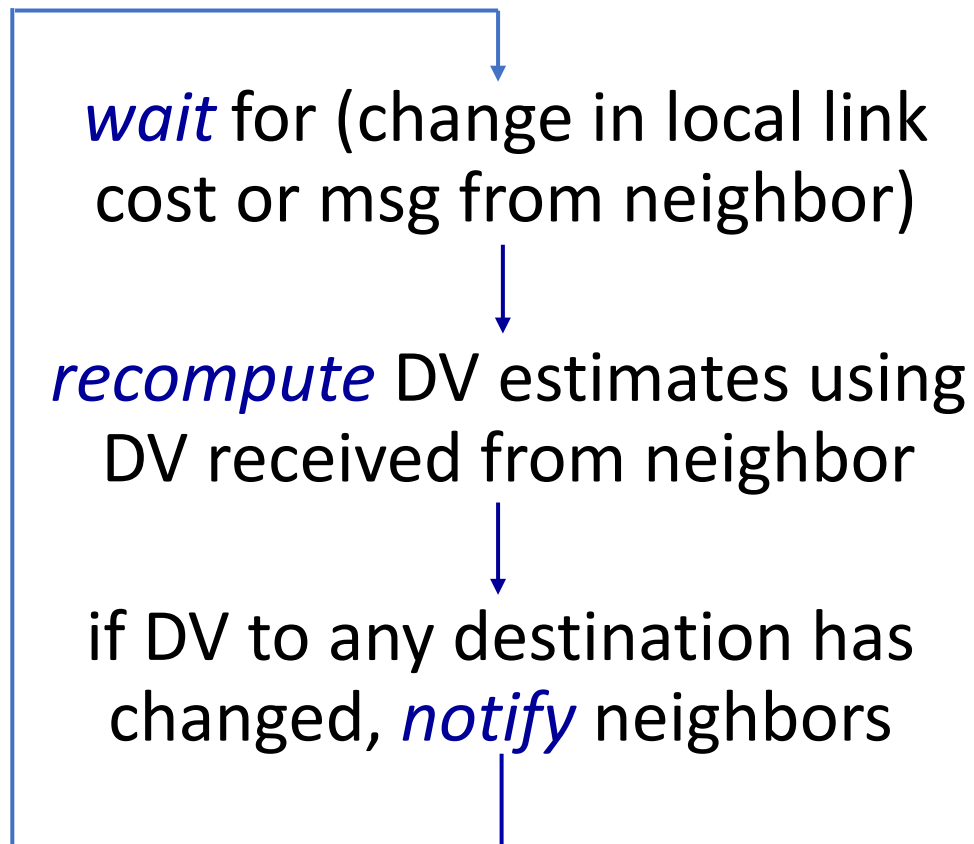

iterative, asynchronous: each local iteration caused by:

- local link cost change
- DV update message from neighbor

distributed, self-stopping: each node notifies neighbors *only* when its DV changes

- neighbors then notify their neighbors – *only if necessary*
- no notification received, no actions taken!


Distance vector: example



t=0

- All nodes have distance estimates to nearest neighbors (only)
- All nodes send their local distance vector to their neighbors

DV in a:
$D_a(a)=0$
$D_a(b)=8$
$D_a(c)=\infty$
$D_a(d)=1$
$D_a(e)=\infty$
$D_a(f)=\infty$
$D_a(g)=\infty$
$D_a(h)=\infty$
$D_a(i)=\infty$

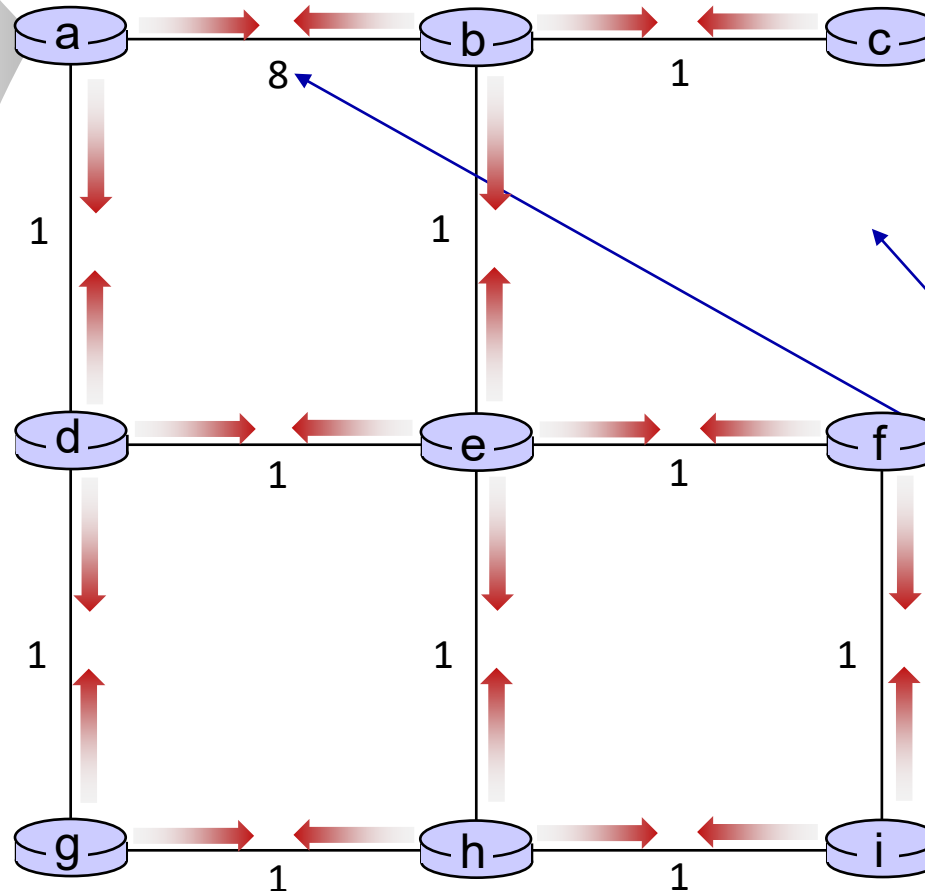

A few asymmetries:
■ missing link
■ larger cost


Distance vector example: iteration



t=1

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

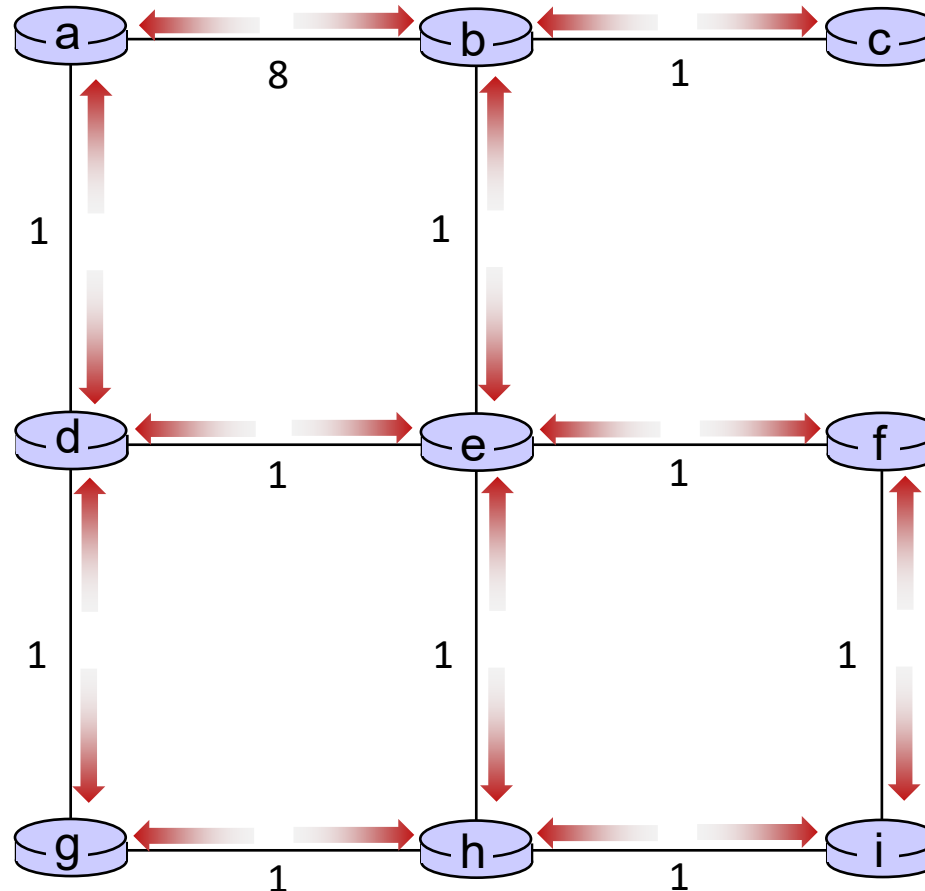


Distance vector example: iteration



t=1

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

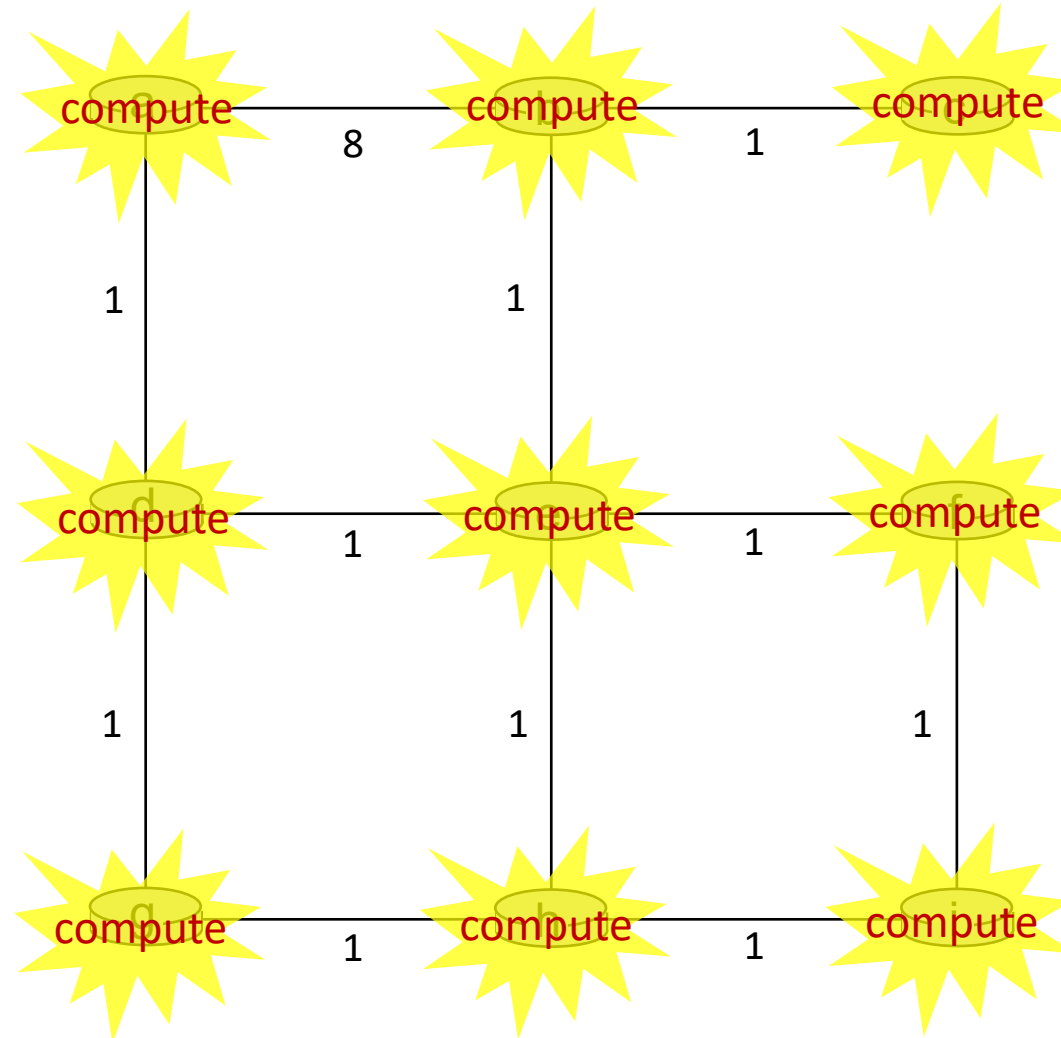


Distance vector example: iteration



t=1

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

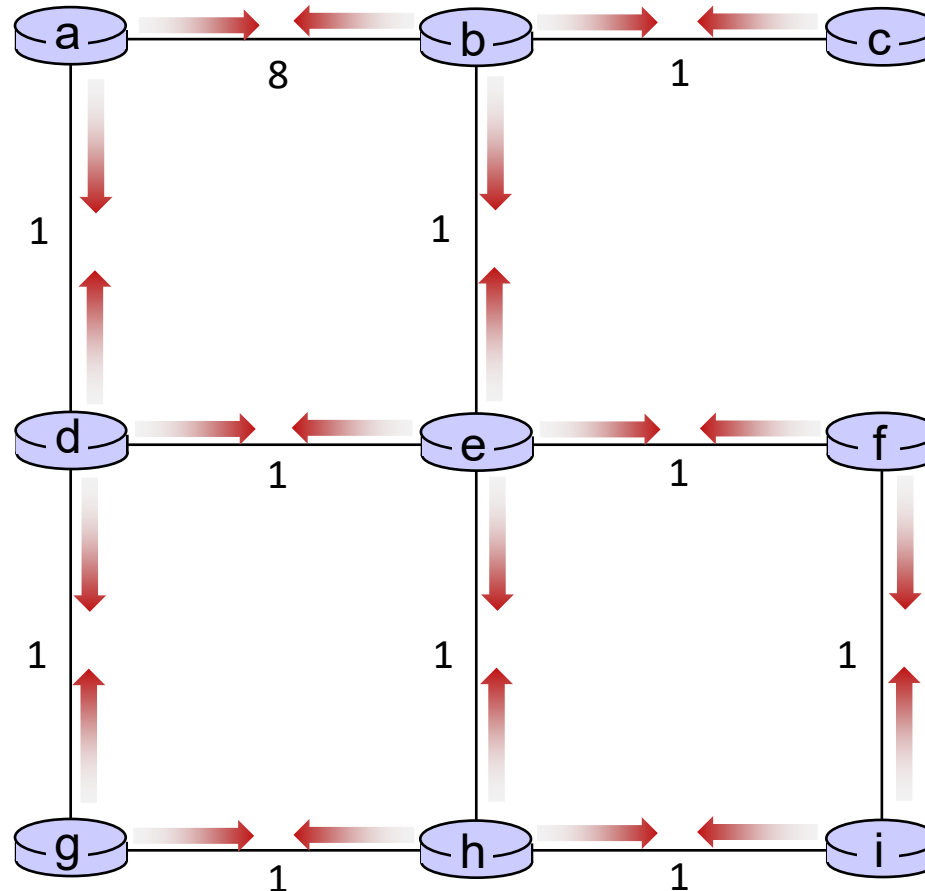


Distance vector example: iteration



t=2

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

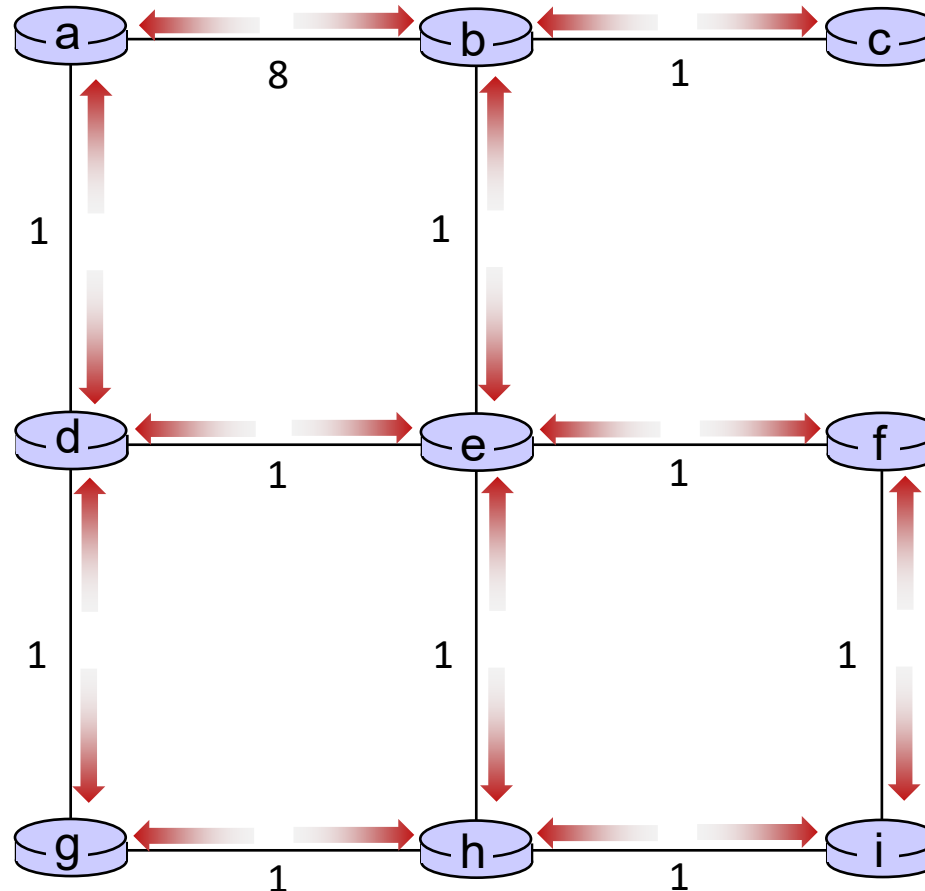


Distance vector example: iteration



t=2

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

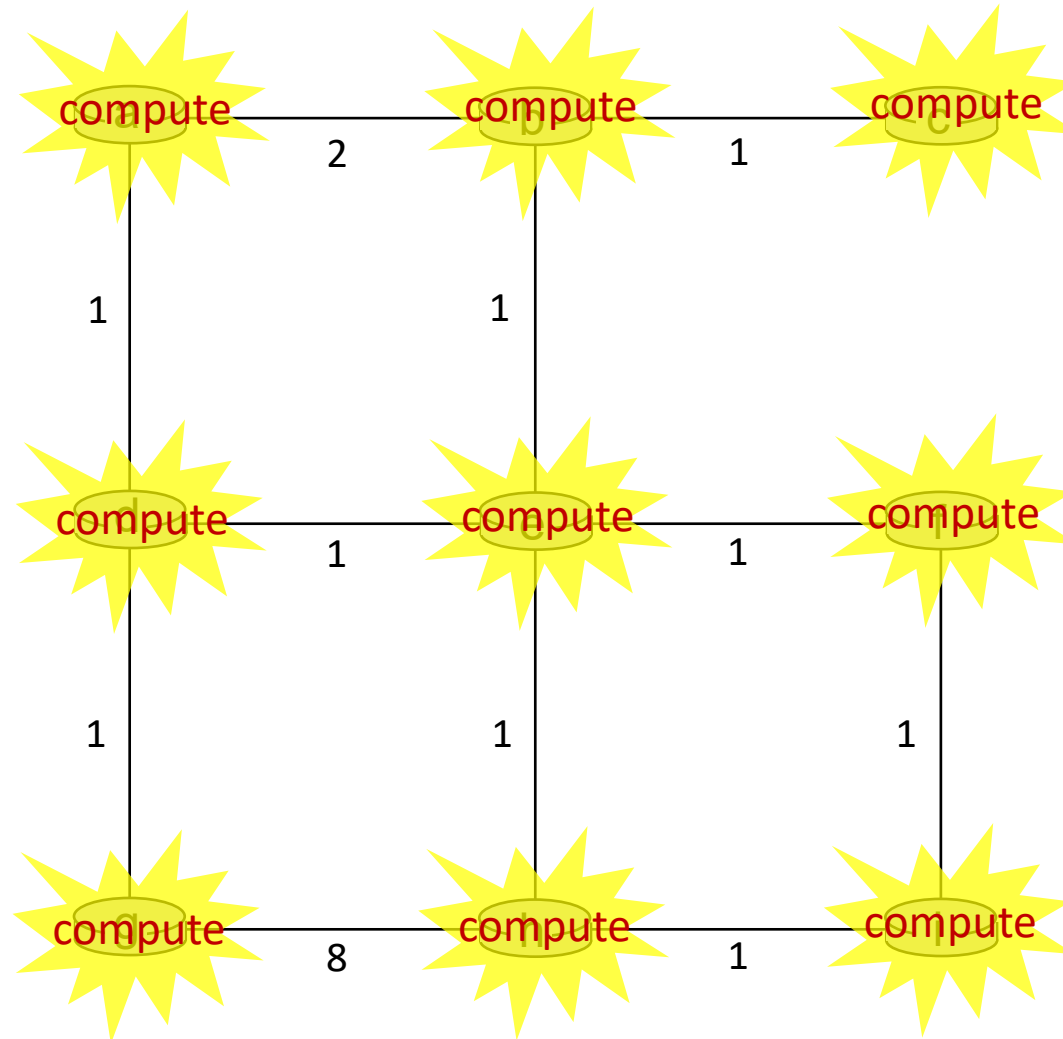


Distance vector example: iteration



t=2

All nodes:

- receive distance vectors from neighbors
- compute their new local distance vector
- send their new local distance vector to neighbors

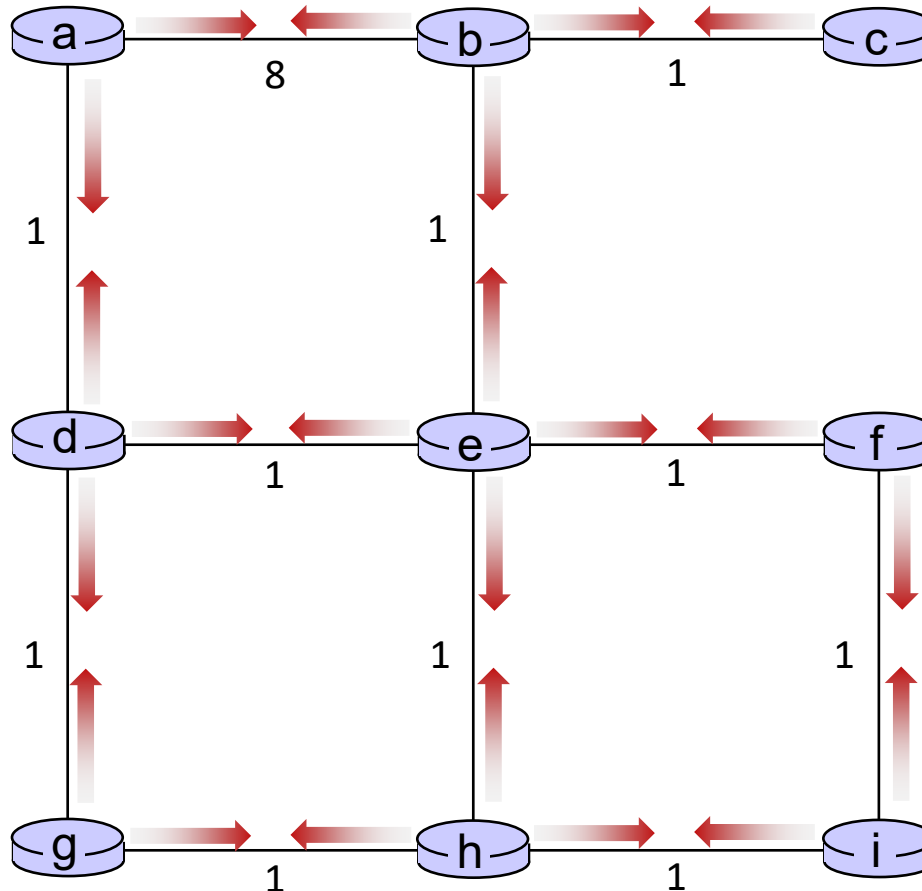

Distance vector example: iteration

.... and so on

Let's next take a look at the iterative *computations* at nodes

Distance vector example:



t=1

- b receives DVs from a, c, e

DV in a:
$D_a(a) = 0$
$D_a(b) = 8$
$D_a(c) = \infty$
$D_a(d) = 1$
$D_a(e) = \infty$
$D_a(f) = \infty$
$D_a(g) = \infty$
$D_a(h) = \infty$
$D_a(i) = \infty$

DV in b:

$$D_b(a) = 8$$

$$D_b(c) = 1$$

$$D_b(d) = \infty$$

$$D_b(e) = 1$$

$$D_b(f) = \infty$$


$$D_b(g) = \infty$$

$$D_b(h) = \infty$$

$$D_b(i) = \infty$$

DV in c:
$D_c(a) = \infty$
$D_c(b) = 1$
$D_c(c) = 0$
$D_c(d) = \infty$
$D_c(e) = \infty$
$D_c(f) = \infty$
$D_c(g) = \infty$
$D_c(h) = \infty$
$D_c(i) = \infty$

DV in e:
$D_e(a) = \infty$
$D_e(b) = 1$
$D_e(c) = \infty$
$D_e(d) = 1$
$D_e(e) = 0$
$D_e(f) = 1$
$D_e(g) = \infty$
$D_e(h) = 1$
$D_e(i) = \infty$

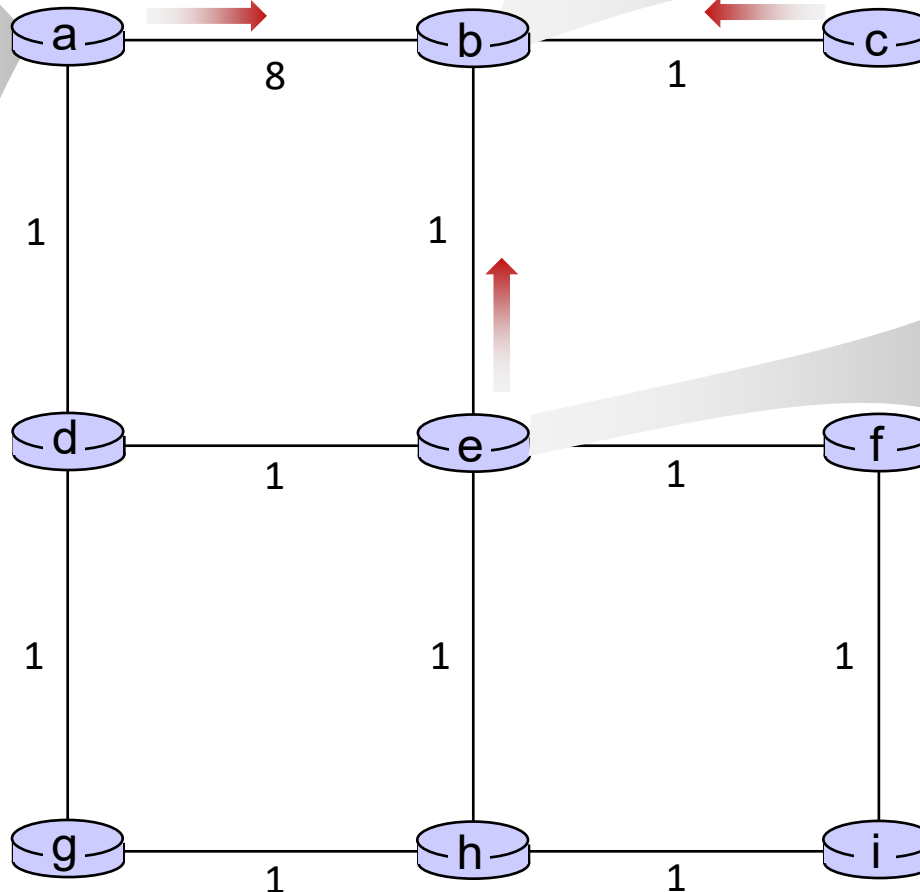

Distance vector example:




t=1

- b receives DVs from a, c, e, computes:

$$\begin{aligned}
 D_b(a) &= \min\{c_{b,a} + D_a(a), c_{b,c} + D_c(a), c_{b,e} + D_e(a)\} = \min\{8, \infty, \infty\} = 8 \\
 D_b(c) &= \min\{c_{b,a} + D_a(c), c_{b,c} + D_c(c), c_{b,e} + D_e(c)\} = \min\{\infty, 1, \infty\} = 1 \\
 D_b(d) &= \min\{c_{b,a} + D_a(d), c_{b,c} + D_c(d), c_{b,e} + D_e(d)\} = \min\{9, 2, \infty\} = 2 \\
 D_b(e) &= \min\{c_{b,a} + D_a(e), c_{b,c} + D_c(e), c_{b,e} + D_e(e)\} = \min\{\infty, \infty, 1\} = 1 \\
 D_b(f) &= \min\{c_{b,a} + D_a(f), c_{b,c} + D_c(f), c_{b,e} + D_e(f)\} = \min\{\infty, \infty, 2\} = 2 \\
 D_b(g) &= \min\{c_{b,a} + D_a(g), c_{b,c} + D_c(g), c_{b,e} + D_e(g)\} = \min\{\infty, \infty, \infty\} = \infty \\
 D_b(h) &= \min\{c_{b,a} + D_a(h), c_{b,c} + D_c(h), c_{b,e} + D_e(h)\} = \min\{\infty, \infty, 2\} = 2 \\
 D_b(i) &= \min\{c_{b,a} + D_a(i), c_{b,c} + D_c(i), c_{b,e} + D_e(i)\} = \min\{\infty, \infty, \infty\} = \infty
 \end{aligned}$$

DV in a:
$D_a(a) = 0$
$D_a(b) = 8$
$D_a(c) = \infty$
$D_a(d) = 1$
$D_a(e) = \infty$
$D_a(f) = \infty$
$D_a(g) = \infty$
$D_a(h) = \infty$
$D_a(i) = \infty$

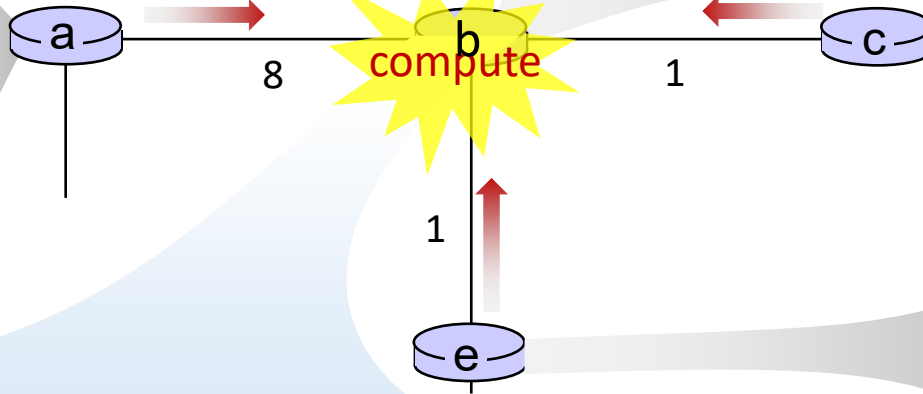

DV in b:

$$D_b(a) = 8$$

$$D_b(c) = 1$$

$$D_b(d) = \infty$$

$$D_b(e) = 1$$

$$D_b(f) = \infty$$

$$D_b(g) = \infty$$

$$D_b(h) = \infty$$

$$D_b(i) = \infty$$

DV in c:
$D_c(a) = \infty$
$D_c(b) = 1$
$D_c(c) = 0$
$D_c(d) = \infty$
$D_c(e) = \infty$
$D_c(f) = \infty$
$D_c(g) = \infty$
$D_c(h) = \infty$
$D_c(i) = \infty$

DV in e:
$D_e(a) = \infty$
$D_e(b) = 1$
$D_e(c) = \infty$
$D_e(d) = 1$
$D_e(e) = 0$
$D_e(f) = 1$
$D_e(g) = \infty$
$D_e(h) = 1$
$D_e(i) = \infty$

DV in b:

$D_b(a) = 8$	$D_b(f) = 2$
$D_b(c) = 1$	$D_b(g) = \infty$
$D_b(d) = 2$	$D_b(h) = 2$
$D_b(e) = 1$	$D_b(i) = \infty$

Distance vector example:



t=1

- c receives DVs from b

DV in a:
$D_a(a)=0$
$D_a(b)=8$
$D_a(c)=\infty$
$D_a(d)=1$
$D_a(e)=\infty$
$D_a(f)=\infty$
$D_a(g)=\infty$
$D_a(h)=\infty$
$D_a(i)=\infty$

DV in b:

$$D_b(a) = 8$$

$$D_b(c) = 1$$

$$D_b(d) = \infty$$

$$D_b(e) = 1$$

$$D_b(f) = \infty$$


$$D_b(g) = \infty$$

$$D_b(h) = \infty$$

$$D_b(i) = \infty$$

DV in c:
$D_c(a)=\infty$
$D_c(b)=1$
$D_c(c)=0$
$D_c(d)=\infty$
$D_c(e)=\infty$
$D_c(f)=\infty$
$D_c(g)=\infty$
$D_c(h)=\infty$
$D_c(i)=\infty$

DV in e:
$D_e(a)=\infty$
$D_e(b)=1$
$D_e(c)=\infty$
$D_e(d)=1$
$D_e(e)=0$
$D_e(f)=1$
$D_e(g)=\infty$
$D_e(h)=1$
$D_e(i)=\infty$

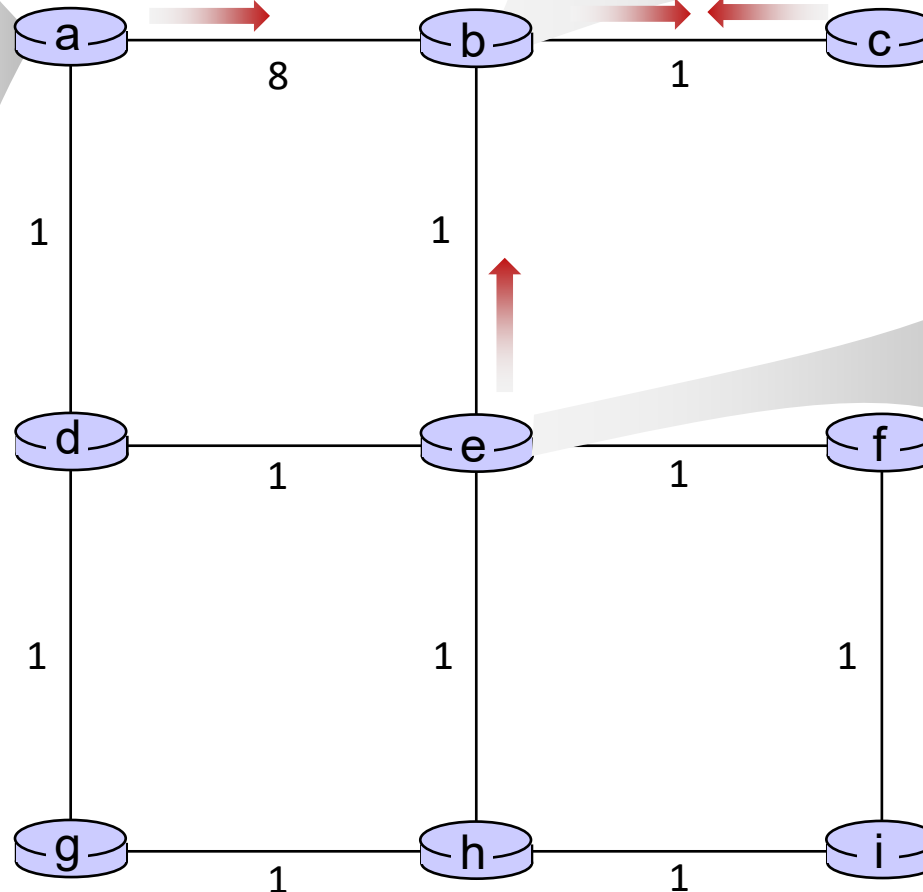


Distance vector example:



t=1

- c receives DVs from b computes:

$$\begin{aligned}D_c(a) &= \min\{c_{c,b} + D_b(a)\} = 1 + 8 = 9 \\D_c(b) &= \min\{c_{c,b} + D_b(b)\} = 1 + 0 = 1 \\D_c(d) &= \min\{c_{c,b} + D_b(d)\} = 1 + \infty = \infty \\D_c(e) &= \min\{c_{c,b} + D_b(e)\} = 1 + 1 = 2 \\D_c(f) &= \min\{c_{c,b} + D_b(f)\} = 1 + \infty = \infty \\D_c(g) &= \min\{c_{c,b} + D_b(g)\} = 1 + \infty = \infty \\D_c(h) &= \min\{c_{c,b} + D_b(h)\} = 1 + \infty = \infty \\D_c(i) &= \min\{c_{c,b} + D_b(i)\} = 1 + \infty = \infty\end{aligned}$$



1

compute

DV in b:

$D_b(a) = 8$	$D_b(f) = \infty$
$D_b(c) = 1$	$D_b(g) = \infty$
$D_b(d) = \infty$	$D_b(h) = \infty$
$D_b(e) = 1$	$D_b(i) = \infty$

DV in c:

$D_c(a) = \infty$
$D_c(b) = 1$
$D_c(c) = 0$
$D_c(d) = \infty$
$D_c(e) = \infty$
$D_c(f) = \infty$
$D_c(g) = \infty$
$D_c(h) = \infty$
$D_c(i) = \infty$

DV in c:

$D_c(a) = 9$
$D_c(b) = 1$
$D_c(c) = 0$
$D_c(d) = 2$
$D_c(e) = \infty$
$D_c(f) = \infty$
$D_c(g) = \infty$
$D_c(h) = \infty$
$D_c(i) = \infty$


* Check out the online interactive exercises for more examples:
http://gaia.cs.umass.edu/kurose_ross/interactive/

Distance vector example:





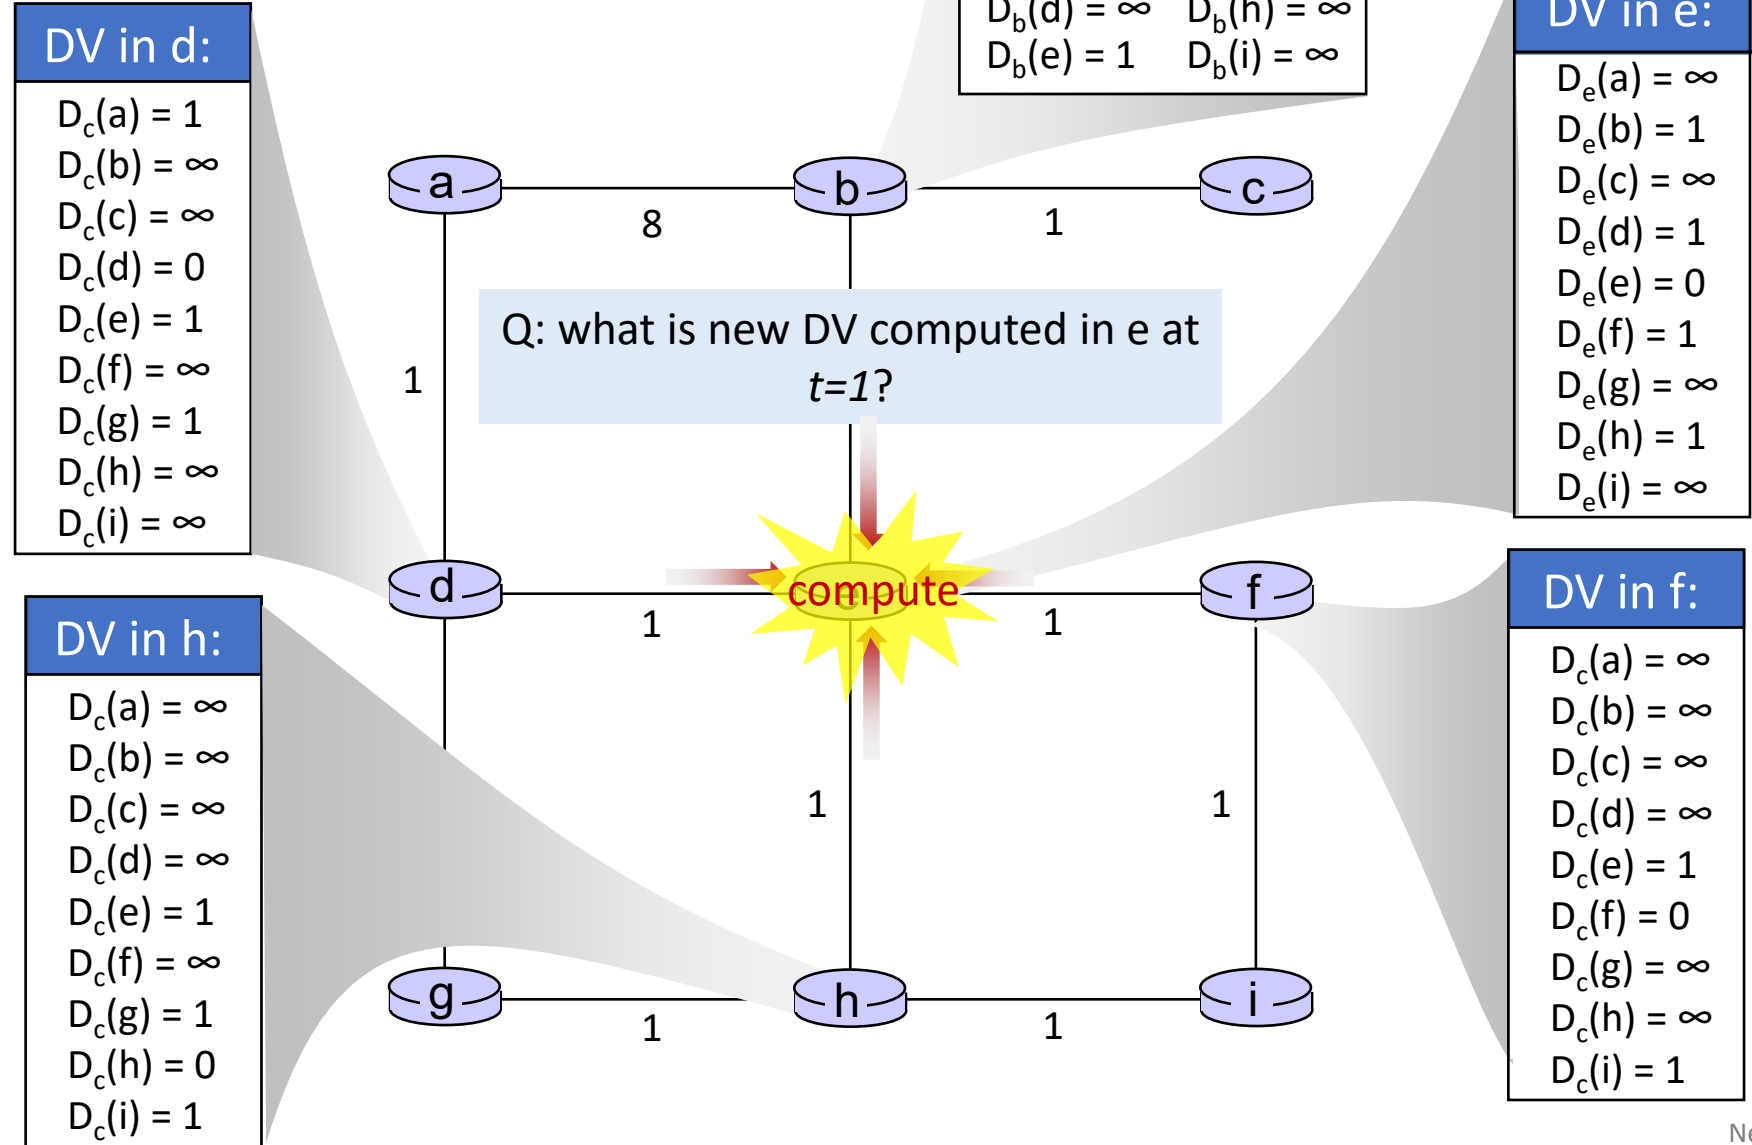


t=1

- e receives DVs from b, d, f, h



Distance vector: state information diffusion

Iterative communication, computation steps diffuses information through network:

-  $t=0$ c's state at $t=0$ is at c only
-  $t=1$ c's state at $t=0$ has propagated to b, and may influence distance vector computations up to **1** hop away, i.e., at b
-  $t=2$ c's state at $t=0$ may now influence distance vector computations up to **2** hops away, i.e., at b and now at a, e as well
-  $t=3$ c's state at $t=0$ may influence distance vector computations up to **3** hops away, i.e., at b,a,e and now at c,f,h as well
-  $t=4$ c's state at $t=0$ may influence distance vector computations up to **4** hops away, i.e., at b,a,e, c, f, h and now at g,i as well

