
F1 · Track0tic™ QR — end-to-end flow (who does what, in order)

screen (click → board) · public, no login · PDF / print · server / automatic · decision

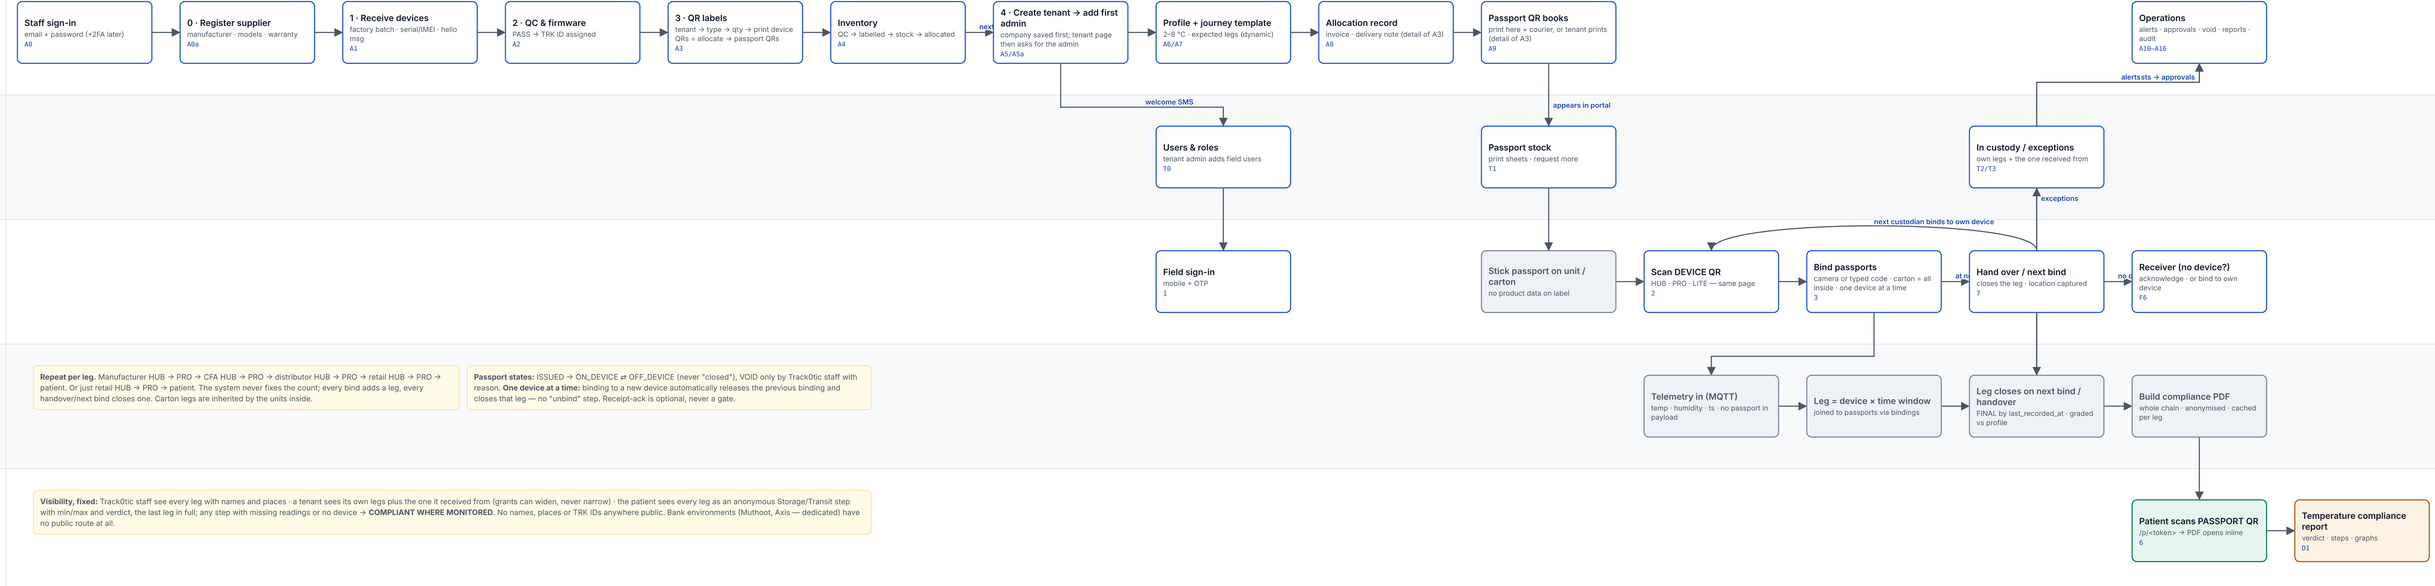

TrackOtic™ F2 · What happens when any QR is scanned

screen (click → board) · public, no login · PDF / print · server / automatic · decision

SCAN

Any QR scanned
phone camera · any app

One rule for every device type. HUB, PRO, LITE, LOCKBOX all resolve to the same device page; scanning a device does exactly one thing — bind passports to it. Type-specific behaviour (lockbox opening, diagnostics bench) is extra sections on that page, not a different flow.

RESOLVE (server)

Device or passport?
/d/<token> or /p/<token>

/d/

Device token valid?
active · label version current

/p/

Passport state?
ISSUED · ON/OFF_DEVICE · VOID

Typed code is always offered next to the camera (8-char short code under every passport QR). Binds made that way are tagged TYPED and shown as such to staff; they are still valid binds.

WHO ARE YOU?

yes · yes · yes

Not logged in
public device view
`0`

Logged in · same tenant
field user

Logged in · other tenant

valid · valid

Logged in
custodian tenant or TrackOtic staff

Not logged in
patient / anyone

WHAT OPENS

no

Invalid / replaced label
"label replaced" or "invalid code"
`F2/F3`

Public device page
log in to bind
`0`

Device staff page
bind · hand over · stock on device
`2`

Not your device
bind to your own device instead
`F1`

Passport journey (staff)
your legs + received-from · hand over
`5`

Compliance PDF
whole chain anonymised · last leg detail
`6/D1`

void · bank env.

Passport cancelled
VOID → no history shown
`F4`

Bank environment: 404 unless branch IP
never confirms a passport exists
`V3`