

# Machine learning Homework- Soft-Margin SVM and Kernels

Abinav Ravi Venkatakrishnan - 03694216 and Abhijeet Parida - 03679676

December 9, 2018

## Problem 1:

No it will not be the correct label. The training sample depends on the distance from the hyperplane decision boundary  $\xi$ . If  $\xi < 1$  for the training sample it gets classified correctly else it gets mis-classified.

## Problem 2:

The cost function for soft-margin SVM is

$$\min f_0(\mathbf{w}, b, \xi) = \frac{1}{2} \mathbf{w}^T \mathbf{w} + C \sum_{i=1}^N \xi_i \quad (1)$$

C is a penalizing factor on  $\xi$ .

case 1: when  $C = 0$  there is no restriction on  $\xi$  values.

case 2: when  $C \rightarrow 0$  it encourages higher values of  $\xi$  and hence encouraging mis-classification.

## Problem 3:

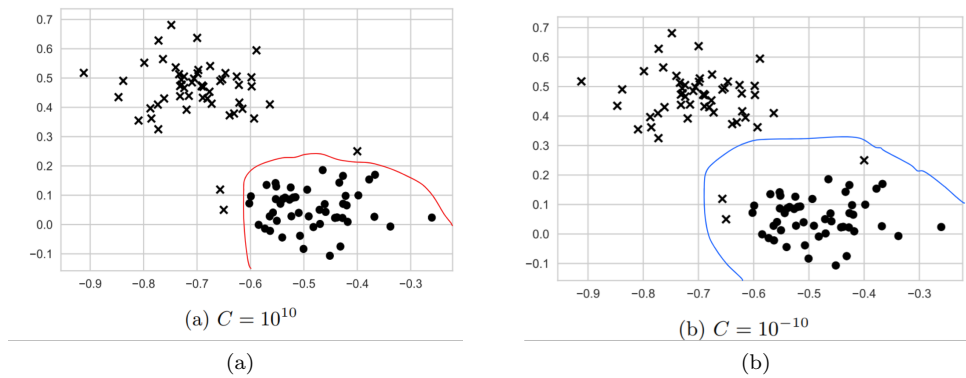


Figure 1

This case tends to have hard margin of SVM since the  $C$  value is very big and  $C$  tends to  $\infty$

## Problem 4:

## Problem 5: