

Task 2 — n8n API Integration Workflow

Candidate: R. Abinayan Workflow: GitHub Repository Digest + Error Handling

Workflow Overview

Schedule Trigger (hourly) → GitHub Search API → JavaScript transformation → GitHub Repository Details API → IF: stars > 1000 → Telegram. API failures from the second request are routed through its error output to a Telegram fallback.

APIs and Purpose

Component	Purpose
GitHub REST API — repository search	Fetch public JavaScript repositories and metadata.
JavaScript Code node	Reshape, sort by stars, and retain the top 5 repositories.
GitHub REST API — repository details	Enrich the top repository with detailed fields.
Telegram Bot API	Send the digest or fallback alert.


Transformation and Conditional Logic

The Code node maps each repository to name, full_name, owner, stars, forks, language and URL, sorts by star count, and keeps the top 5. The top repository is passed to the second GitHub endpoint. The IF node checks **stargazers_count > 1000**; TRUE sends the digest and FALSE sends a threshold fallback.


Error Handling

The second HTTP Request uses **On Error → Continue (using error output)**. Its Error output connects to the Telegram fallback. This was tested with an intentionally invalid GitHub endpoint; the Error path executed and the fallback Telegram alert was received. The original URL was then restored.

Successful Execution Evidence

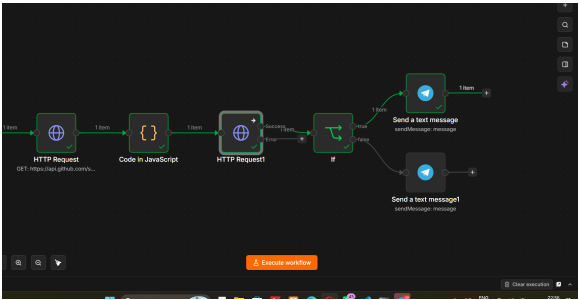

Error-Path Test Evidence

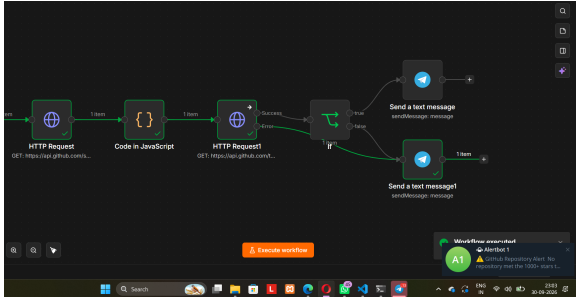

Submission: Export the n8n workflow separately as **Task2_Workflow_Abinayan.json**. This PDF serves as the short documentation/README deliverable.