**TIS Homepage Redesign — Project Document**

**1. Project Title**

**Tulas International School (TIS) — Modern Animated Homepage Redesign**

**2. Project Objective**

The objective is to redesign the existing Tulas International School homepage into a modern, responsive and visually engaging single-page website while retaining the school's core brand identity, important content and conversion-focused calls to action.

The redesigned website will provide:

- Modern premium-school visual design
- Fully responsive layout
- Smooth scrolling
- Scroll-triggered animations
- Custom desktop cursor
- Light/dark theme switching
- Scroll progress indicator
- Mobile navigation
- Reusable React components
- Semantic HTML
- Optimized performance
- Production-ready deployment

**3. Technology Stack**

| **Technology** | **Purpose** |
|---|---|
| Next.js | React framework |
| TypeScript | Type safety |
| Tailwind CSS | Styling |

| Technology | Purpose |
|---|---|
| Framer Motion | Animations |
| Lucide React | Icons |
| Vercel | Deployment |
| Git/GitHub | Version control |

---

**4. Project Structure**

```
tis-homepage-redesign/
|
├── app/
|   ├── globals.css
|   ├── layout.tsx
|   └── page.tsx
|
├── components/
|   ├── animation/
|   |   ├── CustomCursor.tsx
|   |   ├── Reveal.tsx
|   |   └── ScrollProgress.tsx
|   |
|   ├── layout/
|   |   ├── Navbar.tsx
|   |   └── Footer.tsx
|   |
|   ├── sections/
```

```
|   |   ├── HeroSection.tsx
|   |   ├── AboutSection.tsx
|   |   ├── StatsSection.tsx
|   |   ├── ProgramsSection.tsx
|   |   ├── WhyTISSection.tsx
|   |   ├── CampusSection.tsx
|   |   ├── TestimonialsSection.tsx
|   |   └── CTASection.tsx
|   |
|   └── ui/
|       ├── Button.tsx
|       └── SectionHeading.tsx
|
├── data/
|   └── content.ts
|
├── public/
|   └── images/
|
├── app/
|
├── .gitignore
├── next.config.ts
├── package.json
├── postcss.config.mjs
```

├── tailwind.config.ts

├── tsconfig.json

└── README.md

---

**5. Create the Project**

Run:

npx create-next-app@latest tis-homepage-redesign

Select:

TypeScript Yes

ESLint Yes

Tailwind CSS Yes

src/ directory No

App Router Yes

Turbopack Yes

Import alias Yes

Then:

cd tis-homepage-redesign

Install the required packages:

npm install framer-motion lucide-react

Run the project:

npm run dev

Open:

http://localhost:3000

---

**6. Global Styling**

Create/update:

**app/globals.css**

```
@import "tailwindcss";

:root {
  --background: #f7f6f2;
  --foreground: #17251f;
  --primary: #123c2d;
  --secondary: #c9a55c;
  --muted: #6b756f;
  --card: #ffffff;
}

.dark {
  --background: #0b1712;
  --foreground: #f4f5f1;
  --primary: #9fc5ae;
  --secondary: #d5b56d;
  --muted: #a5afa9;
  --card: #12231b;
}

* {
  box-sizing: border-box;
}

html {
```

```
  scroll-behavior: smooth;
}

body {
  margin: 0;
  background: var(--background);
  color: var(--foreground);
  font-family: Arial, Helvetica, sans-serif;
  transition:
    background-color 0.3s ease,
    color 0.3s ease;
}

::selection {
  background: #c9a55c;
  color: #123c2d;
}

a,
button {
  -webkit-tap-highlight-color: transparent;
}

button {
  cursor: pointer;
}
```

```
@media (pointer: coarse) {
  body {
    cursor: auto;
  }
}
```

---

**7. Website Content**

Create:

**data/content.ts**

```
export const navigation = [
  { label: "Home", href: "#home" },
  { label: "About", href: "#about" },
  { label: "Academics", href: "#academics" },
  { label: "Campus", href: "#campus" },
  { label: "Admissions", href: "#admissions" },
];


export const stats = [
  {
    value: "20+",
    label: "Years of Excellence",
  },
  {
    value: "1000+",
    label: "Students",
```

```
  },
  {
    value: "50+",
    label: "Expert Educators",
  },
  {
    value: "25+",
    label: "Academic Programs",
  },
];

export const programs = [
  {
    number: "01",
    title: "Primary School",
    description:
      "Building strong foundations through curiosity-driven learning and holistic development.",
  },
  {
    number: "02",
    title: "Middle School",
    description:
      "Encouraging critical thinking, collaboration and independent learning.",
  },
  {
    number: "03",
```

```
    title: "Senior School",
    description:
      "Preparing students for higher education and future professional opportunities.",
  },
];

export const reasons = [
  "Student-centric learning",
  "Experienced educators",
  "Modern learning environment",
  "Holistic development",
  "Strong academic foundation",
  "Focus on creativity and leadership",
];
```

**Note:** Before submitting the assessment, replace placeholder statistics/content with the verified official TIS content and assets.

---

**8. Scroll Reveal Component**

**components/animation/Reveal.tsx**

```
"use client";

import { motion } from "framer-motion";
import type { ReactNode } from "react";

interface RevealProps {
  children: ReactNode;
```

```
  delay?: number;
  className?: string;
}

export default function Reveal({
  children,
  delay = 0,
  className = "",
}: RevealProps) {
  return (
    <motion.div
      className={className}
      initial={{
        opacity: 0,
        y: 24,
      }}
      whileInView={{
        opacity: 1,
        y: 0,
      }}
      viewport={{
        once: true,
        amount: 0.2,
      }}
      transition={{
        duration: 0.45,
```

```
      delay,
      ease: "easeOut",
    }}
  >
    {children}
  </motion.div>
 );
}
```

This implements the required **scroll-triggered reveal feature**.

---

**9. Scroll Progress**

**components/animation/ScrollProgress.tsx**

```
"use client";

import { motion, useScroll, useSpring } from "framer-motion";

export default function ScrollProgress() {
 const { scrollYProgress } = useScroll();

 const scaleX = useSpring(scrollYProgress, {
  stiffness: 100,
  damping: 30,
  restDelta: 0.001,
 });

 return (
```

```
    <motion.div
      className="fixed left-0 top-0 z-[100] h-1 w-full origin-left bg-[#c9a55c]"
      style={{ scaleX }}
    />
  );
}
```

This gives us the second major standout feature.

---

**10. Custom Cursor**

**components/animation/CustomCursor.tsx**

```
"use client";

import { motion, useMotionValue, useSpring } from "framer-motion";
import { useEffect, useState } from "react";

export default function CustomCursor() {
  const [enabled, setEnabled] = useState(false);

  const mouseX = useMotionValue(-100);
  const mouseY = useMotionValue(-100);

  const springX = useSpring(mouseX, {
    stiffness: 500,
    damping: 35,
  });
```

```
const springY = useSpring(mouseY, {
  stiffness: 500,
  damping: 35,
});

useEffect(() => {
  const media = window.matchMedia("(pointer: fine)");

  setEnabled(media.matches);

  const handleMove = (event: MouseEvent) => {
    mouseX.set(event.clientX);
    mouseY.set(event.clientY);
  };

  window.addEventListener("mousemove", handleMove);

  return () => {
    window.removeEventListener("mousemove", handleMove);
  };
}, [mouseX, mouseY]);

if (!enabled) return null;

return (
  <motion.div
```

```
    className="pointer-events-none fixed left-0 top-0 z-[200] h-8 w-8 rounded-full border border-[#c9a55c]"
    style={{
      x: springX,
      y: springY,
      translateX: "-50%",
      translateY: "-50%",
    }}
  />
 );
}
```

Because it checks pointer: fine, the custom cursor doesn't interfere with touch devices.

---

**11. Button Component**

**components/ui/Button.tsx**

```
import Link from "next/link";
import type { ReactNode } from "react";

interface ButtonProps {
 children: ReactNode;
 href: string;
 variant?: "primary" | "outline";
}

export default function Button({
 children,
```

```
  href,
  variant = "primary",
}: ButtonProps) {
  const styles =
    variant === "primary"
      ? "bg-[#123c2d] text-white hover:bg-[#1d5741]"
      : "border border-[#123c2d] text-[#123c2d] hover:bg-[#123c2d] hover:text-white";

  return (
    <Link
      href={href}
      className={`inline-flex min-h-12 items-center justify-center rounded-full px-7 text-sm font-semibold transition-all duration-300 ${styles}`}
    >
      {children}
    </Link>
  );
}
```

---

**12. Section Heading**

**components/ui/SectionHeading.tsx**

```
import Reveal from "../animation/Reveal";

interface SectionHeadingProps {
  eyebrow: string;
  title: string;
```

```
  description?: string;
}

export default function SectionHeading({
  eyebrow,
  title,
  description,
}: SectionHeadingProps) {
  return (
    <Reveal>
      <div className="max-w-3xl">
        <p className="mb-4 text-sm font-semibold uppercase tracking-[0.25em] text-[#c9a55c]">
          {eyebrow}
        </p>

        <h2 className="text-4xl font-semibold leading-tight tracking-tight md:text-5xl">
          {title}
        </h2>

        {description && (
          <p className="mt-6 text-lg leading-8 text-[var(--muted)]">
            {description}
          </p>
        )}
      </div>
    </Reveal>
```

```
  );
}
```

---

**13. Navbar**

**components/layout/Navbar.tsx**

```
"use client";

import { Menu, Moon, Sun, X } from "lucide-react";
import Link from "next/link";
import { useState } from "react";
import { navigation } from "../../data/content";

export default function Navbar() {
  const [open, setOpen] = useState(false);
  const [dark, setDark] = useState(false);

  const toggleTheme = () => {
    document.documentElement.classList.toggle("dark");
    setDark((value) => !value);
  };

  return (
    <header className="fixed left-0 top-0 z-50 w-full border-b border-black/5 bg-[var(--background)]/80 backdrop-blur-xl dark:border-white/10">
      <div className="mx-auto flex h-20 max-w-7xl items-center justify-between px-6 lg:px-8">
        <Link
```

```
  href="#home"
  className="text-xl font-bold tracking-tight"
>
  TULAS<span className="text-[#c9a55c]">.</span>
</Link>

<nav className="hidden items-center gap-8 md:flex">
  {navigation.map((item) => (
    <Link
      key={item.href}
      href={item.href}
      className="text-sm font-medium transition-colors hover:text-[#c9a55c]"
    >
      {item.label}
    </Link>
  ))}

  <button
    onClick={toggleTheme}
    aria-label="Toggle theme"
    className="rounded-full p-2"
  >
    {dark ? <Sun size={18} /> : <Moon size={18} />}
  </button>
</nav>
```

```
  <button
    onClick={() => setOpen(!open)}
    className="rounded-full p-2 md:hidden"
    aria-label="Toggle navigation"
  >
    {open ? <X /> : <Menu />}
  </button>
</div>

{open && (
  <nav className="border-t border-black/5 px-6 py-6 md:hidden dark:border-white/10">
    <div className="flex flex-col gap-5">
      {navigation.map((item) => (
        <Link
          key={item.href}
          href={item.href}
          onClick={() => setOpen(false)}
          className="text-lg"
        >
          {item.label}
        </Link>
      ))}

      <button
        onClick={toggleTheme}
        className="flex items-center gap-2 text-left"
```

```
          >
            {dark ? <Sun size={18} /> : <Moon size={18} />}
            Toggle theme
          </button>
        </div>
      </nav>
    )}
  </header>
 );
}
```

---

**14. Hero Section**

**components/sections/HeroSection.tsx**

```
"use client";

import { motion } from "framer-motion";
import Button from "../ui/Button";

export default function HeroSection() {
 return (
  <section
    id="home"
    className="relative flex min-h-screen items-center overflow-hidden"
  >
    <div className="absolute inset-0 bg-gradient-to-br from-[#123c2d] via-[#173f30] to-[#07150f]" />
```

```
    <div className="absolute -right-32 -top-32 h-96 w-96 rounded-full bg-[#c9a55c]/20 blur-3xl" />

    <div className="relative mx-auto w-full max-w-7xl px-6 py-32 lg:px-8">
      <div className="max-w-4xl text-white">
        <motion.p
          initial={{ opacity: 0, y: 20 }}
          animate={{ opacity: 1, y: 0 }}
          transition={{ duration: 0.5 }}
          className="mb-6 text-sm font-semibold uppercase tracking-[0.3em] text-[#d9bc7d]"
        >
          Tulas International School
        </motion.p>

        <motion.h1
          initial={{ opacity: 0, y: 30 }}
          animate={{ opacity: 1, y: 0 }}
          transition={{ duration: 0.6, delay: 0.1 }}
          className="text-5xl font-semibold leading-[1.05] tracking-tight sm:text-6xl lg:text-8xl"
        >
          Shaping minds.
          <br />
          <span className="text-[#d9bc7d]">Building futures.</span>
        </motion.h1>
```

```
 <motion.p
  initial={{ opacity: 0, y: 20 }}
  animate={{ opacity: 1, y: 0 }}
  transition={{ duration: 0.5, delay: 0.2 }}
  className="mt-8 max-w-2xl text-lg leading-8 text-white/70 md:text-xl"
 >
  A forward-thinking educational environment designed to
  nurture curiosity, confidence, creativity and lifelong
  learning.
 </motion.p>

 <motion.div
  initial={{ opacity: 0, y: 20 }}
  animate={{ opacity: 1, y: 0 }}
  transition={{ duration: 0.5, delay: 0.3 }}
  className="mt-10 flex flex-col gap-4 sm:flex-row"
 >
  <Button href="#admissions">
   Explore Admissions
  </Button>

  <Button href="#about" variant="outline">
   Discover TIS
  </Button>
 </motion.div>
</div>
```

```
    </div>
   </section>
  );
}
```

---

**15. About Section**

**components/sections/AboutSection.tsx**

```
import Reveal from "../animation/Reveal";
import SectionHeading from "../ui/SectionHeading";


export default function AboutSection() {
  return (
    <section id="about" className="py-24 md:py-32">
      <div className="mx-auto grid max-w-7xl gap-16 px-6 lg:grid-cols-2 lg:px-8">
        <SectionHeading
          eyebrow="About TIS"
          title="Education that goes beyond the classroom."
          description="We believe education is not only about academic achievement. It is about developing confident, thoughtful and responsible individuals."
        />


        <Reveal delay={0.1}>
          <div className="rounded-3xl bg-[var(--card)] p-8 shadow-sm md:p-12">
            <p className="text-lg leading-8 text-[var(--muted)]">
              At Tulas International School, students are encouraged
              to explore ideas, ask meaningful questions and develop
```

```
            the skills needed to navigate a rapidly changing world.
          </p>

          <div className="mt-10 h-px bg-black/10 dark:bg-white/10" />

          <p className="mt-8 text-lg leading-8 text-[var(--muted)]">
            Our approach combines strong academics with experiences
            that support creativity, leadership, collaboration and
            personal growth.
          </p>
        </div>
      </Reveal>
    </div>
  </section>
 );
}
```

---

**16. Statistics Section**

**components/sections/StatsSection.tsx**

```
import Reveal from "../animation/Reveal";
import { stats } from "../../data/content";

export default function StatsSection() {
 return (
  <section className="bg-[#123c2d] py-20 text-white">
```

```
    <div className="mx-auto grid max-w-7xl grid-cols-2 gap-px overflow-hidden px-6 sm:grid-cols-4 lg:px-8">
      {stats.map((stat, index) => (
        <Reveal key={stat.label} delay={index * 0.05}>
          <div className="p-6 text-center md:p-10">
            <p className="text-4xl font-semibold text-[#d9bc7d] md:text-5xl">
              {stat.value}
            </p>

            <p className="mt-3 text-sm text-white/60">
              {stat.label}
            </p>
          </div>
        </Reveal>
      ))}
    </div>
  </section>
 );
}
```

---

**17. Academic Programs**

**components/sections/ProgramsSection.tsx**

```
import Reveal from "../animation/Reveal";
import SectionHeading from "../ui/SectionHeading";
import { programs } from "../../data/content";
```

```
export default function ProgramsSection() {
  return (
    <section id="academics" className="py-24 md:py-32">
      <div className="mx-auto max-w-7xl px-6 lg:px-8">
        <SectionHeading
          eyebrow="Academics"
          title="Learning designed for every stage."
          description="A structured academic journey that develops knowledge, confidence and independent thinking."
        />

        <div className="mt-16 grid gap-5 md:grid-cols-3">
          {programs.map((program, index) => (
            <Reveal key={program.number} delay={index * 0.08}>
              <article className="group h-full rounded-3xl border border-black/10 bg-[var(--card)] p-8 transition-all duration-300 hover:-translate-y-2 hover:shadow-xl dark:border-white/10">
                <div className="flex items-center justify-between">
                  <span className="text-sm font-semibold text-[#c9a55c]">
                    {program.number}
                  </span>

                  <span className="h-2 w-2 rounded-full bg-[#c9a55c]" />
                </div>

                <h3 className="mt-16 text-2xl font-semibold">
                  {program.title}
                </h3>
```

```
            <p className="mt-5 leading-7 text-[var(--muted)]">
              {program.description}
            </p>
          </article>
        </Reveal>
      ))}
    </div>
  </div>
 </section>
 );
}
```

---

**18. Why TIS**

**components/sections/WhyTISSection.tsx**

```
import Reveal from "../animation/Reveal";
import SectionHeading from "../ui/SectionHeading";
import { reasons } from "../../data/content";

export default function WhyTISSection() {
 return (
  <section className="bg-[#eeece5] py-24 dark:bg-[#102019] md:py-32">
   <div className="mx-auto max-w-7xl px-6 lg:px-8">
    <SectionHeading
     eyebrow="Why TIS"
     title="A learning environment built around the student."
```

```
      />

      <div className="mt-16 grid gap-4 sm:grid-cols-2 lg:grid-cols-3">
        {reasons.map((reason, index) => (
          <Reveal key={reason} delay={index * 0.05}>
            <div className="rounded-2xl bg-[var(--card)] p-7">
              <span className="text-sm text-[#c9a55c]">
                0{index + 1}
              </span>

              <h3 className="mt-8 text-xl font-semibold">
                {reason}
              </h3>
            </div>
          </Reveal>
        ))}
      </div>
    </div>
  </section>
 );
}
```

---

**19. Campus Section**

**components/sections/CampusSection.tsx**

```
import Reveal from "../animation/Reveal";
import SectionHeading from "../ui/SectionHeading";
```

```
export default function CampusSection() {
  return (
    <section id="campus" className="py-24 md:py-32">
      <div className="mx-auto max-w-7xl px-6 lg:px-8">
        <SectionHeading
          eyebrow="Campus Life"
          title="A space where curiosity comes alive."
          description="From classrooms to collaborative spaces, every environment should encourage students to explore, create and connect."
        />

        <div className="mt-16 grid gap-5 md:grid-cols-3">
          {["Learning", "Creativity", "Community"].map(
            (item, index) => (
              <Reveal key={item} delay={index * 0.1}>
                <div
                  className={`flex min-h-[320px] items-end rounded-3xl p-8 ${
                    index === 1
                      ? "bg-[#c9a55c]"
                      : "bg-[#123c2d] text-white"
                  }`}
                >
                  <div>
                    <span className="text-sm opacity-60">
                      0{index + 1}
```

```
              </span>

              <h3 className="mt-4 text-3xl font-semibold">
                {item}
              </h3>
            </div>
          </div>
        </Reveal>
      )
    )}
  </div>
 </div>
 </section>
 );
}
```

---

**20. Testimonials**

**components/sections/TestimonialsSection.tsx**

```
import Reveal from "../animation/Reveal";
import SectionHeading from "../ui/SectionHeading";

export default function TestimonialsSection() {
 return (
  <section className="bg-[#123c2d] py-24 text-white md:py-32">
   <div className="mx-auto max-w-7xl px-6 lg:px-8">
    <SectionHeading
```

```
        eyebrow="Community"
        title="Growing together, every day."
      />

      <Reveal delay={0.1}>
        <blockquote className="mt-16 max-w-4xl">
          <p className="text-3xl font-medium leading-tight md:text-5xl">
            “Education becomes meaningful when students are
            encouraged to discover what they are capable of.”
          </p>

          <footer className="mt-8 text-sm text-white/60">
            TIS Community
          </footer>
        </blockquote>
      </Reveal>
    </div>
  </section>
 );
}
```

Again, replace this placeholder testimonial with an authentic, approved TIS testimonial before submission.

---

**21. Admissions CTA**

**components/sections/CTASection.tsx**

```
import Button from "../ui/Button";
```

```
import Reveal from "../animation/Reveal";


export default function CTASection() {
  return (
    <section id="admissions" className="py-24 md:py-32">
      <div className="mx-auto max-w-7xl px-6 lg:px-8">
        <Reveal>
          <div className="overflow-hidden rounded-[2rem] bg-[#c9a55c] p-8 md:p-16">
            <p className="text-sm font-semibold uppercase tracking-[0.25em] text-[#123c2d]">
              Admissions
            </p>

            <h2 className="mt-6 max-w-3xl text-4xl font-semibold leading-tight text-[#123c2d]
md:text-6xl">
              Give your child a place to learn, grow and thrive.
            </h2>

            <p className="mt-6 max-w-2xl text-lg leading-8 text-[#123c2d]/70">
              Discover the TIS learning experience and take the next
              step towards your child's educational journey.
            </p>

            <div className="mt-8">
              <Button href="#home">Begin Your Journey</Button>
            </div>
          </div>
```

```
      </Reveal>
    </div>
  </section>
 );
}
```

---

**22. Footer**

**components/layout/Footer.tsx**

```
import Link from "next/link";

export default function Footer() {
 return (
  <footer className="border-t border-black/10 py-12 dark:border-white/10">
   <div className="mx-auto flex max-w-7xl flex-col gap-6 px-6 md:flex-row md:items-center md:justify-between lg:px-8">
    <div>
     <p className="text-xl font-bold">
      TULAS<span className="text-[#c9a55c]">.</span>
     </p>

     <p className="mt-2 text-sm text-[var(--muted)]">
      Tulas International School
     </p>
    </div>

    <div className="flex gap-6 text-sm">
```

```
        <Link href="#about">About</Link>
        <Link href="#academics">Academics</Link>
        <Link href="#campus">Campus</Link>
        <Link href="#admissions">Admissions</Link>
      </div>
    </div>
  </footer>
 );
}
```

---

**23. Main Page**

**app/page.tsx**

```
import CustomCursor from "../components/animation/CustomCursor";
import ScrollProgress from "../components/animation/ScrollProgress";

import Navbar from "../components/layout/Navbar";
import Footer from "../components/layout/Footer";

import HeroSection from "../components/sections/HeroSection";
import AboutSection from "../components/sections/AboutSection";
import StatsSection from "../components/sections/StatsSection";
import ProgramsSection from "../components/sections/ProgramsSection";
import WhyTISSection from "../components/sections/WhyTISSection";
import CampusSection from "../components/sections/CampusSection";
import TestimonialsSection from "../components/sections/TestimonialsSection";
import CTASection from "../components/sections/CTASection";
```

```
export default function Home() {
  return (
    <>
      <ScrollProgress />
      <CustomCursor />

      <Navbar />

      <main>
        <HeroSection />
        <AboutSection />
        <StatsSection />
        <ProgramsSection />
        <WhyTISSection />
        <CampusSection />
        <TestimonialsSection />
        <CTASection />
      </main>

      <Footer />
    </>
  );
}
```

---

**24. Root Layout**

**app/layout.tsx**

```
import type { Metadata } from "next";
import "./globals.css";

export const metadata: Metadata = {
  title: "Tulas International School | Inspiring Future Leaders",
  description:
    "Tulas International School — a modern learning environment focused on academic excellence and holistic development.",
};

export default function RootLayout({
  children,
}: Readonly<{
  children: React.ReactNode;
}>) {
  return (
    <html lang="en">
      <body>{children}</body>
    </html>
  );
}
```

---

**25. README.md**

Use this as your repository documentation:

**README.md**

# Tulas International School — Homepage Redesign

A modern, animated and responsive homepage redesign for Tulas International School.

## Live Demo

Live URL:

https://your-project.vercel.app

Repository:

https://github.com/your-username/tis-homepage-redesign

## Tech Stack

- Next.js
- TypeScript
- Tailwind CSS
- Framer Motion
- Lucide React
- Vercel

## Features

### Responsive Design

The website is designed and tested for:

- Mobile — 375px
- Tablet — 768px
- Desktop — 1280px+

### Scroll-Triggered Animations

Framer Motion is used to animate content as it enters the viewport.

### Custom Cursor

A lightweight mouse-following cursor is displayed on
fine-pointer devices and disabled on touch devices.

### Scroll Progress

A fixed progress indicator displays the user's position
within the page.

### Theme Switcher

Users can switch between light and dark themes.

## Project Structure

```text
app/
components/
  animation/
  layout/
  sections/
  ui/
data/
public/
```

**Installation**

Clone the repository:

```
git clone https://github.com/your-username/tis-homepage-redesign.git
```

Move into the project:

```
cd tis-homepage-redesign
```

Install dependencies:

```
npm install
```

Start development server:

```
npm run dev
```

Open:

```
http://localhost:3000
```

**Production Build**

Run:

```
npm run build
```

Then:

```
npm start
```

**Deployment**

The project can be deployed using Vercel.

Connect the GitHub repository to Vercel and deploy using the default Next.js settings.

**Accessibility**

The project uses:

- Semantic HTML
- Accessible button labels
- Keyboard-friendly navigation
- Responsive touch targets
- Reduced reliance on animation for core functionality

**Performance**

The project avoids unnecessary animation libraries and uses Framer Motion only for interactive motion.

Animations use transform and opacity wherever possible to minimize layout recalculation.

**AI Usage**

AI tools were used as development assistance.

All generated code was reviewed, adapted and tested before implementation.


The developer is able to explain the component hierarchy, animation implementation and state management used within the project.

---

# 26. Recommended Final Homepage Flow

The final visual flow should be:

```text
┌──────────────────────────────────────┐
│            NAVBAR                    │
├──────────────────────────────────────┤
│                                      │
│            HERO                      │
│                                      │
│      Shaping minds.                  │
│      Building futures.               │
│                                      │
│    [Explore Admissions]              │
│    [Discover TIS]                    │
│                                      │
├──────────────────────────────────────┤
│            ABOUT                     │
│                                      │
│ Education beyond classroom           │
│                                      │
├──────────────────────────────────────┤
│            STATS                     │
│   20+    1000+    50+    25+         │
├──────────────────────────────────────┤
│          ACADEMICS                   │
│                                      │
│ Primary | Middle | Senior            │
```

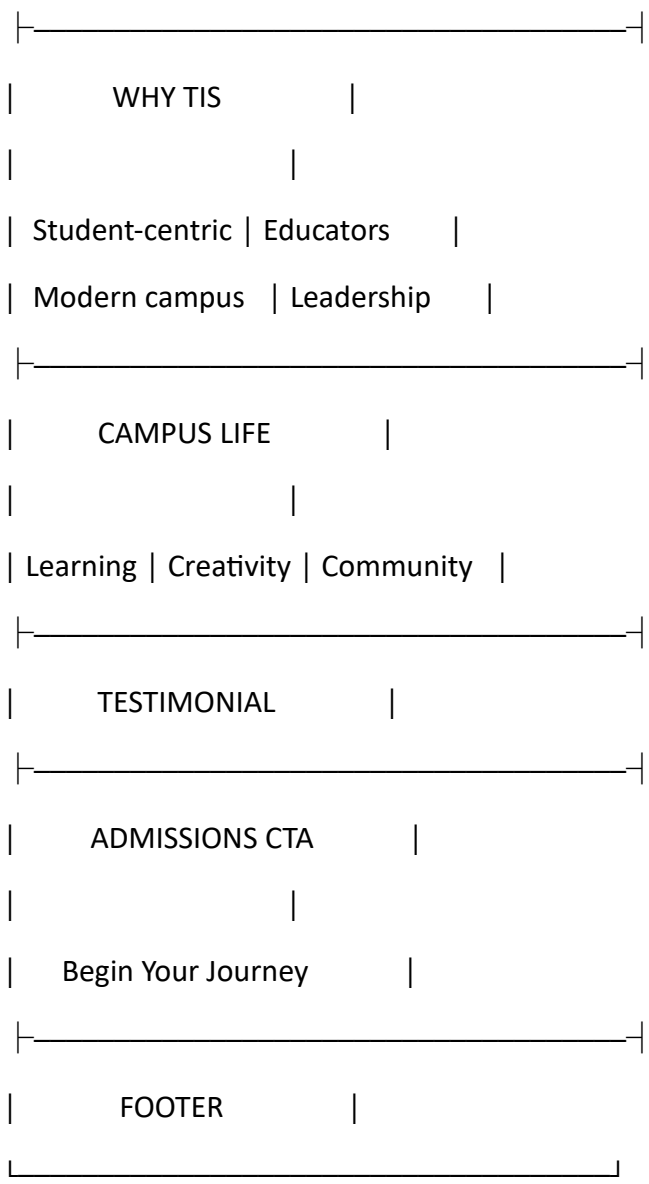


**27. Assessment Checklist**

Before submitting, run:

npm run lint

Then:

npm run build

You should have:

- React/Next.js implementation
- TypeScript

- Tailwind CSS
- Framer Motion
- Modular components
- Semantic HTML
- Responsive navigation
- Mobile layout
- Desktop layout
- Scroll reveals
- Custom cursor
- Scroll progress
- Theme switcher
- README
- Replace placeholder copy with official TIS copy
- Replace placeholder statistics with verified TIS data
- Add approved TIS images/assets
- Test at 375px
- Test at 768px
- Test at 1280px+
- Check keyboard navigation
- Check console for errors
- Push to public GitHub repository
- Deploy to Vercel/Netlify
- Test production URL
- Submit repository + deployment URL through the provided form