


DHCP – Dynamic Host Config Portal

****Write down below steps on a paper. You are allowed to take the paper to the exam.**


Go to windows server 2012 – Open command prompt

Type > services.msc


Go to standard > Find DHCP client > Click on service status > Click on Stop

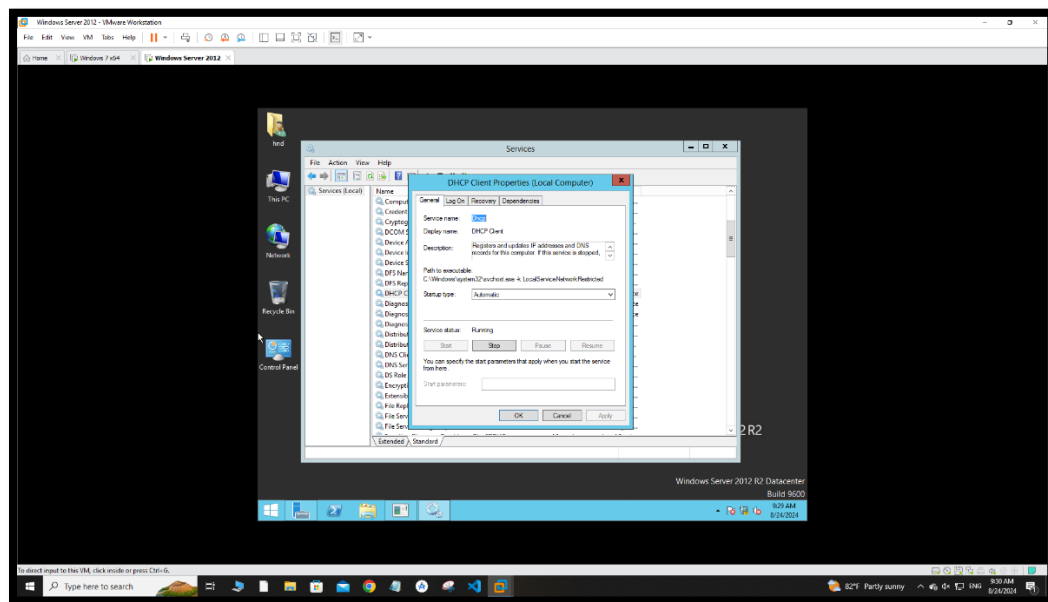


Go to recovery – Make sure to put all three take no action and put 365 days > Apply > Ok

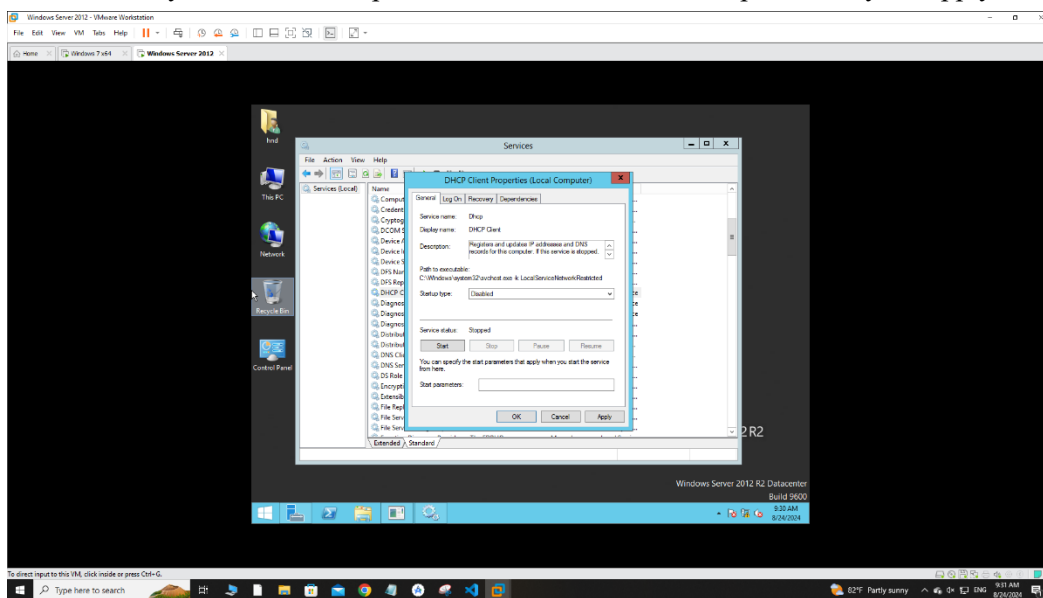

Right click on network > properties >

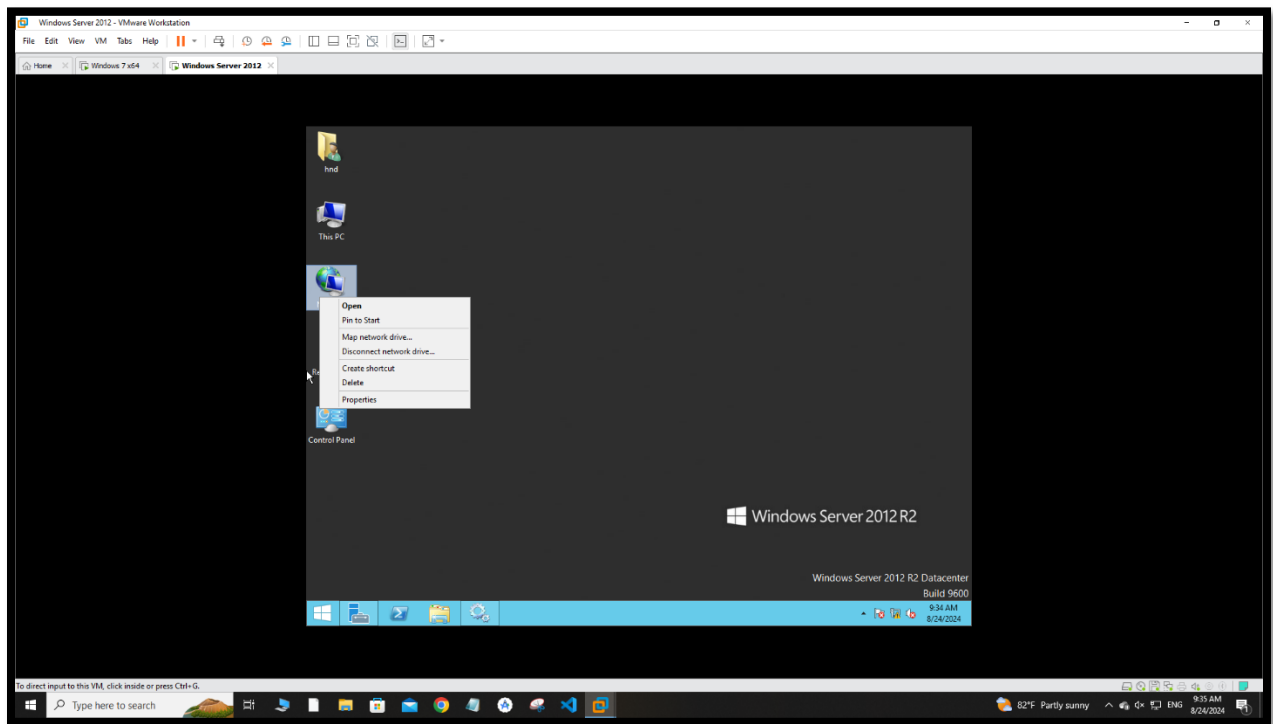

Change adapter setting > right click on ethernet0 > Disable

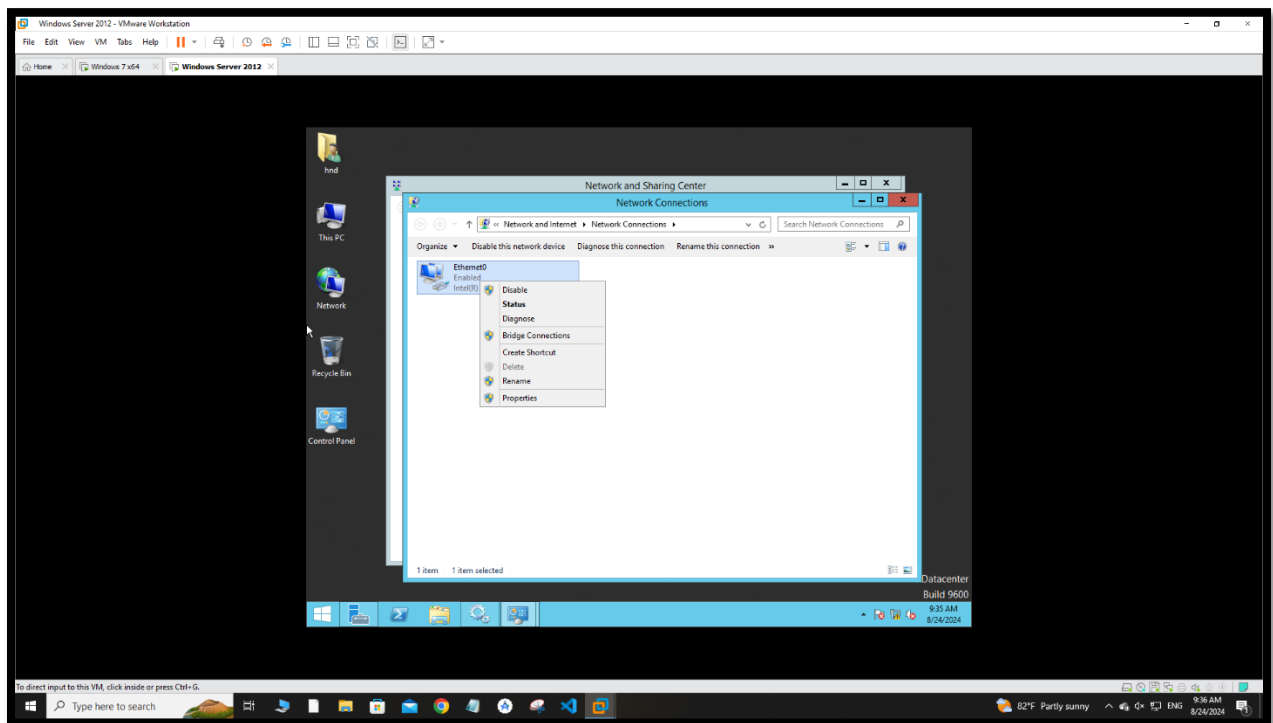

Go to search bar > type CMD > right click > run as administrator.

Type on command prompt > netsh in ip reset

Then type > netsh winsock reset

Type > ipconfig /flushdns

Then go back to network properties > change adapter setting > Ethennet0 > enable

Go back to command prompt type > ipconfig

Type > netsh interface ipv4 show inter

Type > netsh interface ipv4 set interface 12 dadtransmits=0 store=persistent

Type > netsh int ip reset

Type > netsh winsock reset

Type > ipconfig /flushdns > restart the pc (windows server 2012)

Go to the network properties > change adapter setting > ethennet0 > right click > properties > Ipv6 untick
> Ipv4 double click on it > tick on use the following Ip address > type any Ip address > select ok

Then right click on ethennet0 > disable > enable

Then again go to search bar > type CMD > right click > run as administrator.

Type on command prompt > netsh in ip reset

Then type > netsh winsock reset

Type > ipconfig /flushdns

type > ipconfig

Type > netsh interface ipv4 show inter


Type > netsh interface ipv4 set interface 12 dadtransmits=0 store=persistent

Then go back to network properties > change adapter setting > Ethennet0 > disable > enable


Go to server manager




DNC > right click > refresh > if you successfully completed above steps your Ip address will show (Ip address that you entered before) if not you have to do the steps again until you get the Ip address.

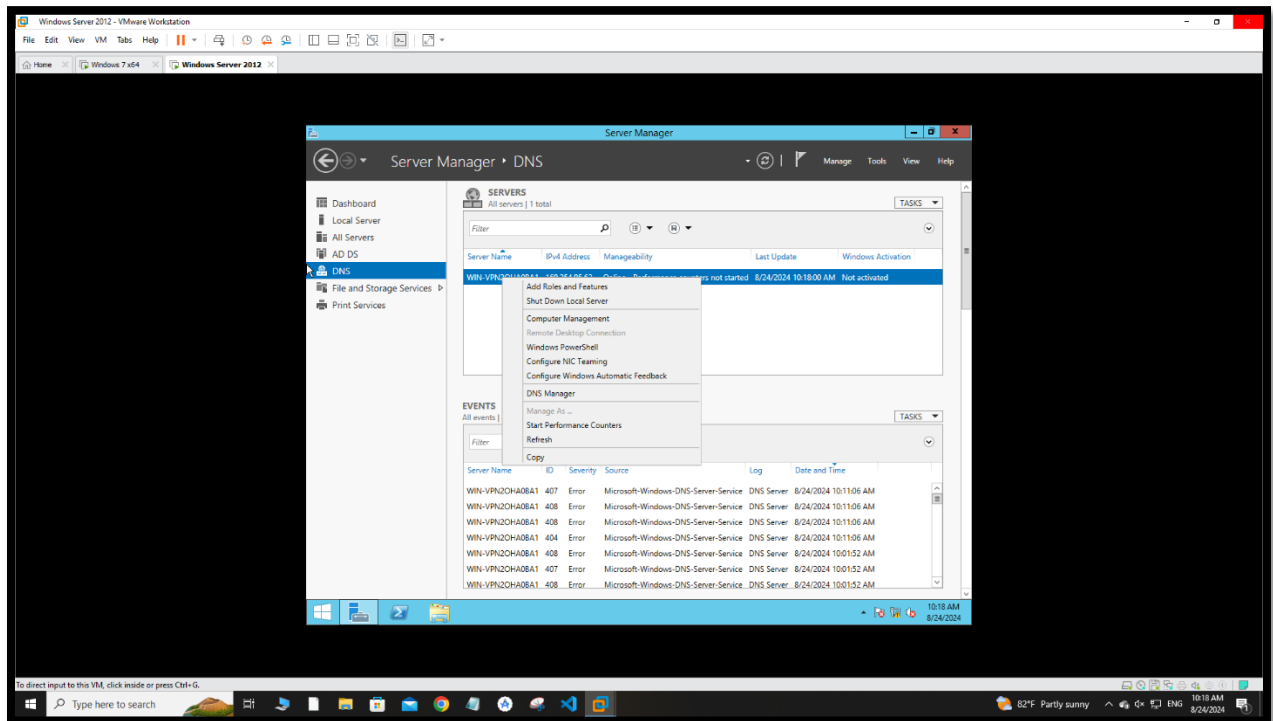


Go to dash board > add roles and features > next > next > next >

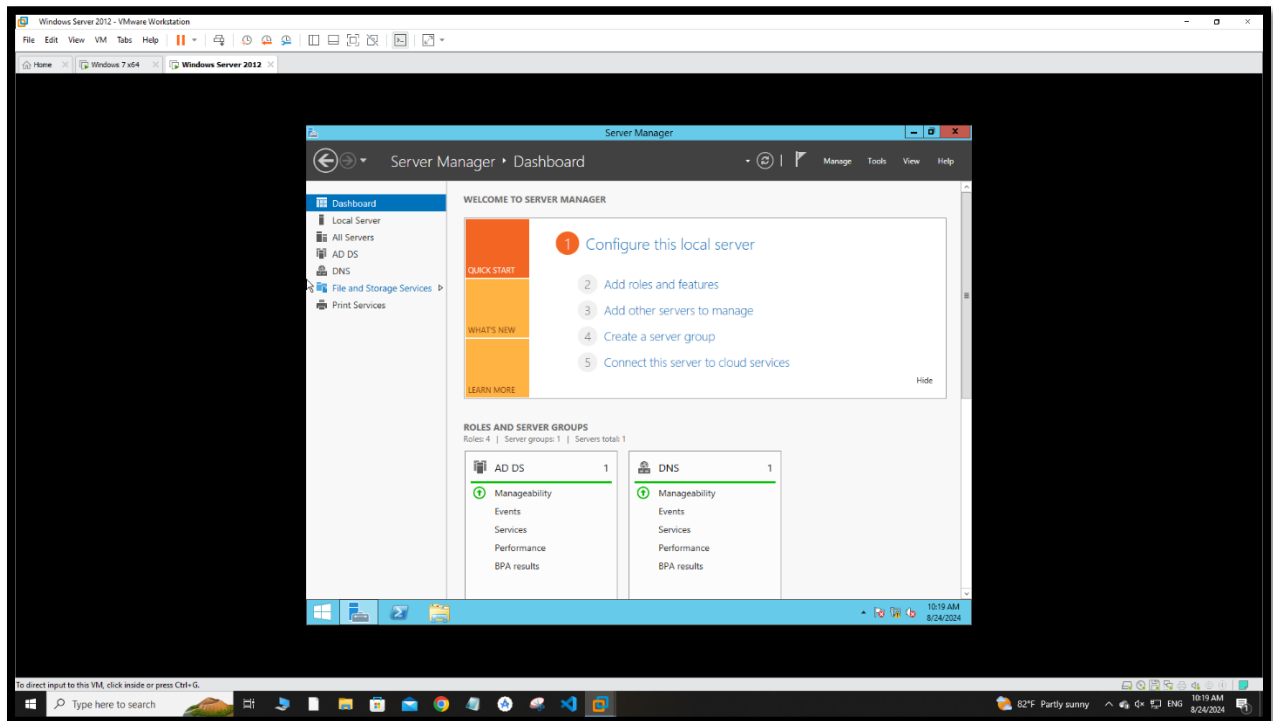


Tick on DHCP server > next > next > Install

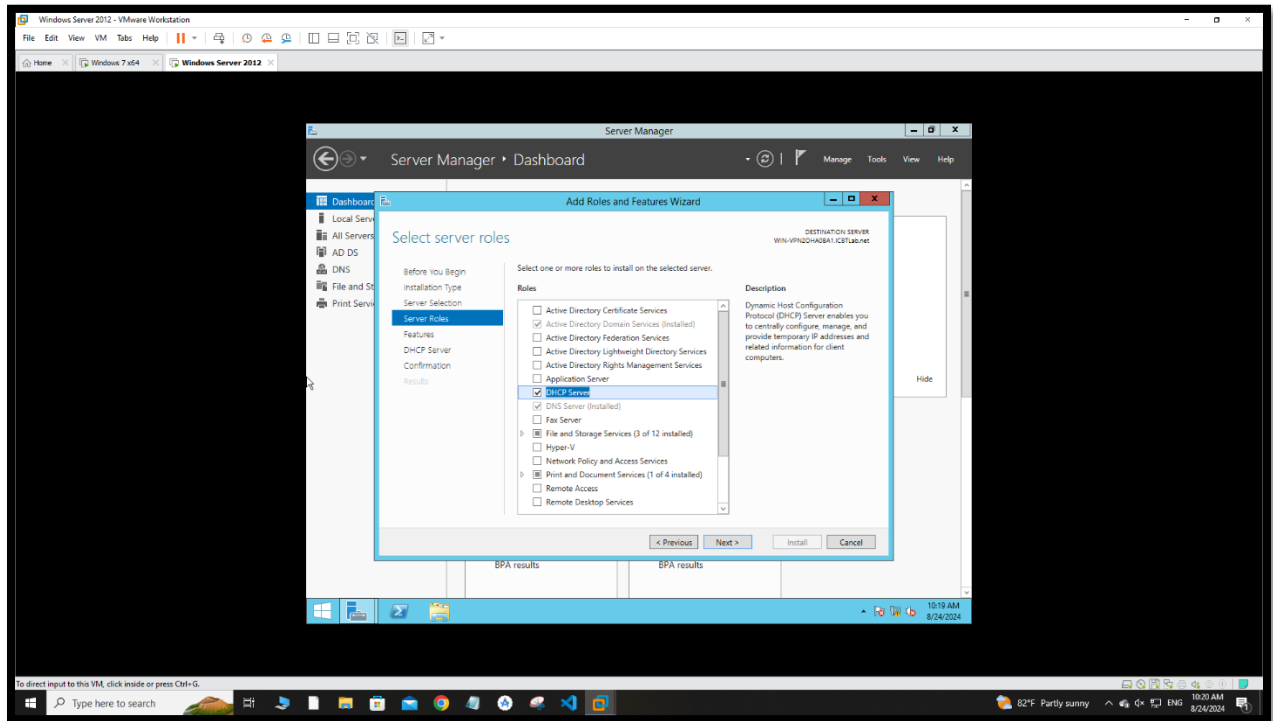


Alert > Complete DHCP configuration > next >

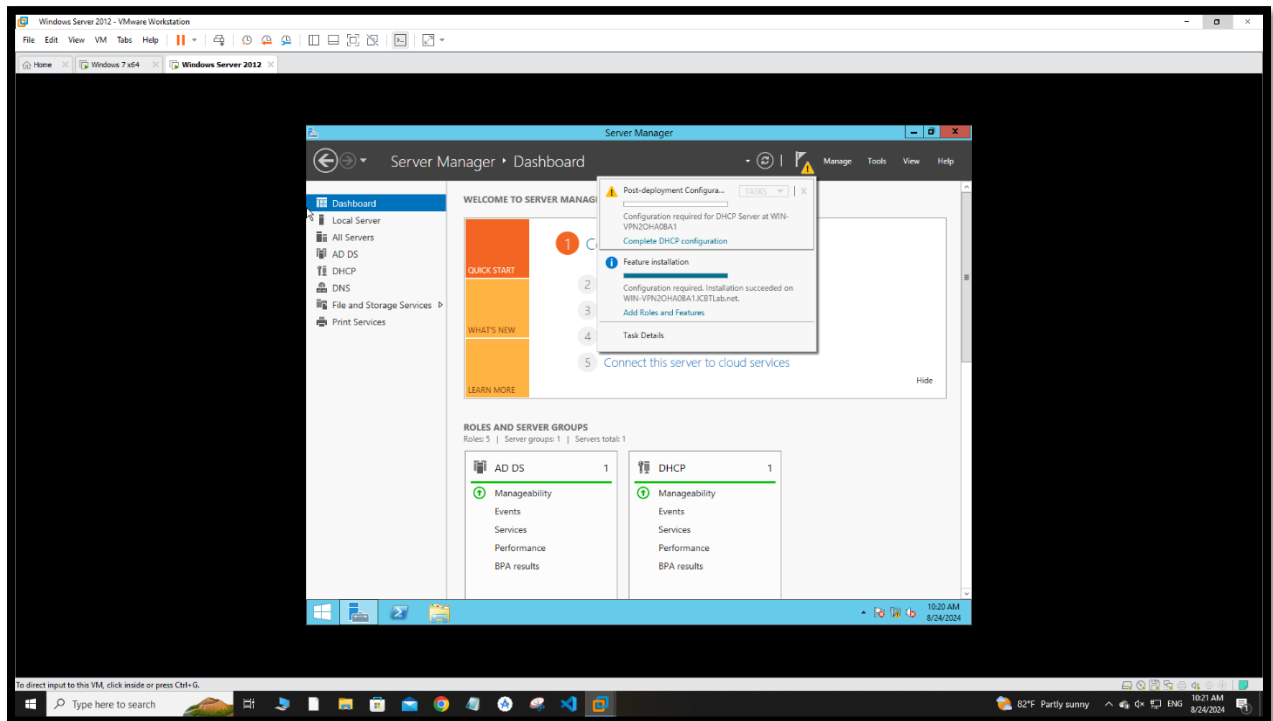


Use alternate credential > specify

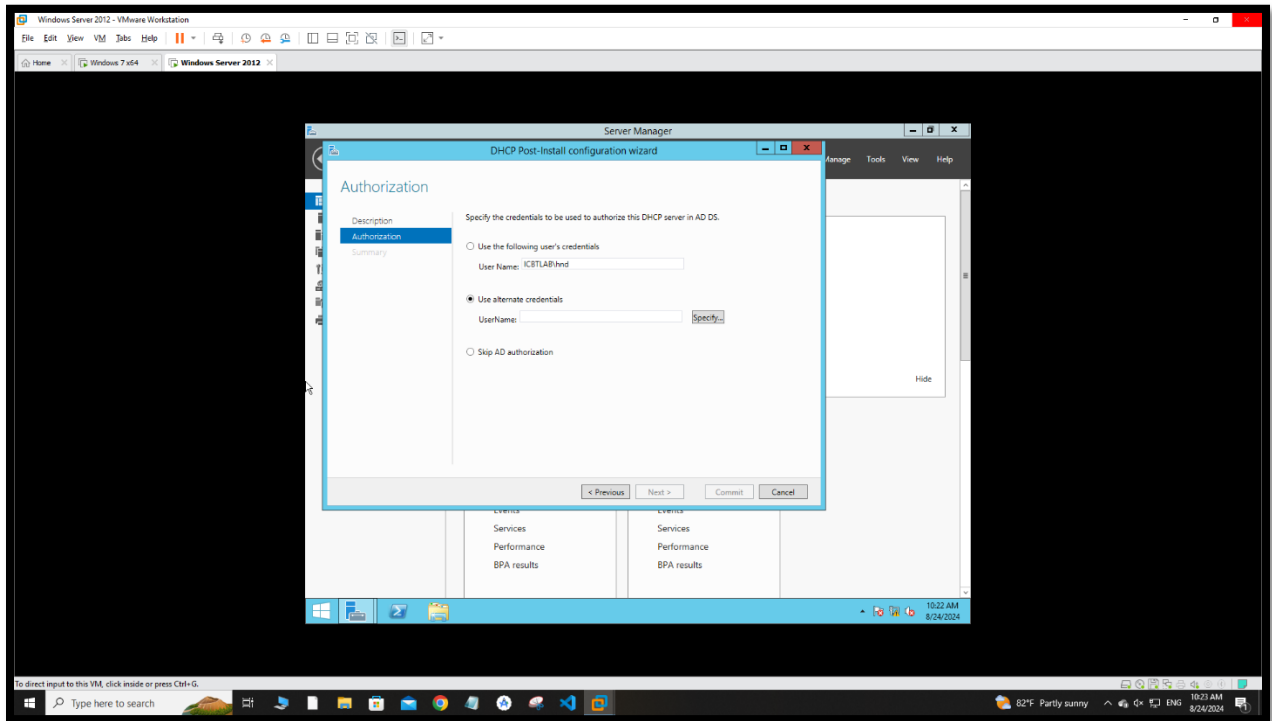


Administrator > password > Ok > Commit

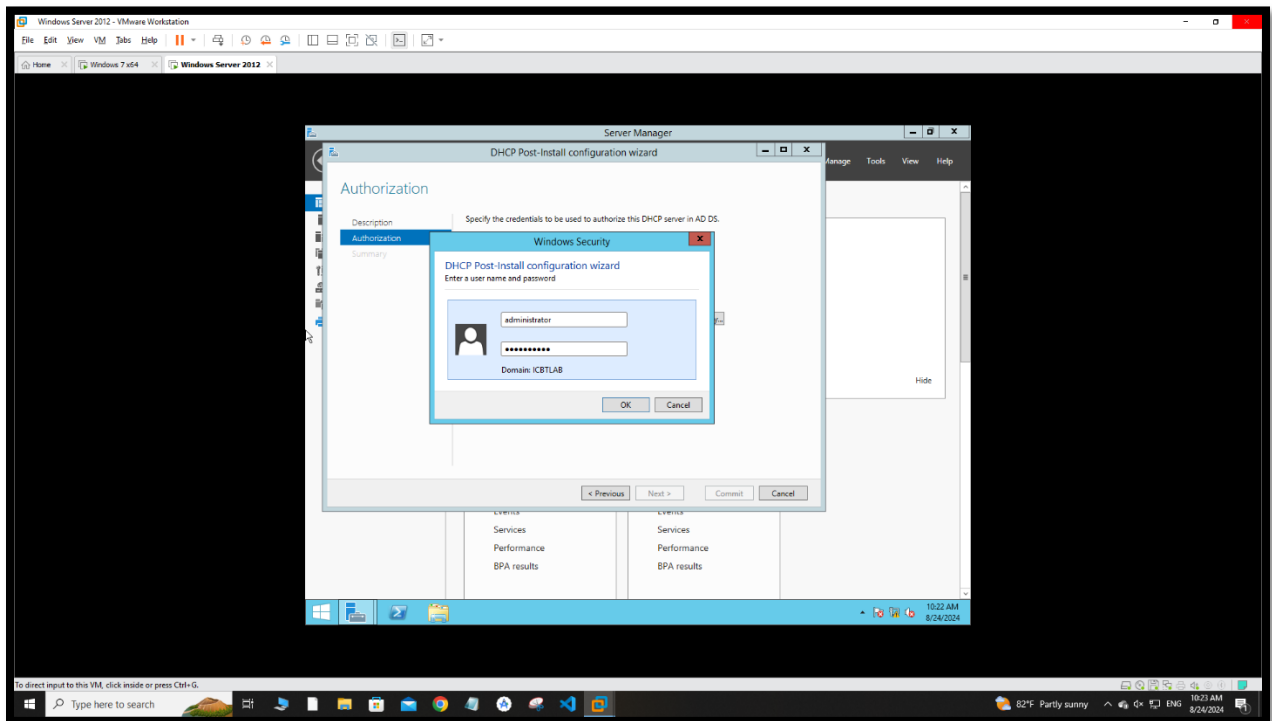


If you did it correct the status will show Done

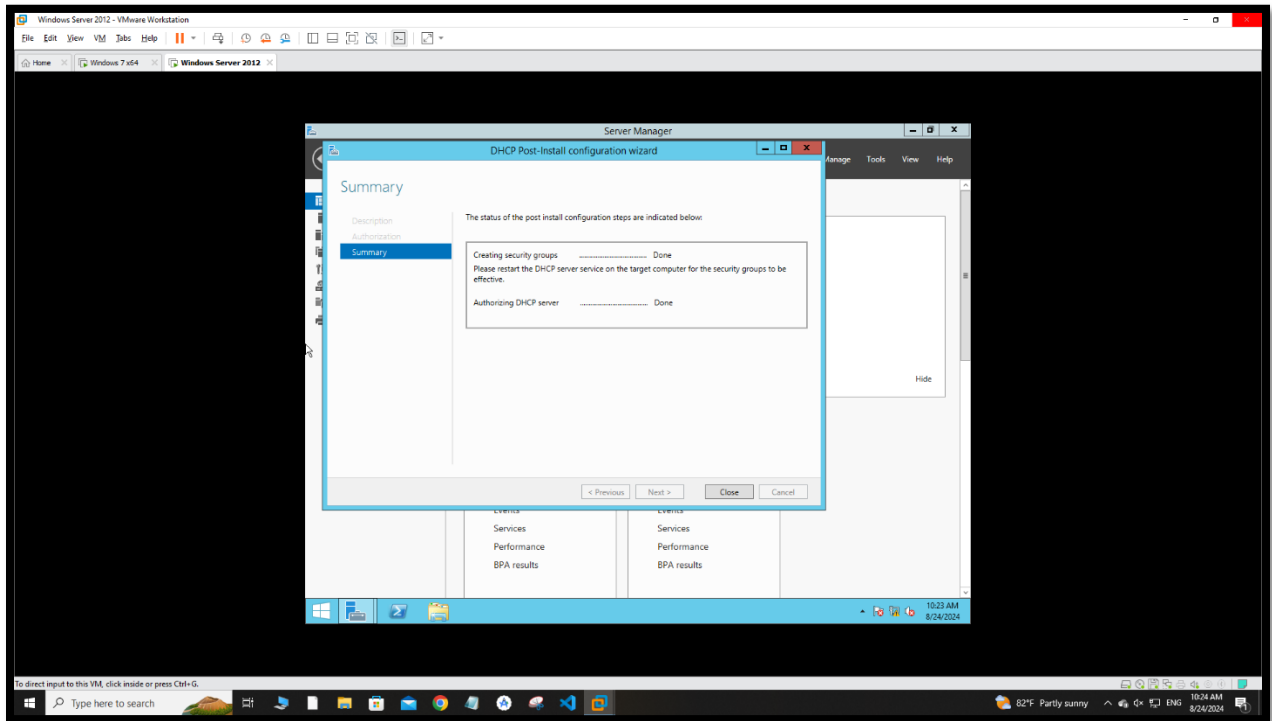


Tools > DHCP > DHCP manager

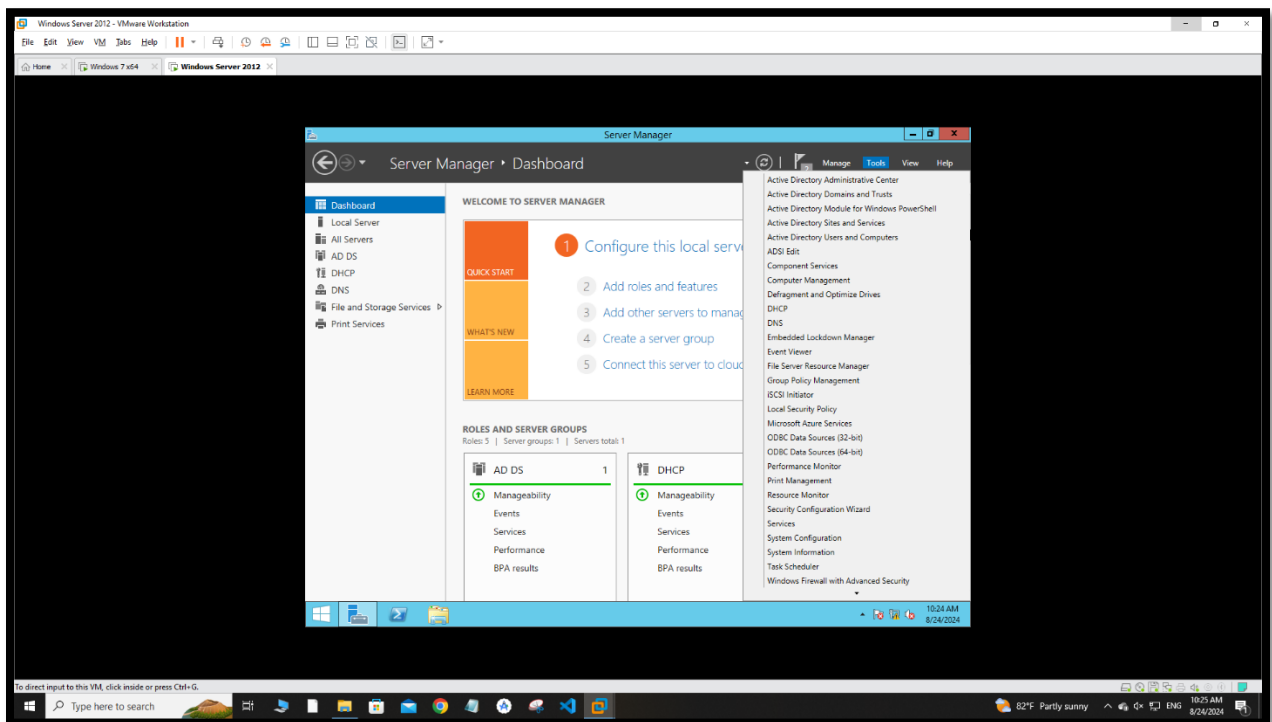

Right click on Ipv4 > new scope > next >

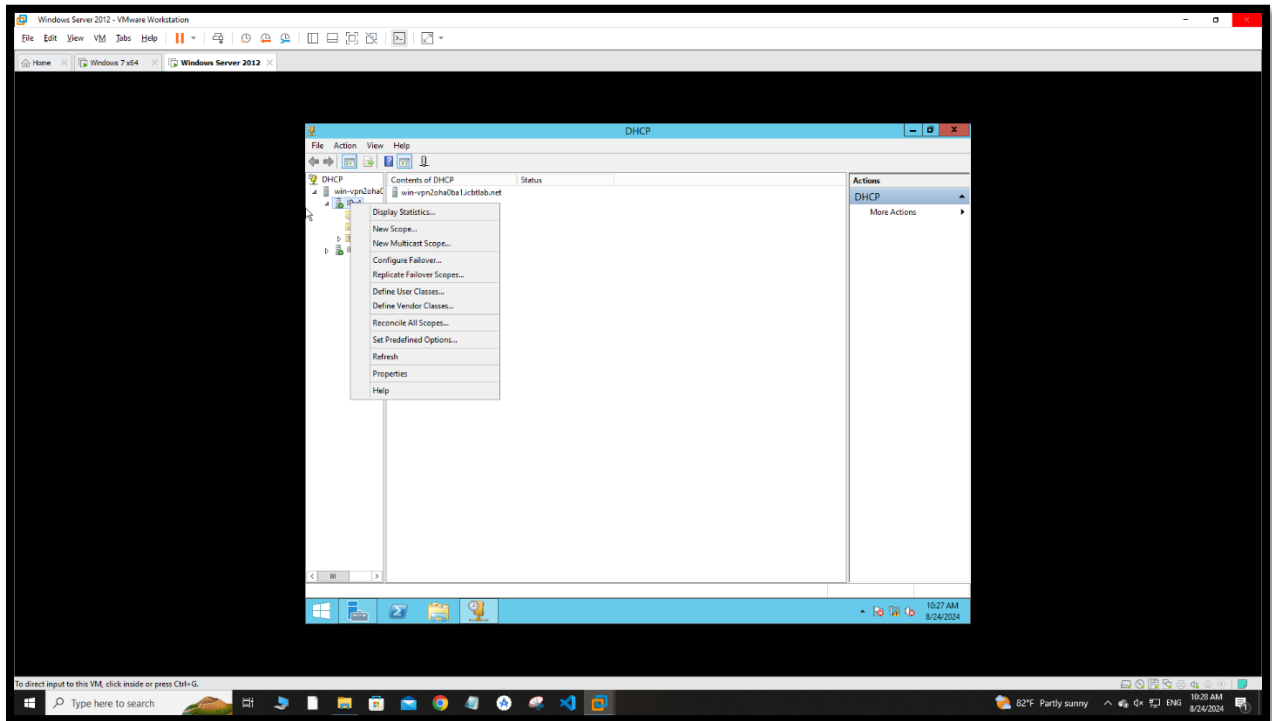


Name Ex: Icbthdddhcp

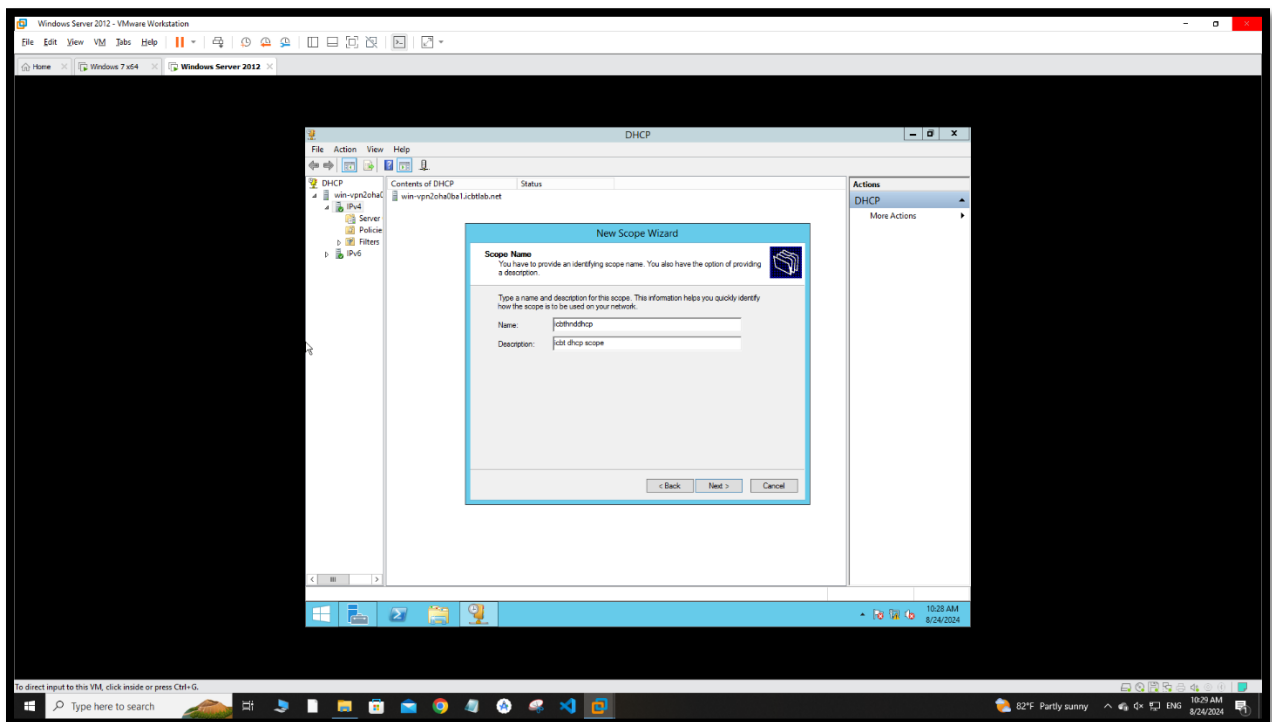


Type 192.168.56.2 (start Ip address)


192.168.56.254 (End Ip address) > next > select I will set scope on later > next

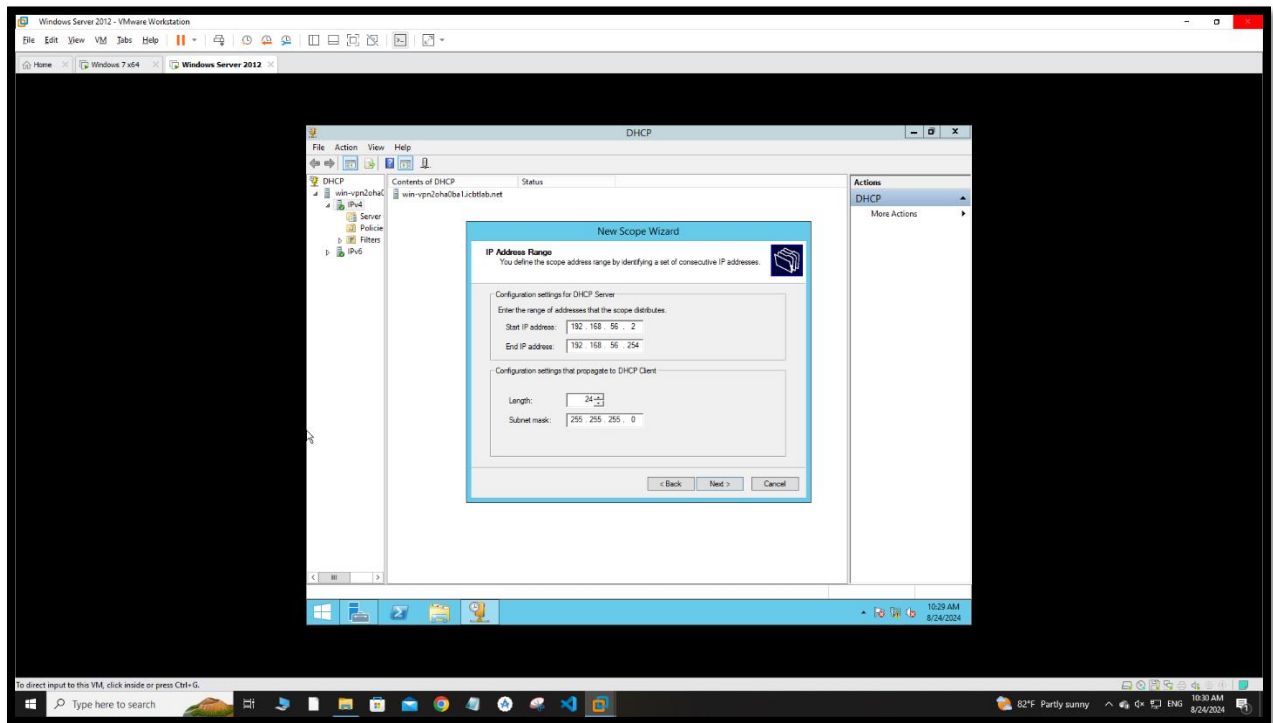


Right click on scope file > activate the scope (I took screenshot after I activate, that's why the picture shows deactivate).

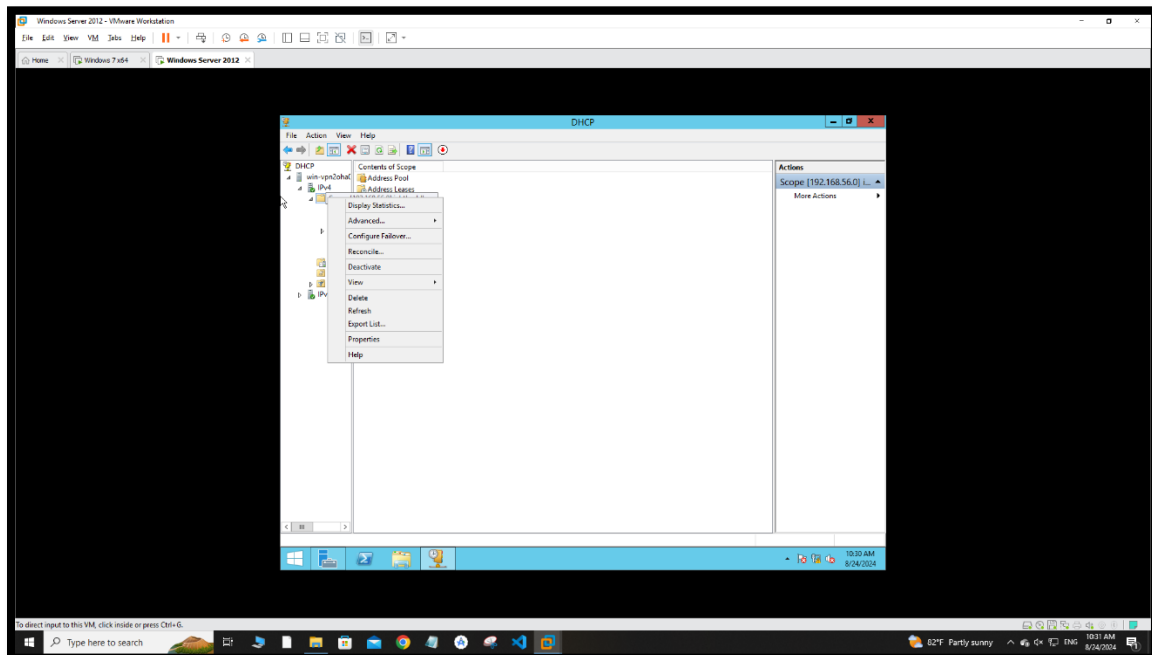


Server option > configuration option

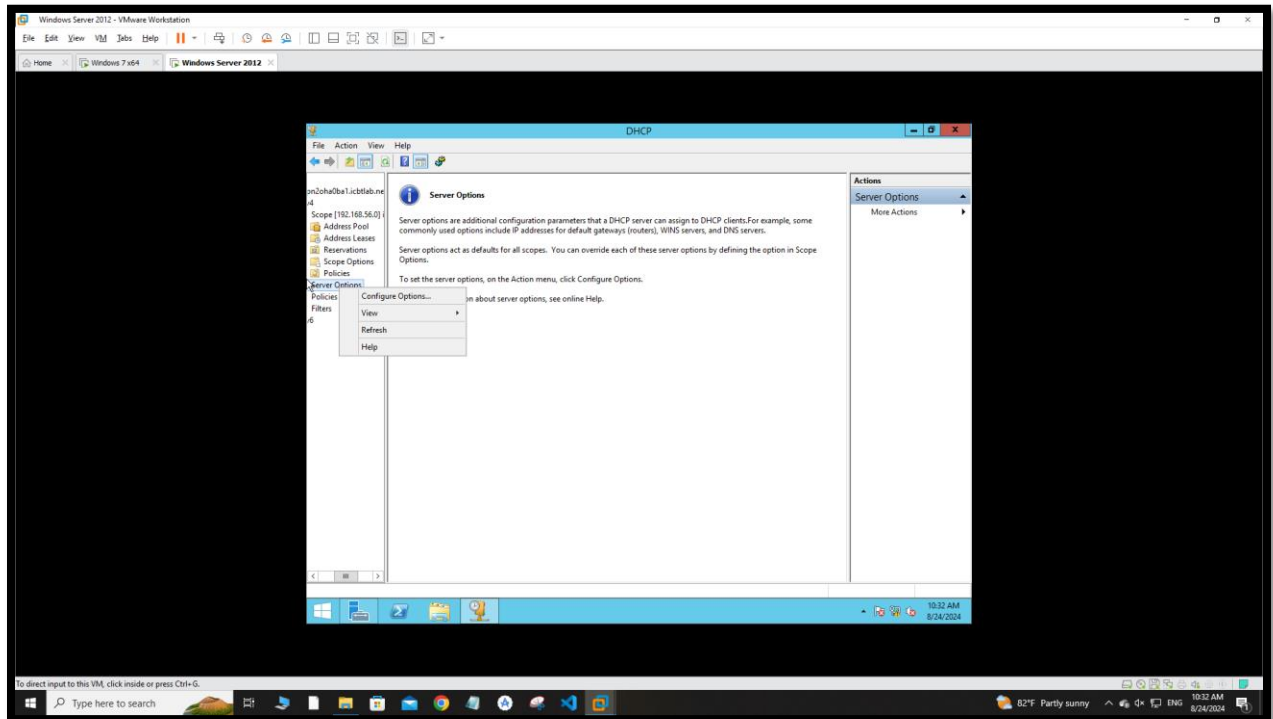


Tick on 003 and 006 type your Ip address > add > apply Ok

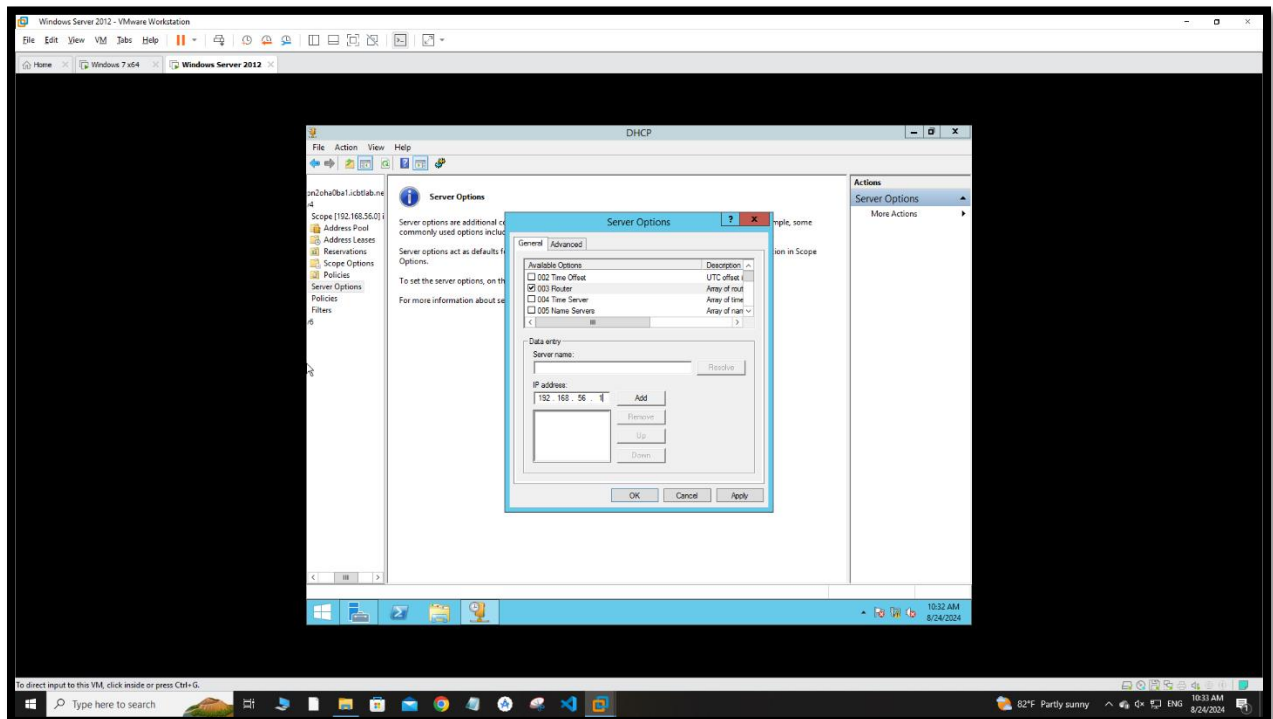


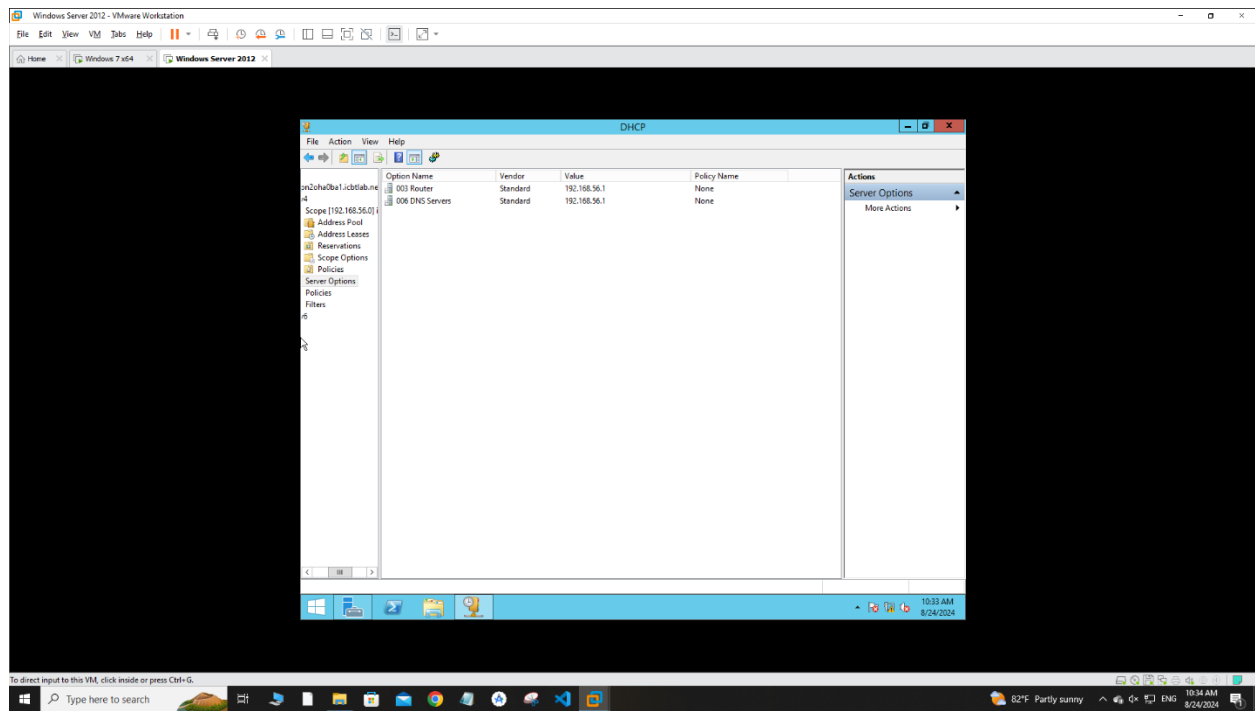

Go to the server option again tick on 015 DNS domain name (Icblab.net) > type a name > Apply > Ok

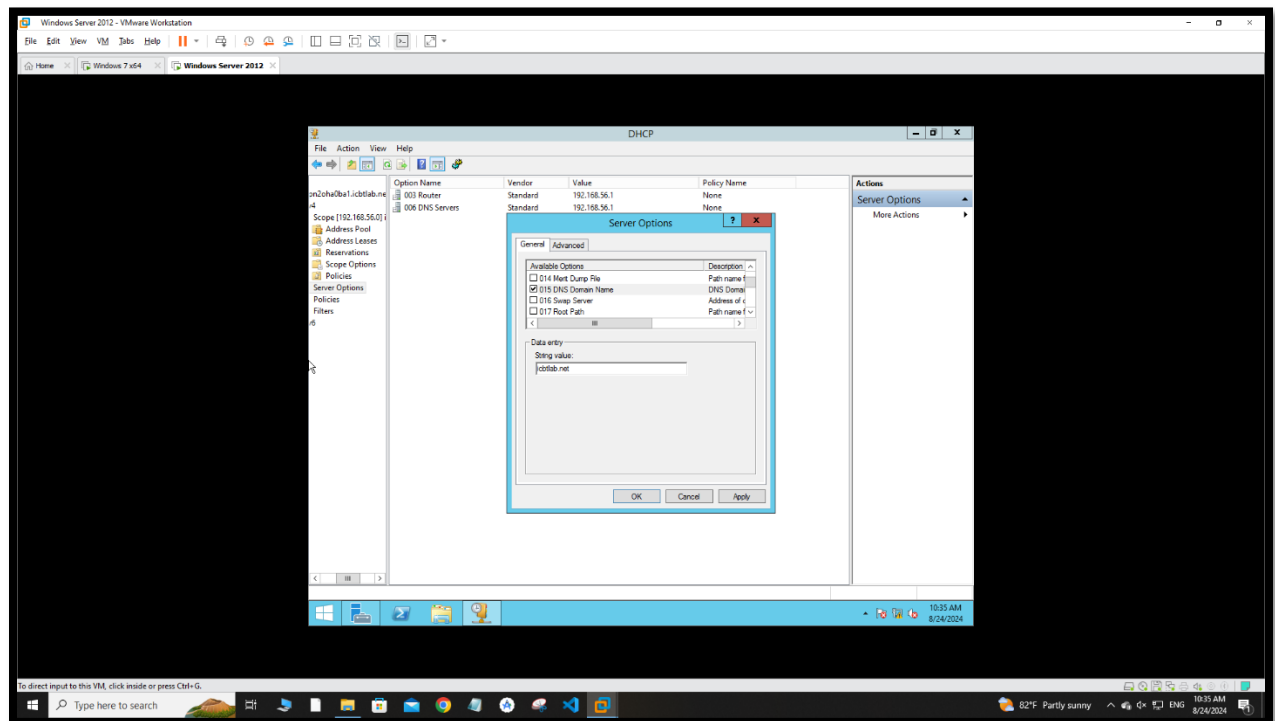


Right click on win.... > all task > restart

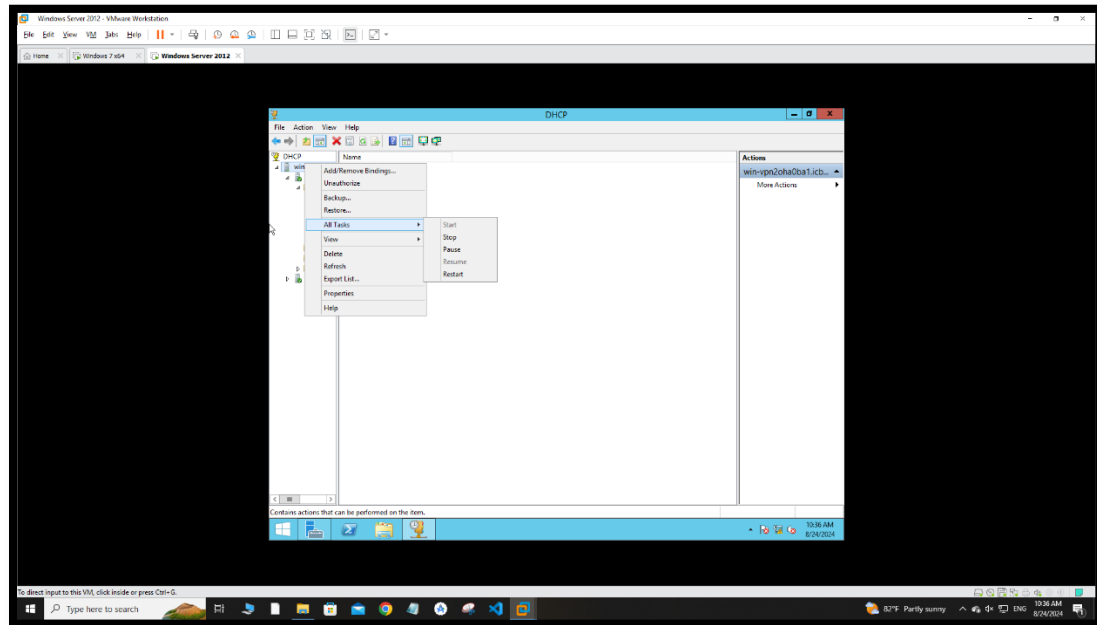


Go to windows 7

Your Logging should be hnd (use switch user because in previous lectures we added two different users)


Right click on network > properties > Local area connection > properties > keep obtain IP address automatically > use the following DNS type the Ip address that you entered

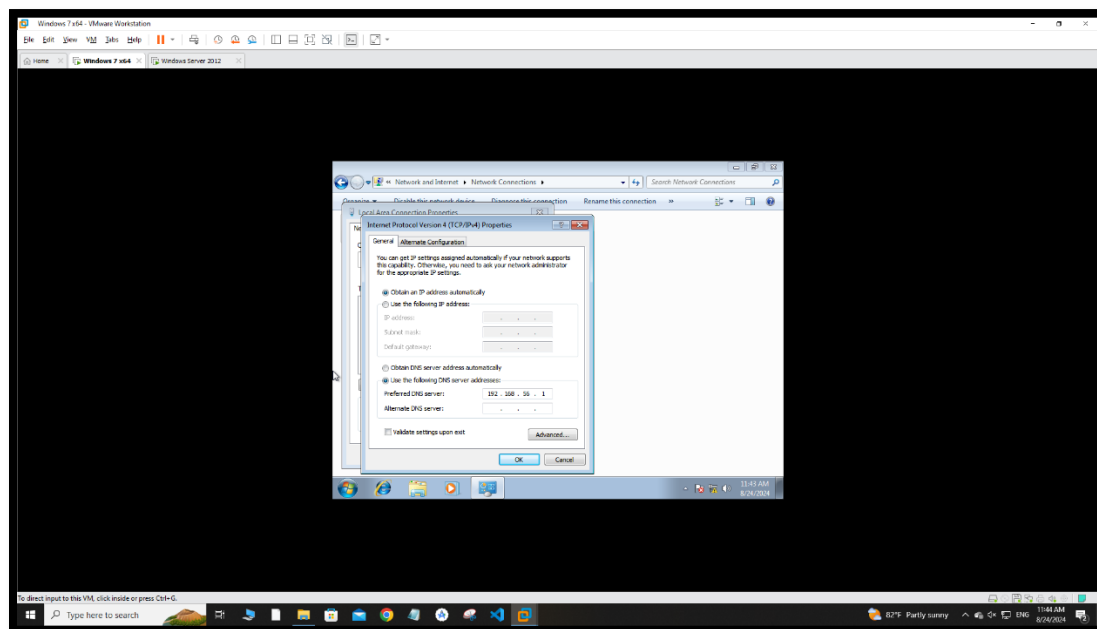


Now go back to the windows server 2012 > DHCP > Address leases > if you did steps are correctly > Your Ip address will be there

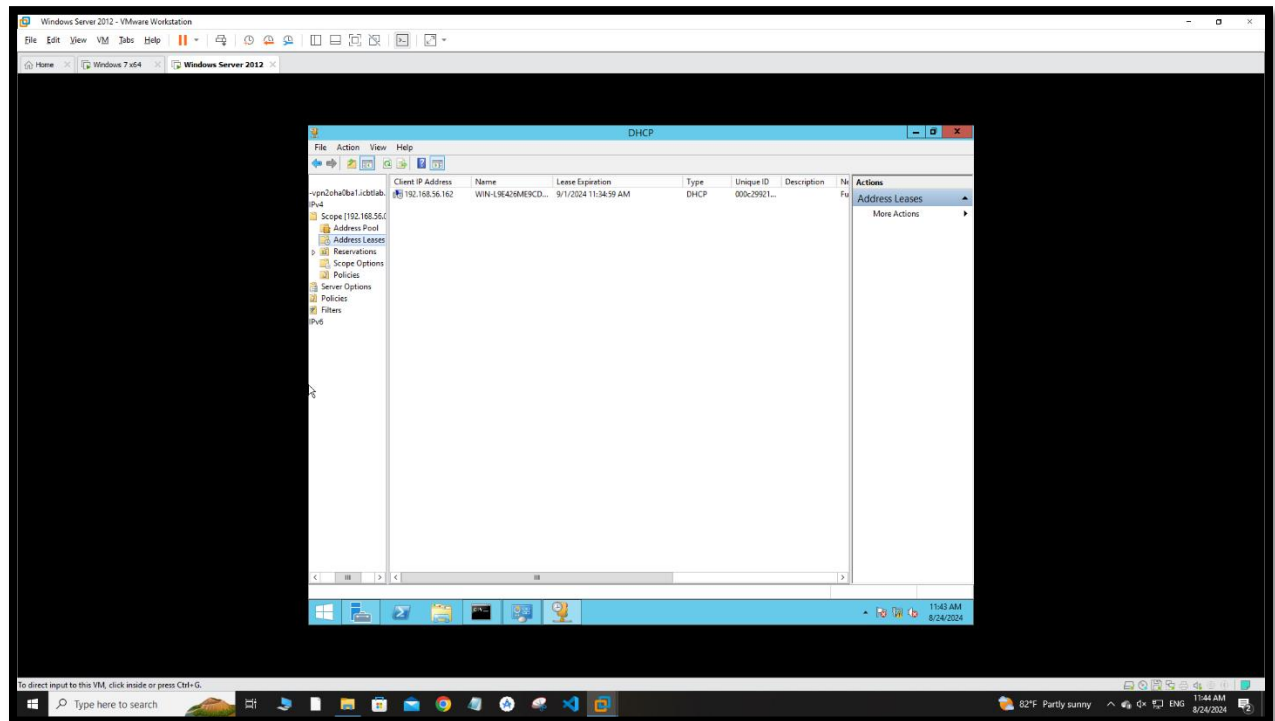


To activate windows firewall, go to local server > public on > advance setting > inbound rules > right click > new rule

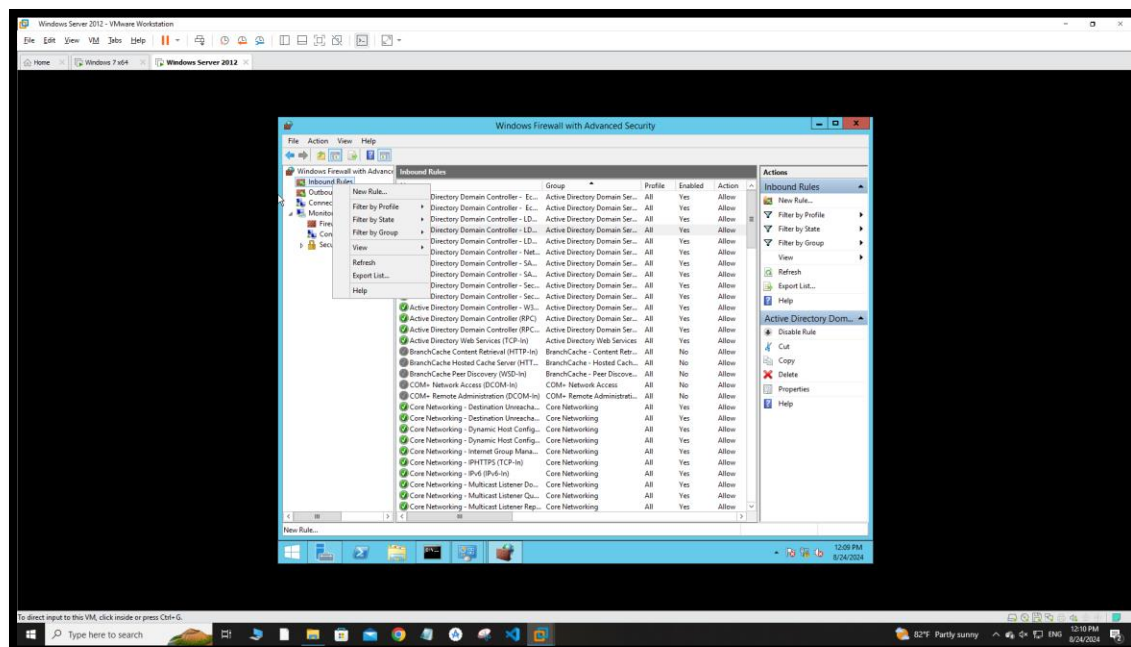


Photocall type ICMPv4 > Click on customize

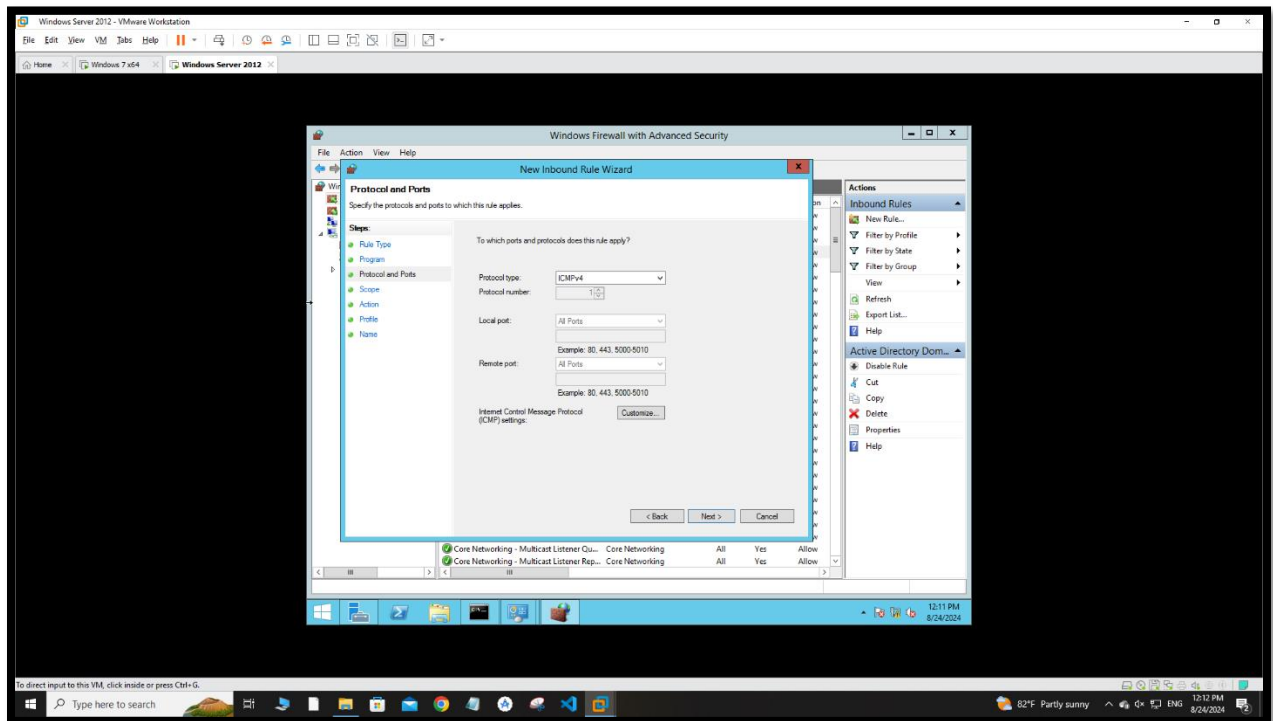


Specific ICMP type > First click on add then select all > Ok >

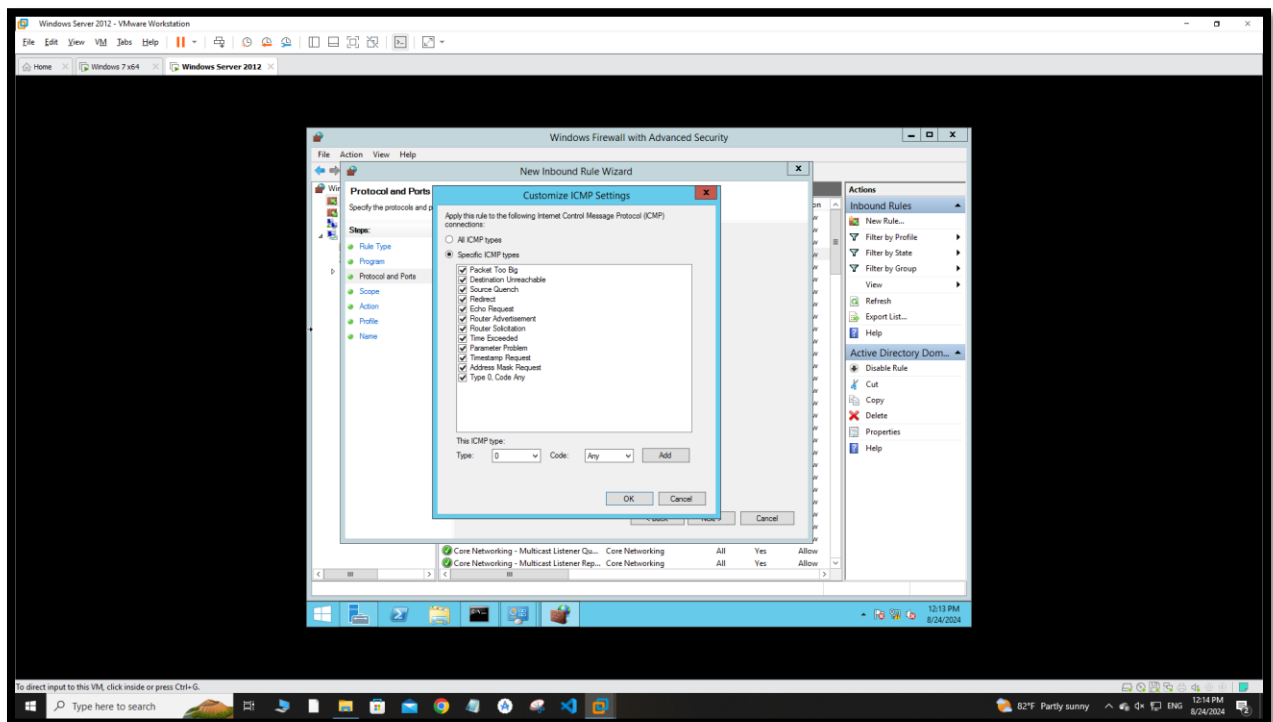

Next > Next > tick on block the connection > Next

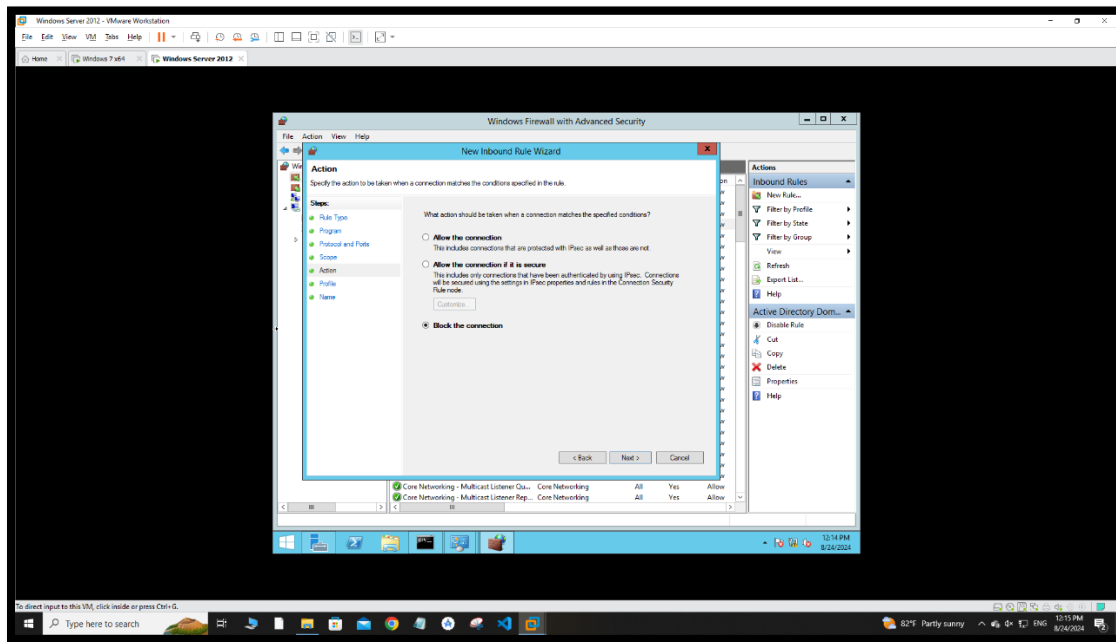

Name Ex: ICMPCustom, Description: ICMPBlock02 > Finish

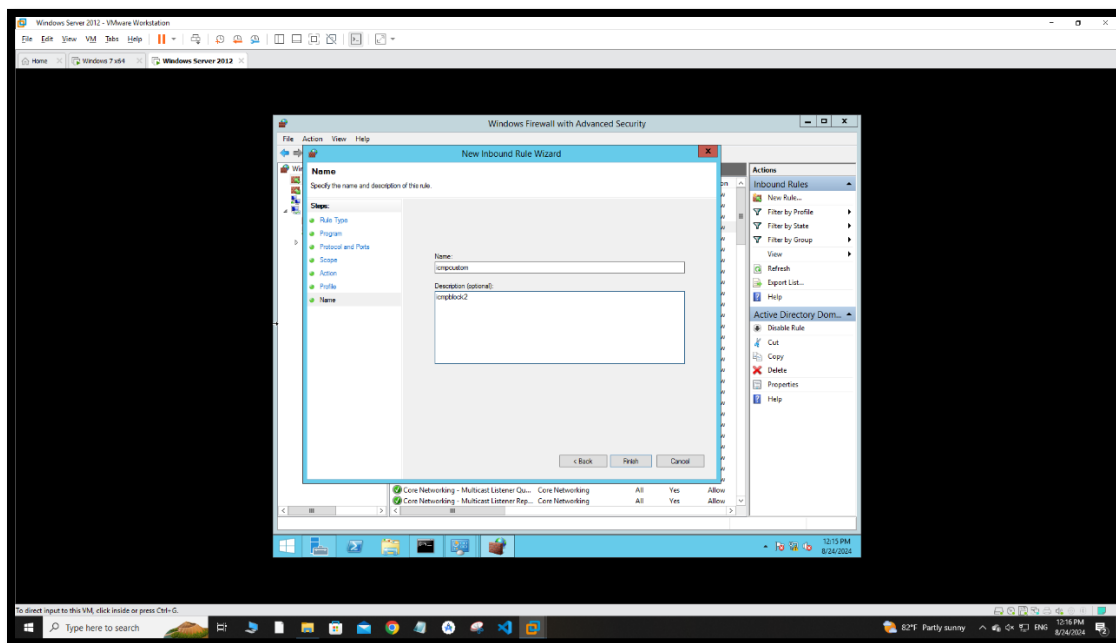

Go to windows 7 > open CMD type > ping 192.168.56.1 -t