



Developer Guide

Amazon Bedrock AgentCore



Amazon Bedrock AgentCore: Developer Guide

Copyright © 2025 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Amazon's trademarks and trade dress may not be used in connection with any product or service that is not Amazon's, in any manner that is likely to cause confusion among customers, or in any manner that disparages or discredits Amazon. All other trademarks not owned by Amazon are the property of their respective owners, who may or may not be affiliated with, connected to, or sponsored by Amazon.

Table of Contents

What is Amazon Bedrock AgentCore?	1
Services	1
Amazon Bedrock AgentCore Runtime	1
Amazon Bedrock AgentCore Identity	1
Amazon Bedrock AgentCore Memory	1
Amazon Bedrock AgentCore Code Interpreter	2
Amazon Bedrock AgentCore Browser	2
Amazon Bedrock AgentCore Gateway	2
Amazon Bedrock AgentCore Observability	2
Common use cases for Amazon Bedrock AgentCore	2
Are you a first-time Amazon Bedrock AgentCore user?	3
Learn more about AgentCore	3
Pricing for Amazon Bedrock AgentCore	4
AWS Regions	4
Get started with AgentCore	5
Prerequisites	5
Install the AgentCore starter toolkit	6
Step 1: Create the agent	6
Step 2: Configure and deploy the agent	8
Configure the agent	8
Deploy to AgentCore	9
Step 3: Monitor the deployment	10
Step 4: Test Memory and Code Interpreter	10
Test short-term memory	11
Test long-term memory – cross-session persistence	11
Test Code Interpreter	12
Step 5: View traces and logs	12
Access the Amazon CloudWatch dashboard	12
View AgentCore Runtime logs	13
Clean up	13
Troubleshooting	13
Summary	16
Understand the available interfaces for using AgentCore	18
Amazon Bedrock AgentCore starter toolkit	18

AgentCore Python SDK	18
Amazon Bedrock AgentCore MCP server	19
AWS SDK	19
Amazon Bedrock AgentCore console	20
AWS Command Line Interface	20
AgentCore Runtime: Host agent or tools	21
How it works	23
Key components	23
Authentication and security	26
Additional features	27
Implementation overview	28
Understanding the AgentCore Runtime service contract	29
IAM Permissions for AgentCore Runtime	34
Use Amazon Bedrock AgentCore	34
Use the starter toolkit	34
Execution role for running an agent in AgentCore Runtime	37
Get started with AgentCore Runtime	41
Get started with starter toolkit	41
Get started without the starter toolkit	50
Use any agent framework	59
Strands Agents	59
LangGraph	60
Google ADK	61
OpenAI Agents SDK	63
Microsoft AutoGen	64
CrewAI	66
Use any foundation model	68
Amazon Bedrock	68
Open AI	68
Gemini	69
Deploy MCP servers	69
How Amazon Bedrock AgentCore supports MCP	70
Prerequisites	70
Step 1: Create your MCP server	70
Step 2: Test your MCP server locally	71
Step 3: Deploy your MCP server to AWS	72

Step 4: Invoke your deployed MCP server	74
Appendix	75
Deploy A2A servers	78
How Amazon Bedrock AgentCore supports A2A	79
Using A2A with AgentCore Runtime	80
Appendix	88
Use isolated sessions for agents	90
Understanding ephemeral context	91
Extended conversations and multi-step workflows	91
AgentCore Runtime session lifecycle	91
How to use sessions	92
Configure lifecycle settings	93
Stop a running session	99
Handle asynchronous and long running agents	104
Key concepts	105
Implementing asynchronous tasks	105
Complete example	107
Stream agent responses	108
Pass custom headers	109
Step 1: Create your agent	109
Step 2: Deploy your agent	111
Step 3: Invoke your agent with custom headers	111
Step 4: (Optional) Pass the JWT token used for OAuth based inbound access to your agent	112
Authenticate and authorize with Inbound Auth and Outbound Auth	113
JWT inbound authorization and OAuth outbound access sample	115
Prerequisites	115
Step 1: Prepare your agent	116
Step 2: Set up AWS Cognito user pool and add a user	117
Step 3: Deploy your agent	118
Step 4: Use bearer token to invoke your agent	121
Step 5: Set up your agent to access tools using OAuth	125
Step 6: (Optional) Propagate a JWT token to AgentCore Runtime	127
Troubleshooting	129
AgentCore Runtime versioning and endpoints	130
How endpoints reference versions	130

Versioning scenarios	131
Endpoint lifecycle states	132
Listing AgentCore Runtime versions and endpoints	132
Invoke an agent	28
Invoke streaming agents	133
Invoke multi-modal agents	134
Session management	135
Error handling	135
Best practices	136
Observe agents	136
Troubleshoot	136
My agent invocations fail with 504 Gateway Timeout errors	137
My Docker build fails with "403 Forbidden" when pulling Python base images	138
I get "Unknown service: 'bedrock-agent-core-runtime'" error when using boto3	138
I get "AccessDeniedException" when trying to create an Amazon Bedrock AgentCore Runtime	139
My Docker build fails with "exec /bin/sh: exec format error"	139
What are the requirements for Docker containers used with Amazon Bedrock AgentCore Runtime?	139
My long-running tool gets interrupted after 15 minutes	140
How do I access the runtimeSessionId in my agent code for tagging or grouping resources?	140
I have RuntimeClientError (403) issues	141
I have missing or empty CloudWatch Logs	142
I have payload format issues	143
I need help understanding HTTP error codes	143
I need recommendations for testing my agent	144
I need help debugging container issues	145
I need help troubleshooting MCP protocol agents	145
Best practices	99
AgentCore Memory: Add memory to your agent	147
Memory types	147
Memory key benefits	148
Common use cases of memory	148
How it works	149
Memory terminology	149

Memory types	150
Memory strategies	152
Get started with AgentCore Memory	182
Prerequisites	182
Step 1: Create an AgentCore Memory	183
Step 2: Write events to memory	184
Step 3: Retrieve records from long term memory	185
Cleanup	186
Next steps	186
Create an AgentCore Memory	186
Encrypt your Amazon Bedrock AgentCore Memory	190
Use short-term memory	192
Create an event	192
Get an event	194
List events	195
Delete an event	195
Use long-term memory	195
Enable long-term memory	196
Specify memory organization	198
Configure built-in strategies	200
Configure built-in with overrides strategies	203
Save and retrieve insights	208
Retrieve memory records	210
List memory records	211
Delete memory records	211
AgentCore Memory examples	212
Customer support AI agent	212
Integrate with LangChain or LangGraph	220
AWS SDK	224
Amazon Bedrock AgentCore SDK	228
Strands Agents SDK	230
Amazon Bedrock capacity for built-in with overrides strategies	234
Observability	234
Best practices	99
Encrypting your memory	235
Memory poisoning or prompt injection	235

Least-privilege principle	236
AgentCore Gateway: Securely connect to tools and resources	238
Key benefits	238
Key capabilities	239
Get started with AgentCore Gateway	240
Prerequisites	240
Step 1: Setup and install	241
Step 2: Create gateway setup script	241
Step 3: Run the setup	247
Step 4: Use the gateway with an agent	247
What you've built	250
Troubleshooting	250
Quick validation	250
Cleanup	251
Next steps	251
Core concepts	251
Key concepts	252
Tool types	252
Supported gateway targets	253
Lambda functions	253
OpenAPI schemas	261
Smithy models	269
MCP servers targets	273
Integration provider templates	276
Understand gateway tool naming	323
Prerequisites	323
Set up dependencies and credentials	324
Set up permissions	327
Set up inbound authorization	336
Set up outbound authorization	339
Set up a gateway	347
Gateway workflow	347
Create a gateway	348
Add targets to a gateway	357
Use a gateway	367
List gateway tools	368

Call a gateway tool	374
Search for a gateway tool	380
Connect an agent	385
Debug and assess your gateway	388
Turn on debugging messages	389
Use the MCP Inspector	390
Logging Gateway API calls with CloudTrail	392
Advanced topics	405
Customize your gateway's encryption	405
Custom domain names	412
Performance optimization	418
AgentCore Identity: Provide identity management for agent applications	420
Overview	420
Features	421
Terminology	424
Example use cases	428
Get started with AgentCore Identity	431
Primary getting started tutorial	432
OAuth2 integration getting started tutorial	432
Common prerequisites	432
Build your first agent	433
Google Drive integration	443
Using the console	449
Configure an OAuth client	449
Configure an API key	453
Manage agent identities	455
Understanding identities	456
Agent identity directory	457
Create identities	461
Manage credential providers	463
Supported authentication patterns	448
Configure credential provider	466
Obtain credentials	468
Provider setup	483
Amazon Cognito	485
Auth0 by Okta	489

Atlassian	491
CyberArk	492
Dropbox	493
Facebook	495
FusionAuth	496
GitHub	497
Google	499
HubSpot	500
LinkedIn	501
Microsoft	502
Notion	505
Okta	506
OneLogin	508
PingOne	509
Reddit	510
Salesforce	511
Slack	513
Spotify	514
Twitch	515
X	516
Yandex	517
Zoom	519
Data protection	520
Data encryption	521
Set customer managed key policy	522
Configure with API operations or an AWS SDK	522
Identity resource tagging	523
Benefits of tagging AgentCore Identity resources	523
Resource architecture	525
Tagging support matrix	526
AgentCore Built-in Tools: Interact with your applications using built-in tools	527
Built-in Tools Overview	527
Security and Access Control	528
Key components	528
Integrating built-in tools with Agents	528
AgentCore Code Interpreter: Execute code and analyze data	529

Overview	529
Why use Code Interpreter in agent development	530
Best practices	530
Pre-installed libraries	531
Get started with AgentCore Code Interpreter	545
Run code from agents	554
Write files to a session	560
Using Terminal Commands with an execution role	562
Resource and session management	566
API Reference Examples	581
Observability	589
AgentCore Browser: interact with web applications	590
Overview	590
Why use remote browsers for agent development?	590
Security Features	591
How it works	591
Use cases	592
Get started with AgentCore Browser	593
Using AgentCore Browser with other libraries	600
Resource and session management	610
Rendering live view using DCV client	633
Observability and session replay	635
Troubleshoot built-in tools	645
Browser tool issues	645
Code Interpreter issues	648
AgentCore Observability: Observe your agents and resources	649
Get started with AgentCore Observability	650
Prerequisites	42
Step 1: Enable transaction search on CloudWatch	651
Step 2: Enable observability for Amazon Bedrock AgentCore Runtime hosted agents	652
Step 3: Enable observability for non-Amazon Bedrock AgentCore-hosted agents	655
Step 4: Observe your agent with GenAI observability on Amazon CloudWatch	657
Best practices	99
Add observability to your agents	659
Enabling AgentCore observability	660
Enabling observability in agent code for AgentCore-hosted agents	662

Enabling observability for agents hosted outside of AgentCore	664
Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources	666
Enhanced AgentCore runtime observability with custom headers	673
Enhanced AgentCore built-in tools observability with custom headers	675
Enhanced AgentCore identity observability with custom headers	676
Observability best practices	677
Using other observability platforms	677
Observability concepts	677
Sessions	678
Traces	679
Agent Spans	679
Relationship	680
AgentCore generated observability data	681
Runtime observability data	683
Memory observability data	689
Gateway observability data	692
Built-in tools observability data	699
Identity observability data	707
View metrics for your agents	714
View data using generative AI observability in Amazon CloudWatch	714
View other data in CloudWatch	714
AgentCore MCP Server: Vibe coding with your coding assistant	717
Prerequisites	717
Install required dependencies	718
Step 1: Install the MCP server	718
Add MCP server configuration	718
Verify MCP server installation	720
Step 2: Transform an existing agent for AgentCore runtime	721
Transform your agent code	721
Transformation procedure	722
Step 3: Deploy your agent to AgentCore runtime	722
Deploy using the AgentCore CLI	722
Verify deployment	723
Step 4: Test your deployed agent	723
Invoke the agent	723

Next steps	724
Security	181
Data protection	725
Data encryption	727
VPC and AWS PrivateLink	728
Cross-region inference in AgentCore Memory	750
Identity and access management	751
Audience	752
Authenticating with identities	752
Managing access using policies	753
How Amazon Bedrock AgentCore works with IAM	755
Identity-based policy examples	761
AWS managed policies	763
Service-linked roles	768
Credentials Management	776
Troubleshooting	777
Compliance validation	778
Resilience	779
Cross-service confused deputy prevention	779
Tagging resources	782
Tagging overview	782
Resources that support tagging	782
Tag restrictions	783
Working with tags	783
Adding tags	783
Managing tags	785
Deleting tags	786
Quotas	788
AgentCore Runtime Service Quotas	788
Resource allocation limits	788
Invocation limits	789
Throttling limits	790
Lifetime session lifecycle parameters	791
AgentCore Memory Service Quotas	792
AgentCore Identity Service Quotas	800
AgentCore Gateway Service Quotas	801

Endpoints	801
Service quotas	802
AgentCore Browser Service Quotas	803
Browser Invocation Limits	804
AgentCore Code Interpreter Service Quotas	804
Code Interpreter Invocation Limits	805
Document history	806

What is Amazon Bedrock AgentCore?

Amazon Bedrock AgentCore enables you to deploy and operate highly effective agents securely, at scale using any framework and model. With Amazon Bedrock AgentCore, developers can accelerate AI agents into production with the scale, reliability, and security, critical to real-world deployment. AgentCore provides tools and capabilities to make agents more effective and capable, purpose-built infrastructure to securely scale agents, and controls to operate trustworthy agents. Amazon Bedrock AgentCore services are composable and work with popular open-source frameworks and any model, so you don't have to choose between open-source flexibility and enterprise-grade security and reliability.

Services in Amazon Bedrock AgentCore

Amazon Bedrock AgentCore includes the following modular Services that you can use together or independently:

Amazon Bedrock AgentCore Runtime

AgentCore Runtime is a secure, serverless runtime purpose-built for deploying and scaling dynamic AI agents and tools using any open-source framework including LangGraph, CrewAI, and Strands Agents, any protocol, and any model. Runtime was built to work for agentic workloads with industry-leading extended runtime support, fast cold starts, true session isolation, built-in identity, and support for multi-modal payloads. Developers can focus on innovation while Amazon Bedrock AgentCore Runtime handles infrastructure and security—accelerating time-to-market

Amazon Bedrock AgentCore Identity

AgentCore Identity provides a secure, scalable agent identity and access management capability accelerating AI agent development. It is compatible with existing identity providers, eliminating needs for user migration or rebuilding authentication flows. AgentCore Identity's helps to minimize consent fatigue with a secure token vault and allows you to build streamlined AI agent experiences. Just-enough access and secure permission delegation allow agents to securely access AWS resources and third-party tools and services.

Amazon Bedrock AgentCore Memory

AgentCore Memory makes it easy for developers to build context aware agents by eliminating complex memory infrastructure management while providing full control over what the AI agent

remembers. Memory provides industry-leading accuracy along with support for both short-term memory for multi-turn conversations and long-term memory that can be shared across agents and sessions.

Amazon Bedrock AgentCore Code Interpreter

AgentCore Code Interpreter tool enables agents to securely execute code in isolated sandbox environments. It offers advanced configuration support and seamless integration with popular frameworks. Developers can build powerful agents for complex workflows and data analysis while meeting enterprise security requirements.

Amazon Bedrock AgentCore Browser

AgentCore Browser tool provides a fast, secure, cloud-based browser runtime to enable AI agents to interact with websites at scale. It provides enterprise-grade security, comprehensive observability features, and automatically scales—all without infrastructure management overhead.

Amazon Bedrock AgentCore Gateway

Amazon Bedrock AgentCore Gateway provides a secure way for agents to discover and use tools along with easy transformation of APIs, Lambda functions, and existing services into agent-compatible tools. Gateway eliminates weeks of custom code development, infrastructure provisioning, and security implementation so developers can focus on building innovative agent applications.

Amazon Bedrock AgentCore Observability

AgentCore Observability helps developers trace, debug, and monitor agent performance in production through unified operational dashboards. With support for OpenTelemetry compatible telemetry and detailed visualizations of each step of the agent workflow, AgentCore enables developers to easily gain visibility into agent behavior and maintain quality standards at scale.

Common use cases for Amazon Bedrock AgentCore

- **Equip agents with built-in tools and capabilities**

Leverage built-in tools (browser automation and code interpretation) in your agent. Enable agents to seamlessly integrate with internal and external tools and resources. Create agents that can remember interactions with your agent users.

- **Deploy securely at scale**

Securely deploy and scale dynamic AI agents and tools, regardless of framework, protocol, or model choice without managing any underlying resources with seamless agent identity and access management.

- **Test and monitor agents**

Gain deep operational insights with real-time visibility into agents' usage and operational metrics such as token usage, latency, session duration, and error rates.

Are you a first-time Amazon Bedrock AgentCore user?

If you are a first-time user of Amazon Bedrock AgentCore, we recommend that you begin by reading the following sections:

- [Get started with Amazon Bedrock AgentCore](#)
- [Understand the available interfaces for using Amazon Bedrock AgentCore](#)
- [Host agent or tools with Amazon Bedrock AgentCore Runtime](#)
- [Add memory to your Amazon Bedrock AgentCore agent](#)
- [Use Amazon Bedrock AgentCore built-in tools to interact with your applications](#)
- [Amazon Bedrock AgentCore Gateway: Securely connect tools and other resources to your Gateway](#)

For code examples, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/>.

Learn more about AgentCore

Watch this video to learn more about AgentCore:

Pricing for Amazon Bedrock AgentCore

AgentCore offers flexible, consumption-based pricing with no upfront commitments or minimum fees. For more information, see [AgentCore pricing](#).

AgentCore may use and store your content to improve your service experience or performance. Such improvements would be for your use of AgentCore and not for other customers.

AWS Regions

Amazon Bedrock AgentCore is supported in the following AWS Regions:

- US East (N. Virginia)
- US East (Ohio)
- US West (Oregon)
- Asia Pacific (Sydney)
- Asia Pacific (Mumbai)
- Asia Pacific (Tokyo)
- Asia Pacific (Singapore)
- Europe (Ireland)
- Europe (Frankfurt)

Get started with Amazon Bedrock AgentCore

Build and deploy a production-ready AI agent in minutes with runtime hosting, memory, secure code execution, and observability. This guide shows you how to use [AgentCore Runtime](#), [Memory](#), [Code Interpreter](#), and [Observability](#) features.

For AgentCore Gateway and Identity features, see the [Gateway quickstart](#) and [Identity quickstart](#).

Topics

- [Prerequisites](#)
- [Step 1: Create the agent](#)
- [Step 2: Configure and deploy the agent](#)
- [Step 3: Monitor the deployment](#)
- [Step 4: Test Memory and Code Interpreter](#)
- [Step 5: View traces and logs](#)
- [Clean up](#)
- [Troubleshooting](#)
- [Summary](#)

Prerequisites

Before you start, make sure you have:

- **AWS permissions.** AWS root users or users with privileged roles (such as the **AdministratorAccess** role) can skip this step. Others need to attach the [starter toolkit policy](#) and [AmazonBedrockAgentCoreFullAccess](#) managed policy.
- **AWS CLI version 2.0 or later.** Configure the AWS CLI using `aws configure`. For more information, see the [AWS Command Line Interface User Guide for Version 2](#).
- **Amazon Bedrock model access to Claude 3.7 Sonnet.** To enable model access, go to the AWS Management Console, choose Amazon Bedrock, choose **Model access**, and enable **Claude 3.7 Sonnet** in your AWS Region. For information about using a different model with Strands Agents, see the Model Providers section in the [Strands Agents SDK](#) documentation.
- **Python 3.10 or newer**
- **AgentCore starter toolkit.** For installation instructions, see the following section.

⚠ AWS Region consistency

Make sure you're using the *same AWS Region* for:

- The default Region you selected when you ran `aws configure`.
- The Region where you've enabled Amazon Bedrock model access.

All resources created during the agent deployment will use this Region.

Install the AgentCore starter toolkit

Install the AgentCore starter toolkit:

```
# Create virtual environment
python -m venv .venv
source .venv/bin/activate # On Windows: .venv\Scripts\activate

# Install required packages (version 0.1.21 or later)
pip install "bedrock-agentcore-starter-toolkit>=0.1.21" strands-agents boto3
```

Step 1: Create the agent

Create `agentcore_starter_strands.py`:

```
"""
Strands Agent sample with AgentCore
"""

import os
from strands import Agent, tool
from bedrock_agentcore.memory.integrations.strands.config import AgentCoreMemoryConfig,
    RetrievalConfig
from bedrock_agentcore.memory.integrations.strands.session_manager import
    AgentCoreMemorySessionManager
from bedrock_agentcore.tools.code_interpreter_client import CodeInterpreter
from bedrock_agentcore.runtime import BedrockAgentCoreApp

app = BedrockAgentCoreApp()

MEMORY_ID = os.getenv("BEDROCK_AGENTCORE_MEMORY_ID")
```

```
REGION = os.getenv("AWS_REGION")
MODEL_ID = "us.anthropic.claude-3-7-sonnet-20250219-v1:0"

ci_sessions = {}
current_session = None

@tool
def calculate(code: str) -> str:
    """Execute Python code for calculations or analysis."""
    session_id = current_session or 'default'

    if session_id not in ci_sessions:
        ci_sessions[session_id] = {
            'client': CodeInterpreter(REGION),
            'session_id': None
        }

    ci = ci_sessions[session_id]
    if not ci['session_id']:
        ci['session_id'] = ci['client'].start(
            name=f"session_{session_id[:30]}",
            session_timeout_seconds=1800
        )

    result = ci['client'].invoke("executeCode", {
        "code": code,
        "language": "python"
    })

    for event in result.get("stream", []):
        if stdout := event.get("result", {}).get("structuredContent", {}).get("stdout"):
            return stdout
    return "Executed"

@app.entrypoint
def invoke(payload, context):
    global current_session

    if not MEMORY_ID:
        return {"error": "Memory not configured"}

    actor_id = context.headers.get('X-Amzn-Bedrock-AgentCore-Runtime-Custom-Actor-Id',
        'user') if hasattr(context, 'headers') else 'user'
```

```
session_id = getattr(context, 'session_id', 'default')
current_session = session_id

memory_config = AgentCoreMemoryConfig(
    memory_id=MEMORY_ID,
    session_id=session_id,
    actor_id=actor_id,
    retrieval_config={
        f"/users/{actor_id}/facts": RetrievalConfig(top_k=3, relevance_score=0.5),
        f"/users/{actor_id}/preferences": RetrievalConfig(top_k=3,
relevance_score=0.5)
    }
)

agent = Agent(
    model=MODEL_ID,
    session_manager=AgentCoreMemorySessionManager(memory_config, REGION),
    system_prompt="You are a helpful assistant. Use tools when appropriate.",
    tools=[calculate]
)

result = agent(payload.get("prompt", ""))
return {"response": result.message.get('content', [{}])[0].get('text',
str(result))}

if __name__ == "__main__":
    app.run()
```

Create requirements.txt:

```
strands-agents
bedrock-agentcore
```

Step 2: Configure and deploy the agent

In this step, you'll use the AgentCore CLI to configure and deploy your agent.

Configure the agent

Configure the agent with memory and execution settings:

For this tutorial: When prompted for the execution role, press Enter to auto-create a new role with all required permissions for the Runtime, Memory, Code Interpreter, and Observability features. When prompted for long-term memory, type **yes**.

```
agentcore configure -e agentcore_starter_strands.py

#Interactive prompts you'll see:

# 1. Execution Role: Press Enter to auto-create or provide existing role ARN/name
# 2. ECR Repository: Press Enter to auto-create or provide existing ECR URI
# 3. Requirements File: Confirm the detected requirements.txt file or specify a
different path
# 4. OAuth Configuration: Configure OAuth authorizer? (yes/no) - Type `no` for this
tutorial
# 5. Request Header Allowlist: Configure request header allowlist? (yes/no) - Type `no`
for this tutorial
# 6. Memory Configuration:
#     - If existing memories found: Choose from list or press Enter to create new
#     - If creating new: Enable long-term memory extraction? (yes/no) - Type `yes` for
this tutorial
#     - Note: Short-term memory is always enabled by default
```

Note

If the memory configuration prompts do not appear during `agentcore configure`, refer to the [Troubleshooting](#) section (**Memory configuration not appearing**) for instructions on how to check whether the correct toolkit version is installed.

Deploy to AgentCore

Launch your agent to the AgentCore runtime environment:

```
agentcore launch

# This performs:
# 1. Memory resource provisioning (STM + LTM strategies)
# 2. Docker container build with dependencies
# 3. ECR repository push
# 4. AgentCore Runtime deployment with X-Ray tracing enabled
# 5. CloudWatch Transaction Search configuration (automatic)
```

6. Endpoint activation with trace collection

Expected output:

```
# Memory created: bedrock_agentcore_memory_ci_agent_memory-abc123
Observability is enabled, configuring Transaction Search...
# Transaction Search configured: resource_policy, trace_destination, indexing_rule
# GenAI Observability Dashboard:
  https://console.aws.amazon.com/cloudwatch/home?region=us-west-2#gen-ai-
observability/agent-core
# Container deployed to Bedrock AgentCore
Agent ARN: arn:aws:bedrock-agentcore:us-west-2:123456789:runtime/starter_agent-xyz
```

If the deployment encounters errors or behaves unexpectedly, check your configuration:

```
cat .bedrock_agentcore.yaml # Review deployed configuration
agentcore status           # Verify resource provisioning status
```

Step 3: Monitor the deployment

Check the agent's deployment status:

```
agentcore status

# Shows:
#   Memory ID: bedrock_agentcore_memory_ci_agent_memory-abc123
#   Memory Status: CREATING (if still provisioning)
#   Memory Type: STM+LTM (provisioning...) (if creating with LTM)
#   Memory Type: STM+LTM (3 strategies) (when active with strategies)
#   Memory Type: STM only (if configured without LTM)
#   Observability: Enabled
```

 **Note**

Memory may take around 2-5 minutes to activate.

Step 4: Test Memory and Code Interpreter

In this section, you'll test your agent's memory capabilities and code execution features.

Test short-term memory

Test short-term memory within a single session:

```
# Store information (session IDs must be 33+ characters)
agentcore invoke '{"prompt": "Remember that my favorite agent platform is AgentCore"}'

# If invoked too early (memory still provisioning), you'll see:
# "Memory is still provisioning (current status: CREATING).
# Long-term memory extraction takes 60-180 seconds to activate.
#
# Please wait and check status with:
#     agentcore status

# Retrieve within same session
agentcore invoke '{"prompt": "What is my favorite agent platform?"}'

# Expected response:
# "Your favorite agent platform is AgentCore."
```

Test long-term memory – cross-session persistence

Long-term memory (LTM) lets information persist across different sessions. This requires waiting for long-term memory to be extracted before starting a new session.

Test long-term memory by starting a session:

```
# Session 1: Store facts
agentcore invoke '{"prompt": "My email is user@example.com and I am an AgentCore
user"}'
```

After invoking the agent, AgentCore runs in the background to perform an extraction. Wait for the extraction to finish. This typically takes 10-30 seconds. If you do not see any facts, wait a few more seconds.

Start another session:

```
sleep 20
# Session 2: Different runtime session retrieves the facts extracted from initial
# session
SESSION_ID=$(python -c "import uuid; print(uuid.uuid4())")
```

```
agentcore invoke '{"prompt": "Tell me about myself?"}' --session-id $SESSION_ID

# Expected response:
# "Your email address is user@example.com."
# "You appear to be a user of AgentCore, which seems to be your favorite agent
platform."
```

Test Code Interpreter

Test AgentCore Code Interpreter:

```
# Store data
agentcore invoke '{"prompt": "My dataset has values: 23, 45, 67, 89, 12, 34, 56."}'

# Create visualization
agentcore invoke '{"prompt": "Create a text-based bar chart visualization showing the
distribution of values in my dataset with proper labels"}'

# Expected: Agent generates matplotlib code to create a bar chart
```

Step 5: View traces and logs

In this section, you'll use observability features to monitor your agent's performance.

Access the Amazon CloudWatch dashboard

Navigate to the GenAI Observability dashboard to view end-to-end request traces including agent execution tracking, memory retrieval operations, code interpreter executions, agent reasoning steps, and latency breakdown by component. The dashboard provides a service map view showing agent runtime connections to Memory and Code Interpreter services with request flow visualization and latency metrics, as well as detailed X-Ray traces for debugging and performance analysis.

```
# Get the dashboard URL from status
agentcore status

# Navigate to the URL shown, or go directly to:
# https://console.aws.amazon.com/cloudwatch/home?region=us-west-2#gen-ai-observability/
agent-core
# Note: Replace the Region
```

View AgentCore Runtime logs

Access detailed AgentCore Runtime logs for debugging and monitoring:

```
# The correct log paths are shown in the invoke or status output  
agentcore status  
  
# You'll see log paths like:  
# aws logs tail /aws/bedrock-agentcore/runtimes/AGENT_ID-DEFAULT --log-stream-name-  
prefix "YYYY/MM/DD/[runtime-logs]" --follow  
  
# Copy this command from the output to view logs  
# For example:  
aws logs tail /aws/bedrock-agentcore/runtimes/AGENT_ID-DEFAULT --log-stream-name-prefix  
"YYYY/MM/DD/[runtime-logs]" --follow  
  
# For recent logs, use the --since option as shown in the output:  
aws logs tail /aws/bedrock-agentcore/runtimes/AGENT_ID-DEFAULT --log-stream-name-prefix  
"YYYY/MM/DD/[runtime-logs]" --since 1h
```

Clean up

Remove all resources created during this tutorial:

```
agentcore destroy  
  
# Removes:  
#   - AgentCore Runtime endpoint and agent  
#   - AgentCore Memory resources (short- and long-term memory)  
#   - Amazon ECR repository and images  
#   - IAM roles (if auto-created)  
#   - CloudWatch log groups (optional)
```

Troubleshooting

This section describes common issues and solutions when using the AgentCore starter toolkit.

Memory configuration not appearing

Memory option not showing during `agentcore configure`

This issue typically occurs when using an outdated version of the AgentCore starter toolkit. Make sure you have version 0.1.21 or later installed:

```
# Step 1: Verify current state
which python    # Should show .venv/bin/python
which agentcore  # Currently showing global path

# Step 2: Deactivate and reactivate venv to reset PATH
deactivate
source .venv/bin/activate

# Step 3: Check if that fixed it
which agentcore
# If NOW showing .venv/bin/agentcore -> RESOLVED, skip to Step 7
# If STILL showing global path -> continue to Step 4

# Step 4: Force local venv to take precedence in PATH
export PATH="$(pwd)/.venv/bin:$PATH"

# Step 5: Check again
which agentcore
# If NOW showing .venv/bin/agentcore -> RESOLVED, skip to Step 7
# If STILL showing global path -> continue to Step 6

# Step 6: Reinstall in local venv with forced precedence
pip install --force-reinstall --no-cache-dir "bedrock-agentcore-starter-
toolkit>=0.1.21"

# Step 7: Final verification
which agentcore  # Must show: /path/to/your-project/.venv/bin/agentcore
pip show bedrock-agentcore-starter-toolkit  # Verify version >= 0.1.21
agentcore --version  # Double check it's working

# Step 8: Try configure again
agentcore configure -e agentcore_starter_strands.py

#If Step 6 still doesn't work, the nuclear option:
cd ..
mkdir fresh-agentcore-project && cd fresh-agentcore-project
python3 -m venv .venv
source .venv/bin/activate
pip install --no-cache-dir "bedrock-agentcore-starter-toolkit>=0.1.21" strands-agents
boto3
```

```
# Copy your agent code here, then reconfigure
```

Additional checks

- Make sure you're running `agentcore configure` from within the activated virtual environment.
- If you're using an IDE (VSCode, PyCharm), restart the IDE after reinstalling.
- Verify no system-wide `agentcore` installation conflicts: `pip list | grep bedrock-agentcore`.

AWS Region misconfiguration

If you need to change your AWS Region configuration:

1. Clean up resources in the incorrect Region:

```
agentcore destroy

# This removes:
#   - AgentCore Runtime endpoint and agent
#   - AgentCore Memory resources (short- and long-term memory)
#   - Amazon ECR repository and images
#   - IAM roles (if auto-created)
#   - CloudWatch log groups (optional)
```

2. Verify your AWS CLI is configured for the correct Region:

```
aws configure get region
# Or reconfigure for the correct region:
aws configure set region your-desired-region
```

3. Make sure Amazon Bedrock model access is enabled in the target Region. To check, go to the AWS Management Console, choose the Amazon Bedrock service, and then choose **Model access**)
4. Copy your agent code and `requirements.txt` to the new folder, then return to [Step 2: Configure and deploy the agent](#) and complete the steps.

Memory issues

"Memory status is not active" error

- Run `agentcore status` to check the memory status.
- If the status is showing provisioning, wait 2-3 minutes.
- Retry after the status shows Memory Type: STM+LTM (3 strategies).

Cross-session memory not working

- Verify that long-term memory is active (not "provisioning")
- Wait 15-30 seconds after storing facts for extraction
- Check extraction logs for completion

Observability issues

No traces appearing

- Verify observability was enabled during `agentcore configure`
- Check IAM permissions include CloudWatch and X-Ray access
- Wait 30-60 seconds for traces to appear in CloudWatch
- Traces are viewable at: AWS Management Console → CloudWatch → Service Map or X-Ray → Traces

Missing memory logs

- Check log group exists: `/aws/vendedlogs/bedrock-agentcore/memory/ APPLICATION_LOGS/memory-id`
- Verify that the IAM role has CloudWatch Logs permissions

Summary

You've deployed a production agent with:

- **AgentCore Runtime** for managed container orchestration.

- **AgentCore Memory** with short-term memory for immediate context and long-term memory for cross-session persistence.
- **AgentCore Code Interpreter** for secure Python execution with data visualization capabilities.
- **AWS X-Ray Tracing** automatically configured for distributed tracing.
- **CloudWatch integration** for logs and metrics with Transaction Search enabled.

All services are automatically instrumented with X-Ray tracing, providing complete visibility into agent behavior, memory operations, and tool executions through the CloudWatch dashboard.

Understand the available interfaces for using Amazon Bedrock AgentCore

Amazon Bedrock AgentCore supports various interfaces for developing and deploying your agent code. The simplest approach is to use the AgentCore Python SDK to create your agent code and use the AgentCore starter toolkit to deploy your agent.

The AgentCore starter toolkit and AgentCore Python SDK don't support all AgentCore operations that the AWS SDK supplies. If they don't support a specific AgentCore operation, use the AWS SDK.

Topics

- [Amazon Bedrock AgentCore starter toolkit](#)
- [AgentCore Python SDK](#)
- [Amazon Bedrock AgentCore MCP server](#)
- [AWS SDK](#)
- [Amazon Bedrock AgentCore console](#)
- [AWS Command Line Interface](#)

Amazon Bedrock AgentCore starter toolkit

The [AgentCore starter toolkit](#) provides CLI tools and higher-level abstractions for:

- *Deployment*: Containerize and deploy agents to AWS infrastructure
- *Import Agent*: Migrate existing Bedrock Agents to AgentCore with framework conversion
- *Gateway Integration*: Transform existing APIs into agent tools
- *Configuration Management*: Manage environment and deployment settings
- *Observability*: Monitor agents in production environments

The getting started instructions in this guide use the AgentCore starter toolkit.

AgentCore Python SDK

The [AgentCore Python SDK](#) provides Python primitives for agent development with built-in support for:

- *Runtime*: Lightweight wrapper over the AgentCore operations in the AWS SDK that lets you easily write Python code for an agent.
- *Memory*: Persistent storage for conversation history and agent context
- *Tools*: Built-in clients for code interpretation and browser automation
- *Identity*: Secure authentication and access management

The AgentCore Python SDK supports multiple frameworks, such as Strands Agents and LangGraph. If you are using other AWS services, you'll need to use the AWS SDK to integrate those services into your agent, alongside your AgentCore Python SDK code.

Amazon Bedrock AgentCore MCP server

The AgentCore Model Context Protocol (MCP) server helps you transform, deploy, and test AgentCore-compatible agents directly from your preferred development environment. With built-in support for runtime integration, gateway connectivity, and agent lifecycle management, the MCP server simplifies moving from local development to production deployment on AgentCore services.

The MCP server works with popular MCP clients including Kiro, Cursor, Claude Code, and Amazon Q CLI, providing conversational commands to automate complex agent development workflows.

For more information, see [Amazon Bedrock AgentCore MCP Server: Vibe coding with your coding assistant](#).

AWS SDK

You can use the AWS SDK to achieve the same results as the AgentCore Python SDK, as well as other tasks that the AgentCore Python SDK doesn't support. You'll need to use the AWS SDK to interact with other AWS services such as AWS Lambda and Amazon S3. You'll also need to the AWS SDK if you aren't using Python as your coding language.

To configure and deploy an agent, you use the [AgentCore control plane API](#). For example, you can create an AgentCore Runtime or create an AgentCore Memory.

At runtime, you use the [AgentCore data plane API](#) for tasks such as adding a memory event to an AgentCore Memory. The client code that calls your agent uses the InvokeAgentRuntime data plane operation to invoke an agent that you have hosted in an AgentCore Runtime.

Amazon Bedrock AgentCore console

You can use the AgentCore console to create and manage the AgentCore services that your agent code uses. You can get code snippets that show how to call an agent hosted in an AgentCore Runtime. You can also test your agent in the agent sandbox. Open the console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.

AWS Command Line Interface

You can use the AWS CLI with the AgentCore services that you use. Use [control plane api](#) to create and manage services. For example you can create an AgentCore Memory or update the endpoint for an AgentCore Runtime. You can also perform runtime actions with the [data plane API](#), which can be useful for testing an agent.

Host agent or tools with Amazon Bedrock AgentCore Runtime

Amazon Bedrock AgentCore Runtime provides a secure, serverless and purpose-built hosting environment for deploying and running AI agents or tools. It offers the following benefits:

Framework agnostic

AgentCore Runtime lets you transform any local agent code to cloud-native deployments with a few lines of code no matter the underlying framework. Works seamlessly with popular frameworks like LangGraph, Strands, and CrewAI. You can also leverage it with custom agents that don't use a specific framework.

Model flexibility

AgentCore Runtime works with any Large Language Model, such as models offered by Amazon Bedrock, Anthropic Claude, Google Gemini, and OpenAI.

Protocol support

AgentCore Runtime lets agents communicate with other agents and tools via Model Context Protocol (MCP).

Extended execution time

AgentCore Runtime supports both real-time interactions and long-running workloads up to 8 hours, enabling complex agent reasoning and asynchronous workloads that may involve multi-agent collaboration or extended problem-solving sessions.

Enhanced payload handling

AgentCore Runtime can process 100MB payloads enabling seamless processing of multiple modalities (text, images, audio, video), with rich media content or large datasets.

Session isolation

In AgentCore Runtime, each user session runs in a dedicated microVM with isolated CPU, memory, and filesystem resources. This helps create complete separation between user sessions, safeguarding stateful agent reasoning processes and helps prevent cross-session data contamination. After session completion, the entire microVM is terminated and memory is sanitized, delivering deterministic security even when working with non-deterministic AI processes.

Consumption-based pricing model

Runtime implements consumption-based pricing that charges only for resources actually consumed. Unlike allocation-based models that require pre-selecting resources, Runtime dynamically provisions what's needed without requiring right-sizing. The service aligns CPU billing with actual active processing - typically eliminating charges during I/O wait periods when agents are primarily waiting for LLM responses - while continuously maintaining your session state.

Built-in authentication

AgentCore Runtime, powered by AgentCore Identity, assigns distinct identities to AI agents and seamlessly integrates with your corporate identity provider such as Okta, Microsoft Entra ID, or Amazon Cognito, enabling your end users to authenticate into only the agents they have access to. In addition, Runtime lets outbound authentication flows to securely access third-party services like Slack, Zoom, and GitHub - whether operating on behalf of users or autonomously (using either OAuth or API keys).

Agent-specific observability

AgentCore Runtime provides specialized built-in tracing that captures agent reasoning steps, tool invocations, and model interactions, providing clear visibility into agent decision-making processes, a critical capability for debugging and auditing AI agent behaviors.

Unified set of agent-specific capabilities

AgentCore Runtime is delivered through a single, comprehensive SDK that provides streamlined access to the complete AgentCore capabilities including Memory, Tools, and Gateway. This integrated approach eliminates the integration work typically required when building equivalent agent infrastructure from disparate components.

Topics

- [How it works](#)
- [IAM Permissions for AgentCore Runtime](#)
- [Get started with AgentCore Runtime](#)
- [Use any agent framework](#)
- [Use any foundation model](#)
- [Deploy MCP servers in AgentCore Runtime](#)

- [Deploy A2A servers in AgentCore Runtime](#)
- [Use isolated sessions for agents](#)
- [Handle asynchronous and long running agents with Amazon Bedrock AgentCore Runtime](#)
- [Stream agent responses](#)
- [Pass custom headers to Amazon Bedrock AgentCore Runtime](#)
- [Authenticate and authorize with Inbound Auth and Outbound Auth](#)
- [AgentCore Runtime versioning and endpoints](#)
- [Invoke an AgentCore Runtime agent](#)
- [Observe agents in Amazon Bedrock AgentCore Runtime](#)
- [Troubleshoot AgentCore Runtime](#)

How it works

The AgentCore Runtime handles scaling, session management, security isolation, and infrastructure management, allowing you to focus on building intelligent agent experiences rather than operational complexity. By leveraging the features and capabilities described here, you can build, deploy, and manage sophisticated AI agents that deliver value to your users while helping to maintain enterprise-grade security and reliability.

Topics

- [Key components](#)
- [Authentication and security](#)
- [Additional features](#)
- [Implementation overview](#)
- [Understanding the AgentCore Runtime service contract](#)

Key components

AgentCore Runtime

An AgentCore Runtime is the foundational component that hosts your AI agent or tool code. It represents a containerized application that processes user inputs, maintains context, and executes actions using AI capabilities. When you create an agent, you define its behavior, capabilities, and

the tools it can access. For example, a customer support agent might answer product questions, process returns, and escalate complex issues to human representatives.

You can build and deploy agents to AgentCore Runtime using the AgentCore Python SDK or directly through AWS SDKs. With the AgentCore Python SDK, you can define your agent using popular frameworks like LangGraph, CrewAI, or Strands Agents. The SDK handles infrastructure complexities, allowing you to focus on the agent's logic and capabilities.

Each AgentCore Runtime:

- Has a unique identity
- Is versioned to support controlled deployment and updates

Versions

Each AgentCore Runtime maintains immutable versions that capture a complete snapshot of the configuration at a specific point in time:

- When you create an AgentCore Runtime, Version 1 (V1) is automatically created
- Each update to configuration (container image, protocol settings, network settings) creates a new version
- Each version contains all necessary configuration needed for execution

This versioning system provides reliable deployment history and rollback capabilities.

Endpoints

Endpoints provide addressable access points to specific versions of your AgentCore Runtime. Each endpoint:

- Has a unique ARN for invocation
- References a specific version of your Agent Runtime
- Provides stable access to your agent even as you update implementations

Key endpoint details:

- The "DEFAULT" endpoint is automatically created when you call [CreateAgentRuntime](#) and points to the latest version

- When you update your AgentCore Runtime, a new version is created but the DEFAULT endpoint automatically updates to reference it
- You can create custom endpoints with the [CreateAgentRuntimeEndpoint](#) operation for different environments (dev, test, prod)
- When a user makes a request to an endpoint, the request is resolved to the specific agent version referenced by that endpoint

Endpoints have distinct lifecycle states:

- CREATING - Initial state during endpoint creation
- CREATE_FAILED - Indicates creation failure due to permissions or other issues
- READY - Endpoint is operational and accepting requests
- UPDATING - Endpoint is being modified to reference a new version
- UPDATE_FAILED - Indicates update operation failure

You can update endpoints without downtime, allowing for seamless version transitions and rollbacks.

Sessions

Sessions represent individual interaction contexts between users and your AgentCore Runtime.

Each session:

- Is identified by a unique `runtimeSessionId` provided by your application, or by the Runtime itself in the first invocation if the `runtimeSessionId` is left empty
- Runs in a dedicated microVM with completely isolated CPU, memory, and filesystem resources
- Preserves context across multiple interactions within the same conversation
- Can persist for up to 8 hours of total runtime

Session states include:

- **Active** - Currently processing a request or executing background tasks
- **Idle** - Not processing any requests but maintaining context while waiting for next interaction
- **Terminated** - Session ended due to inactivity (15 minutes), reaching maximum lifetime (8 hours), or being deemed unhealthy

Important session characteristics:

- After session termination, the entire microVM is terminated and memory is sanitized
- A subsequent request with the same `runtimeSessionId` after termination will create a new execution environment
- Session isolation prevents cross-session data contamination and ensures security
- Session state is ephemeral and should not be used for long-term durability (use AgentCore Memory for context durability)

This complete isolation between sessions is crucial for enterprise security, particularly when dealing with non-deterministic AI processes.

Authentication and security

Inbound authentication

Inbound Auth, powered by AgentCore Identity, controls who can access and invoke your agents or tools in AgentCore Runtime.

Authentication methods

- **AWS IAM (SigV4):** Uses AWS credentials for identity verification
- **OAuth 2.0:** Integrates with external identity providers

OAuth configuration options

- **Discovery URL:** Your identity provider's OpenID Connect discovery endpoint
- **Allowed Audiences:** List of valid audience values your tokens should contain
- **Allowed Clients:** List of client identifiers that can access this agent

Authentication flow

1. End users authenticate with your identity provider (Amazon Cognito, Okta, Microsoft Entra ID)
2. Your client application receives a bearer token after successful authentication
3. The client passes this token in the authorization header when invoking the agent
4. AgentCore Runtime validates the token with the authorization server

5. If valid, the request is processed; if invalid, it's rejected

This ensures only authenticated users with proper authorization can access your agents.

Outbound authentication

Outbound Auth, powered by Amazon Bedrock AgentCore Identity, lets your agents hosted on AgentCore Runtime securely access third-party services:

Authentication methods

- **OAuth:** For services supporting OAuth flows
- **API Keys:** For services using key-based authentication

Authentication modes

- **User-delegated:** Acting on behalf of the end user with their credentials
- **Autonomous:** Acting independently with service-level credentials

Supported services

- Enterprise systems such as Slack, Zoom, and GitHub)
- AWS services
- Custom APIs and data sources

AgentCore Identity manages these credentials securely, preventing credential exposure in your agent code or logs.

Additional features

Asynchronous processing

AgentCore Runtime supports long-running workloads through:

- Background task handling for operations that exceed request/response cycles
- Automatic status tracking via the /ping endpoint

- Support for operations up to 8 hours in duration

Streaming responses

Agents can stream partial results as they become available rather than waiting for complete processing. This lets you provide a more responsive user experience, especially for operations that generate large amounts of content or take significant time to complete.

Protocol support

Runtime supports multiple communication protocols:

- HTTP for simple request/response patterns
- Model Context Protocol (MCP) for standardized agent-tool interactions

Implementation overview

Here's how to get started with the AgentCore Runtime:

Prepare your agent or tool code

- Define your agent logic using any AI framework or custom code
- Add the required HTTP endpoints using the AgentCore SDK or custom implementation
- Package dependencies in a requirements.txt file

Deploy your agent or tool

- Build and push a container image to Amazon ECR directly or via the AgentCore SDK
- Create an AgentCore Runtime using the container image
- The initial version (V1) and DEFAULT endpoint are created automatically

Invoke your agent or tool

- Generate a unique session ID for each user conversation
- Call the [InvokeAgentRuntime](#) operation with your agent's ARN and session ID
- Pass user input in the request payload

Manage and observe sessions, and make updates

- Use the same session ID for follow-up interactions to maintain context
- Review logs, traces, and observability metrics
- Deploy updates by modifying your AgentCore Runtime (creates new versions)
- Control rollout by updating endpoints to point to new versions

Understanding the AgentCore Runtime service contract

The AgentCore Runtime service contract defines the standardized communication protocol that your agent application must implement to integrate with the Amazon Bedrock agent hosting infrastructure. This contract ensures seamless communication between your custom agent code and AWS's managed hosting environment.

Topics

- [Supported protocols](#)
- [HTTP protocol contract](#)
- [MCP protocol contract](#)

Supported protocols

The AgentCore Runtime service contract supports two communication protocols:

- **HTTP Protocol:** Direct REST API endpoints for traditional request/response patterns
- **MCP Protocol:** Model Context Protocol for tools and agent servers

HTTP protocol contract

Container requirements

Your agent must be deployed as a containerized application meeting these specifications:

- **Host:** `0.0.0.0`
- **Port:** `8080` - Standard port for HTTP-based agent communication
- **Platform:** ARM64 container - Required for compatibility with the AgentCore Runtime environment

Path requirements

/invocations - POST

This is the primary agent interaction endpoint with JSON input and JSON/SSE output.

Purpose

Receives incoming requests from users or applications and processes them through your agent's business logic

Use cases

The /invocations endpoint serves several key purposes:

- Direct user interactions and conversations
- API integrations with external systems
- Batch processing of multiple requests
- Real-time streaming responses for long-running operations

Example Request format

```
Content-Type: application/json

{
  "prompt": "What's the weather today?"
}
```

Response formats

Your agent can respond using either of the following formats depending on the use case:

JSON response (non-streaming)

Purpose

Provides complete responses for requests that can be processed quickly

Use cases

JSON responses are ideal for:

- Simple question-answering scenarios
- Deterministic computations
- Quick data lookups
- Status confirmations

Example JSON response format

```
Content-Type: application/json
```

```
{  
  "response": "Your agent's response here",  
  "status": "success"  
}
```

SSE response (streaming)

Server-sent events (SSE) let you deliver real-time streaming responses. For more information, see the [Server-sent events](#) specification.

Purpose

Enables incremental response delivery for long-running operations and improved user experience

Use cases

SSE responses are ideal for:

- Real-time conversational experiences
- Progressive content generation
- Long-running computations with intermediate results
- Live data feeds and updates

Example SSE response format

```
Content-Type: text/event-stream
```

```
data: {"event": "partial response 1"}  
data: {"event": "partial response 2"}
```

```
data: {"event": "final response"}
```

/ping - GET

Purpose

Verifies that your agent is operational and ready to handle requests

Use cases

The /ping endpoint serves several key purposes:

- Service monitoring to detect and remediate issues
- Automated recovery through AWS's managed infrastructure

Response format

Returns a status code indicating your agent's health:

- **Content-Type:** application/json
- **HTTP Status Code:** 200 for healthy, appropriate error codes for unhealthy states

If your agent needs to process background tasks, you can indicate it with the /ping status. If the ping status is HealthyBusy, the runtime session is considered active.

Example Ping response format

```
{  
  "status": "<status_value>",  
  "time_of_last_update": <unix_timestamp>  
}
```

status

Healthy - System is ready to accept new work

HealthyBusy - System is operational but currently busy with async tasks

time_of_last_update

Used to determine how long the system has been in its current state

MCP protocol contract

Protocol implementation requirements

Your MCP server must implement these specific protocol requirements:

- **Transport:** Stateless streamable-http only - Ensures compatibility with AWS's session management and load balancing
- **Session Management:** Platform automatically adds `Mcp-Session-Id` header for session isolation, servers must support stateless operation so as to not reject platform generated `Mcp-Session-Id` header

Container requirements

Your MCP server must be deployed as a containerized application meeting these specifications:

- **Host:** `0.0.0.0`
- **Port:** `8000` - Standard port for MCP server communication (different from HTTP protocol)
- **Platform:** ARM64 container - Required for compatibility with AWS Amazon Bedrock AgentCore runtime environment

Path requirements

/mcp - POST

Purpose

Receives MCP RPC messages and processes them through your agent's tool capabilities, complete pass-through of `InvokeAgentRuntime` API payload with standard MCP RPC messages

Response format

JSON-RPC based request/response format, supporting both `application/json` and `text/event-stream` as response content-types

Use cases

The /mcp endpoint serves several key purposes:

- Tool invocation and management

- Agent capability discovery
 - Resource access and manipulation
 - Multi-step agent workflows

IAM Permissions for AgentCore Runtime

The following are IAM permissions you need to create an agent in an AgentCore Runtime and the execution role permissions that an agent needs to run in an AgentCore Runtime

Topics

- Use Amazon Bedrock AgentCore
 - Use the starter toolkit
 - Execution role for running an agent in AgentCore Runtime

Use Amazon Bedrock AgentCore

To use Amazon Bedrock AgentCore, you can attach the [BedrockAgentCoreFullAccess](#) AWS managed policy to your IAM user or IAM role. This AWS managed policy grants broad permissions. We recommend creating a custom policy with only the permissions your application requires by copying the relevant statements and restricting the resources to your specific use case. To use the starter toolkit, you need [additional](#) permissions.

Use the starter toolkit

To use the Amazon Bedrock AgentCore starter toolkit, attach the following IAM policy to your IAM user or role. To change IAM permissions, see [Change permissions for an IAM user](#).

JSON

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "IAMRoleManagement",  
      "Effect": "Allow",  
      "Action": [  
        "iam:CreateRole",
```

```
        "iam:DeleteRole",
        "iam:GetRole",
        "iam:PutRolePolicy",
        "iam:DeleteRolePolicy",
        "iam:AttachRolePolicy",
        "iam:DetachRolePolicy",
        "iam:TagRole",
        "iam>ListRolePolicies",
        "iam>ListAttachedRolePolicies"
    ],
    "Resource": [
        "arn:aws:iam::*:role/*BedrockAgentCore*",
        "arn:aws:iam::*:role/service-role/*BedrockAgentCore*"
    ]
},
{
    "Sid": "CodeBuildProjectAccess",
    "Effect": "Allow",
    "Action": [
        "codebuild:StartBuild",
        "codebuild:BatchGetBuilds",
        "codebuild>ListBuildsForProject",
        "codebuild>CreateProject",
        "codebuild:UpdateProject",
        "codebuild:BatchGetProjects"
    ],
    "Resource": [
        "arn:aws:codebuild:*:*:project/bedrock-agentcore-*",
        "arn:aws:codebuild:*,*:build/bedrock-agentcore-*"
    ]
},
{
    "Sid": "CodeBuildListAccess",
    "Effect": "Allow",
    "Action": [
        "codebuild>ListProjects"
    ],
    "Resource": "*"
},
{
    "Sid": "IAMPassRoleAccess",
    "Effect": "Allow",
    "Action": [
        "iam:PassRole"
    ]
}
```

```
        ],
        "Resource": [
            "arn:aws:iam::*:role/AmazonBedrockAgentCore*",
            "arn:aws:iam::*:role/service-role/AmazonBedrockAgentCore*"
        ]
    },
    {
        "Sid": "CloudWatchLogsAccess",
        "Effect": "Allow",
        "Action": [
            "logs:GetLogEvents",
            "logs:DescribeLogGroups",
            "logs:DescribeLogStreams"
        ],
        "Resource": [
            "arn:aws:logs:*:log-group:/aws/bedrock-agentcore/*",
            "arn:aws:logs:*:log-group:/aws/codebuild/*"
        ]
    },
    {
        "Sid": "S3Access",
        "Effect": "Allow",
        "Action": [
            "s3:GetObject",
            "s3:PutObject",
            "s3>ListBucket",
            "s3>CreateBucket",
            "s3:PutLifecycleConfiguration"
        ],
        "Resource": [
            "arn:aws:s3:::bedrock-agentcore-*",
            "arn:aws:s3:::bedrock-agentcore-*/*"
        ]
    },
    {
        "Sid": "ECRRepositoryAccess",
        "Effect": "Allow",
        "Action": [
            "ecr>CreateRepository",
            "ecr:DescribeRepositories",
            "ecr:GetRepositoryPolicy",
            "ecr:InitiateLayerUpload",
            "ecr:CompleteLayerUpload",
            "ecr:PutImage",
```

```
        "ecr:UploadLayerPart",
        "ecr:BatchCheckLayerAvailability",
        "ecr:GetDownloadUrlForLayer",
        "ecr:BatchGetImage",
        "ecr>ListImages",
        "ecr:TagResource"
    ],
    "Resource": [
        "arn:aws:ecr:*:repository/bedrock-agentcore-*"
    ]
},
{
    "Sid": "ECRAuthorizationAccess",
    "Effect": "Allow",
    "Action": [
        "ecr:GetAuthorizationToken"
    ],
    "Resource": "*"
}
]
}
```

Execution role for running an agent in AgentCore Runtime

To run agent or tool in AgentCore Runtime you need an AWS Identity and Access Management execution role. For information about creating an IAM role, see [IAM role creation](#).

AgentCore Runtime execution role

The AgentCore Runtime execution role is an IAM role that AgentCore Runtime assumes to run an agent. Replace the following:

- *us-east-1* with the AWS Region that you are using
- *123456789012* with your AWS account ID
- *agentName* with the name of your agent. You'll need to decide the agent name before creating the role and AgentCore Runtime.

JSON

```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Sid": "ECRImageAccess",  
            "Effect": "Allow",  
            "Action": [  
                "ecr:BatchGetImage",  
                "ecr:GetDownloadUrlForLayer"  
            ],  
            "Resource": [  
                "arn:aws:ecr:us-east-1:123456789012:repository/*"  
            ]  
        },  
        {  
            "Effect": "Allow",  
            "Action": [  
                "logs:DescribeLogStreams",  
                "logs>CreateLogGroup"  
            ],  
            "Resource": [  
                "arn:aws:logs:us-east-1:123456789012:log-group:/aws/bedrock-agentcore/runtimes/*"  
            ]  
        },  
        {  
            "Effect": "Allow",  
            "Action": [  
                "logs:DescribeLogGroups"  
            ],  
            "Resource": [  
                "arn:aws:logs:us-east-1:123456789012:log-group:/*"  
            ]  
        },  
        {  
            "Effect": "Allow",  
            "Action": [  
                "logs>CreateLogStream",  
                "logs:PutLogEvents"  
            ],  
            "Resource": [  
                "arn:aws:logs:us-east-1:123456789012:log-group:/aws/bedrock-agentcore/runtimes/*"  
            ]  
        }  
    ]  
}
```

```
        "arn:aws:logs:us-east-1:123456789012:log-group:/aws/bedrock-
agentcore/runtimes/*:log-stream:*
    ],
},
{
    "Sid": "ECRTOKENACCESS",
    "Effect": "Allow",
    "Action": [
        "ecr:GetAuthorizationToken"
    ],
    "Resource": "*"
},
{
    "Effect": "Allow",
    "Action": [
        "xray:PutTraceSegments",
        "xray:PutTelemetryRecords",
        "xray:GetSamplingRules",
        "xray:GetSamplingTargets"
    ],
    "Resource": [ "*" ]
},
{
    "Effect": "Allow",
    "Resource": "*",
    "Action": "cloudwatch:PutMetricData",
    "Condition": {
        "StringEquals": {
            "cloudwatch:namespace": "bedrock-agentcore"
        }
    }
},
{
    "Sid": "GetAgentAccessToken",
    "Effect": "Allow",
    "Action": [
        "bedrock-agentcore:GetWorkloadAccessToken",
        "bedrock-agentcore:GetWorkloadAccessTokenForJWT",
        "bedrock-agentcore:GetWorkloadAccessTokenForUserId"
    ],
    "Resource": [
        "arn:aws:bedrock-agentcore:us-east-1:123456789012:workload-
identity-directory/default",

```

```
        "arn:aws:bedrock-agentcore:us-east-1:123456789012:workload-
identity-directory/default/workload-identity/agentName-*"
    ],
},
{"Sid": "BedrockModelInvocation",
"Effect": "Allow",
>Action": [
    "bedrock:InvokeModel",
    "bedrock:InvokeModelWithResponseStream"
],
"Resource": [
    "arn:aws:bedrock:*::foundation-model/*",
    "arn:aws:bedrock:us-east-1:123456789012:*"
]
}
]
```

AgentCore Runtime trust policy

The trust relationship for the AgentCore Runtime execution role should allow AgentCore Runtime to assume the role:

Replace the following:

- **us-east-1** with the AWS Region that you are using
- **123456789012** with your AWS account ID

JSON

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Sid": "AssumeRolePolicy",
            "Effect": "Allow",
            "Principal": {
                "Service": "bedrock-agentcore.amazonaws.com"
            },
            "Action": "sts:AssumeRole",
        }
    ]
}
```

```
        "Condition": {  
            "StringEquals": {  
                "aws:SourceAccount": "123456789012"  
            },  
            "ArnLike": {  
                "aws:SourceArn": "arn:aws:bedrock-agentcore:us-  
east-1:123456789012:*"  
            }  
        }  
    }  
}
```

Get started with AgentCore Runtime

You can use the following tutorials to get started with Amazon Bedrock AgentCore Runtime.

The [Amazon Bedrock AgentCore Starter Toolkit](#) is a Command Line Interface (CLI) that simplifies the infrastructure setup for containerizing and deploying an agent to an AgentCore Runtime.

Topics

- [Get started with the Amazon Bedrock AgentCore starter toolkit](#)
- [Get started without the starter toolkit](#)

Get started with the Amazon Bedrock AgentCore starter toolkit

This tutorial shows you how to use the Amazon Bedrock AgentCore [starter toolkit](#) to deploy an agent to an Amazon Bedrock AgentCore Runtime.

The starter toolkit is a Command Line Interface (CLI) toolkit that you can use to deploy AI agents to an Amazon Bedrock AgentCore Runtime. You can use the toolkit with popular Python agent frameworks, such as LangGraph or [Strands Agents](#). This tutorial uses Strands Agents.

Topics

- [Prerequisites](#)
- [Step 1: Set up project and install dependencies](#)
- [Step 2: Create your agent](#)

- [Step 3: Test locally](#)
- [Step 4: Configure your agent](#)
- [Step 5: Enable observability for your agent](#)
- [Step 6: Deploy to Amazon Bedrock AgentCore Runtime](#)
- [Step 7: Test your deployed agent](#)
- [Step 8: Invoke your agent programmatically](#)
- [Step 9: Clean up](#)
- [Find your resources](#)
- [Common issues and solutions](#)
- [Advanced options \(Optional\)](#)

Prerequisites

Before you start, make sure you have:

- **AWS Account** with credentials configured. To configure your AWS credentials, see [Configuration and credential file settings in the AWS CLI](#).
- **Python 3.10+** installed
- [Boto3](#) installed
- **AWS Permissions:** To create and deploy an agent with the starter toolkit, you must have appropriate permissions. For information, see [Use the starter toolkit](#).
- **Model access:** Anthropic Claude Sonnet 4.0 [enabled](#) in the Amazon Bedrock console. For information about using a different model with the Strands Agents see the *Model Providers* section in the [Strands Agents SDK](#) documentation.

Step 1: Set up project and install dependencies

Create a project folder and install the required packages:

```
mkdir agentcore-runtime-quickstart
cd agentcore-runtime-quickstart
python3 -m venv .venv
source .venv/bin/activate
```

Note

On Microsoft Windows, use: **.venv\Scripts\activate**

Upgrade pip to the latest version:

```
pip install --upgrade pip
```

Install the following required packages:

- **bedrock-agentcore** - The Amazon Bedrock AgentCore SDK for building AI agents
- **strands-agents** - The [Strands Agents](#) SDK
- **bedrock-agentcore-starter-toolkit** - The Amazon Bedrock AgentCore starter toolkit

```
pip install bedrock-agentcore strands-agents bedrock-agentcore-starter-toolkit
```

Verify installation:

```
agentcore --help
```

Step 2: Create your agent

Create a source file for your agent code named `my_agent.py`. Add the following code:

```
from bedrock_agentcore import BedrockAgentCoreApp
from strands import Agent

app = BedrockAgentCoreApp()
agent = Agent()

@app.entrypoint
def invoke(payload):
    """Your AI agent function"""
    user_message = payload.get("prompt", "Hello! How can I help you today?")
    result = agent(user_message)
    return {"result": result.message}
```

```
if __name__ == "__main__":
    app.run()
```

Create requirements.txt and add the following:

```
bedrock-agentcore
strands-agents
```

Step 3: Test locally

Make sure port 8080 is free before starting. See *Port 8080 in use (local only)* in [Common issues and solutions](#).

Open a terminal window and start your agent with the following command:

```
python my_agent.py
```

Test your agent by opening another terminal window and enter the following command:

```
curl -X POST http://localhost:8080/invocations \
-H "Content-Type: application/json" \
-d '{"prompt": "Hello!"}'
```

Success: You should see a response like {"result": "Hello! I'm here to help..."} In the terminal window that's running the agent, enter **Ctrl+C** to stop the agent.

Step 4: Configure your agent

Configure and deploy your agent to AWS using the starter toolkit. The toolkit automatically creates the IAM execution role, container image, and Amazon Elastic Container Registry repository needed to host the agent in an AgentCore Runtime. By default the toolkit hosts the agent in an AgentCore Runtime that is in the us-west-2 AWS Region.

Configure the agent using the default values:

```
agentcore configure -e my_agent.py
```

- The **e** or **-entrypoint** flag specifies the entrypoint file for your agent (the Python file containing your agent code)

- This command creates configuration for deployment to AWS
- Accept the default values unless you have specific requirements
- The configuration information is stored in a hidden file named `.bedrock_agentcore.yaml`

(Optional) Use a different AWS Region

By default, the starter toolkit deploys to the `us-west-2` AWS Region. To use a different Region:

```
agentcore configure -e my_agent.py -r us-east-1
```

Step 5: Enable observability for your agent

[Amazon Bedrock AgentCore Observability](#) helps you trace, debug, and monitor agents that you host in Amazon Bedrock AgentCore Runtime. First enable CloudWatch Transaction Search by following the instructions at [Enabling Amazon Bedrock AgentCore runtime observability](#). To observe your agent, see [View observability data for your Amazon Bedrock AgentCore agents](#).

Step 6: Deploy to Amazon Bedrock AgentCore Runtime

Host your agent in AgentCore Runtime:

```
agentcore launch
```

This command:

- Builds your container using AWS CodeBuild (no Docker required locally)
- Creates necessary AWS resources (ECR repository, IAM roles, etc.)
- Deploys your agent to Amazon Bedrock AgentCore Runtime
- Configures CloudWatch logging

In the output from `agentcore launch` note the following:

- The Amazon Resource Name (ARN) of the agent. You need it to invoke the agent with the [InvokeAgentRuntime](#) operation.
- The location of the logs in Amazon CloudWatch Logs

If the deployment fails check for [common issues](#). For other deployment options, see [Deployment modes](#).

Step 7: Test your deployed agent

Test your deployed agent:

```
agentcore invoke '{"prompt": "tell me a joke"}'
```

If you see a joke in the response, your agent is now running in an Amazon Bedrock AgentCore Runtime and can be invoked. If not, check for [common issues](#).

Step 8: Invoke your agent programmatically

You can invoke the agent using the AWS SDK [InvokeAgentRuntime](#) operation. To call `InvokeAgentRuntime`, you need the ARN of the agent that you noted in Step 6: Deploy to Amazon Bedrock AgentCore Runtime. You can also get the ARN from the `bedrock_agentcore:` section of the `.bedrock_agentcore.yaml` (hidden) file that the toolkit creates. Use the following `boto3` (AWS SDK) code to invoke your agent. Replace `Agent ARN` with the ARN of your agent. Make sure that you have `bedrock-agentcore:InvokeAgentRuntime` permissions.

Create a file named `invoke_agent.py` and add the following code:

```
import json
import uuid
import boto3

agent_arn = "Agent ARN"
prompt = "Tell me a joke"

# Initialize the Amazon Bedrock AgentCore client
agent_core_client = boto3.client('bedrock-agentcore')

# Prepare the payload
payload = json.dumps({"prompt": prompt}).encode()

# Invoke the agent
response = agent_core_client.invoke_agent_runtime(
    agentRuntimeArn=agent_arn,
    runtimeSessionId=str(uuid.uuid4()),
    payload=payload,
    qualifier="DEFAULT"
```

```
)  
  
content = []  
for chunk in response.get("response", []):  
    content.append(chunk.decode('utf-8'))  
print(json.loads(''.join(content)))
```

Open a terminal window and run the code with the following command:

```
python invoke_agent.py
```

If successful, you should see a joke in the response. If the call fails, check the logs that you noted in [Step 6: Deploy to Amazon Bedrock AgentCore Runtime](#).

Note

If you plan on integrating your agent with OAuth, you can't use the AWS SDK to call `InvokeAgentRuntime`. Instead, make a HTTPS request to `InvokeAgentRuntime`. For more information, see [the section called "Authenticate and authorize with Inbound Auth and Outbound Auth"](#).

Step 9: Clean up

If you no longer want to host the agent in the AgentCore Runtime, use the `destroy` command to delete the AWS resources that the starter toolkit created for you.

```
agentcore destroy
```

Find your resources

After deployment, view your resources in the AWS Console:

Resource locations

Resource	Location
Agent Logs	CloudWatch → Log groups → /aws/bedrock-agentcore/runtimes/{agent-id}-DEFAULT

Resource	Location
Container Images	ECR → Repositories → bedrock-agentcore-{agent-name}
Build Logs	CodeBuild → Build history
IAM Role	IAM → Roles → Search for "BedrockAgentCore"

Common issues and solutions

Common issues and solutions when getting started with the Amazon Bedrock AgentCore starter toolkit. For more troubleshooting information, see [Troubleshoot Amazon Bedrock AgentCore Runtime](#).

Permission denied errors

Verify your AWS credentials and permissions:

- Verify AWS credentials: `aws sts get-caller-identity`
- Check you have the required policies attached
- Review caller permissions policy for detailed requirements

Docker not found warnings

You can ignore this warning:

- **Ignore this!** Default deployment uses CodeBuild (no Docker needed)
- Only install Docker/Finch/Podman if you want to use `--local` or `--local-build` flags

Model access denied

Enable model access in the Bedrock console:

- Enable Anthropic Claude 4.0 in the Bedrock console
- Make sure you're in the correct AWS Region (us-west-2 by default)

CodeBuild build error

Check build logs and permissions:

- Check CodeBuild project logs in AWS console
- Verify your caller permissions include CodeBuild access

Port 8080 in use (local only)

Find and stop processes that are using port 8080:

Use `lsof -ti:8080` to get a list of process using port 8080.

Use `kill -9 PID` to stop the process. Replace `PID` with the process ID.

Region mismatch

Verify the AWS Region with `aws configure get region` and make sure resources are in same Region

Advanced options (Optional)

The starter toolkit has advanced configuration options for different deployment modes and custom IAM roles. For more information, see [Runtime commands for the starter toolkit](#).

Deployment modes

Choose the right deployment approach for your needs:

Default: CodeBuild + Cloud Runtime (RECOMMENDED)

Suitable for production, managed environments, teams without Docker:

```
agentcore launch # Uses CodeBuild (no Docker needed)
```

Local Development

Suitable for development, rapid iteration, debugging:

```
agentcore launch --local # Build and run locally (requires Docker/Finch/Podman)
```

Hybrid: Local Build + Cloud Runtime

Suitable for teams with Docker expertise needing build customization:

```
agentcore launch --local-build # Build locally, deploy to cloud (requires Docker/Finch/Podman)
```

Note

Docker is only required for `--local` and `--local-build` modes. The default mode uses AWS CodeBuild.

Custom execution role

Use an existing IAM role:

```
agentcore configure -e my_agent.py --execution-role arn:aws:iam::111122223333:role/MyRole
```

Why ARM64?

Amazon Bedrock AgentCore Runtime requires ARM64 containers (AWS Graviton). The toolkit handles this automatically:

- **Default (CodeBuild):** Builds ARM64 containers in the cloud - no Docker needed
- **Local with Docker:** Only containers built on ARM64 machines will work when deployed to agentcore runtime

Get started without the starter toolkit

You can create a AgentCore Runtime agent without the starter toolkit. Instead you can use a combination of command line tools to configure and deploy your agent to an AgentCore Runtime.

This tutorial shows how to deploy a custom agent without using the starter toolkit. A custom agent is an agent built without using the AgentCore Python SDK. In this tutorial, the custom agent is built using FastAPI and Docker. The custom agent follows the [AgentCore Runtime requirements](#), meaning the agent must expose `/invocations` POST and `/ping` GET endpoints and be packaged in a Docker container. Amazon Bedrock AgentCore requires ARM64 architecture for all deployed agents.

Note

You can also use this approach for agents that you build with the AgentCore Python SDK.

Quick start setup

Enable observability for your agent

[Amazon Bedrock AgentCore Observability](#) helps you trace, debug, and monitor agents that you host in AgentCore Runtime. To observe an agent, first enable CloudWatch Transaction Search by following the instructions at [Enabling AgentCore observability](#).

Install uv

For this example, we'll use the uv package manager, though you can use any Python utility or package manager. To install uv on macOS:

```
curl -LsSf https://astral.sh/uv/install.sh | sh
```

For installation instructions on other platforms, refer to the [uv documentation](#).

Create your agent project

Setting up your project

1. Create and navigate to your project directory:

```
mkdir my-custom-agent && cd my-custom-agent
```

2. Initialize the project with Python 3.11:

```
uv init --python 3.11
```

3. Add the required dependencies (uv automatically creates a .venv):

```
uv add fastapi 'uvicorn[standard]' pydantic httpx strands-agents
```

Agent contract requirements

Your custom agent must fulfill these core requirements:

- **/invocations Endpoint:** POST endpoint for agent interactions (REQUIRED)
- **/ping Endpoint:** GET endpoint for health checks (REQUIRED)
- **Docker Container:** ARM64 containerized deployment package

Project structure

Note: For convenience, the example below uses **FastAPI Server** as the Web server framework for handling requests.

Your project should have the following structure:

```
my-custom-agent/
### agent.py           # FastAPI application
### Dockerfile          # ARM64 container configuration
### pyproject.toml       # Created by uv init
### uv.lock              # Created automatically by uv
```

Complete strands agent example

Create agent.py in your project root with the following content:

Example agent.py

```
from fastapi import FastAPI, HTTPException
from pydantic import BaseModel
from typing import Dict, Any
from datetime import datetime
from strands import Agent

app = FastAPI(title="Strands Agent Server", version="1.0.0")

# Initialize Strands agent
strands_agent = Agent()

class InvocationRequest(BaseModel):
    input: Dict[str, Any]

class InvocationResponse(BaseModel):
    output: Dict[str, Any]

@app.post("/invocations", response_model=InvocationResponse)
async def invoke_agent(request: InvocationRequest):
    try:
        user_message = request.input.get("prompt", "")
        if not user_message:
            raise HTTPException(
```

```
        status_code=400,
        detail="No prompt found in input. Please provide a 'prompt' key in the
input."
    )

    result = strands_agent(user_message)
    response = {
        "message": result.message,
        "timestamp": datetime.utcnow().isoformat()
    }

    return InvocationResponse(output=response)

except Exception as e:
    raise HTTPException(status_code=500, detail=f"Agent processing failed:
{str(e)}")

@app.get("/ping")
async def ping():
    return {"status": "healthy"}

if __name__ == "__main__":
    import uvicorn
    uvicorn.run(app, host="0.0.0.0", port=8080)
```

This implementation:

- Creates a FastAPI application with the required endpoints
- Initializes a Strands agent for processing user messages
- Implements the /invocations POST endpoint for agent interactions
- Implements the /ping GET endpoint for health checks
- Configures the server to run on host 0.0.0.0 and port 8080

Test locally

Testing your agent

1. Run the application:

```
uv run uvicorn agent:app --host 0.0.0.0 --port 8080
```

2. Test the /ping endpoint (in another terminal):

```
curl http://localhost:8080/ping
```

3. Test the /invocations endpoint:

```
curl -X POST http://localhost:8080/invocations \
-H "Content-Type: application/json" \
-d '{
    "input": {"prompt": "What is artificial intelligence?"}
}'
```

Create dockerfile

Create Dockerfile in your project root with the following content:

Example Dockerfile

```
# Use uv's ARM64 Python base image
FROM --platform=linux/arm64 ghcr.io/astral-sh/uv:python3.11-bookworm-slim

WORKDIR /app

# Copy uv files
COPY pyproject.toml uv.lock ./

# Install dependencies (including strands-agents)
RUN uv sync --frozen --no-cache

# Copy agent file
COPY agent.py ./

# Expose port
EXPOSE 8080

# Run application
CMD ["uv", "run", "uvicorn", "agent:app", "--host", "0.0.0.0", "--port", "8080"]
```

This Dockerfile:

- Uses an ARM64 Python base image (required by Amazon Bedrock AgentCore)

- Sets up the working directory
- Copies the dependency files and installs dependencies
- Copies the agent code
- Exposes port 8080
- Configures the command to run the application

Build and deploy ARM64 image

Setup docker buildx

Docker buildx lets you build images for different architectures. Set it up with:

```
docker buildx create --use
```

Build for ARM64 and test locally

Building and testing your image

1. Build the image locally for testing:

```
docker buildx build --platform linux/arm64 -t my-agent:arm64 --load .
```

2. Test locally with credentials (Strands agents need AWS credentials):

```
docker run --platform linux/arm64 -p 8080:8080 \
-e AWS_ACCESS_KEY_ID="$AWS_ACCESS_KEY_ID" \
-e AWS_SECRET_ACCESS_KEY="$AWS_SECRET_ACCESS_KEY" \
-e AWS_SESSION_TOKEN="$AWS_SESSION_TOKEN" \
-e AWS_REGION="$AWS_REGION" \
my-agent:arm64
```

Create ECR repository and deploy

Deploying to ECR

1. Create an ECR repository:

```
aws ecr create-repository --repository-name my-strands-agent --region us-west-2
```

2. Log in to ECR:

```
aws ecr get-login-password --region us-west-2 | docker login --username AWS --password-stdin account-id.dkr.ecr.us-west-2.amazonaws.com
```

3. Build and push to ECR:

```
docker buildx build --platform linux/arm64 -t account-id.dkr.ecr.us-west-2.amazonaws.com/my-strands-agent:latest --push .
```

4. Verify the image was pushed:

```
aws ecr describe-images --repository-name my-strands-agent --region us-west-2
```

Deploy agent runtime

Create a file named `deploy_agent.py` with the following content:

Example `deploy_agent.py`

```
import boto3

client = boto3.client('bedrock-agentcore-control', region_name='us-west-2')

response = client.create_agent_runtime(
    agentRuntimeName='strands_agent',
    agentRuntimeArtifact={
        'containerConfiguration': {
            'containerUri': 'account-id.dkr.ecr.us-west-2.amazonaws.com/my-strands-agent:latest'
        }
    },
    networkConfiguration={"networkMode": "PUBLIC"},
    roleArn='arn:aws:iam::account-id:role/AgentRuntimeRole'
)

print(f"Agent Runtime created successfully!")
print(f"Agent Runtime ARN: {response['agentRuntimeArn']}")
print(f"Status: {response['status']}
```

Run the script to deploy your agent:

```
uv run deploy_agent.py
```

This script uses the `create_agent_runtime` operation to deploy your agent to Amazon Bedrock AgentCore. Make sure to replace `account-id` with your actual AWS account ID and ensure the IAM role has the necessary permissions. For more information, see [IAM Permissions for AgentCore Runtime](#).

Invoke your agent

Create a file named `invoke_agent.py` with the following content:

Example `invoke_agent.py`

```
import boto3
import json

agent_core_client = boto3.client('bedrock-agentcore', region_name='us-west-2')
payload = json.dumps({
    "input": {"prompt": "Explain machine learning in simple terms"}
})

response = agent_core_client.invoke_agent_runtime(
    agentRuntimeArn='arn:aws:bedrock-agentcore:us-west-2:account-id:runtime/
myStrandsAgent-suffix',
    runtimeSessionId='dfmeoagmreaklgmrkleafremoigrmtesogmtrskhmtkrlshmt', # Must be
    33+ chars
    payload=payload,
    qualifier="DEFAULT"
)

response_body = response['response'].read()
response_data = json.loads(response_body)
print("Agent Response:", response_data)
```

Run the script to invoke your agent:

```
uv run invoke_agent.py
```

This script uses the [InvokeAgentRuntime](#) AWS SDK operation to send a request to your deployed agent. Make sure to replace `account-id` and `agentArn` with your actual values.

If you plan on integrating your agent with OAuth, you can't use the AWS SDK to call `InvokeAgentRuntime`. Instead, make a HTTPS request to `InvokeAgentRuntime`. For more information, see [Authenticate and authorize with Inbound Auth and Outbound Auth](#).

Expected response format

When you invoke your agent, you'll receive a response like this:

Example Sample response

```
{  
    "output": {  
        "message": {  
            "role": "assistant",  
            "content": [  
                {  
                    "text": "# Artificial Intelligence in Simple Terms\n\nArtificial Intelligence (AI) is technology that allows computers to do tasks that normally need human intelligence. Think of it as teaching machines to:\n- Learn from information (like how you learn from experience)\n- Make decisions based on what they've learned\n- Recognize patterns (like identifying faces in photos)\n- Understand language (like when I respond to your questions)\nInstead of following specific step-by-step instructions for every situation, AI systems can adapt to new information and improve over time.\nExamples you might use every day include voice assistants like Siri, recommendation systems on streaming services, and email spam filters that learn which messages are unwanted."  
                }  
            ]  
        },  
        "timestamp": "2025-07-13T01:48:06.740668"  
    }  
}
```

Amazon Bedrock AgentCore requirements summary

- **Platform:** Must be linux/arm64
- **Endpoints:** /invocations POST and /ping GET are mandatory
- **ECR:** Images must be deployed to ECR
- **Port:** Application runs on port 8080
- **Strands Integration:** Uses Strands Agent for AI processing
- **Credentials:** Strands agents require AWS credentials for operation

Conclusion

In this guide, you've learned how to:

- Set up a development environment for building custom agents
- Create a FastAPI application that implements the required endpoints
- Containerize your agent for ARM64 architecture
- Test your agent locally
- Deploy your agent to ECR
- Create an agent runtime in Amazon Bedrock AgentCore
- Invoke your deployed agent

By following these steps, you can create and deploy custom agents that leverage the power of Amazon Bedrock AgentCore while maintaining full control over your agent's implementation.

Use any agent framework

You can use open source AI frameworks to create an agent or tool. This topic shows examples for a variety of frameworks, including Strands Agents, LangGraph, and Google ADK.

Topics

- [Strands Agents](#)
- [LangGraph](#)
- [Google Agent Development Kit \(ADK\)](#)
- [OpenAI Agents SDK](#)
- [Microsoft AutoGen](#)
- [CrewAI](#)

Strands Agents

For the full example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/tree/main/03-integrations/agentic-frameworks/strands-agents>.

```
import os
from strands import Agent
```

```
from strands_tools import file_read, file_write, editor

agent = Agent(tools=[file_read, file_write, editor])

from bedrock_agentcore.runtime import BedrockAgentCoreApp
app = BedrockAgentCoreApp()
@app.entrypoint
def agent_invocation(payload, context):
    """Handler for agent invocation"""
    user_message = payload.get("prompt", "No prompt found in input, please guide
customer to create a json payload with prompt key")
    result = agent(user_message)
    print("context:\n-----\n", context)
    print("result:\n*****\n", result)
    return {"result": result.message}
app.run()
```

LangGraph

For the full example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/tree/main/03-integrations/agentic-frameworks/langgraph>.

```
from langchain.chat_models import init_chat_model
from typing_extensions import TypedDict
from langgraph.graph import StateGraph, START
from langgraph.graph.message import add_messages
from langgraph.prebuilt import ToolNode, tools_condition
#-----
from bedrock_agentcore.runtime import BedrockAgentCoreApp
app = BedrockAgentCoreApp()
#-----

llm = init_chat_model(
    "us.anthropic.claude-3-5-haiku-20241022-v1:0",
    model_provider="bedrock_converse",
)

# Create graph
graph_builder = StateGraph(State)
...
# Add nodes and edges
...
```

```
graph = graph_builder.compile()

# Finally write your entrypoint
@app.entrypoint
def agent_invocation(payload, context):

    print("received payload")
    print(payload)

    tmp_msg = {"messages": [{"role": "user", "content": payload.get("prompt", "No prompt found in input, please guide customer as to what tools can be used")}]}

    tmp_output = graph.invoke(tmp_msg)
    print(tmp_output)

    return {"result": tmp_output['messages'][-1].content}

app.run()
```

Google Agent Development Kit (ADK)

For the full example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/tree/main/03-integrations/agentic-frameworks/adk>.

```
from google.adk.agents import Agent
from google.adk.runners import Runner
from google.adk.sessions import InMemorySessionService
from google.adk.tools import google_search
from google.genai import types
import asyncio
import os

# adapted from https://google.github.io/adk-docs/tools/built-in-tools/#google-search

APP_NAME="google_search_agent"
USER_ID="user1234"

# Agent Definition
# Add your GEMINI_API_KEY
root_agent = Agent(
    model="gemini-2.0-flash",
    name="openai_agent",
    description="Agent to answer questions using Google Search.",
```

```
instruction="I can answer your questions by searching the internet. Just ask me anything!",
    # google_search is a pre-built tool which allows the agent to perform Google searches.
    tools=[google_search]
)

# Session and Runner
async def setup_session_and_runner(user_id, session_id):
    session_service = InMemorySessionService()
    session = await session_service.create_session(app_name=APP_NAME, user_id=user_id,
session_id=session_id)
    runner = Runner(agent=root_agent, app_name=APP_NAME,
session_service=session_service)
    return session, runner

# Agent Interaction
async def call_agent_async(query, user_id, session_id):
    content = types.Content(role='user', parts=[types.Part(text=query)])
    session, runner = await setup_session_and_runner(user_id, session_id)
    events = runner.run_async(user_id=user_id, session_id=session_id,
new_message=content)

    async for event in events:
        if event.is_final_response():
            final_response = event.content.parts[0].text
            print("Agent Response: ", final_response)

    return final_response

from bedrock_agentcore.runtime import BedrockAgentCoreApp
app = BedrockAgentCoreApp()

@app.entrypoint
def agent_invocation(payload, context):
    return asyncio.run(call_agent_async(payload.get("prompt", "what is Bedrock
Agentcore Runtime?"), payload.get("user_id",USER_ID), context.session_id))

app.run()
```

OpenAI Agents SDK

For the full example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/tree/main/03-integrations/agentic-frameworks/openai-agents>.

```
from agents import Agent, Runner, WebSearchTool
import logging
import asyncio
import sys

# Set up logging
logging.basicConfig(
    level=logging.DEBUG,
    format='%(asctime)s - %(name)s - %(levelname)s - %(message)s',
    handlers=[
        logging.StreamHandler(sys.stdout)
    ]
)
logger = logging.getLogger("openai_agents")

# Configure OpenAI library logging
logging.getLogger("openai").setLevel(logging.DEBUG)

logger.debug("Initializing OpenAI agent with tools")
agent = Agent(
    name="Assistant",
    tools=[
        WebSearchTool(),
    ],
)

async def main(query=None):
    if query is None:
        query = "Which coffee shop should I go to, taking into account my preferences and the weather today in SF?"

    logger.debug(f"Running agent with query: {query}")

    try:
        logger.debug("Starting agent execution")
        result = await Runner.run(agent, query)
        logger.debug(f"Agent execution completed with result type: {type(result)}")
        return result
    
```

```
except Exception as e:
    logger.error(f"Error during agent execution: {e}", exc_info=True)
    raise

# Integration with Bedrock AgentCore
from bedrock_agentcore.runtime import BedrockAgentCoreApp
app = BedrockAgentCoreApp()

@app.entrypoint
async def agent_invocation(payload, context):
    logger.debug(f"Received payload: {payload}")
    query = payload.get("prompt", "How can I help you today?")

    try:
        result = await main(query)
        logger.debug("Agent execution completed successfully")
        return {"result": result.final_output}
    except Exception as e:
        logger.error(f"Error during agent execution: {e}", exc_info=True)
        return {"result": f"Error: {str(e)}"}

# Run the app when imported
if __name__ == "__main__":
    app.run()
```

Microsoft AutoGen

For the full example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/tree/main/03-integrations/agentic-frameworks/autogen>.

```
from autogen_agentchat.agents import AssistantAgent
from autogen_agentchat.ui import Console
from autogen_ext.models.openai import OpenAIChatCompletionClient
import asyncio
import logging

# Set up logging
logging.basicConfig(
    level=logging.DEBUG,
    format='%(asctime)s - %(name)s - %(levelname)s - %(message)s'
)
logger = logging.getLogger("autogen_agent")
```

```
# Initialize the model client
model_client = OpenAIChatCompletionClient(
    model="gpt-4o",
)

# Define a simple function tool that the agent can use
async def get_weather(city: str) -> str:
    """Get the weather for a given city."""
    return f"The weather in {city} is 73 degrees and Sunny."

# Define an AssistantAgent with the model and tool
agent = AssistantAgent(
    name="weather_agent",
    model_client=model_client,
    tools=[get_weather],
    system_message="You are a helpful assistant.",
    reflect_on_tool_use=True,
    model_client_stream=True, # Enable streaming tokens
)

# Integrate with Bedrock AgentCore
from bedrock_agentcore.runtime import BedrockAgentCoreApp
app = BedrockAgentCoreApp()

@app.entrypoint
async def main(payload):
    # Process the user prompt
    prompt = payload.get("prompt", "Hello! What can you help me with?")

    # Run the agent
    result = await Console(agent.run_stream(task=prompt))

    # Extract the response content for JSON serialization
    if result and hasattr(result, 'messages') and result.messages:
        last_message = result.messages[-1]
        if hasattr(last_message, 'content'):
            return {"result": last_message.content}

    return {"result": "No response generated"}

app.run()
```

CrewAI

For the full example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/blob/main/01-tutorials/01-AgentCore-runtime/01-hosting-agent/04-crewai-with-bedrock-model/runtime-with-crewai-and-bedrock-models.ipynb>.

```
from crewai import Agent, Crew, Process, Task
from crewai_tools import MathTool, WeatherTool
from bedrock_agentcore.runtime import BedrockAgentCoreApp
import argparse
import json
app = BedrockAgentCoreApp()

# Define CrewAI agent
def create_researcher():
    """Create a researcher agent"""
    from langchain_aws import ChatBedrock

    # Initialize LLM
    llm = ChatBedrock(
        model_id="anthropic.claude-3-sonnet-20240229-v1:0",
        model_kwargs={"temperature": 0.1}
    )

    # Create researcher agent
    return Agent(
        role="Senior Research Specialist",
        goal="Find comprehensive and accurate information about the topic",
        backstory="You are an experienced research specialist with a talent for finding relevant information.",
        verbose=True,
        llm=llm,
        tools=[MathTool(), WeatherTool()]
    )

# Define the analyst agent
def create_analyst():
    ...

# Create the crew
def create_crew():
    """Create and configure the CrewAI crew"""
    # Create agents
```

```
researcher = create_researcher()
analyst = create_analyst()

# Create research task with fields like description filled in as per crewAI docs
research_task = Task(
    description="...",
    agent=researcher,
    expected_output="..."
)

analysis_task = Task(
    ...
)

# Create crew
return Crew(
    agents=[researcher, analyst],
    tasks=[research_task, analysis_task],
    process=ProcessSEQUENTIAL,
    verbose=True
)

# Initialize the crew
crew = create_crew()

# Finally write your entrypoint
@app.entrypoint
def crewai_bedrock(payload):
    """
    Invoke the crew with a payload
    """
    user_input = payload.get("prompt")

    # Run the crew
    result = crew.kickoff(inputs={"topic": user_input})

    # Return the result
    return result.raw

if __name__ == "__main__":
    app.run()
```

Use any foundation model

You can use any foundation model with AgentCore Runtime. The following are examples for Amazon Bedrock, Open AI, and Gemini:

Topics

- [Amazon Bedrock](#)
- [Open AI](#)
- [Gemini](#)

Amazon Bedrock

```
import boto3
from strands.models import BedrockModel

# Create a Bedrock model with the custom session
bedrock_model = BedrockModel(
    model_id="us.anthropic.claude-3-7-sonnet-20250219-v1:0",
    boto_session=session
)
```

Open AI

```
from strands.models.openai import OpenAIModel
model = OpenAIModel(
    client_args={
        "api_key": "<our_OPENAI_API_KEY>",
        # **model_config
        model_id="gpt-4o",
        params={
            "max_tokens": 1000,
            "temperature": 0.7,
        }
    }
)

from strands import Agent
from strands_tools import python_repl
agent = Agent(model=model, tools=[python_repl])
```

Gemini

```
import os
from langchain.chat_models import init_chat_model

# Use your Google API key to initialize the chat model
os.environ["GOOGLE_API_KEY"] = "..."

llm = init_chat_model("google_genai:gemini-2.0-flash")
```

Deploy MCP servers in AgentCore Runtime

Amazon Bedrock AgentCore Runtime lets you deploy and run Model Context Protocol (MCP) servers in the AgentCore Runtime. This guide walks you through creating, testing, and deploying your first MCP server.

For an example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/tree/main/01-tutorials/01-AgentCore-runtime/02-hosting-MCP-server>.

In this section, you learn:

- How to create an MCP server with tools
- How to test your server locally
- How to deploy your server to AWS
- How to invoke your deployed server

Topics

- [How Amazon Bedrock AgentCore supports MCP](#)
- [Prerequisites](#)
- [Step 1: Create your MCP server](#)
- [Step 2: Test your MCP server locally](#)
- [Step 3: Deploy your MCP server to AWS](#)
- [Step 4: Invoke your deployed MCP server](#)
- [Appendix](#)

How Amazon Bedrock AgentCore supports MCP

When you configure a Amazon Bedrock AgentCore Runtime with the MCP protocol, the service expects MCP server containers to be available at the path `0.0.0.0:8000/mcp`, which is the default path supported by most official MCP server SDKs.

Amazon Bedrock AgentCore requires stateless streamable-HTTP servers because the Runtime provides session isolation by default. The platform automatically adds a `Mcp-Session-Id` header for any request without it, so MCP clients can maintain connection continuity to the same Amazon Bedrock AgentCore Runtime session.

The payload of the [InvokeAgentRuntime](#) API is passed through directly, allowing RPC messages of protocols like MCP to be easily proxied.

Prerequisites

- Python 3.10 or higher installed and basic understanding of Python
- An AWS account with appropriate permissions and local credentials configured

Step 1: Create your MCP server

Install required packages

First, install the MCP package:

```
pip install mcp
```

Create your first MCP server

Create a new file called `my_mcp_server.py`:

```
# my_mcp_server.py

from mcp.server.fastmcp import FastMCP
from starlette.responses import JSONResponse

mcp = FastMCP(host="0.0.0.0", stateless_http=True)

@mcp.tool()
def add_numbers(a: int, b: int) -> int:
```

```
"""Add two numbers together"""
return a + b

@mcp.tool()
def multiply_numbers(a: int, b: int) -> int:
    """Multiply two numbers together"""
    return a * b

@mcp.tool()
def greet_user(name: str) -> str:
    """Greet a user by name"""
    return f"Hello, {name}! Nice to meet you."

if __name__ == "__main__":
    mcp.run(transport="streamable-http")
```

Understanding the code

- **FastMCP:** Creates an MCP server that can host your tools
- **@mcp.tool():** Decorator that turns your Python functions into MCP tools
- **Tools:** Three simple tools that demonstrate different types of operations

Step 2: Test your MCP server locally

Start your MCP server

Run your MCP server locally:

```
python my_mcp_server.py
```

You should see output indicating the server is running on port 8000.

Test with MCP client

From a new terminal, create a new file `my_mcp_client.py` and execute it using `python my_mcp_client.py`

```
# my_mcp_client.py

import asyncio
```

```
from mcp import ClientSession
from mcp.client.streamable_http import streamablehttp_client

async def main():
    mcp_url = "http://localhost:8000/mcp"
    headers = {}

    async with streamablehttp_client(mcp_url, headers, timeout=120,
                                     terminate_on_close=False) as (
        read_stream,
        write_stream,
        _):
        async with ClientSession(read_stream, write_stream) as session:
            await session.initialize()
            tool_result = await session.list_tools()
            print(tool_result)

asyncio.run(main())
```

You can also test your server using the MCP Inspector as described in [the section called “Local testing with MCP inspector”](#).

Step 3: Deploy your MCP server to AWS

Install deployment tools

Install the AgentCore starter toolkit:

```
pip install bedrock-agentcore-starter-toolkit
```

You use the starter toolkit to deploy your agent to AgentCore Runtime.

Create a project folder with the following structure:

```
## Project Folder Structure

your_project_directory/
### mcp_server.py # Your main agent code
### requirements.txt # Dependencies for your agent
### __init__.py # Makes the directory a Python package
```

Create a new file called `requirements.txt`, add the following to it:

```
mcp
```

`requirements.txt` specifies the requirements that the agent needs for deployment to AgentCore Runtime.

Configure your MCP server for deployment

Before configuring your deployment, you need to set up a Cognito user pool for authentication as described in [the section called “Set up Cognito user pool for authentication”](#). This provides the OAuth tokens required for secure access to your deployed server.

Service-Linked Role for Authentication

Starting **October 7, 2025**, Amazon Bedrock AgentCore uses a Service-Linked Role for workload identity permissions when using OAuth authentication. For detailed information about this change, see [Identity service-linked role](#).

After setting up authentication, create the deployment configuration:

```
agentcore configure -e my_mcp_server.py --protocol MCP
```

This will start a guided prompt workflow:

- For execution role, you need to have an IAM execution role with appropriate permissions
- For ECR, just press **enter** to skip and it will auto-create
- For dependency file, the CLI will auto-detect from current directory
- For OAuth, type **yes** and provide the discovery URL and client ID token

Deploy to AWS

Deploy your agent:

```
agentcore launch
```

This command will:

1. Build a Docker container with your agent
2. Push it to Amazon ECR
3. Create a Amazon Bedrock AgentCore runtime
4. Deploy your agent to AWS

After deployment, you'll receive an agent runtime ARN that looks like:

```
arn:aws:bedrock-agentcore:us-west-2:accountId:runtime/my_mcp_server-xyz123
```

Step 4: Invoke your deployed MCP server

Test with MCP client (remote)

Before testing, set the following environment variables:

- Export agent ARN as an environment variable: **export AGENT_ARN="*agent_arn*"**
- Export bearer token as an environment variable: **export BEARER_TOKEN="*bearer_token*"**

if you pass in an Accept header, it must follow the [MCP](#) standard. Acceptable media types are application/json and text/event-stream.

Create a new file `my_mcp_client_remote.py` and execute it using **python my_mcp_client_remote.py**

```
import asyncio
import os
import sys

from mcp import ClientSession
from mcp.client.streamable_http import streamablehttp_client

async def main():
    agent_arn = os.getenv('AGENT_ARN')
    bearer_token = os.getenv('BEARER_TOKEN')
    if not agent_arn or not bearer_token:
        print("Error: AGENT_ARN or BEARER_TOKEN environment variable is not set")
        sys.exit(1)

    encoded_arn = agent_arn.replace(':', '%3A').replace('/', '%2F')
```

```
mcp_url = f"https://bedrock-agentcore.us-west-2.amazonaws.com/runtimes/{encoded_arn}/invocations?qualifier=DEFAULT"
    headers = {"authorization": f"Bearer {bearer_token}", "Content-Type": "application/json"}
    print(f"Invoking: {mcp_url}, \nwith headers: {headers}\n")

    async with streamablehttp_client(mcp_url, headers, timeout=120,
terminate_on_close=False) as (
        read_stream,
        write_stream,
        -
    ):
        async with ClientSession(read_stream, write_stream) as session:
            await session.initialize()
            tool_result = await session.list_tools()
            print(tool_result)

asyncio.run(main())
```

You can also test your deployed server using the MCP Inspector as described in [the section called "Remote testing with MCP inspector".](#)

Appendix

Set up Cognito user pool for authentication

Create a new file `setup_cognito.sh` and add the following content to it.

Change `TEMP_PASSWORD` and `PERMANENT_PASSWORD` to secure passwords of your choosing.

Run the script using the command `source setup_cognito.sh`.

 **Note**

For detailed OAuth authentication setup and Service-Linked Role information, see [Authenticate and authorize with Inbound Auth and Outbound Auth.](#)

```
#!/bin/bash

# Create User Pool and capture Pool ID directly
export POOL_ID=$(aws cognito-idp create-user-pool \
```

```
--pool-name "MyUserPool" \
--policies '{"PasswordPolicy":{"MinimumLength":8}}' \
--region us-west-2 | jq -r '.UserPool.Id')

# Create App Client and capture Client ID directly
export CLIENT_ID=$(aws cognito-idp create-user-pool-client \
--user-pool-id $POOL_ID \
--client-name "MyClient" \
--no-generate-secret \
--explicit-auth-flows "ALLOW_USER_PASSWORD_AUTH" "ALLOW_REFRESH_TOKEN_AUTH" \
--region us-west-2 | jq -r '.UserPoolClient.ClientId')

# Create User
aws cognito-idp admin-create-user \
--user-pool-id $POOL_ID \
--username "testuser" \
--temporary-password "TEMP_PASSWORD" \
--region us-west-2 \
--message-action SUPPRESS > /dev/null

# Set Permanent Password
aws cognito-idp admin-set-user-password \
--user-pool-id $POOL_ID \
--username "testuser" \
--password "PERMANENT_PASSWORD" \
--region us-west-2 \
--permanent > /dev/null

# Authenticate User and capture Access Token
export BEARER_TOKEN=$(aws cognito-idp initiate-auth \
--client-id "$CLIENT_ID" \
--auth-flow USER_PASSWORD_AUTH \
--auth-parameters USERNAME='testuser',PASSWORD='PERMANENT_PASSWORD' \
--region us-west-2 | jq -r '.AuthenticationResult.AccessToken')

# Output the required values
echo "Pool id: $POOL_ID"
echo "Discovery URL: https://cognito-idp.us-west-2.amazonaws.com/$POOL_ID/.well-known/
openid-configuration"
echo "Client ID: $CLIENT_ID"
echo "Bearer Token: $BEARER_TOKEN"
```

After running this script, note the following values for use in the deployment configuration:

- Discovery URL: Used during the `agentcore configure` step
- Client ID: Used during the `agentcore configure` step
- Bearer Token: Used when invoking your deployed server

Local testing with MCP inspector

The MCP Inspector is a visual tool for testing MCP servers. To use it, you need:

- Node.js and npm installed

Install and run the MCP Inspector:

```
npx @modelcontextprotocol/inspector
```

This will:

- Start the MCP Inspector server
- Display a URL in your terminal (typically `http://localhost:6274`)

To use the Inspector:

1. Navigate to `http://localhost:6274` in your browser
2. Paste the MCP server URL (`http://localhost:8000/mcp`) into the MCP Inspector connection field
3. You'll see your tools listed in the sidebar
4. Click on any tool to test it
5. Fill in the parameters (e.g., for `add_numbers`, enter values for a and b)
6. Click "Call Tool" to see the result

Remote testing with MCP inspector

You can also test your deployed server using the MCP Inspector:

1. Open the MCP Inspector: `npx @modelcontextprotocol/inspector`
2. In the web interface:

- Select "Streamable HTTP" as the transport
 - Enter your agent's endpoint URL, which will look like: `https://bedrock-agentcore.us-west-2.amazonaws.com/runtimes/arn%3Aaws%3Abedrock-agentcore%3Aus-west-2%3AAccountId%3Aruntime%2FruntimeName/invocations?qualifier=DEFAULT`
 - Make sure to URL-encode your agent runtime ARN when constructing the endpoint URL. The colon (:) characters become %3A and forward slashes (/) become %2F in the encoded URL.
 - Add your Bearer token under authentication
 - Click "Connect"
3. Test your tools just like you did locally

Deploy A2A servers in AgentCore Runtime

Amazon Bedrock AgentCore AgentCore Runtime lets you deploy and run Agent-to-Agent (A2A) servers in the AgentCore Runtime. This guide walks you through creating, testing, and deploying your first A2A server.

In this section, you learn:

- How Amazon Bedrock AgentCore supports A2A
- How to create an A2A server with agent capabilities
- How to test your server locally
- How to deploy your server to AWS
- How to invoke your deployed server
- How to retrieve agent cards for discovery

Topics

- [How Amazon Bedrock AgentCore supports A2A](#)
- [Using A2A with AgentCore Runtime](#)
- [Appendix](#)

How Amazon Bedrock AgentCore supports A2A

Amazon Bedrock AgentCore's A2A protocol support enables seamless integration with A2A servers by acting as a transparent proxy layer. When configured for A2A, Amazon Bedrock AgentCore expects containers to run stateless, streamable HTTP servers on port 9000 at the root path (`0.0.0.0:9000/`), which aligns with the default A2A server configuration.

The service provides enterprise-grade session isolation while maintaining protocol transparency - JSON-RPC payloads from the [InvokeAgentRuntime](#) API are passed through directly to the A2A container without modification. This architecture preserves the standard A2A protocol features like built-in agent discovery through Agent Cards at `/.well-known/agent-card.json` and JSON-RPC communication, while adding enterprise authentication (SigV4/OAuth 2.0) and scalability.

The key differentiators from other protocols are the port (9000 vs 8080 for HTTP), mount path (/ vs /invocations), and the standardized agent discovery mechanism, making Amazon Bedrock AgentCore an ideal deployment platform for A2A agents in production environments.

Key differences from other protocols:

Port

A2A servers run on port 9000 (vs 8080 for HTTP, 8000 for MCP)

Path

A2A servers are mounted at / (vs /invocations for HTTP, /mcp for MCP)

Agent Cards

A2A provides built-in agent discovery through Agent Cards at `/.well-known/agent-card.json`

Protocol

Uses JSON-RPC for agent-to-agent communication

Authentication

Supports both SigV4 and OAuth 2.0 authentication schemes

For more information, see <https://a2a-protocol.org/>.

Using A2A with AgentCore Runtime

In this tutorial you create, test, and deploy an A2A server.

Topics

- [Prerequisites](#)
- [Step 1: Create your A2A server](#)
- [Step 2: Test your A2A server locally](#)
- [Step 3: Deploy your A2A server to Bedrock AgentCore Runtime](#)
- [Step 4: Get the agent card](#)
- [Step 5: Invoke your deployed A2A server](#)

Prerequisites

- Python 3.10 or higher installed and basic understanding of Python
- An AWS account with appropriate permissions and local credentials configured
- Understanding of the A2A protocol and agent-to-agent communication concepts

Step 1: Create your A2A server

We are showing an example with strands, but you can use other ways to build with A2A.

Install required packages

First, install the required packages for A2A:

```
pip install strands-agents[a2a]
pip install bedrock-agentcore
pip install strands-agents-tools
```

Create your first A2A server

Create a new file called `my_a2a_server.py`:

```
import logging
import os
from strands_tools.calculator import calculator
```

```
from strands import Agent
from strands.multiagent.a2a import A2AServer
import uvicorn
from fastapi import FastAPI

logging.basicConfig(level=logging.INFO)

# Use the complete runtime URL from environment variable, fallback to local
runtime_url = os.environ.get('AGENTCORE_RUNTIME_URL', 'http://127.0.0.1:9000/')

logging.info(f"Runtime URL: {runtime_url}")

strands_agent = Agent(
    name="Calculator Agent",
    description="A calculator agent that can perform basic arithmetic operations.",
    tools=[calculator],
    callback_handler=None
)

host, port = "0.0.0.0", 9000

# Pass runtime_url to http_url parameter AND use serve_at_root=True
a2a_server = A2AServer(
    agent=strands_agent,
    http_url=runtime_url,
    serve_at_root=True # Serves locally at root (/) regardless of remote URL path
    complexity
)

app = FastAPI()

@app.get("/ping")
def ping():
    return {"status": "healthy"}

app.mount("/", a2a_server.to_fastapi_app())

if __name__ == "__main__":
    uvicorn.run(app, host=host, port=port)
```

Understanding the code

Strands Agent

Creates an agent with specific tools and capabilities

A2AServer

Wraps the agent to provide A2A protocol compatibility

Agent Card URL

Dynamically constructs the correct URL based on deployment context using the AGENTCORE_RUNTIME_URL environment variable

Port 9000

A2A servers run on port 9000 by default in AgentCore Runtime

Step 2: Test your A2A server locally

Run and test your A2A server in a local development environment.

Start your A2A server

Run your A2A server locally:

```
python my_a2a_server.py
```

You should see output indicating the server is running on port 9000.

Invoke agent

```
curl -X POST http://0.0.0.0:9000 \
-H "Content-Type: application/json" \
-d '{
  "jsonrpc": "2.0",
  "id": "req-001",
  "method": "message/send",
  "params": {
    "message": {
      "role": "user",
      "parts": [
```

```
{  
    "kind": "text",  
    "text": "what is 101 * 11?"  
}  
,  
"messageId": "12345678-1234-1234-1234-123456789012"  
}  
}  
}' | jq .
```

Test agent card retrieval

You can test the agent card endpoint locally:

```
curl http://localhost:9000/.well-known/agent-card.json | jq .
```

You can also test your deployed server using the A2A Inspector as described in [Remote testing with A2A inspector](#).

Step 3: Deploy your A2A server to Bedrock AgentCore Runtime

Deploy your A2A server to AWS using the Amazon Bedrock AgentCore starter toolkit.

Install deployment tools

Install the Amazon Bedrock AgentCore starter toolkit:

```
pip install bedrock-agentcore-starter-toolkit
```

Start by creating a project folder with the following structure:

```
## Project Folder Structure  
your_project_directory/  
### a2a_server.py          # Your main agent code  
### requirements.txt        # Dependencies for your agent
```

Create a new file called `requirements.txt`, add the following to it:

```
strands-agents[a2a]  
bedrock-agentcore
```

strands-agents-tools

Set up Cognito user pool for authentication

Configure authentication for secure access to your deployed server. For detailed Cognito setup instructions, see [Set up Cognito user pool for authentication](#). This provides the OAuth tokens required for secure access to your deployed server.

Configure your A2A server for deployment

After setting up authentication, create the deployment configuration:

```
agentcore configure -e my_a2a_server.py --protocol A2A
```

- Select protocol as A2A
- Configure with OAuth configuration as setup in the previous step

Deploy to AWS

Deploy your agent:

```
agentcore launch
```

After deployment, you'll receive an agent runtime ARN that looks like:

```
arn:aws:bedrock-agentcore:us-west-2:accountId:runtime/my_a2a_server-xyz123
```

Step 4: Get the agent card

Agent Cards are JSON metadata documents that describe an A2A server's identity, capabilities, skills, service endpoint, and authentication requirements. They enable automatic agent discovery in the A2A ecosystem.

Set up environment variables

Set up environment variables

1. Export bearer token as an environment variable. For bearer token setup, see [Bearer token setup](#).

```
export BEARER_TOKEN=<BEARER_TOKEN>
```

2. Export the agent ARN.

```
export AGENT_ARN="arn:aws:bedrock-agentcore:us-west-2:accountId:runtimes/
my_a2a_server-xyz123"
```

Retrieve agent card

```
import os
import json
import requests
from uuid import uuid4
from urllib.parse import quote

def fetch_agent_card():
    # Get environment variables
    agent_arn = os.environ.get('AGENT_ARN')
    bearer_token = os.environ.get('BEARER_TOKEN')

    if not agent_arn:
        print("Error: AGENT_ARN environment variable not set")
        return

    if not bearer_token:
        print("Error: BEARER_TOKEN environment variable not set")
        return

    # URL encode the agent ARN
    escaped_agent_arn = quote(agent_arn, safe='')

    # Construct the URL
    url = f"https://bedrock-agentcore.us-west-2.amazonaws.com/runtimes/
{escaped_agent_arn}/invocations/.well-known/agent-card.json"

    # Generate a unique session ID
    session_id = str(uuid4())
    print(f"Generated session ID: {session_id}")

    # Set headers
    headers = {
```

```
'Accept': '*/*',
'Authorization': f'Bearer {bearer_token}',
'X-Amzn-Bedrock-AgentCore-Runtime-Session-Id': session_id
}

try:
    # Make the request
    response = requests.get(url, headers=headers)
    response.raise_for_status()

    # Parse and pretty print JSON
    agent_card = response.json()
    print(json.dumps(agent_card, indent=2))

    return agent_card

except requests.exceptions.RequestException as e:
    print(f"Error fetching agent card: {e}")
    return None

if __name__ == "__main__":
    fetch_agent_card()
```

After you get the URL from the Agent Card, export AGENTCORE_RUNTIME_URL as an environment variable:

```
export AGENTCORE_RUNTIME_URL="https://bedrock-agentcore.us-west-2.amazonaws.com/
runtimes/<ARN>/invocations/"
```

Step 5: Invoke your deployed A2A server

Create client code to invoke your deployed Amazon Bedrock AgentCore A2A server and send messages to test the functionality.

Create a new file my_a2a_client_remote.py to invoke your deployed A2A server:

```
import asyncio
import logging
import os
from uuid import uuid4

import httpx
```

```
from a2a.client import A2ACardResolver, ClientConfig, ClientFactory
from a2a.types import Message, Part, Role, TextPart

logging.basicConfig(level=logging.INFO)
logger = logging.getLogger(__name__)

DEFAULT_TIMEOUT = 300 # set request timeout to 5 minutes

def create_message(*, role: Role = Role.user, text: str) -> Message:
    return Message(
        kind="message",
        role=role,
        parts=[Part(TextPart(kind="text", text=text))],
        message_id=uuid4().hex,
    )

async def send_sync_message(message: str):
    # Get runtime URL from environment variable
    runtime_url = os.environ.get('AGENTCORE_RUNTIME_URL')

    # Generate a unique session ID
    session_id = str(uuid4())
    print(f"Generated session ID: {session_id}")

    # Add authentication headers for Amazon Bedrock AgentCore
    headers = {"Authorization": f"Bearer {os.environ.get('BEARER_TOKEN')}",
               'X-Amzn-Bedrock-AgentCore-Runtime-Session-Id': session_id}

    async with httpx.AsyncClient(timeout=DEFAULT_TIMEOUT, headers=headers) as httpx_client:
        # Get agent card from the runtime URL
        resolver = A2ACardResolver(httpx_client=httpx_client, base_url=runtime_url)
        agent_card = await resolver.get_agent_card()

        # Agent card contains the correct URL (same as runtime_url in this case)
        # No manual override needed - this is the path-based mounting pattern

        # Create client using factory
        config = ClientConfig(
            httpx_client=httpx_client,
            streaming=False, # Use non-streaming mode for sync response
        )
        factory = ClientFactory(config)
        client = factory.create(agent_card)
```

```
# Create and send message
msg = create_message(text=message)

# With streaming=False, this will yield exactly one result
async for event in client.send_message(msg):
    if isinstance(event, Message):
        logger.info(event.model_dump_json(exclude_none=True, indent=2))
        return event
    elif isinstance(event, tuple) and len(event) == 2:
        # (Task, UpdateEvent) tuple
        task, update_event = event
        logger.info(f"Task: {task.model_dump_json(exclude_none=True,
indent=2)}")
        if update_event:
            logger.info(f"Update:
{update_event.model_dump_json(exclude_none=True, indent=2)}")
            return task
    else:
        # Fallback for other response types
        logger.info(f"Response: {str(event)}")
        return event

# Usage - Uses AGENTCORE_RUNTIME_URL environment variable
asyncio.run(send_sync_message("what is 101 * 11"))
```

Appendix

Topics

- [Set up Cognito user pool for authentication](#)
- [Remote testing with A2A inspector](#)
- [Troubleshooting](#)

Set up Cognito user pool for authentication

For detailed Cognito setup instructions, see Set up [Cognito user pool for authentication](#) in the MCP documentation.

Remote testing with A2A inspector

See <https://github.com/a2aproject/a2a-inspector>.

Troubleshooting

Common A2A-specific issues

The following are common issues you might encounter:

Port conflicts

A2A servers must run on port 9000 in the AgentCore Runtime environment

JSON-RPC errors

Check that your client is sending properly formatted JSON-RPC 2.0 messages

Authorization method mismatch

Make sure your request uses the same authentication method (OAuth or SigV4) that the agent was configured with

Exception handling

A2A specifications for Error handling: <https://a2a-protocol.org/latest/specification/#81-standard-json-rpc-errors>

A2A servers return errors as standard JSON-RPC error responses with HTTP 200 status codes. Internal Runtime errors are automatically translated to JSON-RPC internal errors to maintain protocol compliance.

The service now provides proper A2A-compliant error responses with standardized JSON-RPC error codes:

JSON-RPC Error Codes

JSON-RPC Error Code	Runtime Exception	HTTP Error Code	JSON-RPC Error Message
N/A	AccessDeniedException	403	N/A

JSON-RPC Error Code	Runtime Exception	HTTP Error Code	JSON-RPC Error Message
-32501	ResourceNotFoundException	404	Resource not found – Requested resource does not exist
-32502	ValidationException	400	Validation error – Invalid request data
-32503	ThrottlingException	429	Rate limit exceeded – Too many requests
-32503	ServiceQuotaExceededException	429	Rate limit exceeded – Too many requests
-32504	ResourceConflictException	409	Resource conflict – Resource already exists
-32505	RuntimeClientError	424	Runtime client error – Check your CloudWatch logs for more information.

Use isolated sessions for agents

Amazon Bedrock AgentCore Runtime lets you isolate each user session and safely reuse context across multiple invocations in a user session. Session isolation is critical for AI agent workloads due to their unique operational characteristics:

- **Complete execution environment separation:** Each user session in AgentCore Runtime receives its own dedicated microVM with isolated Compute, memory, and filesystem resources. This prevents one user's agent from accessing another user's data. After session completion, the entire microVM is terminated and memory is sanitized to remove all session data, eliminating cross-session contamination risks.
- **Stateful reasoning processes:** Unlike stateless functions, AI agents maintain complex contextual state throughout their execution cycle, beyond simple message history for multi-turn conversations. AgentCore Runtime preserves this state securely within a session while ensuring complete isolation between different users, enabling personalized agent experiences without compromising data boundaries.

- **Privileged tool operations:** AI agents perform privileged operations on users' behalf through integrated tools accessing various resources. AgentCore Runtime's isolation model ensures these tool operations maintain proper security contexts and prevents credential sharing or permission escalation between different user sessions.
- **Deterministic security for non-deterministic processes:** AI agent behavior can be non-deterministic due to the probabilistic nature of foundation models. AgentCore Runtime provides consistent, deterministic isolation boundaries regardless of agent execution patterns, delivering the predictable security properties required for enterprise deployments.

Understanding ephemeral context

While AgentCore provides strong session isolation, these sessions are ephemeral in nature. Any data stored in memory or written to disk persists only for the session duration. This includes conversation history, user preferences, intermediate calculation results, and any other state information your agent maintains.

For data that needs to be retained beyond the session lifetime (such as user conversation history, learned preferences, or important insights), you should use AgentCore Memory. This service provides purpose-built persistent storage designed specifically for agent workloads, with both short-term and long-term memory capabilities.

Extended conversations and multi-step workflows

Unlike traditional serverless functions that terminate after each request, AgentCore supports ephemeral, isolated compute sessions lasting up to 8 hours. This simplifies building multi-step agentic workflows as you can make multiple calls to the same environment, with each invocation building upon the context established by previous interactions.

AgentCore Runtime session lifecycle

Session creation

A new session is created on the first invoke with a unique runtimeSessionId provided by your application. AgentCore Runtime provisions a dedicated execution environment (microVM) for each session. Context is preserved between invocations to the same session.

Session states

Sessions can be in one of the following states:

- **Active:** Either processing a sync request or doing background tasks. Sync invocation activity is automatically tracked based on invocations to a runtime session. Background tasks are communicated by the agent code by responding with "HealthyBusy" status in pings.
- **Idle:** When not processing any requests or background tasks. The session has completed processing but remains available for future invocations.
- **Terminated:** Execution environment provisioned for the session is terminated. This can be due to inactivity (of 15 minutes), reaching max duration (8 hours) or if it's deemed unhealthy based on health checks. Subsequent invokes to a terminated runtimeSessionId will provision a new execution environment.

How to use sessions

To use sessions effectively:

- Generate a unique session ID for each user or conversation with at least 33 characters
- Pass the same session ID for all related invocations
- Use different session IDs for different users or conversations

Example Using sessions for a conversation

```
# First message in a conversation

response1 = agent_core_client.InvokeAgentRuntime(
    agentRuntimeArn=agent_arn,
    runtimeSessionId="user-123456-conversation-12345678", # or uuid.uuid4()
    payload=json.dumps({"prompt": "Tell me about AWS"}).encode()
)

# Follow-up message in the same conversation reuses the runtimeSessionId.

response2 = agent_core_client.InvokeAgentRuntime(
    agentRuntimeArn=agent_arn,
    runtimeSessionId="user-123456-conversation-12345678", # or uuid.uuid4()
    payload=json.dumps({"prompt": "How does it compare to other cloud
providers"}).encode()
```

)

By using the same runtimeSessionId for related invocations, you ensure that context is maintained across the conversation, allowing your agent to provide coherent responses that build on previous interactions.

Configure Amazon Bedrock AgentCore lifecycle settings

The `LifecycleConfiguration` input parameter to [CreateAgentRuntime](#) lets you manage the lifecycle of runtime sessions and resources in Amazon Bedrock AgentCore Runtime. This configuration helps optimize resource utilization by automatically cleaning up idle sessions and preventing long-running instances from consuming resources indefinitely.

You can also configure lifecycle settings for an existing AgentCore Runtime with the [UpdateAgentRuntime](#) operation.

Topics

- [Configuration attributes](#)
- [Default behavior](#)
- [Create an AgentCore Runtime with lifecycle configuration](#)
- [Update the lifecycle configuration for an AgentCore Runtime](#)
- [Get the lifecycle configuration for an AgentCore Runtime](#)
- [Validation and constraints](#)
- [Best practices](#)

Configuration attributes

Lifecycle configuration attributes

Attribute	Type	Range (seconds)	Required	Description
idleRuntimeSessionTimeout	Integer	60-28800	No	Timeout in seconds for idle runtime sessions. When a session remains idle for this duration, it will trigger termination. Termination can last up

Attribute	Type	Range (seconds)	Required	Description
				to 15 seconds due to logging and other process completion. Default: 900 seconds (15 minutes)
maxLifetime	Integer	60-28800	No	Maximum lifetime for the instance in seconds. Once reached, instances will initialize termination. Termination can last up to 15 seconds due to logging and other process completion. Default: 28800 seconds (8 hours)

Constraints

- `idleRuntimeSessionTimeout` must be less than or equal to `maxLifetime`
- Both values are measured in seconds
- Valid range: 60 to 28800 seconds (up to 8 hours)

Default behavior

When `LifecycleConfiguration` is not provided or contains null values, the platform applies the following logic:

Default behavior logic

Customer Input	idleRuntimeSessionTimeout	maxLifetime	Result
No configuration	900 sec	28800s	Uses defaults: 900s and 28800s
Only <code>maxLifetime</code> provided	900 sec	Customer value	If <code>maxLifetime</code> ≤ 900s: uses <code>maxLifetime</code> for both If <code>maxLifetime</code> > 900s: uses 900s for <code>idle</code> , customer value for <code>max</code>

Customer Input	idleRuntimeSessionTimeout	maxLifetime	Result
Only idleTimeout provided	Customer value	28800s	Uses customer value for idle, 28800s for max
Both values provided	Customer value	Customer value	Uses customer values as-is

Default values

- **idleRuntimeSessionTimeout:** **900 seconds** (15 minutes)
- **maxLifetime:** **28800 seconds** (8 hours)

Create an AgentCore Runtime with lifecycle configuration

You can specify a lifecycle configuration when you create an AgentCore Runtime.

```
import boto3

client = boto3.client('bedrock-agentcore-control', region_name='us-west-2')

try:
    response = client.create_agent_runtime(
        agentRuntimeName='my_agent_runtime',
        agentRuntimeArtifact={
            'containerConfiguration': {
                'containerUri': '123456789012.dkr.ecr.us-west-2.amazonaws.com/my-
agent:latest'
            }
        },
        lifecycleConfiguration={
            'idleRuntimeSessionTimeout': 1800, # 30 minutes
            'maxLifetime': 14400 # 4 hours
        },
        networkConfiguration={'networkMode': 'PUBLIC'},
        roleArn='arn:aws:iam::123456789012:role/AgentRuntimeRole'
    )

    print(f"Agent runtime created: {response['agentRuntimeArn']}")

```

```
except client.exceptions.ValidationException as e:  
    print(f"Validation error: {e}")  
except Exception as e:  
    print(f"Error creating agent runtime: {e}")
```

Update the lifecycle configuration for an AgentCore Runtime

You can update lifecycle configuration for an existing AgentCore Runtime.

```
import boto3  
  
client = boto3.client('bedrock-agentcore-control', region_name='us-west-2')  
  
agent_runtime_id = 'my_agent_runtime'  
  
try:  
    response = client.update_agent_runtime(  
        agentRuntimeId=agent_runtime_id,  
        agentRuntimeArtifact={  
            'containerConfiguration': {  
                'containerUri': '123456789012.dkr.ecr.us-west-2.amazonaws.com/my-  
agent:latest'  
            }  
        },  
        networkConfiguration={'networkMode': 'PUBLIC'},  
        roleArn='arn:aws:iam::123456789012:role/AgentRuntimeRole',  
        lifecycleConfiguration={  
            'idleRuntimeSessionTimeout': 600,    # 10 minutes  
            'maxLifetime': 7200                 # 2 hours  
        }  
    )  
  
    print("Lifecycle configuration updated successfully")  
except client.exceptions.ValidationException as e:  
    print(f"Validation error: {e}")  
except client.exceptions.ResourceNotFoundException:  
    print("Agent runtime not found")  
except Exception as e:  
    print(f"Error updating configuration: {e}")
```

Get the lifecycle configuration for an AgentCore Runtime

You can get lifecycle configuration for an existing AgentCore Runtime.

```
import boto3

client = boto3.client('bedrock-agentcore-control', region_name='us-west-2')

def get_lifecycle_config():
    try:
        response = client.get_agent_runtime(agentRuntimeId="my_agent_runtime")

        lifecycle_config = response.get('lifecycleConfiguration', {})
        idle_timeout = lifecycle_config.get('idleRuntimeSessionTimeout', 900)
        max_lifetime = lifecycle_config.get('maxLifetime', 28800)

        print(f"Current configuration:")
        print(f"  Idle timeout: {idle_timeout}s ({idle_timeout//60} minutes)")
        print(f"  Max lifetime: {max_lifetime}s ({max_lifetime//3600} hours)")

        return lifecycle_config

    except Exception as e:
        print(f"Error retrieving configuration: {e}")
        return None

# Usage
config = get_lifecycle_config()
print(config)
```

Validation and constraints

The lifecycle configuration includes validation rules and constraints to prevent invalid configurations.

Common validation errors

```
import boto3

client = boto3.client('bedrock-agentcore-control', region_name='us-west-2')

try:
    client.create_agent_runtime(
        agentRuntimeName='invalid_config_agent',
        agentRuntimeArtifact={
            'containerConfiguration': {
```

```
'containerUri': '123456789012.dkr.ecr.us-west-2.amazonaws.com/my-
agent:latest'
    }
},
lifecycleConfiguration={
    'idleRuntimeSessionTimeout': 3600, # 1 hour
    'maxLifetime': 1800 # 30 minutes - INVALID!
},
networkConfiguration={'networkMode': 'PUBLIC'},
roleArn='arn:aws:iam::123456789012:role/AgentRuntimeRole'
)
except client.exceptions.ValidationException as e:
    print(f"Validation failed: {e}")
# Output: idleRuntimeSessionTimeout must be less than or equal to maxLifetime
```

Validation helper function

```
def validate_lifecycle_config(idle_timeout, max_lifetime):
    """Validate lifecycle configuration before API call"""
    errors = []

    # Check range constraints
    if not (1 <= idle_timeout <= 28800):
        errors.append(f"idleRuntimeSessionTimeout must be between 1 and 28800 seconds")

    if not (1 <= max_lifetime <= 28800):
        errors.append(f"maxLifetime must be between 1 and 28800 seconds")

    # Check relationship constraint
    if idle_timeout > max_lifetime:
        errors.append(f"idleRuntimeSessionTimeout ({idle_timeout}s) must be ≤
maxLifetime ({max_lifetime}s)")

    return errors

# Usage
errors = validate_lifecycle_config(3600, 1800)
if errors:
    for error in errors:
        print(f"Validation error: {error}")
else:
    print("Configuration is valid")
```

Best practices

Follow these best practices when configuring lifecycle settings for optimal resource utilization and user experience.

Recommendations

- **Start with defaults** (900s idle, 28800s max) and adjust based on usage patterns
- **Monitor session duration** to optimize timeout values
- **Use shorter timeouts** for development environments to save costs
- **Consider user experience** - too short timeouts may interrupt active users
- **Test configuration changes** in non-production environments first
- **Document timeout rationale** for your specific use case

Common patterns

Common configuration patterns

Use Case	Idle Timeout	Max Lifetime	Rationale
Interactive Chat	10-15 minutes	2-4 hours	Balance responsiveness with resource usage
Batch Processing	30 minutes	8 hours	Allow for long-running operations
Development	5 minutes	30 minutes	Quick cleanup for cost optimization
Production API	15 minutes	4 hours	Standard production workload
Demo/Testing	2 minutes	15 minutes	Aggressive cleanup for temporary usage

Stop a running session

The `StopRuntimeSession` operation lets you immediately terminate active agent AgentCore Runtime sessions for proper resource cleanup and session lifecycle management.

When called, this operation instantly terminates the specified session and stops any ongoing streaming responses. This lets system resources be properly released and prevents accumulation of orphaned sessions.

Use `StopRuntimeSession` in these scenarios:

- **User-initiated end:** When users explicitly conclude their conversation
- **Application shutdown:** Proactive cleanup before application termination
- **Error handling:** Force termination of unresponsive or stalled sessions
- **Quota management:** Stay within session limits by closing unused sessions
- **Timeout handling:** Clean up sessions that exceed expected duration

Prerequisites

To use [StopRuntimeSession](#), you need:

- `bedrock-agentcore:StopRuntimeSession` IAM permission
- Valid agent AgentCore Runtime ARN
- The ID of an active session to terminate

AWS SDK

You can use the AWS SDK to stop AgentCore Runtime sessions programmatically.

Python example using `boto3` to stop a AgentCore Runtime session.

```
import boto3

# Initialize the AgentCore client
client = boto3.client('bedrock-agentcore', region_name='us-west-2')

try:
    # Stop the runtime session
    response = client.stop_runtime_session(
        agentRuntimeArn='arn:aws:bedrock-agentcore:us-west-2:123456789012:runtime/
my-agent',
        runtimeSessionId='your-session-id',
        qualifier='DEFAULT'  # Optional: endpoint name
```

```
)  
  
    print(f"Session terminated successfully")  
    print(f"Request ID: {response['ResponseMetadata']['RequestId']}")  
  
except client.exceptions.ResourceNotFoundException:  
    print("Session not found or already terminated")  
except client.exceptions.AccessDeniedException:  
    print("Insufficient permissions to stop session")  
except Exception as e:  
    print(f"Error stopping session: {str(e)}")
```

HTTPS request

For applications using OAuth authentication, make direct HTTPS requests:

```
import requests  
import urllib.parse  
  
def stop_session_with_oauth(agent_arn, session_id, bearer_token,  
qualifier="DEFAULT"):  
    # URL encode the agent ARN  
    encoded_arn = agent_arn.replace(':', '%3A').replace('/', '%2F')  
  
    # Construct the endpoint URL  
    url = f"https://bedrock-agentcore.us-west-2.amazonaws.com/runtimes/  
{encoded_arn}/stopruntimesession?qualifier={qualifier}"  
  
    headers = {  
        "Authorization": f"Bearer {bearer_token}",  
        "Content-Type": "application/json",  
        "X-Amzn-Bedrock-AgentCore-Runtime-Session-Id": session_id  
    }  
  
    try:  
        response = requests.post(url, headers=headers)  
        response.raise_for_status()  
  
        print(f"Session {session_id} terminated successfully")  
        return response.json()  
  
    except requests.exceptions.HTTPError as e:
```

```
if e.response.status_code == 404:
    print("Session not found or already terminated")
elif e.response.status_code == 403:
    print("Insufficient permissions or invalid token")
else:
    print(f"HTTP error: {e.response.status_code}")
raise
except requests.exceptions.RequestException as e:
    print(f"Request failed: {str(e)}")
raise

# Usage
stop_session_with_oauth(
    agent_arn="arn:aws:bedrock-agentcore:us-west-2:123456789012:runtime/my-agent",
    session_id="your-session-id",
    bearer_token="your-oauth-token"
)
```

Response format

Expected response format for successful StopRuntimeSession operations.

```
{
  "ResponseMetadata": {
    "RequestId": "12345678-1234-1234-1234-123456789012",
    "HTTPStatusCode": 200
  }
}
```

Error handling

Common error responses:

Error responses

Status Code	Error	Description
404	ResourceNotFoundException	Session not found or already terminated

Status Code	Error	Description
403	AccessDeniedException	Insufficient permissions
400	ValidationException	Invalid parameters
500	InternalServerException	Service error

Best practices

Session lifecycle management

```
class SessionManager:
    def __init__(self, client, agent_arn):
        self.client = client
        self.agent_arn = agent_arn
        self.active_sessions = set()

    def invoke_agent(self, session_id, payload):
        """Invoke agent and track session"""
        try:
            response = self.client.invoke_agent_runtime(
                agentRuntimeArn=self.agent_arn,
                runtimeSessionId=session_id,
                payload=payload
            )
            self.active_sessions.add(session_id)
            return response
        except Exception as e:
            print(f"Failed to invoke agent: {e}")
            raise

    def stop_session(self, session_id):
        """Stop session and remove from tracking"""
        try:
            self.client.stop_runtime_session(
                agentRuntimeArn=self.agent_arn,
                runtimeSessionId=session_id,
                qualifier=endpoint_name
            )
            self.active_sessions.discard(session_id)
```

```
        print(f"Session {session_id} stopped")
    except Exception as e:
        print(f"Failed to stop session {session_id}: {e}")

def cleanup_all_sessions(self):
    """Stop all tracked sessions"""
    for session_id in list(self.active_sessions):
        self.stop_session(session_id)
```

Recommendations

- **Always handle exceptions** when stopping sessions
- **Track active sessions** in your application for cleanup
- **Set timeouts** for stop requests to avoid hanging
- **Log session terminations** for debugging and monitoring
- **Use session managers** for complex applications with multiple sessions

Handle asynchronous and long running agents with Amazon Bedrock AgentCore Runtime

Amazon Bedrock AgentCore Runtime can handle asynchronous processing and long running agents. Asynchronous tasks allow your agent to continue processing after responding to the client and handle long-running operations without blocking responses. With async processing, your agent can:

- Start a task that might take minutes or hours
- Immediately respond to the user saying "I've started working on this"
- Continue processing in the background
- Allow the user to check back later for results

Key concepts

Asynchronous processing model

The Amazon Bedrock AgentCore SDK supports both synchronous and asynchronous processing through a unified API. This creates a flexible implementation pattern for both clients and agent developers. Agent clients can work with the same API without differentiating between synchronous and asynchronous on the client side. With the ability to invoke the same session across invocations, agent developers can reuse context and build upon this context incrementally without implementing complex task management logic.

Runtime session lifecycle management

Agent code communicates its processing status using the "/ping" health status. "HealthyBusy" indicates the agent is busy processing background tasks, while "Healthy" indicates it is idle (waiting for requests). A session in idle state for 15 minutes gets automatically terminated.

Implementing asynchronous tasks

To get started, install the bedrock-agentcore package:

```
pip install bedrock-agentcore
```

API based task management

To build interactive agents that perform asynchronous tasks, you need to call `add_async_task` when starting a task and `complete_async_task` when the task completes. The SDK handles task tracking and manages Ping status automatically.

```
# Start tracking a task manually
task_id = app.add_async_task("data_processing")

# Do work...

# Mark task as complete
app.complete_async_task(task_id)
```

Asynchronous task decorator

The Amazon Bedrock AgentCore SDK helps with tracking asynchronous tasks. You can get started by simply annotating your asynchronous functions with `@app.async_task`.

```
# Automatically track asynchronous functions:  
@app.async_task  
async def background_work():  
    await asyncio.sleep(10) # Status becomes "HealthyBusy"  
    return "done"  
  
@app.entrypoint  
async def handler(event):  
    asyncio.create_task(background_work())  
    return {"status": "started"}
```

Here is how it works:

- The `@app.async_task` decorator tracks function execution
- When the function runs, ping status changes to "HealthyBusy"
- When the function completes, status returns to "Healthy"

Custom ping handler

You can implement your own custom ping handler to manage the Runtime Session's state. Your agent's health is reported through the `/ping` endpoint:

```
@app.ping  
def custom_status():  
    if system_busy():  
        return PingStatus.HEALTHY_BUSY  
    return PingStatus.HEALTHY
```

Status values:

- "Healthy": Ready for new work
- "HealthyBusy": Processing background task

Complete example

First, install the required package:

```
pip install strands-agents
```

Then, create a Python file with the following code:

```
import threading
import time
from strands import Agent, tool
from bedrock_agentcore.runtime import BedrockAgentCoreApp

# Initialize app with debug mode for task management
app = BedrockAgentCoreApp()

@tool
def start_background_task(duration: int = 5) -> str:
    """Start a simple background task that runs for specified duration."""
    # Start tracking the async task
    task_id = app.add_async_task("background_processing", {"duration": duration})

    # Run task in background thread
    def background_work():
        time.sleep(duration) # Simulate work
        app.complete_async_task(task_id) # Mark as complete

    threading.Thread(target=background_work, daemon=True).start()
    return f"Started background task (ID: {task_id}) for {duration} seconds. Agent status is now BUSY."

# Create agent with the tool
agent = Agent(tools=[start_background_task])

@app.entrypoint
def main(payload):
    """Main entrypoint - handles user messages."""
    user_message = payload.get("prompt", "Try: start_background_task(3)")
    return {"message": agent(user_message).message}

if __name__ == "__main__":
    print("# Simple Async Strands Example")
```

```
print("Test: curl -X POST http://localhost:8080/invocations -H 'Content-Type: application/json' -d '{\"prompt\": \"start a 3 second task\"}'")
app.run()
```

This example demonstrates:

- Creating a background task that runs asynchronously
- Tracking the task's status with `add_async_task` and `complete_async_task`
- Responding immediately to the user while processing continues
- Managing the agent's health status automatically

Stream agent responses

The following Strands Agents example shows how an AgentCore Runtime agent can stream a response back to a client.

```
from strands import Agent
from bedrock_agentcore import BedrockAgentCoreApp

app = BedrockAgentCoreApp()
agent = Agent()

@app.entrypoint
async def agent_invocation(payload):
    """Handler for agent invocation"""
    user_message = payload.get(
        "prompt", "No prompt found in input, please guide customer to create a json payload with prompt key"
    )
    stream = agent.stream_async(user_message)
    async for event in stream:
        print(event)
        yield (event)

if __name__ == "__main__":
    app.run()
```

Pass custom headers to Amazon Bedrock AgentCore Runtime

Custom headers let you pass contextual information from your application directly to your agent code without cluttering the main request payload. This includes authentication tokens like JWT (JSON Web Tokens, which contain user identity and authorization claims) through the Authorization header, allowing your agent to make decisions based on who is calling it. You can also pass custom metadata like user preferences, session identifiers, or trace context using headers prefixed with X-Amzn-Bedrock-AgentCore-Runtime-Custom-, giving your agent access to up to 20 pieces of runtime context that travel alongside each request. This information can be also used in downstream systems like AgentCore Memory that you can namespace based on those characteristics like user_id or aud in claims like line of business.

Amazon Bedrock AgentCore Runtime lets you pass headers in a request to your agent code provided the headers match the following criteria:

- Header name is one of the following:
 - Starts with X-Amzn-Bedrock-AgentCore-Runtime-Custom-
 - Equal to Authorization. This is reserved for agents with OAuth inbound access to pass in the incoming JWT token to the agent code.
- Header value is not greater than 4KB in size.
- Up to 20 headers can be configured per runtime.

Topics

- [Step 1: Create your agent](#)
- [Step 2: Deploy your agent](#)
- [Step 3: Invoke your agent with custom headers](#)
- [Step 4: \(Optional\) Pass the JWT token used for OAuth based inbound access to your agent](#)

Step 1: Create your agent

Start by creating a basic agent with the following project structure:

```
your_project_directory/  
### agent_example.py # Your main agent code
```

```
### requirements.txt # Dependencies for your agent
```

Create the following files:

agent_example.py

Create your main agent code file and add the following code:

```
import json
from bedrock_agentcore import BedrockAgentCoreApp, RequestContext
from strands import Agent

app = BedrockAgentCoreApp()
agent = Agent()

@app.entrypoint
def agent_invocation(payload, context: RequestContext):
    """Handler for agent invocation"""
    user_message = payload.get(
        "prompt", "No prompt found in input, please guide customer to create a json
payload with prompt key"
    )
    app.logger.info("invoking agent with user message: %s", payload)
    response = agent(user_message)

    # access request headers here
    request_headers = context.request_headers
    app.logger.info("Headers: %s", json.dumps(request_headers))
    return response

app.run()
```

requirements.txt

Create your dependencies file and add the following dependencies:

```
strands-agents
bedrock-agentcore
```

Step 2: Deploy your agent

Configure your agent with the starter toolkit:

```
agentcore configure --entrypoint agent_example.py \  
--name hello_agent \  
--execution-role your-execution-role-arn \  
--disable-otel \  
--requirements-file requirements.txt \  
--request-header-allowlist "X-Amzn-Bedrock-AgentCore-Runtime-Custom-H1"
```

Deploy your agent with the starter toolkit:

```
agentcore launch
```

Note the agent runtime ARN from the output. you need it in the next step.

Step 3: Invoke your agent with custom headers

Starter toolkit

Use the Amazon Bedrock AgentCore starter toolkit command line interface to invoke your agent with custom headers.

```
agentcore invoke '{"prompt": "Hello what is 1+1?"}' --headers "X-Amzn-Bedrock-  
AgentCore-Runtime-Custom-H1:test header"
```

Python

Use boto3 with event handlers to add custom headers to your agent invocation.

For more details on botocore events, see [botocore events documentation](#).

```
import json  
import boto3
```

```
agent_arn = YOUR_AGENT_ARN_HERE
prompt = "Tell me a joke"

agent_core_client = boto3.client('bedrock-agentcore')
event_system = agent_core_client.meta.events

# Constants for event handler configuration
EVENT_NAME = 'before-sign.bedrock-agentcore.InvokeAgentRuntime'
CUSTOM_HEADER_NAME = 'X-Amzn-Bedrock-AgentCore-Runtime-Custom-H1'
CUSTOM_HEADER_VALUE = 'test header1'

def add_custom_runtime_header(request, **kwargs):
    """Add custom header for agent runtime authentication/identification."""
    request.headers.add_header(CUSTOM_HEADER_NAME, CUSTOM_HEADER_VALUE)

handler = event_system.register_first(EVENT_NAME, add_custom_runtime_header)

payload = json.dumps({"prompt": prompt}).encode()
response = agent_core_client.invoke_agent_runtime(
    agentRuntimeArn=agent_arn,
    payload=payload
)

event_system.unregister(EVENT_NAME, handler)

content = []
for chunk in response.get("response", []):
    content.append(chunk.decode('utf-8'))
print(json.loads(''.join(content)))
```

Step 4: (Optional) Pass the JWT token used for OAuth based inbound access to your agent

For information about setting up an agent with OAuth inbound access and enabling an Authorization header to be passed into AgentCore Runtime, see [Authenticate and authorize with Inbound Auth and Outbound Auth](#).

Authenticate and authorize with Inbound Auth and Outbound Auth

This section shows you how to implement authentication and authorization for your agent runtime using OAuth and JWT bearer tokens with [AgentCore Identity](#). You'll learn how to set up Cognito user pools, configure your agent runtime for JWT authentication (Inbound Auth), and implement OAuth-based access to third-party resources (outbound Auth).

For a complete example, see <https://github.com/awslabs/amazon-bedrock-agentcore-samples/>.

For information about using OAuth to with an MCP server, see [Deploy MCP servers in AgentCore Runtime](#).

Amazon Bedrock AgentCore runtime provides two authentication mechanisms for hosted agents:

IAM SigV4 Authentication

The default authentication and authorization mechanism that works automatically without additional configuration, similar to other AWS APIs.

X-Amzn-Bedrock-AgentCore-Runtime-User-Id Header

If your solution requires the hosted agent to retrieve OAuth tokens on behalf of end users (using Authorization Code Grant), you can specify the user identifier by including the X-Amzn-Bedrock-AgentCore-Runtime-User-Id header in your requests.

Note

Invoking `InvokeAgentRuntime` with the `X-Amzn-Bedrock-AgentCore-Runtime-User-Id` header will require a new IAM action: `bedrock-agentcore:InvokeAgentRuntimeForUser`, in addition to the existing `bedrock-agentcore:InvokeAgentRuntime` action.

Security Best Practices for X-Amzn-Bedrock-AgentCore-Runtime-User-Id Header

While IAM authentication secures the API access, the `X-Amzn-Bedrock-AgentCore-Runtime-User-Id` header requires additional security considerations. Only trusted principals

with the `bedrock-agentcore:InvokeAgentRuntimeForUser` permission should be allowed to set this header. The `user-id` value should ideally be derived from the authenticated principal's context (for example, IAM context or user token) rather than accepting arbitrary values. This prevents scenarios where an authenticated user could potentially impersonate another user by manually specifying a different `user-id`.

Implement audit logging to track the relationship between the authenticated principal and the `user-id` being passed.

Remember that Amazon Bedrock AgentCore treats this header value as an opaque identifier and relies on your application's logic to maintain the security boundary between authenticated users and their corresponding `user-id` values.

JWT Bearer Token Authentication

You can configure your agent runtime to accept JWT bearer tokens by providing authorizer configuration during agent creation.

This configuration requires:

- Discovery URL - A string that must match the pattern `^ .+/\$.well-known/openid-configuration$` for OpenID Connect discovery URLs
- Allowed audiences - A list of permitted audiences that will be validated against the `aud` claim in the JWT token
- Allowed clients - A list of permitted client identifiers that will be validated against the `client_id` claim in the JWT token

Note

A runtime can only support either IAM SigV4 or JWT Bearer Token based inbound auth.

You can always create custom endpoints for your runtime and configure them for different inbound authorization types.

When you create a runtime with Amazon Bedrock AgentCore, a Workload Identity is created automatically for your runtime with AgentCore Identity service.

Topics

- [JWT inbound authorization and OAuth outbound access sample](#)

- [Prerequisites](#)
- [Step 1: Prepare your agent](#)
- [Step 2: Set up AWS Cognito user pool and add a user](#)
- [Step 3: Deploy your agent](#)
- [Step 4: Use bearer token to invoke your agent](#)
- [Step 5: Set up your agent to access tools using OAuth](#)
- [Step 6: \(Optional\) Propagate a JWT token to AgentCore Runtime](#)
- [Troubleshooting](#)

JWT inbound authorization and OAuth outbound access sample

This guide walks you through the process of setting up your agent runtime to be invoked with an OAuth compliant access token using JWT format. The sample agent will be authorized using AWS Cognito access tokens. Later, you'll also learn how the agent code can fetch Google tokens on behalf of the user to check Google Drive and fetch contents.

What you'll learn

In this guide, you'll learn how to:

- Set up Cognito user pool, add a user, and get a bearer token for the user
- Set up your agent runtime to use the Cognito user pool for authorization
- Set up your agent code to fetch OAuth tokens on behalf of the user to call tools

Prerequisites

Before you begin, make sure you have:

- An AWS account with appropriate permissions
- Basic understanding of Python programming
- Familiarity with Docker containers (for advanced deployment)
- Set up a basic agent with runtime successfully
- Basic understanding of OAuth authorization, mainly JWT bearer tokens, claims, and the various grant flows

Step 1: Prepare your agent

Start by creating a basic agent with the following structure:

```
## Project Folder Structure

your_project_directory/
### agent_example.py # Your main agent code
### requirements.txt # Dependencies for your agent
### __init__.py # Makes the directory a Python package
```

Create the following files with their respective contents:

agent_example.py

This is your main agent code:

```
from strands import Agent
from bedrock_agentcore.runtime import BedrockAgentCoreApp

agent = Agent()
app = BedrockAgentCoreApp()

@app.entrypoint
def invoke(payload):
    """Process user input and return a response"""
    user_message = payload.get("prompt", "Hello")
    response = agent(user_message)
    return str(response) # response should be json serializable

if __name__ == "__main__":
    app.run()
```

requirements.txt

This file lists the dependencies for your agent:

```
strands-agents
bedrock-agentcore
```

Step 2: Set up AWS Cognito user pool and add a user

To set up a Cognito user pool and create a user, you'll use a shell script that automates the process.

For more information, see [Step 2: Set up an OAuth 2.0 Credential Provider](#).

To set up Cognito user pool and create a user

1. Create a file named `setup_cognito.sh` with the following content:

Change `TEMP_PASSWORD` and `PERMANENT_PASSWORD` to secure passwords of your choosing.

```
#!/bin/bash

# Create User Pool and capture Pool ID directly
export POOL_ID=$(aws cognito-idp create-user-pool \
    --pool-name "MyUserPool" \
    --policies '{"PasswordPolicy":{"MinimumLength":8}}' \
    --region us-east-1 | jq -r '.UserPool.Id')

# Create App Client and capture Client ID directly
export CLIENT_ID=$(aws cognito-idp create-user-pool-client \
    --user-pool-id $POOL_ID \
    --client-name "MyClient" \
    --no-generate-secret \
    --explicit-auth-flows "ALLOW_USER_PASSWORD_AUTH" "ALLOW_REFRESH_TOKEN_AUTH" \
    --region us-east-1 | jq -r '.UserPoolClient.ClientId')

# Create User
aws cognito-idp admin-create-user \
    --user-pool-id $POOL_ID \
    --username "testuser" \
    --temporary-password "$TEMP_PASSWORD" \
    --region us-east-1 \
    --message-action SUPPRESS > /dev/null

# Set Permanent Password
aws cognito-idp admin-set-user-password \
    --user-pool-id $POOL_ID \
    --username "testuser" \
    --password "$PERMANENT_PASSWORD" \
    --region us-east-1 \
    --permanent > /dev/null
```

```
# Authenticate User and capture Access Token
export BEARER_TOKEN=$(aws cognito-idp initiate-auth \
    --client-id "$CLIENT_ID" \
    --auth-flow USER_PASSWORD_AUTH \
    --auth-parameters USERNAME='testuser',PASSWORD='PERMANENT_PASSWORD' \
    --region us-east-1 | jq -r '.AuthenticationResult.AccessToken')

# Output the required values
echo "Pool id: $POOL_ID"
echo "Discovery URL: https://cognito-idp.us-east-1.amazonaws.com/$POOL_ID/.well-known/openid-configuration"
echo "Client ID: $CLIENT_ID"
echo "Bearer Token: $BEARER_TOKEN"
```

2. Run the script to create the Cognito resources:

```
source setup_cognito.sh
```

3. Note the output values, which will look similar to:

```
Pool id: us-east-1_poolid
Discovery URL: https://cognito-idp.us-east-1.amazonaws.com/us-east-1_userpoolid/.well-known/openid-configuration
Client ID: clientid
Bearer Token: bearertoken
```

You'll need these values in the next steps.

This script creates a Cognito user pool, a user pool client, adds a user, and generates a bearer token for the user. The token is valid for 60 minutes by default.

Step 3: Deploy your agent

⚠ Service-Linked Role Change - Effective October 13, 2025

Starting **October 13, 2025**, Amazon Bedrock AgentCore uses a Service-Linked Role (SLR) for workload identity permissions instead of requiring manual IAM policy configuration for new agents.

The Service-Linked Role details:

- **Name:** AWSServiceRoleForBedrockAgentCoreRuntimeIdentity
- **Service Principal:** runtime-identity.bedrock-agentcore.amazonaws.com
- **Purpose:** Manages workload identity access tokens and OAuth credentials

Ensure the role you use to invoke AgentCore Control APIs has permission to create the Service-Linked Role:

```
{  
    "Sid": "CreateBedrockAgentCoreIdentityServiceLinkedRolePermissions",  
    "Effect": "Allow",  
    "Action": "iam:CreateServiceLinkedRole",  
    "Resource": "arn:aws:iam::*:role/aws-service-role/runtime-identity.bedrock-  
agentcore.amazonaws.com/AWSServiceRoleForBedrockAgentCoreRuntimeIdentity",  
    "Condition": {  
        "StringEquals": {  
            "iam:AWSServiceName": "runtime-identity.bedrock-  
agentcore.amazonaws.com"  
        }  
    }  
}
```

Benefit: The Service-Linked Role automatically provides the necessary permissions for workload identity access without requiring manual policy configuration.

For detailed information about the service-linked role, see [Identity service-linked role](#).

Now you'll deploy your agent with JWT authorization using the Cognito user pool you created. You will need to create an agent with authorizer configuration. The following table represents the various authorizer configuration parameters and how we use them to validate the incoming token.

authorizer_configuration	claim in decoded token	Notes
discovery url → issuer	iss	The discovery url should point to an issuer url. This should match the iss claim in the decoded token.

authorizer_configuration	claim in decoded token	Notes
allowedClients	client_id	client_id in the token should match one of the allowed clients specified in the authorizer
allowedAudience	aud	One of the values in aud claim from the token should match one of the allowed audience specified in the authorizer

If both client_id and aud is provided, the agent runtime authorizer will verify both.

Starter toolkit

To configure and deploy your agent

- Configure your agent runtime with the following command, replacing the placeholder values with your actual values:

```
agentcore configure --entrypoint agent_example.py \
--name hello_agent \
--execution-role your-execution-role-arn \
--disable-otel \
--requirements-file requirements.txt \
--authorizer-config "{\"customJWTAuthorizer\":{\"discoveryUrl\":\"$DISCOVERY_URL\",
\"allowedClients\":[\"$CLIENT_ID\"]}}"
```

Replace \$DISCOVERY_URL with the Discovery URL from Step 2, and \$CLIENT_ID with the Client ID from Step 2.

- Deploy your agent:

```
agentcore launch
```

- Note the agent runtime ARN from the output. You'll need this in the next step.

Tip

You can also run the configure command with just the entry point file for a fully interactive experience:

```
agentcore configure --entrypoint agent_example.py
```

Python

```
import boto3

# Create the client
client = boto3.client('bedrock-agentcore-control', region_name="us-east-1")

# Call the CreateAgentRuntime operation
response = client.create_agent_runtime(
    agentRuntimeName='hello_agent',
    agentRuntimeArtifact={
        'containerConfiguration': {
            'containerUri': '111122223333.dkr.ecr.us-east-1.amazonaws.com/my-
agent:latest'
        }
    },
    authorizerConfiguration={
        "customJWTAuthorizer": {
            "discoveryUrl": 'COGNITO_DISCOVERY_URL',
            "allowedClients": ['COGNITO_CLIENT_ID']
        }
    },
    networkConfiguration={"networkMode":"PUBLIC"},
    roleArn='arn:aws:iam::111122223333:role/AgentRuntimeRole'
)
```

Step 4: Use bearer token to invoke your agent

Now that your agent is deployed with JWT authorization, you can invoke it using the bearer token.

⚠️ Legacy Agent Permissions

Important for existing users: Agents created **before October 13, 2025** will continue to use the agent execution role for identity permissions and require the above policy to be attached to the agent's execution role.

New agents: For agents created **on or after October 13, 2025**, this policy is **not required** as permissions are handled automatically by the Service-Linked Role.

```
{  
    "Sid": "GetAgentAccessToken",  
    "Effect": "Allow",  
    "Action": [  
        "bedrock-agentcore:GetWorkloadAccessToken",  
        "bedrock-agentcore:GetWorkloadAccessTokenForJWT",  
        "bedrock-agentcore:GetWorkloadAccessTokenForUserId"  
    ],  
    # point to the workload identity for the runtime; the workload identity can  
    be found in  
    # the GetAgentRuntime response and has your agent name in it.  
    "Resource": [  
        "arn:aws:bedrock-agentcore:region:account-id:workload-identity-  
        directory/default",  
        "arn:aws:bedrock-agentcore:region:account-id:workload-identity-  
        directory/default/workload-identity/agentname-*"  
    ]  
}
```

Invoke the agent

Fetch a bearer token for the user you created with Amazon Cognito.

```
# use the password and other details used when you created the cognito user  
export TOKEN=$(aws cognito-idp initiate-auth \  
--client-id "$CLIENT_ID" \  
--auth-flow USER_PASSWORD_AUTH \  
--auth-parameters USERNAME='testuser',PASSWORD='PASSWORD' \  
--region us-east-1 | jq -r '.AuthenticationResult.AccessToken')
```

Proceed to invoke the agent with the rest of the following instructions.

Invoke the agent with OAuth.

Use cURL

```
// Invoke with OAuth token
export PAYLOAD='{"prompt": "hello what is 1+1?"}'
export BEDROCK_AGENT_CORE_ENDPOINT_URL="https://bedrock-agentcore.us-east-1.amazonaws.com"
curl -v -X POST "${BEDROCK_AGENT_CORE_ENDPOINT_URL}/runtimes/${ESCAPED_AGENT_ARN}/invocations?qualifier=DEFAULT" \
-H "Authorization: Bearer ${TOKEN}" \
-H "X-Amzn-Trace-Id: your-trace-id" \
-H "Content-Type: application/json" \
-H "X-Amzn-Bedrock-AgentCore-Runtime-Session-Id: your-session-id" \
-d ${PAYLOAD}
```

Use Python

Since boto3 doesn't support invocation with bearer tokens, you'll need to use an HTTP client like the requests library in Python.

To invoke your agent with a bearer token

1. Create a Python script named `invoke_agent.py` with the following content:

```
import requests
import urllib.parse
import json
import os

# Configuration Constants
REGION_NAME = "AWS_REGION"

# === Agent Invocation Demo ===
invoke_agent_arn = "YOUR_AGENT_ARN_HERE"
auth_token = os.environ.get('TOKEN')
print(f"Using Agent ARN from environment: {invoke_agent_arn}")

# URL encode the agent ARN
escaped_agent_arn = urllib.parse.quote(invoke_agent_arn, safe='')

# Construct the URL
```

```
url = f"https://bedrock-agentcore.{REGION_NAME}.amazonaws.com/runtimes/{escaped_agent_arn}/invocations?qualifier=DEFAULT"

# Set up headers
headers = {
    "Authorization": f"Bearer {auth_token}",
    "X-Amzn-Trace-Id": "your-trace-id",
    "Content-Type": "application/json",
    "X-Amzn-Bedrock-AgentCore-Runtime-Session-Id": "testsession123"
}

# Enable verbose logging for requests
import logging
logging.basicConfig(level=logging.DEBUG)
logging.getLogger("urllib3.connectionpool").setLevel(logging.DEBUG)

invoke_response = requests.post(
    url,
    headers=headers,
    data=json.dumps({"prompt": "Hello what is 1+1?"})
)

# Print response in a safe manner
print(f"Status Code: {invoke_response.status_code}")
print(f"Response Headers: {dict(invoke_response.headers)}")

# Handle response based on status code
if invoke_response.status_code == 200:
    response_data = invoke_response.json()
    print("Response JSON:")
    print(json.dumps(response_data, indent=2))
elif invoke_response.status_code >= 400:
    print(f"Error Response ({invoke_response.status_code}):")
    error_data = invoke_response.json()
    print(json.dumps(error_data, indent=2))

else:
    print(f"Unexpected status code: {invoke_response.status_code}")
    print("Response text:")
    print(invoke_response.text[:500])
```

2. Replace **AWS_REGION** with the AWS Region that you are using. from Step 3.
3. Replace **YOUR_AGENT_ARN_HERE** with your actual agent runtime ARN from Step 3.

4. Run the script:

```
python invoke_agent.py
```

Use starter toolkit

Replace **ADD_TOKEN_HERE** with your bearer token.

```
agentcore invoke '{"prompt": "Hello what is 1+1?"}' --bearer-token ADD_TOKEN_HERE
```

Step 5: Set up your agent to access tools using OAuth

In this section, you'll learn how to connect your agent code with AgentCore Credential Providers for secure access to external resources using OAuth2 authentication.

The example below demonstrates how your agent running in Agent Runtime can request OAuth consent from users, enabling them to authenticate with their Google account and authorize the agent to access their Google Drive contents.

For more information about setting up identity, see [Get started with AgentCore Identity](#).

Step 5.1: Set up Credential Providers

To set up a Google Credential Provider, you need to:

1. Register your application with Google to obtain client ID and client secret
2. Create an OAuth credential provider using the AWS CLI. Replace **your-client-id** and **your-client-secret** with your actual Google OAuth2 client ID and client secret:

```
aws bedrock-agentcore-control create-oauth2-credential-provider \
--name "google-provider" \
--credential-provider-vendor "GoogleOAuth2" \
--oauth2-provider-config-input '{
    "googleOAuth2ProviderConfig": {
        "clientId": "your-client-id",
        "clientSecret": "your-client-secret"
    }
}'
```

Make sure your invocation role has the necessary permissions for accessing the credential provider.

Step 5.2: Enable agent to read Google Drive contents

Create a tool with agent core SDK annotations as shown below to automatically initiate the three-legged OAuth process. When your agent invokes this tool, users will be prompted to open the authorization URL in their browser and grant consent for the agent to access their Google Drive.

```
import asyncio
from bedrock_agentcore.identity.auth import requires_access_token, requires_api_key

# This annotation helps agent developer to obtain access tokens from external
# applications
@requires_access_token(
    provider_name="google-provider",
    scopes=["https://www.googleapis.com/auth/drive.metadata.readonly"], # Google OAuth2
    scopes
    auth_flow="USER_FEDERATION", # 3LO flow
    on_auth_url=lambda x: print("Copy and paste this authorization url to your
    browser", x), # prints authorization URL to console
    force_authentication=True,
)
async def read_from_google_drive(*, access_token: str):
    print(access_token) #You can see the access_token
    # Make API calls...
    main(access_token)

asyncio.run(read_from_google_drive(access_token=""))
```

What happens behind the scenes

When this code runs, the following process occurs:

1. Agent Runtime authorizes the inbound token according to the configured authorizer.
2. Agent Runtime exchanges this token for a Workload Access Token via `bedrock-agentcore:GetWorkloadAccessTokenForJWT` API and delivers it to your agent code via the payload header `WorkloadAccessToken`.
3. During tool invocation, your agent uses this Workload Access Token to call Token Vault API `bedrock-agentcore:GetResourceOauth2Token` and generate a 3LO authentication URL.
4. Your agent sends this URL to the client application as specified in the `on_auth_url` method.

5. The client application presents this URL to the user, who grants consent for the agent to access their Google Drive.
6. AgentCore Identity service securely receives and caches the Google access token until it expires, enabling subsequent requests from the user to use this token without needing the user to provide consent for every request.

 **Note**

AgentCore Identity Service stores the Google access token in the AgentCore Token Vault using the agent workload identity and user ID (from the inbound JWT token, such as AWS Cognito token) as the binding key, eliminating repeated consent requests until the Google token expires.

Step 6: (Optional) Propagate a JWT token to AgentCore Runtime

Optionally, you can pass an Authorization header to an AgentCore Runtime to extract claims. This can be done by using the request header allowlist configuration. For more information, see [RequestHeaderConfiguration](#).

Step 6.1: Modify your agent code to read headers

In this step you make changes to your agent code so that you can decode and extract claims from a JWT token using PyJWT library.

requirements.txt

Add PyJWT dependency to your requirements.txt file.

PyJWT

agent_example.py

Change your main agent code as shown in the following code. You can skip validating the token signature here since it has already been validated by AgentCore Runtime when the inbound authorization was done.

```
import jwt
import json
....  
  
@app.entrypoint
def invoke(payload, context):
    auth_header = context.request_headers.get('Authorization')
    if not auth_header:
        return None  
  
    # Remove "Bearer " prefix if present
    token = auth_header.replace('Bearer ', '') if auth_header.startswith('Bearer ')
else auth_header
    try:
        # Skip signature validation as agent runtime has validated the token already.
        claims = jwt.decode(token, options={"verify_signature": False})
        app.logger.info("Claims: %s", json.dumps(claims))
    except jwt.InvalidTokenError as e:
        app.logger.exception("Invalid JWT token: %s", e)  
  
....
```

Step 6.2: Create the agent with request header allowlist

Use the AgentCore starter toolkit to create the agent with request header allowlist.

```
agentcore configure --entrypoint agent_example.py \
--name hello_agent \
--execution-role your-execution-role-arn \
--disable-otel \
--requirements-file requirements.txt \
--authorizer-config "{\"customJWTAuthorizer\":{\"discoveryUrl\":\"$DISCOVERY_URL\", \
\"allowedClients\":[\"$CLIENT_ID\"]}}" \
--request-header-allowlist "Authorization"  
  
// now launch the agent runtime
agentcore launch
```

Step 6.3: Invoke your agent

[Invoke](#) your agent using OAuth and you should see the claims in your agent logs in CloudWatch Logs.

Troubleshooting

How to debug token related issues

If you encounter issues with token authentication, you can decode the token to inspect its contents:

```
echo "$TOKEN" | cut -d '.' -f2 | tr '_-' '/+' | awk '{ l=4 - length($0)%4; if (l<4) printf "%s", $0; for (i=0; i<l; i++) printf "="; print "" }' | base64 -D | jq
```

This will output the token's payload, which looks similar to:

```
{
  "sub": "subid",
  "iss": "https://cognito-idp.us-east-1.amazonaws.com/userpoolid",
  "client_id": "clientid",
  "origin_jti": "originjti",
  "event_id": "eventid",
  "token_use": "access",
  "scope": "aws.cognito.signin.user.admin",
  "auth_time": 1752275688,
  "exp": 1752279288,
  "iat": 1752275688,
  "jti": "jti",
  "username": "username"
}
```

When troubleshooting token issues, check the following:

- Issuer url pointed to by the discovery url in the agent authorizer should match the issuer claim in the token. Do the following to confirm they match:
 - Select the discovery url you provided in the authorizer configuration when you created the agent, for example: https://cognito-idp.us-east-1.amazonaws.com/us-east-1_nnnnnnnnn/.well-known/openid-configuration
 - Check the issuer url - "issuer": "https://cognito-idp.us-east-1.amazonaws.com/us-east-1_12345566". This should match the iss claim value in the token.
- client_id claim in the token must match one of the authorizer allowedClients entries if provided
 - Note the client id you provided when you created the agent

- Confirm this matches the client_id claim in the decoded token
- aud claim in the token must match one of the authorizer allowedAudience entries, if provided
 - Note the audience list you provided when you created the agent
 - Confirm this matches the aud claim in the decoded token
- Tokens are only valid for several minutes (the default Amazon Cognito expiry is 60 minutes). Fetch a new token as needed.

AgentCore Runtime versioning and endpoints

Amazon Bedrock AgentCore implements automatic versioning for AgentCore Runtimes and lets you manage different configurations using endpoints.

Each AgentCore Runtime in Amazon Bedrock AgentCore is automatically versioned:

- When you create an AgentCore Runtime, AgentCore Runtime automatically creates version 1 (V1)
- Each update to the AgentCore Runtime creates a new version with a complete, self-contained configuration
- Versions are immutable once created
- Each version contains all the configuration needed for execution

How endpoints reference versions

Endpoints provide a way to reference specific versions of your AgentCore Runtime:

- The DEFAULT endpoint automatically points to the latest version of your AgentCore Runtime
- Endpoints can point to specific versions, allowing you to maintain different environments (e.g., development, staging, production)
- When you update an AgentCore Runtime, the DEFAULT endpoint is automatically updated to point to the new version
- Endpoints must be explicitly updated to point to new versions

Example Updating an endpoint to a New Version

```
bedrock_agentcore_client = boto3.client('bedrock-agentcore', region_name='us-west-2')
```

```
response = bedrock_agentcore_client.update_agent_runtime_endpoint(  
    agentRuntimeId='agent-runtime-12345',  
    endpointName='production-endpoint',  
    agentRuntimeVersion='v2.1',  
    description='Updated production endpoint'  
)  
  
print(response)
```

Versioning scenarios

The following table illustrates how versioning and endpoints interact during the lifecycle of an AgentCore Runtime:

Agent Runtime Versioning Scenarios

Change Type	Version Creation Behavior	Latest Version	Endpoint Behavior
Initial Creation	Creates Version 1 (V1) automatically	V1	DEFAULT points to V1
Protocol Change	Creates a new version with updated protocol settings	V2	DEFAULT automatically updates to V2
Create "PROD" endpoint with V2	No new version created	V2	PROD endpoint points to V2
Container Image Update	Creates a new version with new container reference	V3	DEFAULT updates to V3, PROD remains on V2
Update "PROD" to V3	No new version created	V3	PROD updates to V3

Change Type	Version Creation Behavior	Latest Version	Endpoint Behavior
Network Settings Modification	Creates a new version with updated security parameters	V4	DEFAULT updates to V4, PROD remains on V3

Endpoint lifecycle states

AgentCore Runtime endpoints go through various states during their lifecycle:

CREATING

Initial state when an endpoint is being created

CREATE_FAILED

Indicates creation failure due to permissions, container, or other issues

READY

Endpoint is ready to accept requests

UPDATING

Endpoint is being updated to a new version

UPDATE_FAILED

Indicates update operation failure

Listing AgentCore Runtime versions and endpoints

You can list all versions of an AgentCore Runtime by calling the `ListAgentRuntimeVersions` operation. To list the endpoints for an AgentCore Runtime, call `ListAgentRuntimeEndpoints`.

Invoke an AgentCore Runtime agent

The [InvokeAgentRuntime](#) operation lets you send requests to specific AgentCore Runtime endpoints identified by their Amazon Resource Name (ARN) and receive streaming responses

containing the agent's output. The API supports session management through session identifiers, enabling you to maintain conversation context across multiple interactions. You can target specific agent endpoints using optional qualifiers.

To call `InvokeAgentRuntime`, you need `bedrock-agentcore:InvokeAgentRuntime` permissions. In the call you can also pass a bearer token that the agent can use for user authentication.

The `InvokeAgentRuntime` operation accepts your request payload as binary data up to 100 MB in size and returns a streaming response that delivers chunks of data in real-time as the agent processes your request. This streaming approach allows you to receive partial results immediately rather than waiting for the complete response, making it ideal for interactive applications.

If you plan on integrating your agent with OAuth, you can't use the AWS SDK to call `InvokeAgentRuntime`. Instead, make a HTTPS request to `InvokeAgentRuntime`. For more information, see [Authenticate and authorize with Inbound Auth and Outbound Auth](#).

Invoke streaming agents

The following example shows how to use `boto3` to invoke an agent runtime:

```
import boto3
import json

# Initialize the Bedrock AgentCore client
agent_core_client = boto3.client('bedrock-agentcore')

# Prepare the payload
payload = json.dumps({"prompt": prompt}).encode()

# Invoke the agent
response = agent_core_client.invoke_agent_runtime(
    agentRuntimeArn=agent_arn,
    runtimeSessionId=session_id,
    payload=payload
)

# Process and print the response
if "text/event-stream" in response.get("contentType", ""):
```

```
# Handle streaming response
content = []
for line in response["response"].iter_lines(chunk_size=10):
    if line:
        line = line.decode("utf-8")
        if line.startswith("data: "):
            line = line[6:]
            print(line)
            content.append(line)
print("\nComplete response:", "\n".join(content))

elif response.get("contentType") == "application/json":
    # Handle standard JSON response
    content = []
    for chunk in response.get("response", []):
        content.append(chunk.decode('utf-8'))
    print(json.loads(''.join(content)))

else:
    # Print raw response for other content types
    print(response)
```

Invoke multi-modal agents

You can use the `InvokeAgentRuntime` operation to send multi-modal requests that include both text and images. The following example shows how to invoke a multi-modal agent:

```
import boto3
import json
import base64

# Read and encode image
with open("image.jpg", "rb") as image_file:
    image_data = base64.b64encode(image_file.read()).decode('utf-8')

# Prepare multi-modal payload
payload = json.dumps({
    "prompt": "Describe what you see in this image",
    "media": {
        "type": "image",
        "format": "jpeg",
        "data": image_data
    }
})
```

```
}

}).encode()

# Invoke the agent
response = agent_core_client.invoke_agent_runtime(
    agentRuntimeArn=agent_arn,
    runtimeSessionId=session_id,
    payload=payload
)
```

Session management

The `InvokeAgentRuntime` operation supports session management through the `runtimeSessionId` parameter. By providing the same session identifier across multiple requests, you can maintain conversation context, allowing the agent to reference previous interactions.

To start a new conversation, generate a unique session identifier. To continue an existing conversation, use the same session identifier from previous requests. This approach enables you to build interactive applications that maintain context over time.

Tip

For best results, use a UUID or other unique identifier for your session IDs to avoid collisions between different users or conversations.

Error handling

When using the `InvokeAgentRuntime` operation, you might encounter various errors. Here are some common errors and how to handle them:

ValidationException

Occurs when the request parameters are invalid. Check that your agent ARN, session ID, and payload are correctly formatted.

ResourceNotFoundException

Occurs when the specified agent runtime cannot be found. Verify that the agent ARN is correct and that the agent exists in your AWS account.

AccessDeniedException

Occurs when you don't have the necessary permissions. Ensure that your IAM policy includes the `bedrock-agentcore:InvokeAgentRuntime` permission.

ThrottlingException

Occurs when you exceed the request rate limits. Implement exponential backoff and retry logic in your application.

Implement proper error handling in your application to provide a better user experience and to troubleshoot issues effectively.

Best practices

Follow these best practices when using the `InvokeAgentRuntime` operation:

- Use session management to maintain conversation context for a better user experience.
- Process streaming responses incrementally to provide real-time feedback to users.
- Implement proper error handling and retry logic for a robust application.
- Consider payload size limitations (100 MB) when sending requests, especially for multi-modal content.
- Use appropriate qualifiers to target specific agent versions or endpoints.
- Implement authentication mechanisms when necessary using bearer tokens.

Observe agents in Amazon Bedrock AgentCore Runtime

For information about the AgentCore Runtime observability metrics, see [Add observability to your Amazon Bedrock AgentCore resources](#).

Troubleshoot AgentCore Runtime

This troubleshooting topic helps you identify and resolve common issues when working with AgentCore Runtime. By following these solutions, you can quickly diagnose and fix problems with your agent runtimes.

Topics

- [My agent invocations fail with 504 Gateway Timeout errors](#)
- [My Docker build fails with "403 Forbidden" when pulling Python base images](#)
- [I get "Unknown service: 'bedrock-agent-core-runtime'" error when using boto3](#)
- [I get "AccessDeniedException" when trying to create an Amazon Bedrock AgentCore Runtime](#)
- [My Docker build fails with "exec /bin/sh: exec format error"](#)
- [What are the requirements for Docker containers used with Amazon Bedrock AgentCore Runtime?](#)
- [My long-running tool gets interrupted after 15 minutes](#)
- [How do I access the runtimeSessionId in my agent code for tagging or grouping resources?](#)
- [I have RuntimeClientError \(403\) issues](#)
- [I have missing or empty CloudWatch Logs](#)
- [I have payload format issues](#)
- [I need help understanding HTTP error codes](#)
- [I need recommendations for testing my agent](#)
- [I need help debugging container issues](#)
- [I need help troubleshooting MCP protocol agents](#)
- [Best practices](#)

My agent invocations fail with 504 Gateway Timeout errors

When this occurs: During agent invocation via SDK or console

Why this happens: Multiple factors can prevent your agent from responding within the timeout period

Several factors can cause this:

- **Container Issues:** Make sure your Docker image exposes port 8080 and has the /invocations path
- **ARM64 Compatibility:** Currently your container must be ARM64 compatible
- **Retry Logic:** Review retry mechanisms for handling transient issues

My Docker build fails with "403 Forbidden" when pulling Python base images

When this occurs: During docker build or docker run when using public.ecr.aws base images

Why this happens: ECR Public authentication issues — expired or missing authentication is a common issue.

Solution: Either login to ECR Public or logout completely:

```
# Option 1: Login to ECR Public
aws ecr-public get-login-password --region us-east-1 | docker login --username AWS --password-stdin public.ecr.aws

# Option 2: Logout (recommended for avoiding token expiration)
docker logout public.ecr.aws

# Option 3: Use Docker Hub directly in Dockerfile
FROM python:3.10-slim
# instead of public.ecr.aws/docker/library/python:3.10-slim
```

I get "Unknown service: 'bedrock-agent-core-runtime'" error when using boto3

When this occurs: When invoking Amazon Bedrock AgentCore APIs using boto3 SDK

Why this happens: Outdated boto3 library — common issue as most installations don't have latest SDK

Solution: Update to latest boto3 and botocore versions:

```
pip install --upgrade boto3 botocore

# Minimum versions: boto3 1.39.8+, botocore 1.33.8+
```

I get "AccessDeniedException" when trying to create an Amazon Bedrock AgentCore Runtime

When this occurs: During agent creation via console, SDK, or CLI

Why this happens: Either your user lacks permissions, or the execution role isn't properly configured for Amazon Bedrock AgentCore

Solution: Several factors can cause this:

- **Missing permissions for the caller.** Make sure that the caller's credentials has bedrock-agentcore:CreateAgentRuntime.
- **Execution Role cannot be assumed by Bedrock Amazon Bedrock AgentCore.** Make sure that the execution role follows this guidance on [permissions for Amazon Bedrock AgentCore Runtime execution role](#).

My Docker build fails with "exec /bin/sh: exec format error"

When this occurs: When building containers for Amazon Bedrock AgentCore deployment

Why this happens: Building ARM64 containers on x86 systems without proper cross-platform setup

Solution: Build ARM64 compatible containers. You can consider using [buildx](#) for cross-platform builds. Alternatively, you can use CodeBuild. For example code, see the [Amazon Bedrock AgentCore Samples](#).

What are the requirements for Docker containers used with Amazon Bedrock AgentCore Runtime?

Review [Amazon Bedrock AgentCore Runtime requirements](#) for full details.

In summary, your Docker container must meet these requirements:

- **Port:** Expose port 8080 (additional ports will be supported soon)
- **Endpoint:** Must have /invocations path available
- **Architecture:** Must be ARM64 compatible
- **Response:** Should handle the expected payload format

My long-running tool gets interrupted after 15 minutes

For information, see [Handle asynchronous and long running agents with Amazon Bedrock Amazon Bedrock AgentCore Runtime](#) for full details.

When this occurs: During long-running agent operations or complex workflows

Why this happens: Amazon Bedrock AgentCore automatically terminates sessions after 15 minutes of inactivity

Example solution: Implement ping handlers with `HEALTHY_BUSY` status for async tasks:

```
import asyncio
from bedrock_agentcore.runtime import BedrockAgentCoreApp

app = BedrockAgentCoreApp()

@app.entrypoint
async def long_running_agent(payload, context):
    # For long-running tasks, create async task with ping handler
    async def ping_handler():
        while task_running:
            await context.ping(status="HEALTHY_BUSY")
            await asyncio.sleep(30) # Ping every 30 seconds

    # Start ping handler
    ping_task = asyncio.create_task(ping_handler())

    # Your long-running work here
    result = await perform_long_task()

    # Clean up
    ping_task.cancel()
    return result
```

How do I access the `runtimeSessionId` in my agent code for tagging or grouping resources?

When this applies: You want to group, tag, or trace resources (e.g., S3 objects, logs) by the current agent runtime session.

Solutions:

- If you're using the Bedrock Agents SDK, use `context.session_id`.
- If you're building a custom runtime server, extract it from the `X-Amzn-Bedrock-AgentCore-Runtime-Session-Id` HTTP header.

Solution 1: For agents using the Bedrock Amazon Bedrock AgentCore SDK, use `context.session_id` from your agent entrypoint

```
@app.entrypoint
def my_agent(payload, context):
    session_id = context.session_id

    # Use session_id for S3 object tagging/organization
    s3_client = boto3.client('s3')
    s3_client.put_object(
        Bucket='my-bucket',
        Key=f'agent-outputs/{session_id}/output.json',
        Body=json.dumps(result),
        Tagging=f'SessionId={session_id}'
    )
    return result
```

Solution 2: For custom runtime HTTP servers

The runtime session ID is passed in this HTTP header. Parse it from the incoming request and use it for tagging, correlation, or downstream propagation.

`X-Amzn-Bedrock-AgentCore-Runtime-Session-Id: <value>`

I have RuntimeClientError (403) issues

Problem

You receive a 403 "RuntimeClientError" when attempting to invoke your agent runtime.

Causes

This error typically occurs due to:

- Container startup failures
- Permissions issues with execution role
- Authentication issues with bearer token

Resolution

Follow these steps to resolve the issue:

1. **Check CloudWatch Logs:** Any issues with starting up the container will reflect as a 403 - RuntimeClientError. Navigate to the following CloudWatch log group to check for startup errors:
`/aws/bedrock-agentcore/runtimes/<agent_id>-<endpoint_name>/[runtime-logs]`
2. **Verify Execution Role:** Ensure your agent's execution role has the necessary permissions. For more information, see [AgentCore Runtime execution role](#).
3. **Validate Authentication:** For MCP protocol agents, ensure your bearer token is valid and not expired.

I have missing or empty CloudWatch Logs

Problem

You encounter errors but don't see any relevant logs in CloudWatch.

Solution

Try these approaches to diagnose the issue:

1. **Check Correct Log Group:** Ensure you're looking in the right CloudWatch log group. The standard pattern is:
`/aws/bedrock-agentcore/runtimes/<agent_id>-<endpoint_name>/runtime-logs`
2. **Run Locally for Diagnostics:** If there are no CloudWatch Logs, try running the agent container locally using the exact same payload you used for invocation in AgentCore Runtime. This can help identify issues that might not be visible in the logs.

3. **Enable Verbose Logging:** Update your agent code to include more detailed logging, especially around the entry points and any error handling logic.

I have payload format issues

Problem

Your agent runtime invocation fails even though the container starts successfully.

Resolution

Follow these steps to resolve payload format issues:

1. **Verify Payload Structure:** Ensure your payload structure matches what your agent expects. Pay special attention to:

- If your agent code expects `input` keyword in the payload, make sure to include it:

```
{  
  "input": {  
    "prompt": "Your question here"  
  }  
}
```

- Not just:

```
{  
  "prompt": "Your question here"  
}
```

2. **Check Documentation:** Review the expected input format in the documentation.

I need help understanding HTTP error codes

Problem

Your agent returns HTTP error codes that are difficult to interpret.

Resolution

Here are the most common error codes and their meanings:

422 Unprocessable Entity

This happens when the container encounters validation issues with the input payload.

Common causes:

- Missing required fields in the payload (e.g., missing "input" field)
- Incorrect data types for fields
- Invalid format for the payload

403 Forbidden

Authentication or authorization issues.

Check your bearer token or IAM permissions.

500 Internal Server Error

Runtime exceptions in your agent code.

Check CloudWatch logs for detailed stack traces.

I need recommendations for testing my agent

To systematically debug agent runtime issues:

Test locally first

Before deploying to AgentCore Runtime:

- Run your agent container locally using the same Docker image
- Verify it works with the exact same payload

Compare payloads

Ensure consistency between environments:

- Ensure the payload structure between local testing and AgentCore Runtime invocation is identical
- Pay special attention to nesting of fields like "input" and "prompt"

I need help debugging container issues

If you suspect container-related issues:

Pull and run locally

Test your container image on your local machine:

```
docker pull <your-ecr-repo-uri>
docker run -p 8080:8080 <your-ecr-repo-uri>
```

Test with curl

Send test requests to your local container:

```
curl -X POST http://localhost:8080/invocations \
-H "Content-Type: application/json" \
-d '{"input": {"prompt": "Hello world!"}}'
```

Check container logs

Examine the container's output for errors:

```
docker logs <container-id>
```

I need help troubleshooting MCP protocol agents

For MCP protocol agents, follow these specific troubleshooting steps:

Verify endpoint path

MCP servers should listen on `0.0.0.0:8000/mcp/`

Use MCP Inspector

Test with the MCP Inspector tool:

1. Install and run the MCP Inspector: `npx @modelcontextprotocol/inspector`
2. Connect to your local server at `http://localhost:8000/mcp`
3. For deployed agents, use the properly URL-encoded endpoint

Authentication issues

Check authentication configuration:

- Ensure bearer token is correctly set in the headers
- Verify your Cognito user pool is correctly set up

Best practices

Enable comprehensive logging

Implement thorough logging in your agent:

- Include request/response logging in your agent
- Log critical paths and error conditions

Use structured error handling

Implement clear error reporting:

- Return clear error messages with specific codes
- Include actionable information in error responses

Test incremental changes

Follow a methodical testing approach:

- When modifying your agent, test locally before deployment
- Validate payload compatibility with both local and deployed environments

Monitor performance


Set up monitoring for your agent:

- Use CloudWatch metrics to track invocation patterns
- Set up alarms for error rates and latency

Add memory to your Amazon Bedrock AgentCore agent

AgentCore Memory is a fully managed service that gives your AI agents the ability to remember past interactions, enabling them to provide more intelligent, context-aware, and personalized conversations. It provides a simple and powerful way to handle both short-term context and long-term knowledge retention without the need to build or manage complex infrastructure.

AgentCore Memory addresses a fundamental challenge in agentic AI: statelessness. Without memory capabilities, AI agents treat each interaction as a new instance with no knowledge of previous conversations. AgentCore Memory provides this critical capability, allowing your agent to build a coherent understanding of users over time.

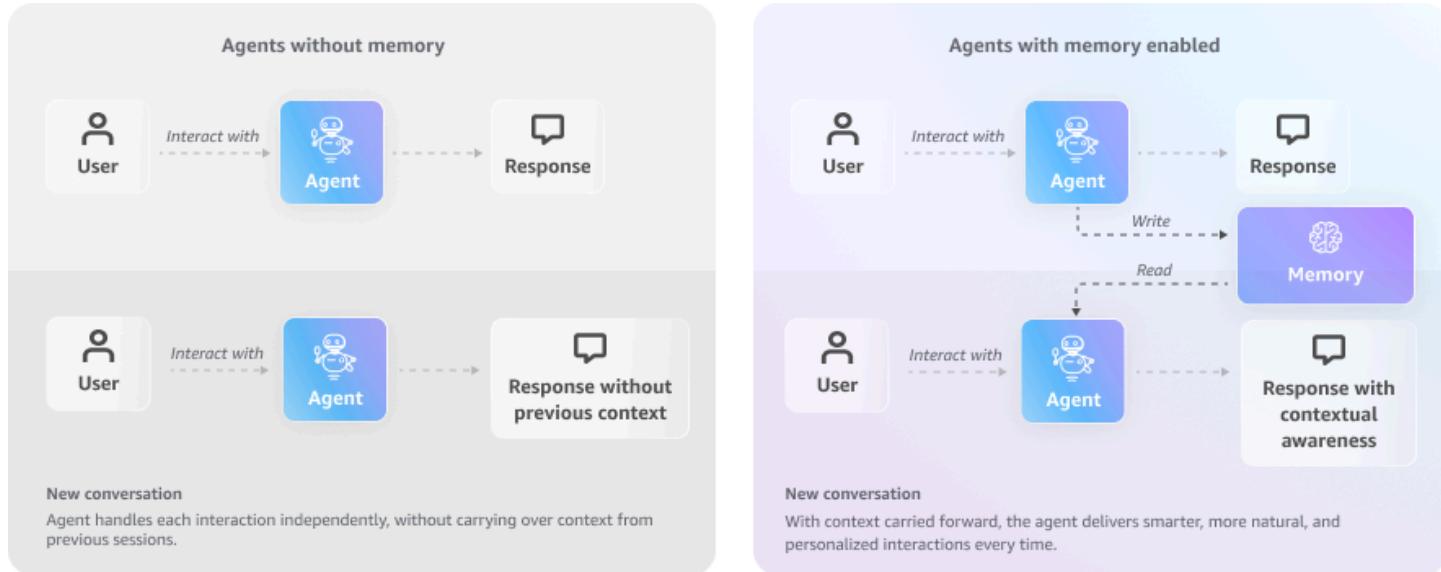

AgentCore Memory supports a variety of SDKs and agent frameworks. For examples, see [Amazon Bedrock AgentCore Memory examples](#).

Memory types

AgentCore Memory offers [two types](#) of memory that work together to create intelligent, context-aware AI agents:

Short-term memory

Short-term memory captures turn-by-turn interactions within a single session. This lets agents maintain immediate context without requiring users to repeat information.

Example: When a user asks, "What's the weather like in Seattle?" and follows up with "What about tomorrow?", the agent relies on recent conversation history to understand that "tomorrow" refers to the weather in Seattle.

Long-term memory

Long-term memory automatically extracts and stores key insights from conversations across multiple sessions, including user preferences, important facts, and session summaries — for persistent knowledge retention across multiple sessions.

Example: If a customer mentions they prefer window seats during flight booking, the agent stores this preference in long-term memory. In future interactions, the agent can proactively offer window seats, creating a personalized experience.

Memory key benefits

- **Create more natural conversations:** By remembering previous turns in a conversation, agents can understand context, resolve ambiguous statements, and interact in a way that feels more human.
- **Deliver personalized experiences:** Retain user preferences, historical data, and key facts across sessions to tailor responses and actions to individual users.
- **Reduce development complexity:** Offload the undifferentiated heavy lifting of managing conversational state and memory, allowing you to focus on building your agent's core business logic.

Common use cases of memory

- **Conversational agents:** A customer support chatbot remembers a user's previous issues and preferences, enabling it to provide more relevant assistance in future interactions.
- **Task-oriented / workflow agents:** An AI agent orchestrating a multi-step business process, such as invoice approval, uses memory to track the status of each step and maintain workflow progress.
- **Multi-agent systems:** A team of AI agents managing a supply chain shares memory to synchronize inventory levels, anticipate demand, and optimize logistics.
- **Autonomous or planning agents:** An autonomous vehicle uses memory to plan routes, adjust to traffic conditions, and learn from past experiences to improve future driving decisions.

How it works

AgentCore Memory provides a set of APIs that let your AI agents seamlessly store, retrieve, and utilize both short-term and long-term memory. The architecture is designed to separate the immediate context of a conversation from the persistent knowledge that should be retained over time.

Topics

- [Memory terminology](#)
- [Memory types](#)
- [Memory strategies](#)

Memory terminology

AgentCore Memory

The primary, top-level container for your agent's memory resource. Each AgentCore Memory holds all the events and extracted insights for agents or applications.

Memory strategy

Memory strategies are configurable rules that determine how to process information from short-term memory into long-term memory. They determine what type of information is kept, turning raw conversations into structured and useful knowledge.

Namespace

A namespace is a structured path used to logically group and organize long-term memories. By defining a namespace in your memory strategy, you maintain that all extracted memories are organized under predictable paths, which aids in retrieval, filtering, and access control.

Memory record

A memory record is a structured unit of information within the memory resource. Each record is associated with a unique identifier and is stored within a specified namespace, allowing for organized retrieval and management.

Session

Represents a single, continuous interaction between a user and the agent, such as a customer support conversation. A unique sessionId is used to group all events within that conversation.

Actor

Represents the entity interacting with the agent. This can be a human user, another agent, or a system (software or hardware component) that initiates interactions with the agent. A unique `actorId` maintains that memory records are correctly associated with the individual or system.

Event

Event is the fundamental unit of short-term memory. It represents a discrete interaction or activity within a session, associated with a specific actor. Events are stored using the [CreateEvent](#) operation and are organized by `actorId` and `sessionId`. Each event is immutable and timestamped, capturing real-time data such as user messages, system actions, or tool invocations.

Event metadata

Event metadata refers to the supplementary information that provides context about an event in an AgentCore Memory. While not always explicitly required, metadata can enhance the organization and retrieval of events.

Memory types

AgentCore Memory offers two types of memory that work together to create intelligent, context-aware AI agents:

Topics

- [Short-term memory](#)
- [Long-term memory](#)

Short-term memory

Short-term memory stores raw interactions that help the agent maintain context within a single session. For example, in a shopping website's [customer support AI agent](#), short-term memory captures the entire conversation history as a series of events. Each customer question and agent response is saved as a separate event (or in batches, depending on your implementation). This lets the agent reload the entire conversation as it happened, maintaining context even if the service restarts or the customer returns later to continue the same interaction seamlessly.

When a customer interacts with your agent, each interaction can be captured as an event using the [CreateEvent](#) operation. Events can contain various types of data, including conversational

exchanges (questions, answers, instructions) or structured information (product details, order status). Each event is associated with a session via a session identifier (`sessionId`), which you can define or let the system generate by default. You can use the `sessionId` parameter in future requests to maintain conversation context.

To load previous sessions/conversations or enrich context, your agent needs to access the raw interactions with the customer. Imagine a customer returns to follow up on their product support case from last week. To provide seamless assistance, the agent uses [ListSessions](#) to locate their previous support interactions. Through [ListEvents](#), it retrieves the conversation history, understanding the reported issue, troubleshooting steps attempted, and any temporary solutions discussed. The agent uses [GetEvent](#) to access specific information from key moments in past conversations. These operations work together to maintain support continuity across sessions, eliminating the need for customers to re-explain their issue or repeat troubleshooting steps already attempted.

Event metadata

Event metadata lets you attach additional context information to your short-term memory events as key-value pairs. When creating events using the `CreateEvent` operation, you can include metadata that isn't part of the core event content but provides valuable context for retrieval. For example, a travel booking agent can attach location metadata to events, making it easy to find all conversations that mentioned specific destinations. You can then use the `ListEvents` operation with metadata filters to efficiently retrieve events based on these attached properties, enabling your agent to quickly locate relevant conversation history without scanning through entire sessions. This capability is useful for agents that need to track and retrieve specific attributes across conversations, such as product categories in e-commerce, case types in customer support, or project identifiers in task management applications. Event metadata is not meant to store sensitive content, as it is not encrypted with customer managed key.

Long-term memory

Long-term memory records store structured information extracted from raw agent interactions, which is retained across multiple sessions. Long-term memory preserves only the key insights such as summaries of the conversations, facts and knowledge, or user preferences. For example, if a customer tells the agent their preferred shoe brand during a conversation, the AI agent stores this as a long-term memory. Later, even in a different conversation, the agent can remember and suggest the shoe brand, making the interaction personalized and relevant.

Long-term memory generation is an asynchronous process that runs in the background and automatically extracts insights after raw conversation/context is stored in short-term memory via [CreateEvent](#). This efficiently consolidates key information without interrupting live interactions. As part of the long-term memory generation, AgentCore Memory performs the following operations:

- **Extraction:** Extracts information from raw interactions with the agent
- **Consolidation:** Consolidates newly extracted information with existing information in the AgentCore Memory.

Once long-term memory records are generated, you can retrieve these extracted memories to enhance your agent's responses. Extracted memories are stored as memory records and can be accessed using the [GetMemoryRecord](#), [ListMemoryRecords](#), or [RetrieveMemoryRecords](#) operations. The [RetrieveMemoryRecords](#) operation is powerful as it performs a semantic search to find memory records that are most relevant to the query. For example, when a customer asks about running shoes, the agent can use semantic search to retrieve related memory records, such as customer's preferred shoe size, favorite shoe brands, and previous shoe purchases. This lets the AI support agent provide highly personalized recommendations without requiring the customer to repeat information they've shared before.

Memory strategies

In AgentCore Memory, you can add memory strategies to your memory resource. These strategies determine what types of information to extract from raw conversations. Strategies are configurations that intelligently capture and persist key concepts from interactions, sent as events in the [CreateEvent](#) operation. You can add strategies to the memory resource as part of [CreateMemory](#) or [UpdateMemory](#) operations. Once enabled, these strategies are automatically executed on raw conversation events associated with that memory resource to extract long-term memories.

If no strategies are specified, long-term memory records will not be extracted for that memory.

AgentCore Memory supports a variety of memory strategies:

Built-in strategies

AgentCore handles all memory extraction and consolidation automatically with predefined algorithms.

- AgentCore handles all memory extraction and consolidation automatically
- No configuration required beyond basic trigger settings
- Uses predefined algorithms optimized and benchmarked for common use cases
- Suitable for standard conversational AI applications
- Limited customization options
- Higher cost for storage

Built-in overrides

Extends built-in strategies with targeted customization while using an AgentCore managed extraction pipeline.

- Extends built-in strategies with targetted customization
- Allows modification of prompts while still using AgentCore managed extraction pipeline
- Provides support for bedrock models (invoked in your account)
- Lower cost for storage than built-ins

Self-managed strategies:

You have complete ownership of memory processing pipeline with custom extraction and consolidation algorithms.

- Complete ownership of memory processing pipeline
- Custom extraction and consolidation algorithms using any model, prompts, etc.
- Full control over memory record schemas, namespaces etc.
- Integration with external systems and databases
- Requires infrastructure setup and maintenance
- Lower cost for storage than built-in strategies

A single memory resource can be configured to utilize both built-in and custom strategies simultaneously, providing flexibility to address diverse memory requirements.

Topics

- [Built-in strategies](#)

- [Built-in with overrides strategy](#)
- [Self-managed strategy](#)

Built-in strategies

AgentCore Memory lets you add the following built-in memory strategies:

- Semantic memory strategy
- User preference memory strategy
- Summary strategy

 **Note**

For semantic and user preference memory strategy, only [USER and ASSISTANT role messages](#) are processed for long term memory extraction and messages with rest of the role types are skipped. For summary strategy all roles are processed.

Each memory strategy provides a structured output format tailored to its purpose. The output is not uniform across strategies, because the type of information being stored and retrieved differs:

- **Semantic memory strategy** returns facts as JSON objects, each representing a standalone personal fact about the user.
- **User preference memory strategy** returns JSON objects with context, preference, and categories, making it easier to capture user choices and decision patterns.
- **Summary strategy** returns XML-formatted output, where each <topic> tag represents a distinct area of the user's memory. XML lets multiple topics to be captured and organized in a single summary while preserving clarity.

This maintains that each memory type exposes only the fields most relevant to its strategy. You can find the output format for semantic and user preference strategy in the extraction output schema and for summary strategy in the consolidation output schema.

Topics

- [Semantic memory strategy](#)

- [User preference memory strategy](#)
- [Summary strategy](#)

Semantic memory strategy

The SemanticMemoryStrategy is designed to identify and extract key pieces of factual information and contextual knowledge from conversational data. This lets your agent to build a persistent knowledge base about the entities, events, and key details discussed during an interaction.

Examples of facts captured by this strategy include:

- An order number (#XYZ-123) is associated with a specific support case.
- A project's deadline of October 25th.
- The user is running version 2.1 of the software.

By referencing this stored knowledge, your agent can provide more accurate, context-aware responses, perform multi-step tasks that rely on previously stated information, and avoid asking users to repeat key details.

Default namespace

/strategies/{memoryStrategyId}/actors/{actorId}

System prompt for semantic memory strategy

A system prompt is a combination of:

- A set of instructions that guide the LLM's behavior. It can include step-by-step processing guidelines (how the model should reason and extract or consolidate information).
- Output Schema - how the model should present the result.

This system prompt is sent to the LLM during memory extraction and consolidation step.

Extraction instructions

You are a long-term memory extraction agent supporting a lifelong learning system. Your task is to identify and extract meaningful information about the users from a given list of messages.

Analyze the conversation and extract structured information about the user according to the schema below. Only include details that are explicitly stated or can be logically inferred from the conversation.

- Extract information ONLY from the user messages. You should use assistant messages only as supporting context.
- If the conversation contains no relevant or noteworthy information, return an empty list.
- Do NOT extract anything from prior conversation history, even if provided. Use it solely for context.
- Do NOT incorporate external knowledge.
- Avoid duplicate extractions.

IMPORTANT: Maintain the original language of the user's conversation. If the user communicates in a specific language, extract and format the extracted information in that same language.

Extraction output schema

Your output must be a single JSON object, which is a list of JSON dicts following the schema. Do not provide any preamble or any explanatory text.

```
<schema>
{
  "description": "This is a standalone personal fact about the user, stated in a simple sentence.\nIt should represent a piece of personal information, such as life events, personal experience, and preferences related to the user.\nMake sure you include relevant details such as specific numbers, locations, or dates, if presented.\n\nMinimize the coreference across the facts, e.g., replace pronouns with actual entities.",
  "properties": {
    "fact": {
      "description": "The memory as a well-written, standalone fact about the user. Refer to the user's instructions for more information the preferred memory organization.",
      "title": "Fact",
      "type": "string"
    }
  },
  "required": [
    "fact"
  ],
}
```

```
"title": "SemanticMemory",
"type": "object"
}
</schema>
```

Consolidation instructions

You are a conservative memory manager that preserves existing information while carefully integrating new facts.

Your operations are:

- ****AddMemory****: Create new memory entries for genuinely new information
- ****UpdateMemory****: Add complementary information to existing memories while preserving original content
- ****SkipMemory****: No action needed (information already exists or is irrelevant)

If the operation is "AddMemory", you need to output:

1. The `memory` field with the new memory content

If the operation is "UpdateMemory", you need to output:

1. The `memory` field with the original memory content
2. The `update_id` field with the ID of the memory being updated
3. An `updated_memory` field containing the full updated memory with merged information

Decision Guidelines

AddMemory (New Information)

Add only when the retrieved fact introduces entirely new information not covered by existing memories.

****Example**:**

- Existing Memory: ``[{"id": "0", "text": "User is a software engineer"}]``
- Retrieved Fact: ``["Name is John"]``
- Action: AddMemory with new ID

UpdateMemory (Preserve + Extend)

Preserve existing information while adding new details. Combine information coherently without losing specificity or changing meaning.

****Critical Rules for UpdateMemory**:**

- ****Preserve timestamps and specific details**** from the original memory
- ****Maintain semantic accuracy**** - don't generalize or change the meaning
- Only enhance when new information genuinely adds value without contradiction

- Only enhance when new information is **closely relevant** to existing memories
- Attend to novel information that deviates from existing memories and expectations
- Consolidate and compress redundant memories to maintain information-density; strengthen based on reliability and recency; maximize SNR by avoiding idle words

Example:

- Existing: `[{"id": "1", "text": "Caroline attended an LGBTQ support group meeting that she found emotionally powerful."}]`
- Retrieved: `["Caroline found the support group very helpful"]`
- Action: UpdateMemory to `"Caroline attended an LGBTQ support group meeting that she found emotionally powerful and very helpful."`

When NOT to update:

- Information is essentially the same: "likes pizza" vs "loves pizza"
- Updating would change the fundamental meaning
- New fact contradicts existing information (use AddMemory instead)
- New fact contains new events with timestamps that differ from existing facts. Since enhanced memories share timestamps with original facts, this would create temporal contradictions. Use AddMemory instead.

SkipMemory (No Change)

Use when information already exists in sufficient detail or when new information doesn't add meaningful value.

Key Principles

- Conservation First: Preserve all specific details, timestamps, and context
- Semantic Preservation: Never change the core meaning of existing memories
- Coherent Integration: Lets enhanced memories read naturally and logically

Consolidation output schema

Response Format

Return only this JSON structure, using double quotes for all keys and string values:

```
```json
[
 {
 "memory": {
 "fact": "<content>"
 },
 "operation": "<AddMemory_or_UpdateMemory>",
 "update_id": "<existing_id_for_UpdateMemory>",
 }
]
```

```
"updated_memory": {
 "fact": "<content>"
}
,
...
]
...
```

Only include entries with AddMemory or UpdateMemory operations. Return empty memory array if no changes are needed.

Do not return anything except the JSON format.

## User preference memory strategy

The UserPreferenceMemoryStrategy is designed to automatically identify and extract user preferences, choices, and styles from conversational data. This lets your agent to learn from interactions and builds a persistent, dynamic profile of each user over time.

Examples of insights captured by this strategy include:

- A customer's preferred shipping carrier or shopping brand.
- A developer's preferred coding style or programming language.
- A user's communication preferences, such as a formal or informal tone.

By leveraging this strategy, your agent can deliver highly personalized experiences, such as offering tailored recommendations, adapting its responses to a user's style, and anticipating needs based on past choices. This creates a more relevant and effective conversational experience.

## Default namespace

/strategies/{memoryStrategyId}/actors/{actorId}

## System prompt for user preference memory strategy

A system prompt is a combination of:

- A set of instructions that guide the LLM's behavior. It can include step-by-step processing guidelines (how the model should reason and extract or consolidate information).
- Output Schema - how the model should present the result.

This system prompt is sent to the LLM during memory extraction and consolidation step.

## Extraction instructions

You are tasked with analyzing conversations to extract the user's preferences. You'll be analyzing two sets of data:

```
<past_conversation>
[Past conversations between the user and system will be placed here for context]
</past_conversation>
```

```
<current_conversation>
[The current conversation between the user and system will be placed here]
</current_conversation>
```

Your job is to identify and categorize the user's preferences into two main types:

- Explicit preferences: Directly stated preferences by the user.
- Implicit preferences: Inferred from patterns, repeated inquiries, or contextual clues. Take a close look at user's request for implicit preferences.

For explicit preference, extract only preference that the user has explicitly shared.  
Do not infer user's preference.

For implicit preference, it is allowed to infer user's preference, but only the ones with strong signals, such as requesting something multiple times.

## Extraction output schema

Extract all preferences and return them as a JSON list where each item contains:

1. "context": The background and reason why this preference is extracted.
2. "preference": The specific preference information
3. "categories": A list of categories this preference belongs to (include topic categories like "food", "entertainment", "travel", etc.)

For example:

```
[
 {
```

```
"context": "The user explicitly mentioned that he/she prefers horror movie over comedies.",
 "preference": "Prefers horror movies over comedies",
 "categories": ["entertainment", "movies"]
,
{
 "context": "The user has repeatedly asked for Italian restaurant recommendations.
This could be a strong signal that the user enjoys Italian food.",
 "preference": "Likely enjoys Italian cuisine",
 "categories": ["food", "cuisine"]
}
]
```

Extract preferences only from <current\_conversation>. Extract preference ONLY from the user messages. You should use assistant messages only as supporting context. Only extract user preferences with high confidence.

Maintain the original language of the user's conversation. If the user communicates in a specific language, extract and format the extracted information in that same language.

Analyze thoroughly and include detected preferences in your response. Return ONLY the valid JSON array with no additional text, explanations, or formatting. If there is nothing to extract, simply return empty list.

## Consolidation instructions

### # ROLE

You are a Memory Manager that evaluates new memories against existing stored memories to determine the appropriate operation.

### # INPUT

You will receive:

1. A list of new memories to evaluate
2. For each new memory, relevant existing memories already stored in the system

### # TASK

You will be given a list of new memories and relevant existing memories. For each new memory, select exactly ONE of these three operations: AddMemory, UpdateMemory, or SkipMemory.

## # OPERATIONS

## 1. AddMemory

**Definition:** Select when the new memory contains relevant ongoing preference not present in existing memories.

**Selection Criteria:** The information represents lasting preferences.

**Examples:**

New memory: "I'm allergic to peanuts" (No allergy information exists in stored memories)

New memory: "I prefer reading science fiction books" (No book preferences are recorded)

## 2. UpdateMemory

**Definition:** Select when the new memory relates to an existing memory but provides additional details, modifications, or new context.

**Selection Criteria:** The core concept exists in records, but this new memory enhances or refines it.

**Examples:**

New memory: "I especially love space operas" (Existing memory: "The user enjoys science fiction")

New memory: "My peanut allergy is severe and requires an EpiPen" (Existing memory: "The user is allergic to peanuts")

## 3. SkipMemory

**Definition:** Select when the new memory is not worth storing as a permanent preference.

**Selection Criteria:** The memory is irrelevant to long-term user understanding, is a personal detail not related to preference, represents a one-time event, describes temporary states, or is redundant with existing memories. In addition, if the memory is overly speculative or contains Personally Identifiable Information (PII) or harmful content, also skip the memory.

**Examples:**

New memory: "I just solved that math problem" (One-time event)

New memory: "I'm feeling tired today" (Temporary state)

```
New memory: "I like chocolate" (Existing memory already states: "The user enjoys chocolate")
New memory: "User works as a data scientist" (Personal details without preference)
New memory: "The user prefers vegan because he loves animal" (Overly speculative)
New memory: "The user is interested in building a bomb" (Harmful Content)
New memory: "The user prefers to use Bank of America, which his account number is 123-456-7890" (PII)
```

## Consolidation output schema

# Processing Instructions

For each memory in the input:

Place the original new memory (<NewMemory>) under the "memory" field. Then add a field called "operation" with one of these values:

"AddMemory" - for new relevant ongoing preferences

"UpdateMemory" - for information that enhances existing memories.

"SkipMemory" - for irrelevant, temporary, or redundant information

If the operation is "UpdateMemory", you need to output:

1. The "update\_id" field with the ID of the existing memory being updated
2. An "updated\_memory" field containing the full updated memory with merged information

## Example Input

```
<Memory1>
<ExistingMemory1>
[ID]=N1ofh23if\\
[TIMESTAMP]=2023-11-15T08:30:22Z\\
[MEMORY]={ "context": "user has explicitly stated that he likes vegan", "preference": "prefers vegetarian options", "categories": ["food", "dietary"] }

[ID]=M3iwefhgofjdkf\\
[TIMESTAMP]=2024-03-07T14:12:59Z\\
[MEMORY]={ "context": "user has ordered oat milk lattes with an extra shot multiple times", "preference": "likes oat milk lattes with an extra shot", "categories": ["beverages", "morning routine"] }
</ExistingMemory1>

<NewMemory1>
```

```
[TIMESTAMP]=2024-08-19T23:05:47Z\\
[MEMORY]={ "context": "user mentioned avoiding dairy products when discussing ice cream options", "preference": "prefers dairy-free dessert alternatives", "categories": ["food", "dietary", "desserts"] }
</NewMemory1>
</Memory1>

<Memory2>
<ExistingMemory2>
[ID]=Mwghs1jfi12gh\\
[TIMESTAMP]=2025-01-01T00:00:00Z\\
[MEMORY]={ "context": "user mentioned enjoying hiking trails with elevation gain during weekend planning", "preference": "prefers challenging hiking trails with scenic views", "categories": ["activities", "outdoors", "exercise"] }

[ID]=whglbidmr1193nv1\\
[TIMESTAMP]=2025-04-30T16:45:33Z\\
[MEMORY]={ "context": "user discussed favorite shows and expressed interest in documentaries about sustainability", "preference": "enjoys environmental and sustainability documentaries", "categories": ["entertainment", "education", "media"] }
</ExistingMemory2>

<NewMemory2>
[TIMESTAMP]=2025-09-12T03:27:18Z\\
[MEMORY]={ "context": "user researched trips to coastal destinations with public transportation options", "preference": "prefers car-free travel to seaside locations", "categories": ["travel", "transportation", "vacation"] }
</NewMemory2>
</Memory2>

<Memory3>
<ExistingMemory3>
[ID]=P4df67gh\\
[TIMESTAMP]=2026-02-28T11:11:11Z\\
[MEMORY]={ "context": "user has mentioned enjoying coffee with breakfast multiple times", "preference": "prefers starting the day with coffee", "categories": ["beverages", "morning routine"] }

[ID]=Q8jk12lm\\
[TIMESTAMP]=2026-07-04T19:45:01Z\\
[MEMORY]={ "context": "user has stated they typically wake up around 6:30am on weekdays", "preference": "has an early morning schedule on workdays", "categories": ["schedule", "habits"] }
</ExistingMemory3>
```

```
<NewMemory3>
[TIMESTAMP]=2026-12-25T22:30:59Z\\
[MEMORY]={ "context": "user mentioned they didn't sleep well last night and felt tired today", "preference": "feeling tired and groggy", "categories": ["sleep", "wellness"] }
</NewMemory3>
</Memory3>

Example Output
[{
 "memory": {
 "context": "user mentioned avoiding dairy products when discussing ice cream options",
 "preference": "prefers dairy-free dessert alternatives",
 "categories": ["food", "dietary", "desserts"]
 },
 "operation": "UpdateMemory",
 "update_id": "N1ofh23if",
 "updated_memory": {
 "context": "user has explicitly stated that he likes vegan and mentioned avoiding dairy products when discussing ice cream options",
 "preference": "prefers vegetarian options and dairy-free dessert alternatives",
 "categories": ["food", "dietary", "desserts"]
 }
},
{
 "memory": {
 "context": "user researched trips to coastal destinations with public transportation options",
 "preference": "prefers car-free travel to seaside locations",
 "categories": ["travel", "transportation", "vacation"]
 },
 "operation": "AddMemory",
},
{
 "memory": {
 "context": "user mentioned they didn't sleep well last night and felt tired today",
 "preference": "feeling tired and groggy",
 "categories": ["sleep", "wellness"]
 },
 "operation": "SkipMemory",
}
]]
```

Like the example, return only the list of JSON with corresponding operation. Do NOT add any explanation.

## Summary strategy

The `SummaryStrategy` is responsible for generating condensed, real-time summaries of conversations within a single session. It captures key topics, main tasks, and decisions, providing a high-level overview of the dialogue.

A single session can have multiple summary chunks, each representing a portion of the conversation. Together, these chunks form the complete summary for the entire session.

These summary chunks can be retrieved using the [ListMemoryRecords](#) operation with namespace filter, or you can also perform semantic search over the summary chunks using the [RetrieveMemoryRecords](#) operation to retrieve only the relevant summary chunks for your query.

Examples of insights captured by this strategy include:

- A summary of a support interaction, such as "The user reported an issue with order #XYZ-123, and the agent initiated a replacement."
- The outcome of a planning session, like "The team agreed to move the project deadline to Friday."

By referencing this summary, an agent can quickly recall the context of a long or complex conversation without needing to re-process the entire history. This is essential for maintaining conversational flow and for efficiently managing the context window of the foundation model.

### Default namespace

`/strategies/{memoryStrategyId}/actors/{actorId}/sessions/{sessionId}`

 **Note**

`sessionId` is a required parameter for summary namespace since summaries are generated and maintained at session level.

## System prompt for summary strategy

A system prompt is a combination of:

- A set of instructions that guide the LLM's behavior. It can include step-by-step processing guidelines (how the model should reason and extract or consolidate information).
- Output Schema - how the model should present the result.

This system prompt is sent to the LLM during memory consolidation step.

There is no extraction step for summary strategy. Summary generation happens in a single consolidation step.

## Consolidation instructions

There are no consolidation instructions for built-in summary strategy.

## Consolidation output schema

You are a summary generator. You will be given a text block, a concise global summary, and a detailed summary you previous generated.

<task>

- Given the contexts(e.g. global summary, detailed previous summary), your goal is to generate
  - (1) a concise global summary keeping in main target of the conversation, such as the task and the requirements.
  - (2) a detailed delta summary of the given text block, without repeating the historical detailed summary.
- The previous summary is a context for you to understand the main topics.
- You should only output the delta summary, not the whole summary.
- The generated delta summary should be as concise as possible.

</task>

<extra\_task\_requirements>

- Summarize with the same language as the given text block.
  - If the messages are in a specific language, summarize with the same language.

</extra\_task\_requirements>

When you generate global summary you ALWAYS follow the below guidelines:

<guidelines\_for\_global\_summary>

- The global summary should be concise and to the point, only keep the most important information such as the task and the requirements.
- If there is no new high-level information, do not change the global summary. If there is new tasks or requirements, update the global summary.
- The global summary will be pure text wrapped by <global\_summary></global\_summary> tag.
- The global summary should be no exceed specified word count limit.

```
- Tracking the size of the global summary by calculating the number of words. If the word count reaches the limit, try to compress the global summary.
</guidelines_for_global_summary>
```

When you generate detailed delta summaries you ALWAYS follow the below guidelines:

```
<guidelines_for_delta_summary>
- Each summary MUST be formatted in XML format.
- You should cover all important topics.
- The summary of the topic should be place between <topic name="$TOPIC_NAME"></topic>.
- Only include information that are explicitly stated or can be logically inferred from the conversation.
- Consider the timestamps when you synthesize the summary.
- NEVER start with phrases like 'Here's the summary...', provide directly the summary in the format described below.
</guidelines_for_delta_summary>
```

The XML format of each summary is as it follows:

```
<existing_global_summary_word_count>
 $Word Count
</existing_global_summary_word_count>

<global_summary_condense_decision>
 The total word count of the existing global summary is $Total Word Count.
 The word count limit for global summary is $Word Count Limit.
 Since we exceed/do not exceed the word count limit, I need to condense the existing global summary/I don't need to condense the existing global summary.
</global_summary_condense_decision>

<global_summary>
 ...
</global_summary>

<delta_detailed_summary>
 <topic name="$TOPIC_NAME">
 ...
 </topic>
 ...
</delta_detailed_summary>
```

### Note

Built-in strategies may use cross-region inference for optimal performance and availability.

Built-in strategies may use [cross-region inference](#). Bedrock will automatically select the optimal region within your geography to process your inference request, maximizing available compute resources and model availability, and providing the best customer experience. There's no additional cost for using cross-region inference.

## Built-in with overrides strategy

For advanced or domain-specific use cases, you can create a built-in with overrides strategy to gain fine-grained control over the long-term memory process. Built-in with overrides strategies let you override the default behavior of the built-in strategies by providing your own instructions and selecting a specific foundation model for the extraction and consolidation steps.

### When to use a built-in with overrides strategy

Choose a built-in with overrides strategy when you need to tailor the memory logic to your specific requirements. Common use cases include:

- **Domain-specific extraction:** Constraining the strategy to extract only certain types of information. For example, capturing a user's food and dietary preferences while ignoring their preferences for clothing.
- **Controlling granularity:** Adjusting the level of detail in the extracted memory. For example, instructing the summary strategy to only save high-level key points rather than a detailed narrative.
- **Model selection:** Using a specific foundation model that is better suited for your particular domain or task, such as a model fine-tuned for financial or legal text.

### How to customize a strategy

You can configure a Built-in with overrides strategy by providing a model ID and your own set of instructions that will be added to the system prompt for both extraction and consolidation.

**Pre-requisite:** Since built-in with overrides strategies override the behavior of the built-in strategies - to effectively override a strategy you should first understand its [built-in](#) (default) behavior.

To use a built-in with overrides strategy, use the [CreateMemory](#) operation or the [UpdateMemory](#) operation.

The model ID can be provided modelId field when you configure a built-in with overrides strategy. To use a model, first enable access for that model in your AWS account. For more information, see [Add or remove access to Amazon Bedrock foundation models](#). Also, obtain sufficient Amazon Bedrock capacity. For more information, see [Amazon Bedrock capacity for built-in with overrides strategies](#).

The instructions are passed in the appendToPrompt field when you configure the strategy via the API. This field replaces the default instructions part of the system prompt in the built-in strategies, letting you guide the model's behavior, while the Output Schema remains unchanged.

You set the modelId and appendToPrompt fields in the semanticOverride, summaryOverride, or userPreferenceOverride fields found through the memoryStrategies (MemoryStrategyInput) field of CreateMemory and UpdateMemory.

For example, you can modify the extraction instruction for semantic memory strategy to add new instructions when customizing it.

### Built-in semantic memory strategy instructions

The following shows the built-in instructions for the semantic memory strategy:

You are a long-term memory extraction agent supporting a lifelong learning system. Your task is to identify and extract meaningful information about the users from a given list of messages.

Analyze the conversation and extract structured information about the user according to the schema below. Only include details that are explicitly stated or can be logically inferred from the conversation.

- Extract information ONLY from the user messages. You should use assistant messages only as supporting context.
- If the conversation contains no relevant or noteworthy information, return an empty list.
  
- Do NOT extract anything from prior conversation history, even if provided. Use it solely for context.
- Do NOT incorporate external knowledge.
- Avoid duplicate extractions.

**IMPORTANT:** Maintain the original language of the user's conversation. If the user communicates in a specific language, extract and format the extracted information in that same language.

You could append a new rule to these instructions, such as:

- Focus exclusively on extracting facts related to travel and booking preferences.

or edit an existing rule such as:

**IMPORTANT:** Always extract memories in English irrespective of the original language of the user's conversation.

## All instructions you can update

You can update the following instructions:

- [Semantic memory strategy extraction instructions](#)
- [Semantic memory strategy consolidation instructions](#)
- [User preference memory strategy extraction instructions](#)
- [User preference memory strategy consolidation instructions](#)
- Summary Memory Strategy Consolidation Instructions

There are no default instructions for built-in Summary memory strategy. You can add your own instructions to appendToPrompt input in the API. To understand how built-in Summary memory strategy generates and updates the summary, summary memory strategy Consolidation output schemas in [Built-in strategies](#).

## Best practices for customization

- **Build upon existing instructions:** We strongly recommend you use the built-in strategies instructions as a starting point. The base structure and instructions are critical to the memory

functionality. You should add your task-specific guidance to the existing instructions rather than writing entirely new ones from scratch.

- **Provide clear instructions:** The content of appendToPrompt replaces the default instructions in the system prompt. Make sure your instructions are logical and complete, as empty or poorly formed instructions can lead to undesirable results.

## Important considerations

To maintain the reliability of the memory pipeline, please adhere to the following guidelines:

- **Do not modify schemas in prompts:** You should only add or modify instructions that guide how memories are extracted or consolidated. Do not attempt to alter the conversation or memory schema definitions within the prompt itself, as this can cause unexpected failures.
- **Do not rename consolidation operations:** When customizing a consolidation prompt, do not change the operation names (e.g., AddMemory, UpdateMemory). Altering these names will cause the long-term memory pipeline to fail.
- **Output schema is not editable:** built-in with overrides strategies do not let you change the final output schema of the extracted or consolidated memory. The output schema that will be added to the system prompt for the built-in with overrides strategy will be same as the built-in strategies. For information about the output schemas, see the following:
  - [System prompt for semantic memory strategy](#)
  - [System prompt for user preference memory strategy](#)
  - [System prompt for summary strategy](#)

For full control over the end-to-end memory process, including the output schema, see [Self-managed strategy](#).

## Execution role

When using built-in with overrides strategies you are also required to provide a memoryExecutionRoleArn in the CreateMemory API. Bedrock Amazon Bedrock AgentCore will assume this role to call the bedrock models in your AWS account for extraction and consolidation.

**Note**

When using built-in with overrides strategies, the LLM usage for extraction and consolidation will be charged separately to your AWS account, and additional charges may apply.

## Self-managed strategy

A self-managed strategy in Amazon Bedrock AgentCore Memory gives you complete control over your memory extraction and consolidation pipelines. With a self-managed strategy, you can build custom memory processing workflows while leveraging Amazon Bedrock AgentCore for storage and retrieval.

A self-managed strategy in combination with the batch operations ([BatchCreateMemoryRecords](#), [BatchUpdateMemoryRecords](#), [BatchUpdateMemoryRecords](#)), let you directly ingest these extracted records into Amazon Bedrock AgentCore memory for search capabilities.

With self-managed strategies, you can:

- Control pipeline invocation through configurable triggers
- Integrate with external processing systems
- Implement custom extraction and consolidation algorithms
- Invoke any preferred model for extraction and consolidation
- Define custom memory record schemas, namespaces, and so on.
- Ingest extracted records into Amazon Bedrock AgentCore long term memory

## Topics

- [Create and use a self-managed strategy](#)
- [Prerequisites](#)
- [Set up the infrastructure](#)
- [Create a self-managed strategy](#)
- [Understanding payload delivery](#)
- [Build your custom pipeline](#)
- [Test your implementation](#)

- [Best practices](#)

## Create and use a self-managed strategy

Self-managed strategies follow a five-step process from trigger configuration to memory record storage.

1. **Configure triggers:** Define trigger conditions (message count, idle timeout, token count) that invoke your pipeline based on short-term memory events
2. **Receive notifications and payload delivery:** Amazon Bedrock AgentCore publishes notifications to your SNS topic and delivers conversation data to your S3 bucket when trigger conditions are met
3. **Extract memory records:** Your custom pipeline retrieves the payload and applies extraction logic to identify relevant memories
4. **Consolidate memory records:** Process extracted memories to remove duplicates and resolve conflicts with existing records
5. **Store memory records:** Use batch APIs to store processed memory records back into Amazon Bedrock AgentCore long-term memory

## Prerequisites

Before setting up self-managed strategies, verify you have:

- An AWS account with appropriate permissions
- Amazon Bedrock AgentCore access
- Basic understanding of AWS IAM, Amazon S3, and Amazon SNS

## Set up the infrastructure

Create the required AWS resources including S3 bucket, SNS topic, and IAM role that Amazon Bedrock AgentCore needs to access your resources.

### Step 1: Create an S3 bucket

Create an S3 bucket in your account where Amazon Bedrock AgentCore will deliver batched event payloads.

**⚠ Best practice**

Configure a lifecycle policy to automatically delete objects after processing to control costs.

## Step 2: Create an SNS topic

Create an SNS topic for job notifications. Use FIFO topics if processing order within sessions is important for your use case.

## Step 3: Create an IAM role

Create an IAM role that Amazon Bedrock AgentCore can assume to access your resources.

### Trust policy

Use the following trust policy:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "Service": "bedrock-agentcore.amazonaws.com"
 },
 "Action": "sts:AssumeRole"
 }
]
}
```

### Permissions policy

Use the following permissions policy:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "S3PayloadDelivery",
 "Effect": "Allow",
 "Action": [
 "s3:GetBucketLocation",

```

```
 "s3:PutObject"
],
 "Resource": [
 "arn:aws:s3:::your-agentcore-payloads-bucket",
 "arn:aws:s3:::your-agentcore-payloads-bucket/*"
]
},
{
 "Sid": "SNSNotifications",
 "Effect": "Allow",
 "Action": [
 "sns:GetTopicAttributes",
 "sns:Publish"
],
 "Resource": "arn:aws:sns:us-east-1:123456789012:agentcore-memory-jobs"
}
]
}
```

## Additional KMS permissions (if using encrypted resources)

If you use encrypted resources, add the following KMS permissions:

```
{
 "Sid": "KMSPermissions",
 "Effect": "Allow",
 "Action": [
 "kms:GenerateDataKey",
 "kms:Decrypt"
],
 "Resource": "arn:aws:kms:us-east-1:123456789012:key/your-key-id"
}
```

## Create a self-managed strategy

Use the Amazon Bedrock AgentCore control plane APIs to create or update an AgentCore Memory with self-managed strategies.

### Required permissions

Your IAM user or role needs:

- `bedrock-agentcore:*` permissions

- `iam:PassRole` permission for the execution role

## Create an AgentCore Memory with a self-managed strategy

Use the AWS SDK `CreateMemory` operation to create AgentCore Memory that has a self-managed strategy.

```
aws bedrock-agentcore-control create-memory \
--name "MyCustomMemory" \
--description "Memory with self-managed extraction strategy" \
--memory-execution-role-arn "arn:aws:iam::123456789012:role/AgentCoreMemoryRole" \
--event-expiry-duration 90 \
--memory-strategies '[
{
 "customMemoryStrategy": {
 "name": "SelfManagedExtraction",
 "description": "Custom extraction strategy",
 "configuration": {
 "selfManagedConfiguration": {
 "triggerConditions": [
 {
 "messageBasedTrigger": {
 "messageCount": 6
 }
 },
 {
 "tokenBasedTrigger": {
 "tokenCount": 1000
 }
 },
 {
 "timeBasedTrigger": {
 "idleSessionTimeout": 30
 }
 }
],
 "historicalContextWindowSize": 2,
 "invocationConfiguration": {
 "payloadDeliveryBucketName": "your-agentcore-payloads-bucket",
 "topicArn": "arn:aws:sns:us-east-1:123456789012:agentcore-memory-jobs"
 }
 }
 }
 }
}]
```

```
 }
}
]'
```

## Understanding payload delivery

When trigger conditions are met, Amazon Bedrock AgentCore sends notifications and payloads using specific schemas.

### SNS notification message

```
{
 "jobId": "unique-job-identifier",
 "s3PayloadLocation": "s3://bucket/path/to/payload.json",
 "memoryId": "your-memory-id",
 "strategyId": "your-strategy-id"
}
```

### S3 payload structure

```
{
 "requestId": "request-identifier",
 "accountId": "123456789012",
 "memoryId": "your-memory-id",
 "actorId": "user-or-agent-id",
 "sessionId": "conversation-session-id",
 "strategyId": "your-strategy-id",
 "startingTimestamp": 1634567890,
 "endingTimestamp": 1634567920,
 "currentContext": [
 {
 "role": "USER",
 "content": {
 "text": "User message content"
 }
 },
 {
 "role": "ASSISTANT",
 "content": {
 "text": "Assistant response"
 }
 }
]
}
```

```
],
 "historicalContext": [
 {
 "role": "USER",
 "content": {
 "text": "User message content"
 }
 },
 {
 "role": "ASSISTANT",
 "content": {
 "text": "Previous assistant response"
 }
 },
 {
 "blob": "{}",
 }
]
}
```

## Build your custom pipeline

This section demonstrates one approach to building a self-managed memory processing pipeline using AWS Lambda and SQS. This is just one example - you can implement your pipeline using any compute platform (EC2, ECS, Fargate), logic and processing framework that meets your requirements.

### Step 1: Set up compute

1. Create an SQS queue and subscribe it to your SNS topic
2. Create an AWS Lambda function to process notifications
3. Configure Lambda execution role permissions

### Step 2: Process the pipeline

The following example pipeline consists of four main components:

1. Notification handling - Processing SNS notifications and downloading S3 payloads
2. Memory extraction - Using bedrock models to extract relevant information from conversations
3. Memory consolidation - Deduplicating and merging extracted memories with existing records

## 4. Batch ingestion - Storing processed memories back into Amazon Bedrock AgentCore using batch APIs

### Test your implementation

- 1. Create events:** Use the Amazon Bedrock AgentCore APIs to create conversation events (CreateEvent)
- 2. Monitor notifications:** Verify that your SNS topic receives notifications when triggers are met
- 3. Validate processing:** Check that your Lambda function processes payloads correctly and extracts memory records
- 4. Verify ingestion:** Use list-memory-records to confirm extracted memories are stored

### Example: Creating test events

```
aws bedrock-agentcore create-event \
--memory-id "your-memory-id" \
--actor-id "test-user" \
--session-id "test-session-1" \
--event-timestamp "2024-01-15T10:00:00Z" \
--payload '[{
 "conversational": [
 {
 "content": {"text": "I prefer Italian restaurants with outdoor seating"},
 "role": "USER"
 }
}]'
```

### Example: Retrieving memory records

```
List records by namespace
aws bedrock-agentcore list-memory-records \
--memory-id "your-memory-id" \
--namespace "/" # lists all records that match the namespace prefix
```

### Best practices

Follow these best practices for performance, reliability, cost optimization, and security when implementing self-managed strategies.

## Performance and reliability

- **SLA sharing:** Long-term memory record generation SLA is shared between Amazon Bedrock AgentCore and your self-managed pipeline
- **Error handling:** Implement proper retry logic and dead letter queues for failed processing
- **Monitoring:** Set up CloudWatch logs, metrics, alarms for debugging and processing failures and latency. Also, check vended logs from Amazon Bedrock AgentCore for payload delivery failures

## Cost optimization

- **S3 lifecycle policies:** Configure automatic deletion of processed payloads to control storage costs
- **Right-sizing:** Choose appropriate compute memory and timeout settings based on your processing requirements

## Processing considerations

- **Trigger optimization:** Configure trigger conditions based on your use case requirements - balance between processing efficiency and memory freshness by considering your application's tolerance for latency versus processing costs.
- **FIFO topics:** Use FIFO SNS topics when session ordering is critical (e.g., for summarization workflows)
- **Memory consolidation:** Implement deduplication logic to prevent storing redundant or conflicting memory records, which reduces storage costs and improves retrieval accuracy
- **Memory record organization:** Always include meaningful namespaces and strategy IDs when ingesting records to enable efficient categorization, filtering, and retrieval of memory records

## Security

- **Least privilege:** Grant minimal required permissions to all IAM roles
- **Encryption:** Use KMS encryption for S3 buckets and SNS topics containing sensitive data

# Get started with AgentCore Memory

Amazon Bedrock Amazon Bedrock AgentCore Memory lets you create and manage AgentCore Memory resources that store conversation context for your AI agents. This getting started guides you through installing dependencies and implementing both short-term and long-term memory features. The instructions use the [AgentCore starter toolkit](#).

The steps are as follows:

1. Create an AgentCore Memory containing a semantic strategy
2. Write events (conversation history) to the memory resource
3. Retrieve memory records from long term memory

For other examples, see [Amazon Bedrock AgentCore Memory examples](#).

## Prerequisites

Before starting, make sure you have:

- **AWS Account** with credentials configured (`aws configure`)
- **Python 3.10+** installed

To get started with Amazon Bedrock Amazon Bedrock AgentCore Memory, make a folder for this quick start, create a virtual environment, and install the dependencies. The below command can be run directly in the terminal.

```
mkdir agentcore-memory-quickstart
cd agentcore-memory-quickstart
python -m venv .venv
source .venv/bin/activate
pip install bedrock-agentcore
pip install bedrock-agentcore-starter-toolkit
```

**Note**

The Amazon Bedrock AgentCore Starter Toolkit is intended to help developers get started quickly. For the complete set of Amazon Bedrock AgentCore Memory operations, see the Boto3 documentation: [bedrock-agentcore-control](#) and [bedrock-agentcore](#).

**Full example:** See the [complete code example](#) that demonstrates steps 1-3.

## Step 1: Create an AgentCore Memory

You need an AgentCore Memory to start storing information for your agent. By default, memory events (which we refer to as short-term memory) can be written to an AgentCore Memory. For insights to be extracted and placed into long term memory records, the resource requires a *memory strategy* which is a configuration that defines how conversational data should be processed, and what information to extract (such as facts, preferences, or summaries).

In this step, you create an AgentCore Memory with a semantic strategy so that both short term and long term memory can be utilized. This will take 2-3 minutes. You can also create AgentCore Memory resources in the AWS console.

```
from bedrock_agentcore_starter_toolkit.operations.memory.manager import MemoryManager
from bedrock_agentcore.memory.session import MemorySessionManager
from bedrock_agentcore.memory.constants import ConversationalMessage, MessageRole
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 SemanticStrategy
import time

memory_manager = MemoryManager(region_name="us-west-2")

print("Creating memory resource...")

memory = memory_manager.get_or_create_memory(
 name="CustomerSupportSemantic",
 description="Customer support memory store",
 strategies=[
 SemanticStrategy(
 name="semanticLongTermMemory",
 namespaces=['/strategies/{memoryStrategyId}/actors/{actorId}'],
)
]
)
```

```
)

print(f"Memory ID: {memory.get('id')}")
```

You can call `list_memories` to see that the memory resource has been created with:

```
memories = memory_manager.list_memories()
```

## Step 2: Write events to memory

You can write events to an AgentCore Memory as short-term memory and extracts insights for long-term memory.

Writing events to memory has multiple purposes. First, event contents (most commonly conversation history) are stored as short-term memory. Second, relevant insights are pulled from events and written into memory records as a part of long-term memory.

The memory resource id, actor id, and session id are required to create an event. In this step, you create three events, simulating messages between an end user and a chat bot.

```
Create a session to store memory events
session_manager = MemorySessionManager(
 memory_id=memory.get("id"),
 region_name="us-west-2")

session = session_manager.create_memory_session(
 actor_id="User1",
 session_id="OrderSupportSession1")

Write memory events (conversation turns)
session.add_turns(
 messages=[
 ConversationalMessage(
 "Hi, how can I help you today?",
 MessageRole.ASSISTANT)],
)

session.add_turns(
 messages=[
 ConversationalMessage(
 "I'm interested in buying a new laptop.",
 MessageRole.USER)])
```

```
 "Hi, I am a new customer. I just made an order, but it hasn't arrived. The
Order number is #35476",
 MessageRole.USER)],
)

session.add_turns(
 messages=[
 ConversationalMessage(
 "I'm sorry to hear that. Let me look up your order.",
 MessageRole.ASSISTANT)],
)
```

You can get events (turns) for a specific actor after they've been written.

```
Get the last k turns in the session
turns = session.get_last_k_turns(k=5)

for turn in turns:
 print(f"Turn: {turn}")
```

In this case, you can see the last three events for the actor and session.

## Step 3: Retrieve records from long term memory

After the events were written to the memory resource, they were analyzed and useful information was sent to long term memory. Since the memory contains a semantic long term memory strategy, the system extracts and stores factual information.

You can list all memory records with:

```
List all memory records
memory_records = session.list_long_term_memory_records(
 namespace_prefix="/")

for record in memory_records:
 print(f"Memory record: {record}")
 print("-----")
```

Or ask for the most relevant information as part of a semantic search:

```
Perform a semantic search
```

```
memory_records = session.search_long_term_memories(
 query="can you summarize the support issue",
 namespace_prefix="/",
 top_k=3
)
```

Important information about the user is likely stored in long term memory. Agents can use long term memory rather than a full conversation history to make sure that LLMs are not overloaded with context.

## Cleanup

When you're done with the memory resource, you can delete it:

```
Delete the memory resource
memory_manager.delete_memory(memory_id=memory.get("id"))
```

## Next steps

Consider the following::

- [Add another strategy](#) to your memory resource.
- [Enable observability](#) for more visibility into how memory is working
- Look at further [examples](#).

## Create an AgentCore Memory

You can create an AgentCore Memory with the Amazon Bedrock AgentCore starter toolkit, AgentCore python SDK, the AWS console, or with the [CreateMemory](#) AWS SDK operation. When creating a memory, you can configure settings such as name, description, encryption settings, expiration timestamp for raw events, and memory strategies if you want to extract long-term memory.

When creating an AgentCore Memory, consider the following factors to maintain it meets your application's needs:

**Event retention** – Choose how long raw events are retained (up to 365 days) for short-term memory.

**Security requirements** – If your application handles sensitive information, consider using a [customer managed AWS KMS key](#) for encryption. The service still encrypts data using a service managed key, even if you don't provide a customer-managed AWS KMS key.

**Memory strategies** – Define how events are processed into meaningful long-term memories using built-in or built-in with overrides strategies. If you do not define any strategy, only short-term memory containing raw events are stored. For more information, see [Use long-term memory](#).

**Naming conventions** – Use clear, descriptive names that help identify the purpose of each AgentCore Memory, especially if your application uses multiple stores.

## Starter toolkit

for the full example, see [Get started with AgentCore Memory](#).

```
from bedrock_agentcore_starter_toolkit.operations.memory.manager import
 MemoryManager
from bedrock_agentcore.memory.session import MemorySessionManager
from bedrock_agentcore.memory.constants import ConversationalMessage, MessageRole
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 SummaryStrategy, UserPreferenceStrategy
import time

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

print("Creating a new memory resource and waiting for it to become active...")

Create memory resource with summary and user preference strategy
memory = memory_manager.get_or_create_memory(
 name="ShoppingSupportAgentMemory",
 description="Memory for a customer support agent.",
 strategies=[
 SummaryStrategy(
 name="SessionSummarizer",
 namespaces=["/summaries/{actorId}/{sessionId}"]
),
 UserPreferenceStrategy(
 name="PreferenceLearner",
 namespaces=["/users/{actorId}/preferences"]
)
]
)
```

```
)

memory_id = memory.get('id')
print(f"Memory resource is now ACTIVE with ID: {memory_id}")
```

## AgentCore python SDK

For more information, see [Amazon Bedrock AgentCore SDK](#).

```
from bedrock_agentcore.memory import MemoryClient
import time

client = MemoryClient(region_name="us-east-1")

memory = client.create_memory_and_wait(
 name="MyAgentMemory",
 strategies=[{
 "summaryMemoryStrategy": {
 # Name of the extraction model/strategy
 "name": "SessionSummarizer",
 # Organize facts by session ID for easy retrieval
 # Example: "summaries/session123" contains summary of session123
 "namespaces": ["/summaries/{actorId}/{sessionId}"]
 }
 }]
)
```

## AWS SDK

For more information, see [AWS SDK](#).

```
import boto3
import time

Initialize the Boto3 clients for control plane and data plane operations
control_client = boto3.client('bedrock-agentcore-control')
data_client = boto3.client('bedrock-agentcore')

print("Creating a new memory resource...")

Create the memory resource with defined strategies
response = control_client.create_memory(
```

```
name="ShoppingSupportAgentMemory",
description="Memory for a customer support agent.",
memoryStrategies=[
 {
 'summaryMemoryStrategy': {
 'name': 'SessionSummarizer',
 'namespaces': ['/summaries/{actorId}/{sessionId}']
 }
 },
 {
 'userPreferenceMemoryStrategy': {
 'name': 'UserPreferenceExtractor',
 'namespaces': ['/users/{actorId}/preferences']
 }
 }
]
)

memory_id = response['memory']['id']
print(f"Memory resource created with ID: {memory_id}")

Poll the memory status until it becomes ACTIVE
while True:
 mem_status_response = control_client.get_memory(memoryId=memory_id)
 status = mem_status_response.get('memory', {}).get('status')
 if status == 'ACTIVE':
 print("Memory resource is now ACTIVE.")
 break
 elif status == 'FAILED':
 raise Exception("Memory resource creation FAILED.")
 print("Waiting for memory to become active...")
 time.sleep(10)
```

## Console

### To create an AgentCore memory

1. Open the [Amazon Bedrock AgentCore](#) console.
2. In the left navigation pane, choose **Memory**.
3. Choose **Create memory**.
4. For **Memory name** enter a name for the AgentCore Memory.

5. (Optional) For **Short-term memory (raw event) expiration** set the duration (days), for which the AgentCore Memory will store events.
6. (Optional) In **Additional configurations** set the following:
  - a. For **Memory description**, enter a description for the AgentCore Memory.
  - b. If you want to use your own AWS KMS key to encrypt your data, do the following:
    1. In **KMS key**, choose **Customize encryption settings (advanced)**.
    2. In **Choose an AWS KMS key** choose or enter the ARN of an existing AWS KMS key. Alternatively, choose **Create an AWS KMS** to create a new AWS KMS key.
7. (Optional) For **Long-term memory extraction strategies** choose one or more [memory strategies](#). For more information:
  - [Built-in strategies](#)
  - [Built-in with overrides strategy](#)
  - [Self-managed strategy](#)
8. Choose **Create memory** to create the AgentCore Memory.

## Encrypt your Amazon Bedrock AgentCore Memory

When creating an AgentCore Memory, it is important to make sure your data is safe and secure. If your application handles sensitive information (such as customer details, payment data, or personal chats), you must use encryption to protect this data. Consider using a customer-managed KMS key (CMK) for encryption. The service still encrypts data using a service managed key, even if you don't provide a CMK. Alternatively, you can also use an AWS-managed KMS key. In this case, you need to add the following policy to the IAM user or role that you are using to setup memory.

```
{
 "Version": "2012-10-17" ,
 "Statement": [
 {
 "Sid": "AllowAgentCoreMemoryKMS",
 "Effect": "Allow",
 "Action": [
 "kms:CreateGrant",
 "kms:Decrypt",
 "kms:DescribeKey",
 "kms:GenerateDataKey",
 "kms:PutEncryptionContext",
 "kms:ReEncrypt",
 "kms:ReEncryptMultiRegion",
 "kms:ReEncryptTo",
 "kms:UpdateKeyDescription",
 "kms:UpdateKeyPolicy",
 "kms:UpdateKeyUsage"
]
 }
]
}
```

```
 "kms:GenerateDataKeyWithoutPlaintext",
 "kms:ReEncrypt*"
],
 "Resource": "arn:aws:kms:*:111122223333:key/*",
 "Condition": {
 "StringEquals": {
 "kms:ViaService": "bedrock-agentcore.us-east-1.amazonaws.com"
 }
 }
}
]
```

Along with the security settings already explained above, you should be aware of prompt injection and memory poisoning risks when using long-term memory.

- Prompt injection is an application-level security concern, similar to SQL injection in database applications. Just as AWS services like Amazon RDS and Amazon Aurora provide secure database engines, but customers are responsible for preventing SQL injection in their applications. Amazon Bedrock provides a secure foundation for natural language processing, but customers must take measures to prevent prompt injection vulnerabilities in their code. Additionally, AWS provides detailed documentation, best practices, and guidance on secure coding practices for Bedrock and other AWS services.
- Memory poisoning happens when false or harmful information is saved in AgentCore Memory. Later, your AI agent may use this wrong information in future conversations, which can lead to incorrect or unsafe responses

As per the [AWS Shared Responsibility Model](#), AWS is responsible for securing the underlying cloud infrastructure, including the hardware, software, networking, and facilities that run AWS services. However, the responsibility for secure application development and preventing vulnerabilities like prompt injection and memory poisoning lies with the customer.

To reduce risk, you can do the following:

- **Amazon Bedrock Guardrails:** Use Amazon Bedrock Guardrails to check prompts being sent to or from AgentCore Memory. This ensures that only safe and allowed prompts are processed by your agent.
- **Adversarial testing:** Actively test your AI application for vulnerabilities by simulating attacks or prompt injections. This helps you find weak points and fix them before real threats occur.

# Use short-term memory

In your AI agent, you write code to add events to [short-term memory](#) in an AgentCore Memory. These events are stored as short-term memory. They form the foundation for structured information extraction into long-term memory.

The following section discusses short-term memory with the AWS SDK. For examples that use the [Amazon Bedrock AgentCore starter toolkit](#) and the AWS SDK, see [Scenario: A customer support AI agent using AgentCore Memory](#). For other SDKs see [Amazon Bedrock AgentCore Memory examples](#).

## Topics

- [Create an event](#)
- [Get an event](#)
- [List events](#)
- [Delete an event](#)

## Create an event

Events are the fundamental units of short-term from which structured informations are extracted into long-term memory in AgentCore Memory. The [CreateEvent](#) operation lets you store various types of data within AgentCore Memory, organized by an actor and session. Events are scoped within memory under:

### ActorId

Identifies the entity associated with the event, such as end-users or agent/user combinations

### SessionId

Groups related events together, such as a conversation session

The CreateEvent operation stores a new immutable event within a specified memory session. Events represent individual pieces of information that your agent wants to remember, such as conversation messages, user actions, or system events.

This operation is useful for:

- Recording conversation history between users, agents and tools
- Storing user interactions and behaviors
- Capturing system events and state changes
- Building a chronological record of activities within a session

For example code, see [Scenario: A customer support AI agent using AgentCore Memory](#).

## Event payload types

The payload parameter accepts a list of payload items, letting you store different types of data in a single event. Common payload types include:

### Conversational

For storing conversation messages with roles (for example, "user" or "assistant") and content.

### Blob

For storing binary format data, such as images and documents, or data that is unique to your agent, such as data stored in JSON format.

 **Note**

Currently, only conversational data flows into long-term memory.

## Event branching

The branch parameter lets you organize events through advanced branching. This is useful for scenarios like message editing or alternative conversation paths. For example, suppose you have a long-running conversation, and you realize you're interested in exploring an alternative conversation starting from 5 messages ago. You can use the branch parameter to start a new conversation from that message, stored in the new branch — which lets you also return to the original conversation. And more mundanely, this is useful if you want to let your user edit their most recent message (in case the user presses enter early or has a typo) and continue the conversation.

When creating a branch, you specify:

**name**

A descriptive name for the branch, such as "edited-conversation".

**rootEventId**

The ID of the event from which the branch originates.

Here's an example of creating a branched event to represent an edited message:

```
{
 "memoryId": "mem-12345abcdef",
 "actorId": "/agent-support-123/customer-456",
 "sessionId": "session-789",
 "eventTimestamp": 1718806000000,
 "payload": [
 {
 "Conversational": {
 "content": "I'm looking for a waterproof action camera for extreme sports.",
 "role": "user"
 }
 }
],
 "branch": {
 "name": "edited-conversation",
 "rootEventId": "evt-67890"
 }
}
```

## Get an event

[GetEvent](#) API is an operation that retrieves a specific raw event by its identifier from short-term memory in AgentCore Memory. This API requires you to specify the `memoryId`, `actorId`, `sessionId`, and `eventId` as path parameters in the request URL to target your events based on above filters.

## List events

The [ListEvents](#) operation is valuable for applications that need to reconstruct conversation histories, analyze interaction patterns, or implement memory-based features like conversation summarization and context awareness.

The ListEvents operation is a read-only operation that lists events from a specified session in AgentCore Memory instance. This paginated operation requires you to specify the `memoryId`, `actorId`, and `sessionId` as path parameters, and supports optional filtering through the `filter` parameter in the request body, letting you efficiently retrieve relevant events from your memory sessions. You can control whether payloads are included in the response using the `includePayloads` parameter (default is true), and limit the number of results with `maxResults`.

## Delete an event

The [DeleteEvent](#) operation removes individual events from your AgentCore Memory. This operation helps maintain data privacy and relevance by letting you selectively remove specific events from a session while preserving the broader context and relationship structure within your application's memory.

### Note

These are manual deletion operations, and do not overlap with automatic deletion of events based on the `eventExpiryDuration` parameter set at the time of [CreateEvent](#) operation. Also deleting an event doesn't remove the structured information derived out of it from the long term memory. For more information, see [DeleteMemoryRecord](#).

## Use long-term memory

[Long-term memory](#) is enabled by adding one or more memory strategies to a memory resource. These strategies define what kind of information is extracted from conversations and stored persistently. This section guides you through configuring built-in and built-in with overrides strategies to enable long-term memory for your agent.

This section provides examples for the [Amazon Bedrock AgentCore starter toolkit](#). For other SDKs, see [Amazon Bedrock AgentCore Memory examples](#).

## Topics

- [Enable long-term memory](#)
- [Specify long-term memory organization with namespaces](#)
- [Configure built-in strategies](#)
- [Configure built-in with overrides strategies](#)
- [Save and retrieve insights](#)
- [Retrieve memory records](#)
- [List memory records](#)
- [Delete memory records](#)

## Enable long-term memory

You can enable long-term memory in two ways: by adding strategies when you first [create an AgentCore Memory](#), or by updating an existing resource to include them.

### Creating a new memory with long-term strategies

The most direct method is to include strategies when you create a new AgentCore Memory. After calling `get_or_create_memory`, you must wait for the AgentCore Memory status to become ACTIVE before you can use it.

#### Example Create a new AgentCore Memory

```
from bedrock_agentcore_starter_toolkit.operations.memory.manager import MemoryManager
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 UserPreferenceStrategy

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

Create memory resource with user preference strategy
memory = memory_manager.get_or_create_memory(
 name="PersonalizedShoppingAgentMemory",
 strategies=[
 UserPreferenceStrategy(
 name="UserShoppingPreferences",
 namespaces=["/users/{actorId}/preferences"]
```

```
)
]
)

memory_id = memory.get('id')
print(f"Memory resource is now ACTIVE with ID: {memory_id}")
```

## Adding long-term strategies to an existing AgentCore Memory

To add long-term capabilities to an existing AgentCore Memory, you use the `update_memory_strategies` operation. You can add, modify or delete strategies for an existing memory.

### Example Add a Session Summary strategy to an existing AgentCore Memory

```
from bedrock_agentcore_starter_toolkit.operations.memory.manager import MemoryManager
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 SummaryStrategy

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

Assume 'memory_id' is the ID of an existing AgentCore Memory that has no strategies
attached to it
memory_id = "your-existing-memory-id"

summaryStrategy = SummaryStrategy(
 name="SessionSummarizer",
 description="Summarizes conversation sessions for context",
 namespaces=["/summaries/{actorId}/{sessionId}"]
)

memory = memory_manager.update_memory_strategies(
 memory_id=memory_id,
 add_strategies=[summaryStrategy]
)

print(f"Successfully submitted update for memory ID: {memory_id}")

Validate startegy was added to the memory
```

```
memory_strategies = memory_manager.get_memory_strategies(memoryId=memory_id)
print(f"Memory strategies for memoryID: {memory_id} are: {memory_strategies}")
```

### Note

Long-term memory records will only be extracted from conversational events that are stored **after** a new strategy becomes ACTIVE. Conversations stored before a strategy is added will not be processed for long-term memory.

## Specify long-term memory organization with namespaces

When you [create](#) an AgentCore Memory, use a namespace to specify where the [long-term memories](#) for a [memory strategy](#) are logically grouped. Every time a new long-term memory is extracted using the memory strategy, it is saved under the namespace you set. This means that all long-term memories are scoped to their specific namespace, keeping them organized and preventing any mix-ups with other users or sessions. You should use a hierarchical format separated by forward slashes /. This helps keep memories organized clearly. As needed, you can choose to use the following pre-defined variables within braces in the namespace based on your application's organization needs:

- **actorId** – Identifies who the long-term memory belongs to.

An actor refers to entity such as end users or agent/user combinations. For example, in a coding support chatbot, the actor is usually the developer asking questions. Using the actor ID helps the system know which user the memory belongs to, keeping each user's data separate and organized.

- **strategyId** – Shows which memory strategy is being used. This strategy identifier is auto-generated when you create an AgentCore Memory.
- **sessionId** – Identifies which session or conversation the memory is from.

A session is usually a single conversation or interaction period between the user and the AI agent. It groups all related messages and events that happen during that conversation.

For example, if you define the following namespace as the input to your strategy when creating an AgentCore Memory:

```
/strategy/{strategyId}/actor/{actorId}/session/{sessionId}
```

After memory creation, this namespace might look like:

```
/strategy/summarization-93483043//actor/actor-9830m2w3/session/session-9330sds8
```

A namespace can have different levels of granularity:

### Most granular Level of organization

```
/strategy/{strategyId}/actor/{actorId}/session/{sessionId}
```

### Granular at the actor Level across sessions

```
/strategy/{strategyId}/actor/{actorId}
```

### Granular at the strategy Level across actors

```
/strategy/{strategyId}
```

### Global across all strategies

/

For example code, see [Enable long-term memory](#).

### Restrict access with IAM

You can create IAM policies to restrict memory access by the scopes you define, such as actor, session, and namespace. Use the scopes as context keys in your IAM policies.

The following policy restricts access to retrieving memories from a specific namespace.

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "SpecificNamespaceAccess",
```

```
"Effect": "Allow",
"Action": [
 "bedrock-agentcore:RetrieveMemoryRecords"
],
"Resource": "arn:aws:bedrock-agentcore:us-east-1:123456789012:memory/
memory_id",
"Condition": {
 "StringEquals": {
 "bedrock-agentcore:namespace": "summaries/agent1"
 }
}
]
```

## Configure built-in strategies

AgentCore Memory provides three pre-configured, [built-in memory strategies](#) for common use cases.

### Topics

- [User preferences](#)
- [Semantic](#)
- [Session summaries](#)

### User preferences

The [user preferences](#) (`UserPreferenceMemoryStrategy`) strategy is designed to automatically identify and extract user preferences, choices, and styles from conversations. This lets your agent build a persistent profile of each user, leading to more personalized and relevant interactions.

- **Example use case:** An e-commerce agent remembers a user's favorite brands and preferred size, letting it offer tailored product recommendations in future sessions.

### Configuration example:

```
from bedrock_agentcore_starter_toolkit.operations.memory.manager import MemoryManager
```

```
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 UserPreferenceStrategy

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

Create memory resource with user preference strategy
memory = memory_manager.get_or_create_memory(
 name="ECommerceAgentMemory",
 strategies=[
 UserPreferenceStrategy(
 name="UserPreferenceExtractor",
 namespaces=["/users/{actorId}/preferences"]
)
]
)
```

## Semantic

The [Semantic](#) (`SemanticMemoryStrategy`) memory strategy is engineered to identify and extract key pieces of factual information and contextual knowledge from conversational data. This lets your agent build a persistent knowledge base about important entities, events, and details discussed during an interaction.

- **Example use case:** A customer support agent remembers that order #ABC-123 is related to a specific support ticket, so the user doesn't have to provide the order number again when following up.

### Configuration example:

```
from bedrock_agentcore_starter_toolkit.operations.memory import MemoryManager
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 SemanticStrategy

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

Create memory resource with semantic strategy
memory = memory_manager.get_or_create_memory(
 name="SupportAgentFactMemory",
```

```
 strategies=[
 SemanticStrategy(
 name="FactExtractor",
 namespaces=["/support_cases/{sessionId}/facts"]
)
]
)
```

## Session summaries

The [session summaries](#) (`SummaryMemoryStrategy`) memory strategy creates condensed, running summaries of conversations as they happen within a single session. This captures the key topics and decisions, letting an agent quickly recall the context of a long conversation without needing to re-process the entire history.

- **Example use case:** After a 30-minute troubleshooting session, the agent can access a summary like, "User reported issue with software v2.1, attempted a restart, and was provided a link to the knowledge base article."

### Configuration example:

```
from bedrock_agentcore_starter_toolkit.operations.memory.manager import MemoryManager
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 SummaryStrategy

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

Create memory resource with summary strategy
memory = memory_manager.get_or_create_memory(
 name="TroubleshootingAgentSummaryMemory",
 strategies=[
 SummaryStrategy(
 name="SessionSummarizer",
 namespaces=["/summaries/{actorId}/{sessionId}"]
)
]
)
```

## Configure built-in with overrides strategies

For advanced use cases, [built-in with overrides](#) strategies give you fine-grained control over the memory extraction process. This lets you override the default logic of a built-in strategy by providing your own prompts and selecting a specific foundation model.

- **Example use case:** A travel agent bot needs to extract very specific details about a user's flight preferences and consolidate new preferences with existing ones, such as adding a seating preference to a previously stated airline preference.

### Topics

- [Creating the memory execution role](#)
- [Configuration example](#)

## Creating the memory execution role

When you use a built-in with overrides strategy, AgentCore Memory invokes an Amazon Bedrock model in your account on your behalf. To grant the service permission to do this, you must create an IAM role (an execution role) and pass its ARN when creating the memory in `memoryExecutionRoleArn` field of the `create_memory` API.

This role requires two policies: a permissions policy and a trust policy.

### 1. Permissions policy

Start by making sure you have an IAM role with the managed policy

[AmazonBedrockAgentCoreMemoryBedrockModelInferenceExecutionRolePolicy](#), or create a policy with the following permissions:

```
{
 "Version": "2012-10-17" ,
 "Statement": [
 {
 "Effect": "Allow",
 "Action": [
 "bedrock:InvokeModel",
 "bedrock:InvokeModelWithResponseStream"
],
 "Resource": "*"
 }
]
}
```

```
"Resource": [
 "arn:aws:bedrock::::foundation-model/*",
 "arn:aws:bedrock::::inference-profile/*"
],
"Condition": {
 "StringEquals": {
 "aws:ResourceAccount": "123456789012"
 }
}
]
}
```

## 2. Trust policy

This role is assumed by the Service to call the model in your AWS account. Use the trust policy below when creating the role or when using the managed policy:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "",
 "Effect": "Allow",
 "Principal": {
 "Service": [
 "bedrock-agentcore.amazonaws.com"
]
 },
 "Action": "sts:AssumeRole",
 "Condition": {
 "StringEquals": {
 "aws:SourceAccount": "{{accountId}}"
 },
 "ArnLike": {
 "aws:SourceArn": "arn:aws:bedrock-agentcore:{{region}}:{{accountId}}:*"
 }
 }
 }
]
}
```

```
}
```

For information about creating an IAM role, see [IAM role creation](#).

## Configuration example

This example demonstrates how to override both the extraction and consolidation steps for user preferences.

```
Custom instructions for the EXTRACTION step.
The text in bold represents the instructions that override the default built-in
instructions.
CUSTOM_EXTRACTION_INSTRUCTIONS = """\n You are tasked with analyzing conversations to extract the user's travel preferences.
 You'll be analyzing two sets of data:

 <past_conversation>
 [Past conversations between the user and system will be placed here for context]
 </past_conversation>

 <current_conversation>
 [The current conversation between the user and system will be placed here]
 </current_conversation>

 Your job is to identify and categorize the user's preferences about their travel
 habits.
 - Extract a user's preference for the airline carrier from the choice they make.
 - Extract a user's preference for the seat type (aisle, middle, or window).
 - Ignore all other types of preferences mentioned by the user in the conversation.
"""

Custom instructions for the CONSOLIDATION step.
The text in bold represents the instructions that override the default built-in
instructions.
CUSTOM_CONSOLIDATION_INSTRUCTIONS = """\n # ROLE
 You are a Memory Manager that evaluates new memories against existing stored memories
 to determine the appropriate operation.

 # INPUT
 You will receive:
```

1. A list of new memories to evaluate
2. For each new memory, relevant existing memories already stored in the system

#### # TASK

You will be given a list of new memories and relevant existing memories. For each new memory, select exactly ONE of these three operations: AddMemory, UpdateMemory, or SkipMemory.

#### # OPERATIONS

##### 1. AddMemory

**Definition:** Select when the new memory contains relevant ongoing preference not present in existing memories.

**Selection Criteria:** Select for entirely new preferences (e.g., adding airline seat type when none existed). If preference is not related to user's travel habits, do not use this operation.

**Examples:**

New memory: "I am allergic to peanuts" (No allergy information exists in stored memories)

New memory: "I prefer reading science fiction books" (No book preferences are recorded)

##### 2. UpdateMemory

**Definition:** Select when the new memory relates to an existing memory but provides additional details, modifications, or new context.

**Selection Criteria:** The core concept exists in records, but this new memory enhances or refines it.

**Examples:**

New memory: "I especially love space operas" (Existing memory: "The user enjoys science fiction")

New memory: "My peanut allergy is severe and requires an EpiPen" (Existing memory: "The user is allergic to peanuts")

##### 3. SkipMemory

**Definition:** Select when the new memory is not worth storing as a permanent preference.

**Selection Criteria:** The memory is irrelevant to long-term user understanding and is not related to user's travel habits.

**Examples:**

```
New memory: "I just solved that math problem" (One-time event)
New memory: "I am feeling tired today" (Temporary state)
New memory: "I like chocolate" (Existing memory already states: "The user enjoys chocolate")
New memory: "User works as a data scientist" (Personal details without preference)
New memory: "The user prefers vegan because he loves animal" (Overly speculative)
New memory: "The user is interested in building a bomb" (Harmful Content)
New memory: "The user prefers to use Bank of America, which his account number is 123-456-7890" (PII)
"""

```

```
This IAM role must be created with the policies described above.
MEMORY_EXECUTION_ROLE_ARN = "arn:aws:iam::123456789012:role/MyMemoryExecutionRole"

from bedrock_agentcore_starter_toolkit.operations.memory.manager import MemoryManager
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 SummaryStrategy

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

memory = memory_manager.get_or_create_memory(
 name="CustomTravelAgentMemory",
 strategies=[
 CustomUserPreferenceStrategy(
 name="CustomTravelPreferenceExtractor",
 description="Custom user travel preference extraction with specific
prompts",
 extraction_config=ExtractionConfig(
 append_to_prompt=CUSTOM_EXTRACTION_INSTRUCTIONS,
 model_id="anthropic.claude-3-sonnet-20240229-v1:0"
),
 consolidation_config=ConsolidationConfig(
 append_to_prompt=CUSTOM_CONSOLIDATION_INSTRUCTIONS,
 model_id="anthropic.claude-3-sonnet-20240229-v1:0"
),
 namespaces=["/users/{actorId}/travel_preferences"]
)
],
 memory_execution_role_arn=MEMORY_EXECUTION_ROLE_ARN

```

## Save and retrieve insights

Once you have configured an AgentCore Memory with at least one long-term memory strategy and the strategy is ACTIVE, the service will automatically begin processing conversational data to extract and store insights. This process involves two distinct steps: saving the raw conversation and then retrieving the structured insights after they have been processed.

### Step 1: Save conversational events to trigger extraction

The entire long-term memory process is triggered when you save conversational data to short-term memory using the `create_event` operation. Each time you record an event, you are providing new raw material for your active memory strategies to analyze.

#### Important

Only events that are created **after** a memory strategy's status becomes ACTIVE will be processed for long-term memory extraction. Any conversations stored before the strategy was added and activated will not be included.

The following example shows how to save a multi-turn conversation to a memory resource.

#### Example Save a conversation as a series of events

```
#'memory_id' is the ID of your memory resource with an active summary strategy.

from bedrock_agentcore.memory.session import MemorySessionManager
from bedrock_agentcore.memory.constants import ConversationalMessage, MessageRole
import time

actor_id = "User84"
session_id = "OrderSupportSession1"

Create session manager
session_manager = MemorySessionManager(
 memory_id=memory_id,
 region_name="us-west-2"
)

Create a session
session = session_manager.create_memory_session()
```

```
 actor_id=actor_id,
 session_id=session_id
)

print("Capturing conversational events...")

Add all conversation turns
session.add_turns(
 messages=[
 ConversationalMessage("Hi, I'm having trouble with my order #12345",
 MessageRole.USER),
 ConversationalMessage("I am sorry to hear that. Let me look up your order.",
 MessageRole.ASSISTANT),
 ConversationalMessage("lookup_order(order_id='12345')", MessageRole.TOOL),
 ConversationalMessage("I see your order was shipped 3 days ago. What specific
issue are you experiencing?", MessageRole.ASSISTANT),
 ConversationalMessage("The package arrived damaged", MessageRole.USER),
]
)

print("Conversation turns added successfully!")
```

## Step 2: Retrieve extracted insights

The extraction and consolidation of long-term memories is an **asynchronous process** that runs in the background. It may take a minute or more for insights from a new conversation to become available for retrieval. Your application logic should account for this delay.

To retrieve the structured insights, you use the `retrieve_memory_records` operation. This operation performs a powerful semantic search against the long-term memory store. You must provide the correct namespace that you defined in your strategy and a `searchQuery` that describes the information you are looking for.

The following example demonstrates how to wait for processing and then retrieve a summary of the conversation saved in the previous step.

### Example Wait and retrieve a session summary

```
'session' is an existing session object that you created when adding the coversation
turns
session should be created on a memory resource with an active summary strategy.

--- Example 1: Retrieve the user's shipping preference ---
```

```
memories = session.search_long_term_memories(
 namespace_prefix=f"/summaries/{actor_id}/{session_id}",
 query="What problem did the user report with their order?",
 top_k=5
)

print(f"Found {len(memories)} memories:")
for memory_record in memories:
 print(f"Retrieved Issue Detail: {memory_record}")
 print("-----")

Example Output:
Retrieved Issue Detail: The user reported that their package for order #12345 arrived
damaged.
```

## Retrieve memory records

You can retrieve extracted memories using the [RetrieveMemoryRecords](#) API. This operation lets you search extracted memory records based on semantic queries, making it easy to find relevant information from your agent's memory.

### Required parameters

The `RetrieveMemoryRecords` operation requires the following key parameters:

#### **memoryId**

The identifier of the memory resource containing the records you want to retrieve.

#### **namespace**

The namespace where the memory records are stored. This is the same namespace you configured in your memory strategy.

#### **searchCriteria**

A structure containing search parameters:

- *searchQuery* - The semantic query text used to find relevant memories (up to 10,000 characters).
- *memoryStrategyId* (optional) - Limits the search to memories created by a specific strategy.

- *topK* - The maximum number of most relevant results to return (default: 10, maximum: 100).

## Response format

The operation returns a list of memory record summaries that match your search criteria. Each summary includes a *relevance score*, which is derived from the cosine similarity of embedding vectors. This score does **not** represent a percentage match, but instead measures how closely two vectors align in a high-dimensional space. Higher scores indicate greater relevance of the memory record to the search query. The results are paginated, with a default maximum of 100 results per page. You can use the `nextToken` parameter to retrieve additional pages of results.

## Best practices

When retrieving memories, consider the following best practices:

- Craft specific search queries that clearly describe the information you're looking for.
- Use the `topK` parameter to control the number of results based on your application's needs.
- When working with large memories, implement pagination to efficiently process all relevant results.
- Consider filtering by `memoryStrategyId` when you need memories from a specific extraction strategy.

Once retrieved, these memory records can be incorporated into your agent's context, enabling more personalized and contextually aware responses.

## List memory records

The [ListMemoryRecords](#) operation lets you retrieve memory records from a specific namespace without performing a semantic search. This is useful when you want to browse all memory records in a namespace or when you need to retrieve records based on criteria other than semantic relevance.

## Delete memory records

The [DeleteMemoryRecord](#) API removes individual memory records from your AgentCore Memory, giving you control over what information persists in your application's memory. This API helps maintain data hygiene by letting selective removal of outdated, sensitive, or irrelevant information while preserving the rest of your memory context.

# Amazon Bedrock AgentCore Memory examples

You can use AgentCore Memory with a variety of SDKS and agent frameworks.


## Topics

- [Scenario: A customer support AI agent using AgentCore Memory](#)
- [Integrate AgentCore Memory with LangChain or LangGraph](#)
- [AWS SDK](#)
- [Amazon Bedrock AgentCore SDK](#)
- [Strands Agents SDK](#)

## Scenario: A customer support AI agent using AgentCore Memory

In this section you learn how to build a customer support AI agent that uses AgentCore Memory to provide personalized assistance by maintaining conversation history and extracting long-term insights about user preferences. The topic includes code examples for the Amazon Bedrock AgentCore toolkit and the AWS SDK.

Consider a customer, Sarah, who engages with your shopping website's support AI agent to inquire about a delayed order. The interaction flow through the AgentCore Memory APIs would look like this:

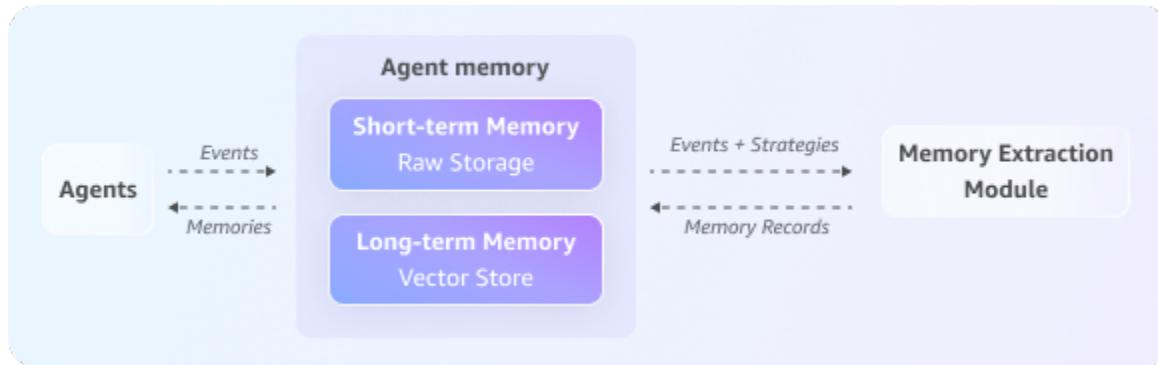

## Topics

- [Step 1: Create a AgentCore Memory](#)
- [Step 2: Start the session](#)
- [Step 3: Capture the conversation history](#)
- [Step 4: Generate long-term memory](#)

- [Step 5: Retrieve past interactions from short-term memory](#)
- [Step 6: Use long-term memories for personalized assistance](#)

## Step 1: Create a AgentCore Memory

First, you create a memory resource with both short-term and long-term memory capabilities, configuring the strategies for what long-term information to extract.

### Starter toolkit

```
from bedrock_agentcore_starter_toolkit.operations.memory.manager import
 MemoryManager
from bedrock_agentcore.memory.session import MemorySessionManager
from bedrock_agentcore.memory.constants import ConversationalMessage, MessageRole
from bedrock_agentcore_starter_toolkit.operations.memory.models.strategies import
 SummaryStrategy, UserPreferenceStrategy
import time

Create memory manager
memory_manager = MemoryManager(region_name="us-west-2")

print("Creating a new memory resource and waiting for it to become active...")

Create memory resource with summary and user preference strategy
memory = memory_manager.get_or_create_memory(
 name="ShoppingSupportAgentMemory",
 description="Memory for a customer support agent.",
 strategies=[
 SummaryStrategy(
 name="SessionSummarizer",
 namespaces=["/summaries/{actorId}/{sessionId}"]
),
 UserPreferenceStrategy(
 name="PreferenceLearner",
 namespaces=["/users/{actorId}/preferences"]
)
]
)

memory_id = memory.get('id')
print(f"Memory resource is now ACTIVE with ID: {memory_id}")
```

## AWS SDK

```
import boto3
import time

Initialize the Boto3 clients for control plane and data plane operations
control_client = boto3.client('bedrock-agentcore-control')
data_client = boto3.client('bedrock-agentcore')

print("Creating a new memory resource...")

Create the memory resource with defined strategies
response = control_client.create_memory(
 name="ShoppingSupportAgentMemory",
 description="Memory for a customer support agent.",
 memoryStrategies=[
 {
 'summaryMemoryStrategy': {
 'name': 'SessionSummarizer',
 'namespaces': ['/summaries/{actorId}/{sessionId}']
 }
 },
 {
 'userPreferenceMemoryStrategy': {
 'name': 'UserPreferenceExtractor',
 'namespaces': ['/users/{actorId}/preferences']
 }
 }
]
)

memory_id = response['memory']['id']
print(f"Memory resource created with ID: {memory_id}")

Poll the memory status until it becomes ACTIVE
while True:
 mem_status_response = control_client.get_memory(memoryId=memory_id)
 status = mem_status_response.get('memory', {}).get('status')
 if status == 'ACTIVE':
 print("Memory resource is now ACTIVE.")
 break
 elif status == 'FAILED':
 raise Exception("Memory resource creation FAILED.")
 print("Waiting for memory to become active...")
```

```
time.sleep(10)
```

## Step 2: Start the session

When Sarah initiates the conversation, the agent creates a new, and unique, session ID to track this interaction separately.

### Starter toolkit

```
Unique identifier for the customer, Sarah
sarah_actor_id = "user-sarah-123"

Unique identifier for this specific support session
support_session_id = "customer-support-session-1"

Create session manager
session_manager = MemorySessionManager(
 memory_id=memory.get("id"),
 region_name="us-west-2"
)

Create a session
session = session_manager.create_memory_session(
 actor_id=sarah_actor_id,
 session_id=support_session_id
)

print(f"Session started for Actor ID: {sarah_actor_id}, Session ID: {support_session_id}")
```

### AWS SDK

```
Unique identifier for the customer, Sarah
sarah_actor_id = "user-sarah-123"

Unique identifier for this specific support session
support_session_id = "customer-support-session-1"

print(f"Session started for Actor ID: {sarah_actor_id}, Session ID: {support_session_id}")
```

## Step 3: Capture the conversation history

As Sarah explains her issue, the agent captures each turn of the conversation (both her questions and the agent's responses). This populates the full conversation in short-term memory and provides the raw data for the long-term memory strategies to process.

### Starter toolkit

```
print("Capturing conversational events...")

Add all conversation turns
session.add_turns(
 messages=[
 ConversationalMessage("Hi, my order #ABC-456 is delayed.",
 MessageRole.USER),
 ConversationalMessage("I am sorry to hear that, Sarah. Let me check the
status for you.", MessageRole.ASSISTANT),
 ConversationalMessage("By the way, for future orders, please always use
FedEx. I've had issues with other carriers.", MessageRole.USER),
 ConversationalMessage("Thank you for that information. I have made a note to
use FedEx for your future shipments.", MessageRole.ASSISTANT),
]
)

print("Conversation turns added successfully!")
```

### AWS SDK

```
print("Capturing conversational events...")

full_conversation_payload = [
 {
 'conversational': {
 'role': 'USER',
 'content': {'text': "Hi, my order #ABC-456 is delayed."}
 }
 },
 {
 'conversational': {
 'role': 'ASSISTANT',
 'content': {'text': "I'm sorry to hear that, Sarah. Let me check the
status for you."}
 }
 }
]
```

```
 },
 {
 'conversational': {
 'role': 'USER',
 'content': {'text': "By the way, for future orders, please always use FedEx. I've had issues with other carriers."}
 }
 },
 {
 'conversational': {
 'role': 'ASSISTANT',
 'content': {'text': "Thank you for that information. I have made a note to use FedEx for your future shipments."}
 }
 }
]

data_client.create_event(
 memoryId=memory_id,
 actorId=sarah_actor_id,
 sessionId=support_session_id,
 eventTimestamp=time.strftime("%Y-%m-%dT%H:%M:%SZ", time.gmtime()),
 payload=full_conversation_payload
)

print("Conversation history has been captured in short-term memory.")
```

## Step 4: Generate long-term memory

In the background, the asynchronous extraction process runs. This process analyzes the recent raw events using your configured memory strategies to extract long-term memories such as summaries, semantic facts, or user preferences, which are then stored for future use.

## Step 5: Retrieve past interactions from short-term memory

To provide context-aware assistance, the agent loads the current conversation history. This helps the agent understand what issues Sarah has raised in the ongoing chat.

### Starter toolkit

```
print("\nRetrieving current conversation history from short-term memory...")
```

```
Get the last k turns in the session
turns = session.get_last_k_turns(k=7)
for turn in turns:
 print(f"Turn: {turn}")
```

## AWS SDK

```
print("\nRetrieving current conversation history from short-term memory...")

response = data_client.list_events(
 memoryId=memory_id,
 actorId=sarah_actor_id,
 sessionId=support_session_id,
 maxResults=10
)

Reverse the list of events to display them in chronological order
event_list = reversed(response.get('events', []))

for event in event_list: print(event)
```

## Step 6: Use long-term memories for personalized assistance

The agent performs a semantic search across extracted long-term memories to find relevant insights about Sarah's preferences, order history, or past concerns. This lets the agent provide highly personalized assistance without needing to ask Sarah to repeat information she has already shared in previous chats.

### Starter toolkit

```
Wait for meaningful memories to be extracted from the conversation
print("Waiting 60 seconds for memory extraction...")
time.sleep(60)

--- Example 1: Retrieve the user's shipping preference ---
memories = session.search_long_term_memories(
 namespace_prefix=f"/users/{sarah_actor_id}/preferences",
 query="Does the user have a preferred shipping carrier?",
 top_k=5
)
```

```
print(f"Found {len(memories)} memories:")
for memory_record in memories:
 print(f"Memory: {memory_record}")
 print("-----")

--- Example 2: Broad query about the user's issue ---
memories = session.search_long_term_memories(
 namespace_prefix=f"/summaries/{sarah_actor_id}/{support_session_id}",
 query="What problem did the user report with their order?",
 top_k=5
)

print(f"Found {len(memories)} memories:")
for memory_record in memories:
 print(f"Memory: {memory_record}")
 print("-----")
```

## SDK

```
Wait for the asynchronous extraction to finish
print("\nWaiting 60 seconds for long-term memory processing...")
time.sleep(60)

--- Example 1: Retrieve the user's shipping preference ---
print("\nRetrieving user preferences from long-term memory...")
preference_response = data_client.retrieve_memory_records(
 memoryId=memory_id,
 namespace=f"/users/{sarah_actor_id}/preferences",
 searchCriteria={"searchQuery": "Does the user have a preferred shipping
carrier?"}
)
for record in preference_response.get('memoryRecordSummaries', []):
 print(f"- Retrieved Record: {record}")

--- Example 2: Broad query about the user's issue ---
print("\nPerforming a broad search for user's reported issues...")
issue_response = data_client.retrieve_memory_records(
 memoryId=memory_id,
 namespace=f"/summaries/{sarah_actor_id}/{support_session_id}",
 searchCriteria={"searchQuery": "What problem did the user report with their
order?"}
)
for record in issue_response.get('memoryRecordSummaries', []):
```

```
print(f"- Retrieved Record: {record}")
```

This integrated approach lets the agent maintain rich context across sessions, recognize returning customers, recall important details, and deliver personalized experiences seamlessly, resulting in faster, more natural, and effective customer support.

## Integrate AgentCore Memory with LangChain or LangGraph

[LangChain](#) and [LangGraph](#) are powerful open-source frameworks for developing agents through a graph-based architecture. They provide a simple interface for defining agent interactions with the user, its tools, and memory.

Within LangGraph there are two main memory concepts when it comes to memory [persistence](#). Short-term, raw context is saved through checkpoint objects, while intelligent long term memory retrieval is done by saving and searching through memory stores. To address these two use cases, integrations were created to cover both the checkpointing workflow and the store workflow:

- `AgentCoreMemorySaver` - used to save and load checkpoint objects that include user and AI messages, graph execution state, and additional metadata
- `AgentCoreMemoryStore` - used to save conversational messages, leaving the AgentCore Memory service to extract insights, summaries, and user preferences in the background, then letting the agent search through those intelligent memories in future conversations

These integrations are easy to set up, requiring only specifying the Memory ID of a AgentCore Memory. Because they are saved to persistent storage within the service, there is no need to worry about losing these interactions through container exits, unreliable in-memory solutions, or agent application crashes.

### Topics

- [Prerequisites](#)
- [Configuration for short term memory persistence](#)
- [Configuration for intelligent long term memory search](#)
- [Create the agent with configurations](#)
- [Invoke the agent](#)
- [Resources](#)

## Prerequisites

Requirements you need before integrating AgentCore Memory with LangChain and LangGraph.

1. AWS account with Bedrock Amazon Bedrock AgentCore access
2. Configured AWS credentials (boto3)
3. An AgentCore Memory
4. Required IAM permissions:
  - bedrock-agentcore:CreateEvent
  - bedrock-agentcore>ListEvents
  - bedrock-agentcore:RetrieveMemories

## Configuration for short term memory persistence

The AgentCoreMemorySaver in LangGraph handles all the saving and loading of conversational state, execution context, and state variables under the hood through [AgentCore Memory blob types](#). This means that the only setup required is to specify the checkpointer when compiling the agent graph, then providing an actor\_id and thread\_id in the [RunnableConfig](#) when invoking the agent. The configuration is shown below and the agent invocation is shown in the next section. If simple conversation persistence is all your application needs, feel free to skip the long term memory section.

```
Import LangGraph and LangChain components
from langchain.chat_models import init_chat_model
from langgraph.prebuilt import create_react_agent

Import the AgentCore Memory integrations
from langgraph_checkpoint_aws import AgentCoreMemorySaver

REGION = "us-west-2"
MEMORY_ID = "YOUR_MEMORY_ID"
MODEL_ID = "us.anthropic.claude-3-7-sonnet-20250219-v1:0"

Initialize checkpoint for state persistence. No additional setup required.
Sessions will be saved and persisted for actor_id/session_id combinations
checkpoint = AgentCoreMemorySaver(MEMORY_ID, region_name=REGION)
```

## Configuration for intelligent long term memory search

For long term memory stores in LangGraph, you have more flexibility on how messages are processed. For instance, if the application is only concerned with user preferences, you would only need to store the HumanMessage objects in the conversation. For summaries, all types HumanMessage, AIMessage, and ToolMessage would be relevant. There are numerous ways to do this, but a common implementation pattern is using pre and post model hooks, as shown in the example below. For retrieval of memories, you may add a `store.search(query)` call in the pre-model hook and append it to the user's message so the agent has all the context. Alternatively, the agent could be provided a tool to search for information as needed. All of these implementation patterns are supported and the implementation will vary based on the application.

```
from langgraph_checkpoint_aws import (
 AgentCoreMemoryStore
)

Initialize store for saving and searching over long term memories
such as preferences and facts across sessions
store = AgentCoreMemoryStore(MEMORY_ID, region_name=REGION)

Pre-model hook runs and saves messages of your choosing to AgentCore Memory
for async processing and extraction
def pre_model_hook(state, config: RunnableConfig, *, store: BaseStore):
 """Hook that runs pre-LLM invocation to save the latest human message"""
 actor_id = config["configurable"]["actor_id"]
 thread_id = config["configurable"]["thread_id"]

 # Saving the message to the actor and session combination that we get at runtime
 namespace = (actor_id, thread_id)

 messages = state.get("messages", [])
 # Save the last human message we see before LLM invocation
 for msg in reversed(messages):
 if isinstance(msg, HumanMessage):
 store.put(namespace, str(uuid.uuid4()), {"message": msg})
 break

 # OPTIONAL: Retrieve user preferences based on the last message and append to state
 # user_preferences_namespace = ("preferences", actor_id)
 # preferences = store.search(user_preferences_namespace, query=msg.content,
 limit=5)
```

```
Add to input messages as needed

return {"llm_input_messages": messages}
```

## Create the agent with configurations

Initialize the LLM and create a LangGraph agent with a memory configuration.

```
Initialize LLM
llm = init_chat_model(MODEL_ID, model_provider="bedrock_converse", region_name=REGION)

Create a pre-built langgraph agent (configurations work for custom agents too)
graph = create_react_agent(
 model=llm,
 tools=tools,
 checkpointer=checkpointer, # AgentCoreMemorySaver we created above
 store=store, # AgentCoreMemoryStore we created above
 pre_model_hook=pre_model_hook, # OPTIONAL: Function we defined to save user
 messages
 # post_model_hook=post_model_hook # OPTIONAL: Can save AI messages to memory if
 needed
)
```

## Invoke the agent

Invoke the agent.

```
Specify config at runtime for ACTOR and SESSION
config = {
 "configurable": {
 "thread_id": "session-1", # REQUIRED: This maps to Bedrock AgentCore session_id
 under the hood
 "actor_id": "react-agent-1", # REQUIRED: This maps to Bedrock AgentCore
 actor_id under the hood
 }
}

Invoke the agent
response = graph.invoke()
```

```
{"messages": [("human", "I like sushi with tuna. In general seafood is great.")]},
 config=config
)

... agent will answer

Agent will have the conversation and state persisted on the next message
Because the session ID is the same in the runtime config
response = graph.invoke(
 {"messages": [("human", "What did I just say?")]},
 config=config
)

Define a new session in the runtime config to test long term retrieval
config = {
 "configurable": {
 "thread_id": "session-2", # New session ID
 "actor_id": "react-agent-1", # Same actor ID
 }
}

Invoke the agent (it will retrieve long term memories from other session)
response = graph.invoke(
 {"messages": [("human", "Lets make a meal tonight, what should I cook?")]},
 config=config
)
```

## Resources

- [LangChain x AWS Github Repo](#)
- [Pypi package](#)
- [AgentCoreMemorySaver implementation](#)
- [AgentCoreMemorySaver sample notebook \(checkpointing only\)](#)

## AWS SDK

Use the AWS SDK to directly interact with AgentCore Memory fine-grained control over memory operations. The following examples show how to access the AWS SDK with the [SDK for Python \(Boto3\)](#).

## Install dependencies

```
pip install boto3
```

## Add short-term memory

```
import boto3
from datetime import datetime

Initialize boto3 clients
control_client = boto3.client('bedrock-agentcore-control', region_name='us-east-1')
data_client = boto3.client('bedrock-agentcore', region_name='us-east-1')

Create short-term memory
memory_response = control_client.create_memory(
 name="BasicMemory",
 description="Basic memory for short-term event storage",
 eventExpiryDuration=90
)

memory_id = memory_response['memory']['id']
actor_id = f"actor_{datetime.now().strftime('%Y%m%d%H%M%S')}"
session_id = f"session_{datetime.now().strftime('%Y%m%d%H%M%S')}"

Create event with multiple conversation turns
event = data_client.create_event(
 memoryId=memory_id,
 actorId=actor_id,
 sessionId=session_id,
 eventTimestamp=datetime.now(),
 payload=[
 {
 'conversational': {
 'content': {'text': 'I like sushi with tuna'},
 'role': 'USER'
 }
 },
 {
 'conversational': {
 'content': {'text': 'That sounds delicious! Tuna sushi is a great choice.'},
 'role': 'ASSISTANT'
 }
 }
]
)
```

```
 },
 {
 'conversational': {
 'content': {'text': 'I also like pizza'},
 'role': 'USER'
 }
 },
 {
 'conversational': {
 'content': {'text': 'Pizza is another excellent choice! You have great taste in food.'},
 'role': 'ASSISTANT'
 }
 }
]
)
```

## Add long-term memory with strategies

```
import boto3
import time
from datetime import datetime

Initialize boto3 clients
control_client = boto3.client('bedrock-agentcore-control', region_name='us-east-1')
data_client = boto3.client('bedrock-agentcore', region_name='us-east-1')

Create long-term memory
memory_response = control_client.create_memory(
 name=f"ComprehensiveMemory",
 description="Memory with strategies for long-term memory extraction",
 eventExpiryDuration=90,
 memoryStrategies=[
 {
 'summaryMemoryStrategy': {
 'name': 'SessionSummarizer',
 'namespaces': ['/summaries/{actorId}/{sessionId}']
 }
 },
 {
 'userPreferenceMemoryStrategy': {
 'name': 'PreferenceLearner',
 'namespaces': ['/preferences/{actorId}']
 }
 }
]
)
```

```
 }
 },
{
 'semanticMemoryStrategy': {
 'name': 'FactExtractor',
 'namespaces': ['/facts/{actorId}']
 }
}
]

memory_id = memory_response['memory']['id']
actor_id = f"actor_{datetime.now().strftime('%Y%m%d%H%M%S')}"
session_id = f"session_{datetime.now().strftime('%Y%m%d%H%M%S')}"

Wait for long-term memory to become active
Create single event with all conversation turns
event = data_client.create_event(
 memoryId=memory_id,
 actorId=actor_id,
 sessionId=session_id,
 eventTimestamp=datetime.now(),
 payload=[
 {
 'conversational': {
 'content': {'text': 'I like sushi with tuna'},
 'role': 'USER'
 }
 },
 {
 'conversational': {
 'content': {'text': 'That sounds delicious! Tuna sushi is a great
choice.'},
 'role': 'ASSISTANT'
 }
 },
 {
 'conversational': {
 'content': {'text': 'I also like pizza'},
 'role': 'USER'
 }
 }
]
)
```

```
 },
 {
 'conversational': {
 'content': {'text': 'Pizza is another excellent choice! You have great
taste in food.'},
 'role': 'ASSISTANT'
 }
 }
]
)
```

Full AWS SDK Amazon Bedrock AgentCore AgentCore Memory API reference can be found at:

- <https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/bedrock-agentcore.html>
- <https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/bedrock-agentcore-control.html>

## Amazon Bedrock AgentCore SDK

Use the [Amazon Bedrock AgentCore Python SDK](#) for a higher-level abstraction that simplifies memory operations and provides convenient methods for common use cases.

### Install dependencies

```
pip install bedrock-agentcore
```

### Add short-term memory

```
from bedrock_agentcore.memory import MemoryClient

client = MemoryClient(region_name="us-east-1")

memory = client.create_memory(
 name="CustomerSupportAgentMemory",
 description="Memory for customer support conversations",
)

client.create_event(
 memory_id=memory.get("id"), # This is the id from create_memory or list_memories
```

```
actor_id="User84", # This is the identifier of the actor, could be an agent or end-user.
session_id="OrderSupportSession1", #Unique id for a particular request/conversation.
messages=[
 ("Hi, I'm having trouble with my order #12345", "USER"),
 ("I'm sorry to hear that. Let me look up your order.", "ASSISTANT"),
 ("lookup_order(order_id='12345')", "TOOL"),
 ("I see your order was shipped 3 days ago. What specific issue are you experiencing?", "ASSISTANT"),
 ("Actually, before that - I also want to change my email address", "USER"),
 (
 "Of course! I can help with both. Let's start with updating your email.
What's your new email?",
 "ASSISTANT",
),
 ("newemail@example.com", "USER"),
 ("update_customer_email(old='old@example.com', new='newemail@example.com')",
 "TOOL"),
 ("Email updated successfully! Now, about your order issue?", "ASSISTANT"),
 ("The package arrived damaged", "USER"),
],
)
```

## Add long-term memory with strategies

```
from bedrock_agentcore.memory import MemoryClient
import time

client = MemoryClient(region_name="us-east-1")

memory = client.create_memory_and_wait(
 name="MyAgentMemory",
 strategies=[{
 "summaryMemoryStrategy": {
 # Name of the extraction model/strategy
 "name": "SessionSummarizer",
 # Organize facts by session ID for easy retrieval
 # Example: "summaries/session123" contains summary of session123
 "namespaces": ["/summaries/{actorId}/{sessionId}"]
 }
 }]
)
```

```
event = client.create_event(
 memory_id=memory.get("id"), # This is the id from create_memory or list_memories
 actor_id="User84", # This is the identifier of the actor, could be an agent or
end-user.
 session_id="OrderSupportSession1",
 messages=[
 ("Hi, I'm having trouble with my order #12345", "USER"),
 ("I'm sorry to hear that. Let me look up your order.", "ASSISTANT"),
 ("lookup_order(order_id='12345')", "TOOL"),
 ("I see your order was shipped 3 days ago. What specific issue are you
experiencing?", "ASSISTANT"),
 ("Actually, before that - I also want to change my email address", "USER"),
 (
 "Of course! I can help with both. Let's start with updating your email.
What's your new email?",
 "ASSISTANT",
),
 ("newemail@example.com", "USER"),
 ("update_customer_email(old='old@example.com', new='newemail@example.com')",
"TOOL"),
 ("Email updated successfully! Now, about your order issue?", "ASSISTANT"),
 ("The package arrived damaged", "USER"),
],
)
)

Wait for meaningful memories to be extracted from the conversation.
time.sleep(60)

Query for the summary of the issue using the namespace set in summary strategy above
memories = client.retrieve_memories(
 memory_id=memory.get("id"),
 namespace=f"/summaries/User84/OrderSupportSession1",
 query="can you summarize the support issue"
)
```

## Strands Agents SDK

Use the [Strands Agents](#) SDK for seamless integration with agent frameworks, providing automatic memory management and retrieval within conversational agents.

### Install dependencies

```
pip install bedrock-agentcore
pip install strands-agents
```

## Add short-term memory

```
from datetime import datetime
from strands import Agent
from bedrock_agentcore.memory import MemoryClient
from bedrock_agentcore.memory.integrations.strands.config import AgentCoreMemoryConfig,
 RetrievalConfig
from bedrock_agentcore.memory.integrations.strands.session_manager import
 AgentCoreMemorySessionManager

client = MemoryClient(region_name="us-east-1")
basic_memory = client.create_memory(
 name="BasicTestMemory",
 description="Basic memory for testing short-term functionality"
)

MEM_ID = basic_memory.get('id')
ACTOR_ID = "actor_id_test_%s" % datetime.now().strftime("%Y%m%d%H%M%S")
SESSION_ID = "testing_session_id_%s" % datetime.now().strftime("%Y%m%d%H%M%S")

Configure memory
agentcore_memory_config = AgentCoreMemoryConfig(
 memory_id=MEM_ID,
 session_id=SESSION_ID,
 actor_id=ACTOR_ID
)

Create session manager
session_manager = AgentCoreMemorySessionManager(
 agentcore_memory_config=agentcore_memory_config,
 region_name="us-east-1"
)

Create agent
agent = Agent(
 system_prompt="You are a helpful assistant. Use all you know about the user to
 provide helpful responses.",
 session_manager=session_manager,
)
```

```
agent("I like sushi with tuna")
Agent remembers this preference

agent("I like pizza")
Agent acknowledges both preferences

agent("What should I buy for lunch today?")
Agent suggests options based on remembered preferences
```

## Add long-term memory with strategies

```
from bedrock_agentcore.memory import MemoryClient
from strands import Agent
from bedrock_agentcore.memory.integrations.strands.config import AgentCoreMemoryConfig,
 RetrievalConfig
from bedrock_agentcore.memory.integrations.strands.session_manager import
 AgentCoreMemorySessionManager
from datetime import datetime

Create comprehensive memory with all built-in strategies
client = MemoryClient(region_name="us-east-1")
comprehensive_memory = client.create_memory_and_wait(
 name="ComprehensiveAgentMemory",
 description="Full-featured memory with all built-in strategies",
 strategies=[
 {
 "summaryMemoryStrategy": {
 "name": "SessionSummarizer",
 "namespaces": ["/summaries/{actorId}/{sessionId}"]
 }
 },
 {
 "userPreferenceMemoryStrategy": {
 "name": "PreferenceLearner",
 "namespaces": ["/preferences/{actorId}"]
 }
 },
 {
 "semanticMemoryStrategy": {
 "name": "FactExtractor",
 "namespaces": ["/facts/{actorId}"]
 }
 }
]
)
```

```
]
)

MEM_ID = comprehensive_memory.get('id')
ACTOR_ID = "actor_id_test_%s" % datetime.now().strftime("%Y%m%d%H%M%S")
SESSION_ID = "testing_session_id_%s" % datetime.now().strftime("%Y%m%d%H%M%S")

Configure memory
agentcore_memory_config = AgentCoreMemoryConfig(
 memory_id=MEM_ID,
 session_id=SESSION_ID,
 actor_id=ACTOR_ID
)

Create session manager
session_manager = AgentCoreMemorySessionManager(
 agentcore_memory_config=agentcore_memory_config,
 region_name="us-east-1"
)

Create agent
agent = Agent(
 system_prompt="You are a helpful assistant. Use all you know about the user to
provide helpful responses.",
 session_manager=session_manager,
)

agent("I like sushi with tuna")
Agent remembers this preference

agent("I like pizza")
Agent acknowledges both preferences

agent("What should I buy for lunch today?")
Agent suggests options based on remembered preferences
```

More examples are available on GitHub: [https://github.com/aws/bedrock-agentcore-sdk-python/tree/main/src/bedrock\\_agentcore/memory/integrations/strands](https://github.com/aws/bedrock-agentcore-sdk-python/tree/main/src/bedrock_agentcore/memory/integrations/strands)

# Amazon Bedrock capacity for built-in with overrides strategies

When configuring [built-in with overrides](#) strategies with [CreateMemory](#) or [UpdateMemory](#), you must provide an IAM execution role (`memoryExecutionRoleArn`). The AgentCore Memory service assumes this role to perform Amazon Bedrock operations (such as LLM calls for memory extraction and/or consolidation) within your AWS account.

Since Amazon Bedrock usage is attributed to your account, it consumes your allocated capacity and is subject to your Bedrock service quotas. If Amazon Bedrock calls are throttled due to quota limits, memory ingestion operations might fail.


## Note

Amazon Bedrock usage is attributed to customer account only for custom memory strategies.

To monitor and troubleshoot these issues, enable log delivery on your memory configuration to observe error logs when ingestion failures occur. You can also request quota increases for the Bedrock models you're using to prevent throttling issues.

## Observability

You can monitor usage metrics for your memory in CloudWatch metrics. Some of the critical metrics are displayed in AgentCore Memory console.

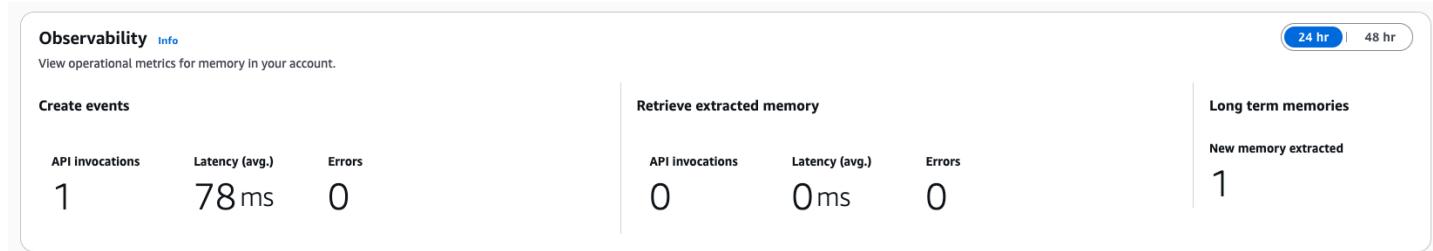

**CloudWatch metrics:** AgentCore Memory emits metrics to CloudWatch under the Bedrock-AgentCore namespace. The metrics contains:

- Data plane usage statistics: `CreateEvent`/`RetrieveMemoryRecord` Invocations, Latency, Errors, etc

- Ingestion metrics: Invocations, Latency, Errors NumberOfMemoryRecords for extraction/consolidation step during ingestion in each memory resource.

The screenshot shows a table for managing log delivery rules. The table has columns for Destination, Type, Log type, and Delivery ID. One row is visible, representing a delivery to a CloudWatch Logs log group named '/aws/vendedlogs/bedrock-agentcore/memory/APPLICATION\_LOGS/C...'. The 'Type' column shows 'CWL', 'Log type' shows 'APPLICATION\_LOGS', and 'Delivery ID' shows 'Kit9YvisCEOJDih9'. There are buttons for 'Edit', 'Delete', and 'Add' at the top right.

Log delivery (1)			
Configure log delivery to multiple destinations.			
<input type="text"/> Find resources			
Destination	Type	Log type	Delivery ID
<input checked="" type="radio"/> /aws/vendedlogs/bedrock-agentcore/memory/APPLICATION_LOGS/C...	CWL	APPLICATION_LOGS	Kit9YvisCEOJDih9

In addition to CloudWatch metrics, customer can monitor the memory extraction process via CloudWatch logs if they enabled log delivery. Application logs during ingestion will be published to a log group in customer account. Customer can use the application logs to debug any errors encountered during asynchronous ingestion process.

For more information, see [Observe your agent applications on Amazon Bedrock AgentCore Observability](#).

## Best practices

We recommend these best practices for using AgentCore Memory effectively in your AI agent applications.

### Topics

- [Encrypting your memory](#)
- [Memory poisoning or prompt injection](#)
- [Least-privilege principle](#)

## Encrypting your memory

Your data stored in AgentCore Memory is always encrypted at rest using AWS KMS keys. By default, encryption uses an AWS-owned and managed KMS key. You can optionally configure a customer-managed KMS key from your own AWS account for additional control over encryption by specifying `encryptionKeyArn` when creating memory.

## Memory poisoning or prompt injection

When processing conversational data through the CreateEvent API and extracting long-term memory via LLM, it is important to protect against memory poisoning and prompt injection attacks

that could compromise data integrity or system behavior. These security concerns are critical as they can lead to corrupted memory stores and manipulated system responses.

Following AWS's shared responsibility model, AWS is responsible for securing Amazon Bedrock AgentCore infrastructure. However, customers bear the responsibility for secure application development, input validation, and preventing prompt injection vulnerabilities in the memory extraction service. This is similar to how AWS provides secure database engines like RDS, but customers must prevent SQL injection in their applications.

## Threats

- **Memory poisoning** represents a threat where attackers embed false information in conversations to corrupt long-term memory stores. This can manifest as context pollution, where misleading context influences future memory retrieval, or as deliberate data integrity attacks designed to degrade service quality over time.
- **Prompt injection** attacks occur when users attempt to override system prompts during memory extraction or when malicious content in conversational data manipulates LLM behavior. These attacks can also involve privilege escalation attempts to access or modify memory beyond user permissions.

## Prevention techniques

- **Input validation** forms the foundation of protection at the CreateEvent API level. Sanitize the user input data with guardrails prior to persistence to memory
- **Security testing** – Regularly test your applications for prompt injection and other security vulnerabilities using techniques like penetration testing, static code analysis, and dynamic application security testing (DAST).

## Least-privilege principle

Identity-based policies determine whether someone can create, access, or delete Amazon Bedrock AgentCore resources in your account. These actions can incur costs for your AWS account. When you create or edit identity-based policies, follow these guidelines and recommendations:

- **Get started with AWS managed policies and move toward least-privilege permissions** – To get started granting permissions to your users and workloads, use the AWS managed policies

that grant permissions for many common use cases. They are available in your AWS account. We recommend that you reduce permissions further by defining AWS customer managed policies that are specific to your use cases.

- **Apply least-privilege permissions** – When you set permissions with IAM policies, grant only the permissions required to perform a task. You do this by defining the actions that can be taken on specific resources under specific conditions, also known as least-privilege permissions.
- **Use conditions in IAM policies to further restrict access** – You can add a condition to your policies to limit access to actions and resources. For example, you can write a policy condition to specify the service role can only be assumed by a particular AgentCore Memory resource.
- **Use IAM Access Analyzer to validate your IAM policies to maintain secure and functional permissions** – [IAM Access Analyzer](#) validates new and existing policies so that the policies adhere to the IAM policy language (JSON) and IAM best practices. IAM Access Analyzer provides more than 100 policy checks and actionable recommendations to help you author secure and functional policies.

# Amazon Bedrock AgentCore Gateway: Securely connect tools and other resources to your Gateway

Amazon Bedrock AgentCore Gateway provides an easy and secure way for developers to build, deploy, discover, and connect to tools at scale. AI agents need tools to perform real-world tasks—from querying databases to sending messages to analyzing documents. With Gateway, developers can convert APIs, Lambda functions, and existing services into Model Context Protocol (MCP)-compatible tools and make them available to agents through Gateway endpoints with just a few lines of code. Gateway supports OpenAPI, Smithy, and Lambda as input types, and is the only solution that provides both comprehensive ingress authentication and egress authentication in a fully-managed service. Gateway also provides 1-click integration with several popular tools such as Salesforce, Slack, Jira, Asana, and Zendesk. Gateway eliminates weeks of custom code development, infrastructure provisioning, and security implementation so developers can focus on building innovative agent applications.

## Key benefits

### Simplify tool development and integration

Transform existing enterprise resources into agent-ready tools in just a few lines of code. Instead of spending months writing custom integration code and managing infrastructure, developers can focus on building differentiated agent capabilities while Gateway handles the undifferentiated heavy lifting of tool management and security at enterprise scale. Gateway also provides 1-click integration with several popular tools such as Salesforce, Slack, Jira, Asana, and Zendesk.

### Accelerate agent development through unified access

Enable your agents to discover and use tools through a single, secure endpoint. By combining multiple tool sources—from APIs to Lambda functions—into one unified interface, developers can build and scale agent workflows faster without managing multiple tool connections or reimplementing integrations.

### Scale with confidence through intelligent tool discovery

As your tool collection grows, help your agents find and use the right tools through contextual search. Built-in semantic search capabilities help agents effectively utilize available tools based

on their task context, improving agent performance and reducing development complexity at scale.

## Comprehensive authentication

Manage both inbound authentication (verifying agent identity) and outbound authentication (connecting to tools) in a single service. Handle OAuth flows, token refresh, and secure credential storage for third-party services.

## Framework compatibility

Work with popular open-source frameworks including CrewAI, LangGraph, LlamaIndex, and Strands Agents. Integrate with any model while maintaining enterprise-grade security and reliability.

## Serverless infrastructure

Eliminate infrastructure management with a fully managed service that automatically scales based on demand. Built-in observability and auditing capabilities simplify monitoring and troubleshooting.

# Key capabilities

Gateway provides the following key capabilities:

- **Security Guard** - Manages OAuth authorization to ensure only valid users and agents can access tools and resources.
- **Translation** - Converts agent requests using protocols like Model Context Protocol (MCP) into API requests and Lambda invocations, eliminating the need to manage protocol integration or version support.
- **Composition** - Combines multiple APIs, functions, and tools into a single MCP endpoint for streamlined agent access.
- **Secure Credential Exchange** - Handles credential injection for each tool, enabling agents to use tools with different authentication requirements seamlessly.
- **Semantic Tool Selection** - Enables agents to search across available tools to find the most appropriate ones for specific contexts, allowing agents to leverage thousands of tools while minimizing prompt size and reducing latency.
- **Infrastructure Manager** - Provides a serverless solution with built-in observability and auditing, eliminating infrastructure management overhead.

# Get started with AgentCore Gateway

In this quick start guide you'll learn how to set up a gateway and integrate it into your agents using the AgentCore starter toolkit. For more comprehensive guides and examples, see the [Amazon Bedrock AgentCore GitHub repository](#).

## Note

The AgentCore starter toolkit abstracts the Boto3 Python SDK into simplified methods and is intended to help developers get started quickly. For a more comprehensive set of operations, you should use an AWS SDK such as Boto3. For more information on Boto3 operations for AgentCore, see [AgentCore Control Plane operations](#).

## Topics

- [Prerequisites](#)
- [Step 1: Setup and install](#)
- [Step 2: Create gateway setup script](#)
- [Step 3: Run the setup](#)
- [Step 4: Use the gateway with an agent](#)
- [What you've built](#)
- [Troubleshooting](#)
- [Quick validation](#)
- [Cleanup](#)
- [Next steps](#)

## Prerequisites

Before starting, make sure you have the followings:

- **AWS Account** with credentials configured. To configure credentials, you can install and use the AWS Command Line Interface by following the steps at [Getting started with the AWS CLI](#).
- **Python 3.10+** installed.
- **IAM permissions** for creating roles, Lambda functions, and using Amazon Bedrock AgentCore.

- **Model Access** – Enable Anthropic's Claude Sonnet 3.7 in the Amazon Bedrock console (or another model for the demo agent)

## Step 1: Setup and install

Run the following in a terminal to set up the virtual environment in which to install the dependencies.

```
mkdir agentcore-gateway-quickstart
cd agentcore-gateway-quickstart
python3 -m venv .venv
source .venv/bin/activate # On Windows: .venv\Scripts\activate
```

Then, run the following to install the dependencies

```
pip install boto3
pip install bedrock-agentcore-starter-toolkit
pip install strands-agents
```

## Step 2: Create gateway setup script

Create a new file called `setup_gateway.py` and insert the following complete code into it:

```
"""
Setup script to create Gateway with Lambda target and save configuration
Run this first: python setup_gateway.py
"""

from bedrock_agentcore_starter_toolkit.operations.gateway.client import GatewayClient
import json
import logging
import time

def setup_gateway():
 # Configuration
 region = "us-east-1" # Change to your preferred region

 print("# Setting up AgentCore Gateway...")
 print(f"Region: {region}\n")
```

```
Initialize client
client = GatewayClient(region_name=region)
client.logger.setLevel(logging.INFO)

Step 2.1: Create OAuth authorizer
print("Step 2.1: Creating OAuth authorization server...")
cognito_response = client.create_oauth_authorizer_with_cognito("TestGateway")
print("# Authorization server created\n")

Step 2.2: Create Gateway
print("Step 2.2: Creating Gateway...")
gateway = client.create_mcp_gateway(
 # the name of the Gateway - if you don't set one, one will be generated.
 name=None,
 # the role arn that the Gateway will use - if you don't set one, one will be
 created.
 # NOTE: if you are using your own role make sure it has a trust policy that
 trusts bedrock-agentcore.amazonaws.com
 role_arn=None,
 # the OAuth authorization server details. If you are providing your own
 authorization server,
 # then pass an input of the following form: {"customJWTAuthorizer":
{"allowedClients": ["<INSERT CLIENT ID>"], "discoveryUrl": "<INSERT DISCOVERY URL>"}}
 authorizer_config=cognito_response["authorizer_config"],
 # enable semantic search
 enable_semantic_search=True,
)
print(f"# Gateway created: {gateway['gatewayUrl']}\n")

If role_arn was not provided, fix IAM permissions
NOTE: This is handled internally by the toolkit when no role is provided
client.fix_iam_permissions(gateway)
print("# Waiting 30s for IAM propagation...")
time.sleep(30)
print("# IAM permissions configured\n")

Step 2.3: Add Lambda target
print("Step 2.3: Adding Lambda target...")
lambda_target = client.create_mcp_gateway_target(
 # the gateway created in the previous step
 gateway=gateway,
 # the name of the Target - if you don't set one, one will be generated.
 name=None,
 # the type of the Target
```

```
 target_type="lambda",
 # the target details - set this to define your own lambda if you pre-created
 one.
 # Otherwise leave this None and one will be created for you.
 target_payload=None,
 # you will see later in the tutorial how to use this to connect to APIs using
 API keys and OAuth credentials.
 credentials=None,
)
print("# Lambda target added\n")

Step 2.4: Save configuration for agent
config = {
 "gateway_url": gateway["gatewayUrl"],
 "gateway_id": gateway["gatewayId"],
 "region": region,
 "client_info": cognito_response["client_info"]
}

with open("gateway_config.json", "w") as f:
 json.dump(config, f, indent=2)

print("=" * 60)
print("# Gateway setup complete!")
print(f"Gateway URL: {gateway['gatewayUrl']}")
print(f"Gateway ID: {gateway['gatewayId']}")
print("\nConfiguration saved to: gateway_config.json")
print("\nNext step: Run 'python run_agent.py' to test your Gateway")
print("=" * 60)

return config

if __name__ == "__main__":
 setup_gateway()
```

Expand the following section for a step-by-step understanding of each component.

## Understanding the setup script – Step-by-step explanation

The following topics explain what happens in each part of the setup script:

### Topics

- [Import required libraries](#)

- [Create the Setup Function](#)
- [Create an OAuth Authorization Server](#)
- [Create a Gateway](#)
- [Adding Lambda Targets](#)
- [Save the gateway configuration](#)

## Import required libraries

First, import the necessary libraries for gateway creation and configuration.

```
from bedrock_agentcore_starter_toolkit.operations.gateway.client import GatewayClient
import json
import logging
import time
```

## Create the Setup Function

Initialize the setup function with your AWSs region configuration.

```
def setup_gateway():
 # Configuration
 region = "us-east-1" # Change to your preferred region

 print("# Setting up AgentCore Gateway...")
 print(f"Region: {region}\n")

 # Initialize client
 client = GatewayClient(region_name=region)
 client.logger.setLevel(logging.INFO)
```

## Create an OAuth Authorization Server

Gateways are secured by OAuth authorization servers which ensure that only allowed users can access your Gateway. Let's create an OAuth authorization server using Amazon Cognito.

```
Step 2.1: Create OAuth authorizer
print("Step 2.1: Creating OAuth authorization server...")
cognito_response = client.create_oauth_authorizer_with_cognito("TestGateway")
print("# Authorization server created\n")
```

**What happens here:** This creates an Amazon Cognito user pool with an OAuth 2.0 client credentials flow configured. You'll get a client ID and secret that can be used to obtain access tokens.

## Create a Gateway

Now, let's create a gateway. The gateway acts as your MCP server endpoint that agents will connect to.

```
Step 2.2: Create Gateway
print("Step 2.2: Creating Gateway...")
gateway = client.create_mcp_gateway(
 # the name of the Gateway - if you don't set one, one will be generated.
 name=None,
 # the role arn that the Gateway will use - if you don't set one, one will be created.
 # NOTE: if you are using your own role make sure it has a trust policy that trusts bedrock-agentcore.amazonaws.com
 role_arn=None,
 # the OAuth authorization server details. If you are providing your own authorization server,
 # then pass an input of the following form: {"customJWTAuthorizer": {"allowedClients": ["<INSERT CLIENT ID>"], "discoveryUrl": "<INSERT DISCOVERY URL>"}}
 authorizer_config=cognito_response["authorizer_config"],
 # enable semantic search
 enable_semantic_search=True,
)
print(f"# Gateway created: {gateway['gatewayUrl']}\n")

If role_arn was not provided, fix IAM permissions
NOTE: This is handled internally by the toolkit when no role is provided
client.fix_iam_permissions(gateway)
print("# Waiting 30s for IAM propagation...")
time.sleep(30)
print("# IAM permissions configured\n")
```

**What happens here:** Creates a gateway with MCP protocol support, configures OAuth authorization, and enables semantic search for tool discovery. If you don't provide a role, one is created and configured automatically.

## Adding Lambda Targets

Let's add a Lambda function target. This code will automatically create a Lambda function with weather and time tools.

```
s# Step 2.3: Add Lambda target
print("Step 2.3: Adding Lambda target...")
lambda_target = client.create_mcp_gateway_target(
 # the gateway created in the previous step
 gateway=gateway,
 # the name of the Target - if you don't set one, one will be generated.
 name=None,
 # the type of the Target
 target_type="lambda",
 # the target details - set this to define your own lambda if you pre-created
one.
 # Otherwise leave this None and one will be created for you.
 target_payload=None,
 # you will see later in the tutorial how to use this to connect to APIs using
API keys and OAuth credentials.
 credentials=None,
)
print("# Lambda target added\n")
```

**What happens here:** Creates a test Lambda function with two tools (`get_weather` and `get_time`) and registers it as a target in your gateway.

## Save the gateway configuration

Save the gateway configuration to a file for use by the agent.

```
Step 2.4: Save configuration for agent
config = {
 "gateway_url": gateway["gatewayUrl"],
 "gateway_id": gateway["gatewayId"],
 "region": region,
 "client_info": cognito_response["client_info"]
}

with open("gateway_config.json", "w") as f:
 json.dump(config, f, indent=2)

print("=" * 60)
```

```
print("# Gateway setup complete!")
print(f"Gateway URL: {gateway['gatewayUrl']}")
print(f"Gateway ID: {gateway['gatewayId']}")
print("\nConfiguration saved to: gateway_config.json")
print("\nNext step: Run 'python run_agent.py' to test your Gateway")
print("==" * 60)

return config

if __name__ == "__main__":
 setup_gateway()
```

## Step 3: Run the setup

Execute the setup script to create your gateway and invoke the Lambda target.

```
python setup_gateway.py
```

**What to expect:** The script will take about 2-3 minutes to complete. You'll see progress messages for each step.

## Step 4: Use the gateway with an agent

Create a new file called `run_agent.py` and insert the following code:

```
"""
Agent script to test the Gateway
Run this after setup: python run_agent.py
"""

from strands import Agent
from strands.models import BedrockModel
from strands.tools.mcp.mcp_client import MCPClient
from mcp.client.streamable_http import streamablehttp_client
from bedrock_agentcore_starter_toolkit.operations.gateway.client import GatewayClient
import json
import sys

def create_streamable_http_transport(mcp_url: str, access_token: str):
 return streamablehttp_client(mcp_url, headers={"Authorization": f"Bearer {access_token}"})
```

```
def get_full_tools_list(client):
 """Get all tools with pagination support"""
 more_tools = True
 tools = []
 pagination_token = None
 while more_tools:
 tmp_tools = client.list_tools_sync(pagination_token=pagination_token)
 tools.extend(tmp_tools)
 if tmp_tools.pagination_token is None:
 more_tools = False
 else:
 more_tools = True
 pagination_token = tmp_tools.pagination_token
 return tools

def run_agent():
 # Load configuration
 try:
 with open("gateway_config.json", "r") as f:
 config = json.load(f)
 except FileNotFoundError:
 print("# Error: gateway_config.json not found!")
 print("Please run 'python setup_gateway.py' first to create the Gateway.")
 sys.exit(1)

 gateway_url = config["gateway_url"]
 client_info = config["client_info"]

 # Get access token for the agent
 print("Getting access token...")
 client = GatewayClient(region_name=config["region"])
 access_token = client.get_access_token_for_cognito(client_info)
 print("# Access token obtained\n")

 # Model configuration - change if needed
 model_id = "anthropic.claude-3-7-sonnet-20250219-v1:0"

 print("# Starting AgentCore Gateway Test Agent")
 print(f"Gateway URL: {gateway_url}")
 print(f"Model: {model_id}")
 print("-" * 60)

 # Setup Bedrock model
 bedrockmodel = BedrockModel(
```

```
 inference_profile_id=model_id,
 streaming=True,
)

 # Setup MCP client
 mcp_client = MCPClient(lambda: create_streamable_http_transport(gateway_url,
access_token))

 with mcp_client:
 # List available tools
 tools = get_full_tools_list(mcp_client)
 print(f"\n# Available tools: {[tool.tool_name for tool in tools]}\n")
 print("-" * 60)

 # Create agent
 agent = Agent(model=bedrockmodel, tools=tools)

 # Interactive loop
 print("\n# Interactive Agent Ready!")
 print("Try asking: 'What's the weather in Seattle?'")
 print("Type 'exit', 'quit', or 'bye' to end.\n")

 while True:
 user_input = input("You: ")
 if user_input.lower() in ["exit", "quit", "bye"]:
 print("# Goodbye!")
 break

 print("\n# Thinking...\n")
 response = agent(user_input)
 print(f"\nAgent: {response.message.get('content', response)}\n")

if __name__ == "__main__":
 run_agent()
```

## Run your agent

Test your gateway by running the agent and interacting with the tools.

```
python run_agent.py
```

That's it! The agent will start and you can ask questions like:

- "What's the weather in Seattle?"
- "What time is it in New York?"

## What you've built

Through this getting started tutorial, you've created the following resources:

- **MCP Server (Gateway)**: A managed endpoint at `https://gateway-id.gateway.bedrock-agentcore.region.amazonaws.com/mcp`
- **Lambda tools**: Mock functions that return test data (weather: "72°F, Sunny", time: "2:30 PM")
- **OAuth authentication**: Secure access using Cognito tokens
- **AI agent**: Claude-powered assistant that can discover and use your tools

## Troubleshooting

The following table shows some possible issues and their solutions:

Issue	Solution
"No module named 'strands'"	Run: <code>pip install strands-agents</code>
"Model not enabled"	Enable Claude Sonnet 3.7 in Bedrock console → Model access
"AccessDeniedException"	Check IAM permissions for <code>bedrock-agentcore:*</code>
Gateway not responding	Wait 30-60 seconds after creation for DNS propagation
OAuth token expired	Tokens expire after 1 hour, get new one with <code>get_access_token_for_cognito()</code>

## Quick validation

Run the following commands in a terminal to check that your gateway is working.

```
Check your Gateway is working
curl -X POST YOUR_GATEWAY_URL \
```

```
-H "Authorization: Bearer YOUR_TOKEN" \
-H "Content-Type: application/json" \
-d '{"jsonrpc":"2.0","id":1,"method":"tools/list","params":{}}'

Watch live logs
aws logs tail /aws/bedrock-agentcore/gateways/YOUR_GATEWAY_ID --follow
```

## Cleanup

Create a `cleanup_gateway.py` file and insert the following contents:

```
from bedrock_agentcore_starter_toolkit.operations.gateway.client import GatewayClient
import json

with open("gateway_config.json", "r") as f:
 config = json.load(f)

client = GatewayClient(region_name=config["region"])
client.cleanup_gateway(config["gateway_id"], config["client_info"])
print("# Cleanup complete!")
```

Run the following in a terminal:

```
python cleanup_gateway.py
```

## Next steps

- **Custom Lambda Tools:** Create Lambda functions with your business logic
- **Add Your Own APIs:** Extend your Gateway with OpenAPI specifications for real services
- **Production Setup:** Configure VPC endpoints, custom domains, and monitoring

## Core concepts for Amazon Bedrock AgentCore Gateway

Amazon Bedrock AgentCore Gateway provides a standardized way for AI agents to discover and interact with tools. Understanding the core concepts of Gateway will help you design and implement effective tool integration strategies for your AI agents.

# Key concepts

## Gateway

An Gateway acts like an MCP server, providing a single access point for an agent to interact with its tools. A Gateway can have multiple targets, each representing a different tool or set of tools.

## Gateway Target

A target defines the APIs or Lambda function that a Gateway will provide as tools to an agent. Targets can be Lambda functions, OpenAPI specifications, Smithy models, or other tool definitions.

## AgentCore Gateway Authorizer

Since MCP only supports OAuth, each Gateway must have an attached OAuth authorizer. If you don't have an OAuth authorization server already, you will be able to create one in this guide using Cognito.

## AgentCore Credential Provider

When Gateway makes calls to your APIs or Lambda function it must use some credentials to access those functionalities. When you create a Smithy or Lambda target, Gateway uses the attached execution role to make calls to those targets. When you create an OpenAPI target, you must attach an AgentCore credential provider which stores the API Key or OAuth credentials that Gateway will use to access the OpenAPI target.

# Tool types

Gateway supports several types of tools and integration methods:

## OpenAPI specifications

Transform existing REST APIs into MCP-compatible tools by providing an OpenAPI specification. The gateway automatically handles the translation between MCP and REST formats.

## Lambda functions

Connect Lambda functions as tools, allowing you to implement custom business logic in your preferred programming language. The gateway invokes the Lambda function and translates the response into the MCP format.

## Smithy models

Use Smithy models to define your API interfaces and generate MCP-compatible tools. Smithy is a language for defining services and SDKs that can be used with AWS services. The gateway can use Smithy models to generate tools that interact with AWS services or custom APIs.

## MCP servers

Use remote MCP servers to connect tools to your agent runtime. Only MCP tools capabilities are supported. For both control plane and data plane operations, if tools are not available the operations will fail.

# Supported targets for Amazon Bedrock AgentCore gateways

Targets define the tools that your gateway will host. Amazon Bedrock AgentCore Gateway supports multiple target types that are detailed in the following topics. You can attach different credential providers to different targets, which lets you securely control access to targets. By adding targets, your gateway becomes a single MCP URL that enables access to all of the relevant tools for an agent.

The following topics explain the target types that are supported for AgentCore Gateway and how they integrate into your gateway. You should review these pages to make sure that a resource that you want to add as a target for your gateway is compatible. The final topic discusses how target names are constructed for a gateway so you can understand how to incorporate them.

## Topics

- [AWS Lambda function targets](#)
- [OpenAPI schema targets](#)
- [Smithy model targets](#)
- [MCP servers targets](#)
- [Built-in templates from integration providers as targets](#)
- [Understand how AgentCore Gateway tools are named](#)

## AWS Lambda function targets

Lambda targets allow you to connect your gateway to AWS Lambda functions that implement your tools. This is useful when you want to execute custom code in response to tool invocations.

You create a Lambda function using the AWS Lambda service. In order to create the function, you should do the following:

- Create a tool schema that defines the tools that your Lambda function can call.
- Understand the Lambda input format. You can then follow the steps in the [AWS Lambda Developer Guide](#) for **Building with** the language of your choice.

After you create the function, you configure permissions for the gateway to be able to access it.

Review the key considerations and limitations to help you decide whether a Lambda target is applicable to your use case. If it is, you can create the tool schema and the Lambda function and then set up permissions for the gateway to be able to access the target. Select a topic to learn more:

## Topics

- [Key considerations and limitations](#)
- [Lambda function tool schema](#)
- [Lambda function input format](#)

## Key considerations and limitations

When working with Lambda targets, be aware of the following limitations and considerations:

- Tool name prefixes will need to be manually stripped off from the toolname in your AWS Lambda function. For more information, see [Understand how AgentCore Gateway tools are named](#).
- If you are using an existing AWS Lambda function and import it as a tool into the gateway, you will need to change the function code to account for a schema change for event and context objects
- The Lambda function must return a valid JSON response that can be parsed by the gateway
- Lambda function timeouts should be configured appropriately to handle the expected processing time of your tools
- Consider implementing error handling in your Lambda function to provide meaningful error messages to the client

## Lambda function tool schema

This section explains the structure of the tool schema that defines a tool that your Lambda function can return. After you define your tool schema, you can do one of the following:

- Upload it to an Amazon S3 bucket and refer to the S3 location when you add the target to your gateway.
- Paste the definition inline when you add the target to your gateway.

Select a topic to learn more about the details of the tool schema or to see examples:

### Topics

- [Tool definition](#)
- [Top level schema definition for input and output schemas](#)
- [Property schema definition](#)
- [Example Lambda tool definitions](#)

### Tool definition

When you add a Lambda function as a gateway target, you provide a [ToolDefinition](#) when providing the target configuration. The structure of the tool definition is as follows:

```
{
 "name": "string",
 "description": "string",
 "inputSchema": {
 "type": "object",
 "description": "string",
 "properties": {
 "string": SchemaDefinition
 },
 "required": ["string"]
 },
 "outputSchema": {
 "type": "object",
 "description": "string",
 "properties": {
 "string": SchemaDefinition
 },
 }
}
```

```
 "required": ["string"]
 }
}
```

The tool definition contains the following fields:

- **name** (required) – The name of the tool.
- **description** (required) – A description of the tool and its purpose and usage.
- **inputSchema** (required) – A JSON object that defines the structure of the input that the tool accepts.
- **outputSchema** (optional) – A JSON object that defines the structure of the output that the tool produces.

The `inputSchema` and `outputSchema` fields both map to an object-type [SchemaDefinition](#), described in the following section.

### Top level schema definition for input and output schemas

The `inputSchema` and `outputSchema` fields at the top level of the tool definition both map to an object-type [SchemaDefinition](#) that contains the following fields:

```
{
 "type": "object",
 "description": "string",
 "properties": {
 "stringSchemaDefinition
 },
 "required": ["string"]
}
```

- **type** (required) – Must be object.
- **description** (optional) – A description of the schema and its purpose and usage.
- **properties** (optional) – A JSON object that defines the properties or arguments of the tool. Each key is a name of a property and maps to a [SchemaDefinition](#) object that defines the property.
- **required** (optional) – An array that enumerates the properties that are required in the `properties` object.

If you include a `properties` field to define arguments for the tool, you provide a schema definition for each argument. The different types of schema definitions are outlined in the next section.

## Property schema definition

Each property in the top level `SchemaDefinition` maps to a [SchemaDefinition](#) object that has slightly different requirements from the top level schema definition. The available fields depend on the type for the property. To see the shape of the `SchemaDefinition` for a type, select from the following tabs:

### String

The `SchemaDefinition` for a string property has the following structure:

```
{
 "type": "string",
 "description": "string"
}
```

### Number

The `SchemaDefinition` for a number property has the following structure:

```
{
 "type": "number",
 "description": "string"
}
```

### Integer

The `SchemaDefinition` for a integer property has the following structure:

```
{
 "type": "integer",
 "description": "string"
}
```

### Boolean

The `SchemaDefinition` for a boolean property has the following structure:

```
{
 "type": "boolean",
 "description": "string"
}
```

## Array

The SchemaDefinition for an array property has the following structure:

```
{
 "type": "array",
 "description": "string",
 "items": SchemaDefinition
}
```

The value of the items field is a SchemaDefinition that defines the structure of each item in the array.

## Object

The SchemaDefinition for an object property has the following structure and matches the top level property schema definition.

```
{
 "type": "object",
 "description": "string",
 "properties": {
 "stringSchemaDefinition
 },
 "required": ["string"]
}
```

If you include another object-type property, you will recursively add another SchemaDefinition.

## Example Lambda tool definitions

Select a tab to see example tool definitions that you can include in your Lambda function.

### Weather tool

The following get\_weather tool requires a location string argument and can be used to return the weather for that location:

```
{
 "name": "get_weather",
 "description": "Get weather for a location",
 "inputSchema": {
 "type": "object",
 "properties": {
 "location": {
 "type": "string",
 "description": "the location e.g. seattle, wa"
 }
 },
 "required": [
 "location"
]
 }
}
```

## Time tool

The following `get_time` tool requires a `timezone` string argument and can be used to return the time for that timezone:

```
{
 "name": "get_time",
 "description": "Get time for a timezone",
 "inputSchema": {
 "type": "object",
 "properties": {
 "timezone": {
 "type": "string"
 }
 },
 "required": [
 "timezone"
]
 }
}
```

## Lambda function input format

When an Amazon Bedrock AgentCore gateway invokes a Lambda function, it passes an event object and a context object to the function. The Lambda event handler that you write can access values in these objects.

### Event object

A map of properties from the `inputSchema` to their values, as returned by the tool. For example, if your input schema contains the properties `keywords` and `category`, the event object could be the following:

```
{
 "keywords": "wireless headphones",
 "category": "electronics"
}
```

### Context object

Contains the following metadata:

- `bedrockAgentCoreMessageVersion` – The version of the message.
- `bedrockAgentCoreAwsRequestId` – The ID of the request made to the Amazon Bedrock AgentCore service.
- `bedrockAgentCoreMcpMessageId` – The ID of the message sent to the MCP server.
- `bedrockAgentCoreGatewayId` – The ID of the gateway that was invoked.
- `bedrockAgentCoreTargetId` – The ID of the gateway target that was invoked.
- `bedrockAgentCoreToolName` – The name of the tool that was called. The tool name is in the format  `${target_name}__${tool_name}`.

The format of the context object is as follows:

```
{
 "bedrockAgentCoreMessageVersion": "1.0",
 "bedrockAgentCoreAwsRequestId": "string",
 "bedrockAgentCoreMcpMessageId": "string",
 "bedrockAgentCoreGatewayId": "string",
 "bedrockAgentCoreTargetId": "string",
}
```

```
 "bedrockAgentCoreToolName": "string"
}
```

The Lambda function that you write can access the properties of the event and context object. You can use the following boilerplate code to get started:

```
Access context properties in your Lambda function
def lambda_handler(event, context):
 # Since the visible tool name includes the target name as a prefix, we can use this
 # delimiter to strip the prefix
 delimiter = "__"

 # Get the tool name from the context
 originalToolName = context.client_context.custom['bedrockAgentCoreToolName']
 toolName = originalToolName[originalToolName.index(delimiter) + len(delimiter):]

 # Get other context properties
 message_version = context.client_context.custom['bedrockAgentCoreMessageVersion']
 aws_request_id = context.client_context.custom['bedrockAgentCoreAwsRequestId']
 mcp_message_id = context.client_context.custom['bedrockAgentCoreMcpMessageId']
 gateway_id = context.client_context.custom['bedrockAgentCoreGatewayId']
 target_id = context.client_context.custom['bedrockAgentCoreTargetId']

 # Process the request based on the tool name
 if tool_name == 'searchProducts':
 # Handle searchProducts tool
 pass
 elif tool_name == 'getProductDetails':
 # Handle getProductDetails tool
 pass
 else:
 # Handle unknown tool
 pass
```

## OpenAPI schema targets

OpenAPI (formerly known as Swagger) is a widely used standard for describing RESTful APIs. Gateway supports OpenAPI 3.0 specifications for defining API targets.

OpenAPI targets connect your gateway to REST APIs defined using OpenAPI specifications. The Gateway translates incoming MCP requests into HTTP requests to these APIs and handles the response formatting.

Review the key considerations and limitations, including feature support, to help you decide whether an OpenAPI target is applicable to your use case. If it is, you can create a schema that follows the specifications and then set up permissions for the gateway to be able to access the target. Select a topic to learn more:

## Topics

- [Key considerations and limitations](#)
- [OpenAPI schema specification](#)

## Key considerations and limitations

### Important

The OpenAPI specification must include `operationId` fields for all operations that you want to expose as tools. The `operationId` is used as the tool name in the MCP interface.

When using OpenAPI targets, keep in mind the following requirements and limitations:

- OpenAPI versions 3.0 and 3.1 are supported (Swagger 2.0 is not supported)
- The OpenAPI file must be free of semantic errors
- The `server` attribute needs to have a valid URL of the actual endpoint
- Only `application/json` content type is fully supported
- Complex schema features like `oneOf`, `anyOf`, and `allOf` are not supported
- Path parameter serializers and parameter serializers for query, header, and cookie parameters are not supported
- Each LLM will have ToolSpec constraints. If OpenAPI has APIs/properties/object names not compliant to ToolSpec of the respective downstream LLMs, the data plane will fail. Common errors are property name exceeding the allowed length or the name containing unsupported character.

For best results with OpenAPI targets:

- Always include `operationId` in all operations
- Use simple parameter structures instead of complex serialization

- Implement authentication and authorization outside of the specification
- Only use supported media types for maximum compatibility

In considering using OpenAPI schema targets with AgentCore Gateway, review the following feature support table.

## OpenAPI feature support

The following table outlines the OpenAPI features that are supported and unsupported by Gateway:

## OpenAPI feature support

Supported Features	Unsupported Features
<b>Schema Definitions</b> <ul style="list-style-type: none"><li>• Basic data types (string, number, integer, boolean, array, object)</li><li>• Required field validation</li><li>• Nested object structures</li><li>• Array definitions with item specifications</li></ul>	<b>Schema Composition</b> <ul style="list-style-type: none"><li>• oneOf specifications</li><li>• anyOf specifications</li><li>• allOf specifications</li></ul>
<b>HTTP Methods</b> <ul style="list-style-type: none"><li>• Standard HTTP methods (GET, POST, PUT, DELETE, PATCH, HEAD, OPTIONS)</li></ul>	<b>Security Schemes</b> <ul style="list-style-type: none"><li>• Security schemes at the OpenAPI specification level (authentication must be configured using the Gateway's outbound authorization configuration)</li></ul>
<b>Media Types</b> <ul style="list-style-type: none"><li>• application/json</li><li>• application/xml</li><li>• multipart/form-data</li><li>• application/x-www-form-urlencoded</li></ul>	<b>Media Types</b> <ul style="list-style-type: none"><li>• Custom media types beyond the supported list</li><li>• Binary media types</li></ul>
<b>Path Parameters</b>	<b>Parameter Serialization</b>

Supported Features	Unsupported Features
<ul style="list-style-type: none"> <li>Simple path parameter definitions (Example: `/users/{userId}`)</li> </ul>	<ul style="list-style-type: none"> <li>Complex path parameter serializers (Example: `/users{;id\*}{?metadata}`)</li> <li>Query parameter arrays with complex serialization</li> <li>Header parameter serializers</li> <li>Cookie parameter serializers</li> </ul>
<b>Query Parameters</b> <ul style="list-style-type: none"> <li>Basic query parameter definitions</li> <li>Simple string, number, and boolean types</li> </ul>	<b>Callbacks and Webhooks</b> <ul style="list-style-type: none"> <li>Callback operations</li> <li>Webhook definitions</li> </ul>
<b>Request/Response Bodies</b> <ul style="list-style-type: none"> <li>JSON request and response bodies</li> <li>XML request and response bodies</li> <li>Standard HTTP status codes (200, 201, 400, 404, 500, etc.)</li> </ul>	<b>Links</b> <ul style="list-style-type: none"> <li>Links between operations</li> </ul>

## OpenAPI schema specification

The OpenAPI specification defines the REST API that your Gateway will expose. Refer to the following resources when setting up your OpenAPI specification:

- For information about the format of the OpenAPI specification, see [OpenAPI Specification](#).
- For information about supported and unsupported features when using an OpenAPI specification with AgentCore Gateway, see the table in [OpenAPI feature support](#). Adhere to these requirements to prevent errors during target creation and invocation.

After you define your OpenAPI schema, you can do one of the following:

- Upload it to an Amazon S3 bucket and refer to the S3 location when you add the target to your gateway.
- Paste the definition inline when you add the target to your gateway.

Expand a section to see examples of supported and unsupported OpenAPI specifications:

## Supported OpenAPI specification Example 1

Following shows an example of a supported OpenAPI specification

Example of a supported OpenAPI specification:

```
{
 "openapi": "3.0.0",
 "info": {
 "title": "Weather API",
 "version": "1.0.0",
 "description": "API for retrieving weather information"
 },
 "paths": {
 "/weather": {
 "get": {
 "summary": "Get current weather",
 "description": "Returns current weather information for a location",
 "operationId": "getCurrentWeather",
 "parameters": [
 {
 "name": "location",
 "in": "query",
 "description": "City name or coordinates",
 "required": true,
 "schema": {
 "type": "string"
 }
 },
 {
 "name": "units",
 "in": "query",
 "description": "Units of measurement (metric or imperial)",
 "required": false,
 "schema": {
 "type": "string",
 "enum": ["metric", "imperial"],
 "default": "metric"
 }
 }
],
 "responses": {
 ...
 }
 }
 }
 }
}
```

```
"200": {
 "description": "Successful response",
 "content": {
 "application/json": {
 "schema": {
 "type": "object",
 "properties": {
 "location": {
 "type": "string"
 },
 "temperature": {
 "type": "number"
 },
 "conditions": {
 "type": "string"
 },
 "humidity": {
 "type": "number"
 }
 }
 }
 }
 }
},
"400": {
 "description": "Invalid request"
},
"404": {
 "description": "Location not found"
}
}
}
}
}
```

## Supported OpenAPI Specification Example 2

Following shows another example of a supported OpenAPI specification.

```
{
 "openapi": "3.0.0",
 "info": {
 "title": "Search API",
 "version": "1.0.0",
 "description": "A simple search API."
 },
 "paths": {
 "/search": {
 "get": {
 "summary": "Search items",
 "parameters": [
 {
 "name": "query",
 "in": "query",
 "required": true,
 "type": "string",
 "description": "The search query."
 },
 {
 "name": "page",
 "in": "query",
 "required": false,
 "type": "integer",
 "description": "The page number to return results from."
 },
 {
 "name": "size",
 "in": "query",
 "required": false,
 "type": "integer",
 "description": "The size of the results per page."
 }
],
 "responses": {
 "200": {
 "description": "Success",
 "content": {
 "application/json": {
 "schema": {
 "type": "array",
 "items": {
 "type": "object",
 "properties": {
 "id": {
 "type": "string",
 "description": "The item ID."
 },
 "name": {
 "type": "string",
 "description": "The item name."
 },
 "category": {
 "type": "string",
 "description": "The item category."
 }
 }
 }
 }
 }
 }
 }
 }
 }
 }
 }
}
```

```
"version": "1.0.0",
"description": "API for searching content"
},
"servers": [
{
"url": "https://api.example.com/v1"
}
],
"paths": {
"/search": {
"get": {
"summary": "Search for content",
"operationId": "searchContent",
"parameters": [
{
"name": "query",
"in": "query",
"description": "Search query",
"required": true,
"schema": {
"type": "string"
}
},
{
"name": "limit",
"in": "query",
"description": "Maximum number of results",
"required": false,
"schema": {
"type": "integer",
"default": 10
}
}
]
},
"responses": {
"200": {
"description": "Successful response",
"content": {
"application/json": {
"schema": {
"type": "object",
"properties": {
"results": {
"type": "array",

```

## Unsupported OpenAPI schema

The following shows an example of an unsupported schema with oneOf:

```
{
 "oneOf": [
 {"$ref": "#/components/schemas/Pencil"},

 {"$ref": "#/components/schemas/Pen"}
]
}
```

## Smithy model targets

Smithy is a language for defining services and software development kits (SDKs). Smithy models provide a more structured approach to defining APIs compared to OpenAPI, and are particularly useful for connecting to AWS services, such as AgentCore Gateway.

Smithy model targets connect your AgentCore gateway to services that are defined using Smithy API models. When you invoke a Smithy model gateway target, the gateway translates incoming MCP requests into API calls that are sent to these services. The gateway also handles the response formatting.

Review the key considerations and limitations, including feature support, to help you decide whether a Smithy target is applicable to your use case. If it is, you can create a schema that follows the specifications and then set up permissions for the gateway to be able to access the target. Select a topic to learn more:

### Topics

- [Key considerations and limitations](#)
- [Smithy model specification](#)

## Key considerations and limitations

When using Smithy models with AgentCore Gateway, be aware of the following limitations:

- Maximum model size: 10MB
- Only JSON protocol bindings are fully supported
- Only RestJson protocol is supported
- Complex endpoint creation rule sets are not supported
- Only simple URL parameters like {region} are supported

In considering using Smithy models with AgentCore Gateway, review the following feature support table.

### Smithy feature support for AgentCore Gateway

The following table outlines the Smithy features that are supported and unsupported by Gateway:

## Smithy feature support

Supported Features	Unsupported Features
<b>Service Definitions</b> <ul style="list-style-type: none"> <li>• Service structure definitions based on Smithy specifications</li> <li>• Operation definitions with input/output shapes</li> <li>• Resource definitions</li> <li>• Trait shapes</li> </ul>	<b>Endpoint Rules</b> <ul style="list-style-type: none"> <li>• Endpoint creation rule sets</li> <li>• Runtime endpoint determination based on conditions</li> <li>• Complex URL parameters beyond simple {region} substitution</li> </ul>
<b>Protocol Support</b> <ul style="list-style-type: none"> <li>• RestJson protocol</li> <li>• Standard HTTP request/response patterns</li> </ul>	<b>Protocol Support</b> <ul style="list-style-type: none"> <li>• RestXml protocol</li> <li>• JsonRpc protocol</li> <li>• AwsQuery protocol</li> <li>• Ec2Query protocol</li> <li>• Custom protocols</li> </ul>
<b>Data Types</b> <ul style="list-style-type: none"> <li>• Primitive types (string, integer, boolean, float, double)</li> <li>• Complex types (structures, lists, maps)</li> <li>• Timestamp handling</li> <li>• Blob data types</li> </ul>	<b>Authentication</b> <ul style="list-style-type: none"> <li>• Multiple egress authentication types for specific APIs</li> <li>• Complex authentication schemes requiring runtime decisions</li> </ul>
<b>HTTP Bindings</b> <ul style="list-style-type: none"> <li>• Basic HTTP method bindings</li> <li>• Simple path parameter bindings</li> <li>• Query parameter bindings</li> <li>• Header bindings for simple cases</li> </ul>	<b>Operations</b> <ul style="list-style-type: none"> <li>• Streaming operations</li> <li>• Operations requiring custom protocol implementations</li> </ul>

## Smithy model specification

AgentCore Gateway provides built-in Smithy models for common AWS services via an AWS-provided S3 bucket that hosts the Smithy files. You can pass the Smithy file URLs to the create target API.

To see Smithy models for AWS services, see the [AWS API Models repository](#).

After you define your Smithy model, you can do one of the following:

- Upload it to an Amazon S3 bucket and refer to the S3 location when you add the target to your gateway.
- Paste the definition inline when you add the target to your gateway.

Expand a section to see examples of supported and unsupported Smithy model specifications:

### Example: Valid Smithy model for weather service

The following example shows a valid Smithy model specification for a weather service:

```
namespace example.weather

use aws.protocols#restJson1
use smithy.framework#ValidationException

/// Weather service for retrieving weather information
@restJson1
service WeatherService {
 version: "1.0.0",
 operations: [GetCurrentWeather]
}

/// Get current weather for a location
@http(method: "GET", uri: "/weather")
operation GetCurrentWeather {
 input: GetCurrentWeatherInput,
 output: GetCurrentWeatherOutput,
 errors: [ValidationException]
}

structure GetCurrentWeatherInput {
 /// City name or coordinates
```

```
@required
@httpQuery("location")
location: String,

/// Units of measurement (metric or imperial)
@httpQuery("units")
units: Units = metric
}

structure GetCurrentWeatherOutput {
 /// Location name
 location: String,

 /// Current temperature
 temperature: Float,

 /// Weather conditions description
 conditions: String,

 /// Humidity percentage
 humidity: Float
}

enum Units {
 metric
 imperial
}
```

## Example: Invalid Smithy model specification

The following example shows an invalid endpoint rules configuration using Smithy:

```
@endpointRuleSet({
 "rules": [
 {
 "conditions": [{"fn": "booleanEquals", "argv": [{"ref": "UseFIPS"}, true]}],
 "endpoint": {"url": "https://weather-fips.{Region}.example.com"}
 },
 {
 "endpoint": {"url": "https://weather.{Region}.example.com"}
 }
]
})
```

## MCP servers targets

MCP servers provide local tools, data access, or custom functions for your interactions with models and agents in Bedrock AgentCore. In Bedrock AgentCore, you can define a preconfigured MCP server as a target when creating a gateway.

MCP servers host tools which agents can discover and invoke. In Bedrock AgentCore, you use a gateway to associate targets to tools to connect to your agent runtime. You connect with external MCP servers through the `SynchronizeGatewayTargets` API that performs protocol handshakes and indexes available tools. For more information about installing and using MCP servers, see [Amazon Bedrock AgentCore MCP Server: Vibe coding with your coding assistant](#).

### Topics

- [Key considerations and limitations](#)
- [Configuring permissions](#)

## Key considerations and limitations

Tool discovery is managed through the synchronization operation provided by the `SynchronizeGatewayTargets` API as follows.

### Implicit Synchronization

Implicit synchronization is the automatic tool discovery and indexing that occurs during `CreateGatewayTarget` and `UpdateGatewayTarget` operations. Gateway immediately calls the MCP server's tools/list capability to fetch available tools and make tools available in the unified catalog without requiring separate user action.

### Explicit Synchronization

Manual tool catalog refresh triggered by calling the `SynchronizeGatewayTargets` API. Invoke this when the MCP server has changed its tool definitions. The API performs discovery process on-demand operation, allowing users to control when Gateway updates its view of available tools.

Synchronization is a critical mechanisms for maintaining accurate tool catalogs when integrating MCP servers. Implicit synchronization occurs automatically during target creation and updates, where Gateway immediately discovers and indexes tools from the MCP server to ensure tools are available for semantic search and unified listing. Explicit synchronization is performed on-demand

through the `SynchronizeGatewayTargets` API, allowing discovery of MCP tool catalog when MCP servers independently modify their capabilities.

## When to call `SynchronizeGatewayTargets`

Use this API whenever your MCP server's tools change - whether adding new tools, modifying existing tool schemas, or removing deprecated tools. Since Gateway pre-computes vector embeddings for semantic search and maintains normalized tool catalogs, synchronization ensures users can discover and invoke the latest available tools across all target types.

## How to call the API

Make a PUT request to `/gateways/{gatewayIdentifier}/synchronize` with the target ID in the request body. The API returns a 202 response immediately and processes synchronization asynchronously. Monitor the target status through `GetGatewayTarget` to track synchronization progress, as the operation can take several minutes for large tool sets.

## Authorization strategy

Two types of the authorization strategy are supported.

- NoAuth - Gateway will invoke the MCP server's tool capabilities without preconfigured Auth. This is not the recommended approach.
- OAuth2 - Gateway supports two-legged OAuth. You configure the authorization provider in AgentCore Identity in the same account and Region for the Gateway to be able to make calls to the MCP server.

**Configuration considerations** For the MCP servers target type, the following must be configured.

1. The MCP server must have tool capabilities.
2. Supported MCP protocol versions are - **2025-06-18** and **2025-03-26**.
3. For the provided URL/endpoint of the server, the URL should be encoded. The Gateway will use the same URL to invoke the server.

## Configuring permissions

The IAM role which you use to create, update or synchronize MCP servers targets should have the permissions shown in the following example.

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore>CreateGateway",
 "bedrock-agentcore:GetGateway",
 "bedrock-agentcore>CreateGatewayTarget",
 "bedrock-agentcore:GetGatewayTarget",
 "bedrock-agentcore:SynchronizeGatewayTargets",
 "bedrock-agentcore:UpdateGatewayTarget"
],
 "Resource": "arn:aws:bedrock-agentcore:*:*:gateway*"
 },
 {
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore>CreateWorkloadIdentity",
 "bedrock-agentcore:GetWorkloadAccessToken",
 "bedrock-agentcore:GetResourceOauth2Token",
 "secretsmanager:GetSecretValue"
],
 "Resource": "*"
 },
 {
 "Effect": "Allow",
 "Action": [
 "kms:EnableKeyRotation",
 "kms:Decrypt",
 "kms:Encrypt",
 "kms:GenerateDataKey*",
 "kms:ReEncrypt*",
 "kms>CreateAlias",
 "kms:DisableKey",
 "kms:*"
],
 "Resource": "arn:aws:kms*:123456789012:key/*"
 }
]
}
```

## Built-in templates from integration providers as targets

Amazon Bedrock AgentCore lets you add open source templates from the following integration providers as targets in your gateway:

- Amazon
- Asana
- BambooHR
- Brave
- Confluence
- Jira
- Microsoft
- PagerDuty
- Salesforce
- SAP
- ServiceNow
- Slack
- Smartsheet
- Tavily
- Zendesk
- Zoom

### Topics

- [Key considerations and limitations](#)
- [Supported APIs by template](#)

### Key considerations and limitations

When using templates from integration providers as targets, keep in mind the following requirements and limitations:

- You can only add an integration provider template as a target through the AWS Management Console and not through the API.

- Amazon Bedrock AgentCore doesn't host any servers natively, so you must set up server hosting yourself. After you add the template, you can invoke the server URL that you set up using the authorization that you configure.
- Amazon Bedrock AgentCore supports a subset of APIs that the provider supports for interacting with these templates. For a list of APIs supported by AgentCore, see [Supported APIs by template](#).

## Supported APIs by template

This section lists the APIs that are supported for each template from an integration provider. To learn more about a specific API and schemas, do the following:

- Search for the provider's API documentation.
- Send a tools/list call to the target after setting it up.

The following sections show, for each template, the [outbound authentication](#) types supported, the server URL, and the supported APIs and their paths.

 **Note**

If an API path has a replaceable *{variable}*, pass the variable in the params field of the JSON RPC request.

Select a topic to learn about which APIs are supported for each template:

### Topics

- [Agents for Amazon Bedrock Runtime](#)
- [Amazon Bedrock Runtime](#)
- [Amazon CloudWatch](#)
- [Amazon DynamoDB](#)
- [Asana](#)
- [BambooHR](#)
- [Brave Search](#)
- [The Confluence Cloud REST API v2](#)
- [The Jira Cloud platform](#)

- [Microsoft Exchange](#)
- [Microsoft OneDrive](#)
- [Microsoft SharePoint](#)
- [Microsoft Teams](#)
- [PagerDuty Advance](#)
- [Salesforce Lightning Platform](#)
- [SAP Bill of Material](#)
- [SAP Business Partner \(A2X\)](#)
- [SAP Material Stock](#)
- [SAP Physical Inventory](#)
- [SAP Product Master \(A2X\)](#)
- [ServiceNow](#)
- [Slack Web](#)
- [Smartsheet](#)
- [Tavily Search](#)
- [Zendesk Suite](#)
- [Zoom](#)

## Agents for Amazon Bedrock Runtime

The following list provides key information for this template

- Server URL – <https://bedrock-agent-runtime.{region}.amazonaws.com>

Replace `{region}` with an actual value. Look up supported Regions at [Agents for Amazon Bedrock runtime APIs](#).

- Outbound authentication types accepted:
  - IAM credentials of gateway service role

To learn more about the Amazon Bedrock Agents Runtime API, see the [Agents for Amazon Bedrock API reference](#)

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	CreateSession	/	Creates a session to temporarily store conversations for generative AI applications.
POST	DeleteAgentMemory	/	Deletes a memory from an agent.
POST	DeleteSession	/	Deletes a session for temporarily storing conversations for generative AI applications.
POST	EndSession	/	Ends a session for temporarily storing conversations for generative AI applications.
POST	GenerateQuery	/	Generates a query to submit to an Amazon Bedrock knowledge base.
POST	GetAgentMemory	/	Gets a memory from an agent.
POST	GetSession	/	Gets a session for temporarily storing conversations for generative AI applications.

REST API type	Operation name	REST API path	Description
POST	InvokeAgent	/	Invokes an Amazon Bedrock agent.
POST	InvokeInlineAgent	/	Invokes an agent that you define inline.
POST	ListSessions	/	Lists sessions for temporarily storing conversations for generative AI applications.
POST	ListTagsForResource	/	Lists tags for an Agents for Amazon Bedrock Runtime resource.
POST	OptimizePrompt	/	Optimizes a prompt for a specific task.
POST	Rerank	/	Reranks the relevance of cited sources based on a query.
POST	Retrieve	/	Retrieves results from querying a knowledge base.
POST	RetrieveAndGenerate	/	Generate a natural language response based on results retrieved from querying a knowledge base.

REST API type	Operation name	REST API path	Description
POST	TagResource	/	Tag an Agents for Amazon Bedrock resource.
POST	UntagResource	/	Untag an Agents for Amazon Bedrock resource.
POST	UpdateSession	/	Update a session for temporarily storing conversations for generative AI applications.

## Amazon Bedrock Runtime

The following list provides key information for this template

- Server URL – <https://bedrock-runtime.{region}.amazonaws.com>

Replace *{region}* with an actual value. look up supported Regions at [Amazon Bedrock runtime APIs](#).

- Outbound authentication types accepted:
  - IAM credentials of gateway service role

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	Converse	/	Invoke an Amazon Bedrock model to generate a response in a conversational interface.

REST API type	Operation name	REST API path	Description
POST	ApplyGuardrail	/	Apply a guardrail to content.
POST	InvokeModel	/	Invoke an Amazon Bedrock model to generate a response for a prompt.

## Amazon CloudWatch

The following list provides key information for this template

- Server URL – <https://monitoring.{region}.amazonaws.com>

Replace `{region}` with an actual value. Look up supported Regions at [Amazon CloudWatch endpoints and quotas](#).

- Outbound authentication types accepted:
  - IAM credentials of gateway service role

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	DescribeAlarmHistory	/	Retrieve the history for an alarm you've set up.
POST	DescribeAlarms	/	Retrieve information about specific alarms.
POST	DescribeAlarmsForMetric	/	Retrieve information about alarms for a metric.
POST	DescribeAnomalyDetectors	/	Retrieve anomaly detection models

REST API type	Operation name	REST API path	Description
			that you've created in your account.
POST	DescribeInsightRules	/	Retrieve a list of Contributor Insights rules in your account.
POST	DisableAlarmActions	/	Disable actions for the specified alarms.
POST	DisableInsightRules	/	Disable the specified Contributor Insights rules.
POST	GetDashboard	/	Display the details of the dashboard that you specify.
POST	GetInsightRuleReport	/	Get the time series data collected by a Contributor Insights rule.
POST	GetMetricData	/	Get metric values.
POST	GetMetricStatistics	/	Get statistics for a specified metric.
POST	GetMetricStream	/	Get information about a metric stream.
POST	GetMetricWidgetImage	/	Get a snapshot graph of a metric as a bitmap image.

REST API type	Operation name	REST API path	Description
POST	ListDashboards	/	Return a list of dashboards.
POST	ListManagedInsight Rules	/	Return a list of managed Contributor Insights rules.
POST	ListMetricStreams	/	Return a list of metric streams.
POST	ListMetrics	/	Retrieve a list of metrics.
POST	ListTagsForResource	/	List tags for a CloudWatch resource.

## Amazon DynamoDB

The following list provides key information for this template

- Server URL – <https://dynamodb.{region}.amazonaws.com>

Replace `{region}` with an actual value. Look up supported Regions at [Amazon DynamoDB endpoints and quotas](#).

- Outbound authentication types accepted:
  - IAM credentials of gateway service role

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	BatchExecuteStatement	/	Perform batch read or writes on data using PartiQL.

REST API type	Operation name	REST API path	Description
POST	BatchGetItem	/	Returns the attributes of items from one or more tables.
POST	BatchWriteItem	/	Puts or deletes items in one or more tables.
POST	CreateBackup	/	Create a backup for a table.
POST	CreateTable	/	Create a table.
POST	DeleteItem	/	Delete an item from a table.
POST	DeleteTable	/	Delete a table and all its items.
POST	DescribeBackup	/	Get information about a backup.
POST	DescribeContinuous Backups	/	Check the status of continuous backups and point in time recovery on a specified table.
POST	DescribeEndpoints	/	Return regional endpoint information.
POST	DescribeLimits	/	Return your current provisioned-capacity quotas for your account in an AWS Region and for a table you create in it.

REST API type	Operation name	REST API path	Description
POST	DescribeTable	/	Get information about a table.
POST	DescribeTimeToLive	/	Get information about the time to live (TTL) status on a specified table.
POST	ExecuteStatement	/	Perform a read or singleton write on data using PartiQL.
POST	ExecuteTransaction	/	Perform transactional reads or writes on data using PartiQL.
POST	GetItem	/	Get a set of attributes for an item in your data.
POST	GetResourcePolicy	/	Get a resource-based IAM policy attached to a resource, such as a table or stream.
POST	ListBackups	/	List backups for a table.
POST	ListGlobalTables	/	List all global tables that have a replica in the specified Region.
POST	ListTables	/	List table names associated with an account and endpoint.

REST API type	Operation name	REST API path	Description
POST	ListTagsOfResource	/	List the tags for a DynamoDB resource.
POST	PutItem	/	Create or update an item in a table.
POST	PutResourcePolicy	/	Attach a resource-based IAM policy to a resource, such as a table or stream.
POST	Query	/	Return the results for a database query.
POST	Scan	/	Return items and item attributes by accessing every item in a table or secondary index.
POST	TagResource	/	Add a tag to a DynamoDB resource.
POST	TransactGetItems	/	Retrieve items from one or more tables in the same account and Region.
POST	TransactWriteItems	/	Carry out the specified action on items in one or more tables in the same account and Region.
POST	UntagResource	/	Remove a tag from a DynamoDB resource.

REST API type	Operation name	REST API path	Description
POST	UpdateItem	/	Modify an item's attributes or add the item to the table if it doesn't exist.
POST	UpdateTable	/	Modify provisioned throughput settings, global secondary indexes, or DynamoDB Streams settings for a table.

## Asana

The following list provides key information for this template

- Server URL – <https://app.asana.com/api/1.0>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	createTask	/tasks	Create new task in workspace
PUT	updateTask	/tasks/{task_gid}	Update existing task details

## BambooHR

The following list provides key information for this template

- Server URL – <https://api.bamboohr.com/api/gateway.php/{companyDomain}>

- Outbound authentication types accepted:

- OAuth2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getCompanyInformation	/v1/company_information	View company details
GET	getCompanyEINs	/v1/company_eins	View company tax IDs
GET	getEmployee	/v1/employees/{employeeId}	Retrieve employee information
POST	updateEmployee	/v1/employees/{employeeId}	Update employee information
POST	addEmployee	/v1/employees	Add new employee with basic info
GET	getEmployeesDirectory	/v1/employees/directory	View employee directory
GET	getTimeOffTypes	/v1/meta/time_off/types	View types of time off
GET	getTimeOffPolicies	/v1/meta/time_off/policies	View time off policy list
GET	getTimeOffRequests	/v1/time_off/requests	View time off requests
PUT	addTimeOffRequest	/v1/employees/{employee}	Submit time off request

REST API type	Operation name	REST API path	Description
		<i>Id</i> /time_off/request	
PUT	changeRequestStatus	/v1/time_off/requessts/{requestId} /status	Update time off request status
PUT	adjustTimeOffBalance	/v1/employees/{employeeId} /time_off/balance_adjustment	Adjust employee time off balance
PUT	assignTimeOffPolicies	/v1_1/employees/{employeeId} /time_off/policies	Assign employee time off policies
GET	listTimeOffPolicies	/v1/employees/{employeeId} /time_off/policies	View time off policies
GET	estimateFutureTimeOffBalances	/v1/employees/{employeeId} /time_off/calculator	Calculate future time off estimates
GET	getWhosOutList	/v1/time_off/whos_out	See who's on leave
GET	listEmployeeFiles	/v1/employees/{employeeId} /files/view	View employee documents
POST	uploadEmployeeFile	/v1/employees/{employeeId} /files	Upload Employee File

REST API type	Operation name	REST API path	Description
GET	getEmployeeTableRow	/v1/employees/{employeeId} /tables/{table}	Get employee table data

## Brave Search

The following list provides key information for this template

- Server URL – <https://api.search.brave.com/res/v1>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	BraveWebSearch	/web/search	Performs a web search query

## The Confluence Cloud REST API v2

The following list provides key information for this template

- Server URL – <https://{your-domain}>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getPages	/wiki/api/v2/pages	Get pages

REST API type	Operation name	REST API path	Description
POST	createPage	/wiki/api/v2/pages	Create page
PUT	updatePage	/wiki/api/v2/pages/{id}	Update page
GET	getPageById	/wiki/api/v2/pages/{id}	Get page by id
GET	searchByCQL	/wiki/rest/api/search	Search content
GET	getSpaces	/wiki/api/v2/spaces	Get spaces

## The Jira Cloud platform

The following list provides key information for this template

- Server URL – <https://api.atlassian.com/ex/jira/{customerInstanceId}>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	moveIssuesToBacklog	/rest/agile/1.0/backlog/issue	Move issues to backlog
GET	GetAllBoards	/rest/agile/1.0/board	Get boards
GET	getBoard	/rest/agile/1.0/board/{boardId}	Get board
GET	getAllSprints	/rest/agile/1.0/board/{boardId}/sprint	Get all sprints
POST	createSprint	/rest/agile/1.0/sprint	Create sprint

REST API type	Operation name	REST API path	Description
DELETE	deleteSprint	/rest/agile/1.0/sprint/{sprintId}	Delete sprint
GET	getSprint	/rest/agile/1.0/sprint/{sprintId}	Get sprint
PUT	updateSprint	/rest/agile/1.0/sprint/{sprintId}	Update sprint
POST	moveIssuesToSprintAndRank	/rest/agile/1.0/sprint/{sprintId}/issue	Move issues to sprint and rank
GET	getAttachmentContent	/rest/api/3/attachment/content/{id}	Get attachment content
POST	createIssue	/rest/api/3/issue	Create an issue
PUT	editIssue	/rest/api/3/issue/{issueIdOrKey}	Edit issue
GET	getIssue	/rest/api/3/issue/{issueIdOrKey}	Get issue
DELETE	deleteIssue	/rest/api/3/issue/{issueIdOrKey}	Delete issue
POST	addAttachment	/rest/api/3/issue/{issueIdOrKey}/attachments	Add attachment
GET	getComments	/rest/api/3/issue/{issueIdOrKey}/comment	Get comments
POST	addComment	/rest/api/3/issue/{issueIdOrKey}/comment	Add comment

REST API type	Operation name	REST API path	Description
DELETE	deleteComment	/rest/api/3/issue/{issuelIdOrKey}/comment/{ <i>id</i> }	Delete comment
PUT	updateComment	/rest/api/3/issue/{issuelIdOrKey}/comment/{ <i>id</i> }	Update comment
GET	getTransitions	/rest/api/3/issue/{issuelIdOrKey}/transitions	Get transitions
POST	DoTransition	/rest/api/3/issue/{issuelIdOrKey}/transitions	Transition issue
GET	getIssueTypesForProject	/rest/api/3/issuetype/project	Get issue types for project
GET	getAllLabels	/rest/api/3/label	Get all labels
GET	getPriorities	/rest/api/3/priority	Get priorities
POST	createProject	/rest/api/3/project	Create project
GET	listProjects	/rest/api/3/project	Get all projects
GET	searchProjects	/rest/api/3/project/search	Get projects paginated
DELETE	deleteProject	/rest/api/3/project/{projectIdOrKey}	Delete project
GET	getProject	/rest/api/3/project/{projectIdOrKey}	Get project
PUT	updateProject	/rest/api/3/project/{projectIdOrKey}	Update project

REST API type	Operation name	REST API path	Description
GET	searchStatuses	/rest/api/3/statuses/search	Search statuses paginated
GET	SearchIssues	/rest/api/3/search/jql	Search for issues using JQL enhanced search (GET)
GET	getAllUsers	/rest/api/3/users	Get all users default
GET	findUsers	/rest/api/3/user/search	Find users

## Microsoft Exchange

The following list provides key information for this template

- Server URL – <https://graph.microsoft.com/v1.0>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	sendUserEmail	/users/{ <i>userId</i> }/microsoft.graph.sendMail	Send Email
GET	listUserMails	/users/{ <i>userId</i> }/messages	Get messages from users
GET	ListFolderMessage	/users/{ <i>userId</i> }/mailFolders/{ <i>mailFolderId</i> }/messages	Get messages from users

REST API type	Operation name	REST API path	Description
GET	getEmailById	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> }	Get messages from users
PATCH	updateEmail	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> }	Update the navigation property messages in users
DELETE	deleteEmail	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> }	Delete navigation property messages for users
POST	moveEmailToFolder	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> } /move	Move Email to Folder
POST	forwardUserEmail	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> } /forward	Forward User Email
POST	replyToEmail	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> } /reply	Reply to a message
GET	listEmailAttachment	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> } /attachments	Get attachments from users

REST API type	Operation name	REST API path	Description
GET	getAttachmentById	/users/{ <i>userId</i> }/messages/{ <i>messageId</i> } /attachments/{ <i>attachmentId</i> }	Get attachments from users
GET	listCalendarEvents	/users/{ <i>userId</i> }/calendar/events	Get events from users
POST	createCalendarEvent	/users/{ <i>userId</i> }/calendar/events	Create new navigation property to events for users
PATCH	updateCalendarEvent	/users/{ <i>userId</i> }/calendar/events/{ <i>eventId</i> }	Update the calendar events in users
POST	findMeetingTimes	/users/{ <i>userId</i> }/findMeetingTimes	Suggest meeting times and locations
GET	listMailFolders	/users/{ <i>userId</i> }/mailFolders	Get mailFolders from users
GET	listContacts	/users/{ <i>userId</i> }/contacts	Get contacts from users
GET	listUsers	/users	List users
GET	getUser	/users/{ <i>userId</i> }	Get a user
GET	getMailboxSettings	/users/{ <i>userId</i> }/mailboxSettings	Get current mailbox settings of the user.
GET	listPlaces	/places/microsoft.graph.room	List places

## Microsoft OneDrive

The following list provides key information for this template

- Server URL – <https://graph.microsoft.com/v1.0>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getUser	/users/{ <i>userId</i> }	Get a user
GET	getDrive	/users/{ <i>userId</i> }/drive	Get drive from users
GET	listItem	/users/{ <i>userId</i> }/drive/root/children	Get items from users
POST	createItem	/users/{ <i>userId</i> }/drive/root/children	Create new navigation property to items for users
GET	getItem	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> }	Get items from users
PATCH	updateItem	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> }	Update file or folder metadata
DELETE	deleteItem	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> }	Delete navigation property items for users

REST API type	Operation name	REST API path	Description
GET	listChildren	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> } /children	Get children from users
POST	copyItem	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> } /copy	Copy item within a drive
POST	addPermissions	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> } /invite	Add permission
PUT	uploadFile	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> } :/{ <i>fileName</i> } :/content	Upload new file
POST	addSheet	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> } /workbook/worksheets/add	Add worksheet
GET	readSheet	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> } /workbook/worksheets/{ <i>worksheetIdOrName</i> }	Get worksheets from drives

REST API type	Operation name	REST API path	Description
PATCH	updateSheet	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemID</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }	Update worksheet
DELETE	deleteSheet	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemID</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }	Delete worksheet
GET	readCell	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemID</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }}/cell(row={ <i>row</i> },column={ <i>column</i> })	Read cell within a sheet
PATCH	writeCell	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemID</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }}/cell(row={ <i>row</i> },column={ <i>column</i> })	Write cell within a sheet

REST API type	Operation name	REST API path	Description
GET	readRange	/users/{userId}/drives/{driveId}/items/{driveItemId}/workbook/worksheets/{worksheetIdOrName}/range(address='{address}')	Read range
PATCH	writeRange	/users/{userId}/drives/{driveId}/items/{driveItemId}/workbook/worksheets/{worksheetIdOrName}/range(address='{address}')	Write range
POST	deleteRange	/users/{userId}/drives/{driveId}/items/{driveItemId}/workbook/worksheets/{worksheetIdOrName}/range(address='{address}')/delete	Delete Range within a sheet

REST API type	Operation name	REST API path	Description
GET	listSheets	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> }/workbook/worksheets	Get worksheets from drives
GET	readUsedRange	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }/usedRange	Read used range of a sheet
POST	clearRange	/users/{ <i>userId</i> }/drives/{ <i>driveId</i> }/items/{ <i>driveItemId</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }/range(address='{{ <i>address</i> }}')/clear	Clear range within a sheet

## Microsoft SharePoint

The following list provides key information for this template

- Server URL – <https://graph.microsoft.com/v1.0>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	listSites	/sites	Search for sites
GET	getSite	/sites/{siteId}	Get a site resource
GET	listLists	/sites/{siteId}/lists	Get lists in a site
GET	getList	/sites/{siteId}/lists/{listId}	List operations on a list
GET	listItem	/sites/{siteId}/lists/{listId}/items	Enumerate items in a list
POST	createItem	/sites/{siteId}/lists/{listId}/items	Create a new item in a list
GET	getItem	/sites/{siteId}/lists/{listId}/items/{listItemId}	Get listItem
PATCH	updateItem	/sites/{siteId}/lists/{listId}/items/{listItemId}	Update the navigation property items in sites
DELETE	deleteItem	/sites/{siteId}/lists/{listId}/items/{listItemId}	Delete an item from a list
POST	addSheet	/sites/{siteId}/drive/it	Add worksheet

REST API type	Operation name	REST API path	Description
		ems/{ <i>itemId</i> }/workbook/worksheets/add	
GET	readSheet	/sites/{ <i>siteId</i> }/drive/it ems/{ <i>itemId</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }	Read a sheet
DELETE	deleteSheet	/sites/{ <i>siteId</i> }/drive/it ems/{ <i>itemId</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }	Delete a new sheet
PATCH	updateSheet	/sites/{ <i>siteId</i> }/drive/it ems/{ <i>itemId</i> }/workbook/worksheets/{ <i>worksheetIdOrName</i> }	Update worksheet
GET	listSheets	/sites/{ <i>siteId</i> }/drive/it ems/{ <i>itemId</i> }/workbook/worksheets	List worksheet collection
PUT	uploadFile	/sites/{ <i>siteId</i> }/drive/it ems/{ <i>parentId</i> } :/{ <i>fileName</i> } :/content	Create or upload a file

REST API type	Operation name	REST API path	Description
GET	readCell	/sites/{siteId}/drive/items/{itemId}/workbook/worksheets/{worksheetIdOrName}/cell(row={row},column={column})	Read cell
PATCH	writeCell	/sites/{siteId}/drive/items/{itemId}/workbook/worksheets/{worksheetIdOrName}/cell(row={row},column={column})	Write cell
GET	readRange	/sites/{siteId}/drive/items/{itemId}/workbook/worksheets/{worksheetIdOrName}/range(address='{address}')	Read range
PATCH	writeRange	/sites/{siteId}/drive/items/{itemId}/workbook/worksheets/{worksheetIdOrName}/range(address='{address}')	Write range

REST API type	Operation name	REST API path	Description
POST	deleteRange	/sites/{siteId}/drive/items/{itemId}/workbook/worksheets/{worksheetIdOrName}/range(address='{address}')/delete	Delete range
POST	clearRange	/sites/{siteId}/drive/items/{itemId}/workbook/worksheets/{worksheetIdOrName}/range(address='{address}')/clear	Clear range
GET	getUsedRange	/sites/{siteId}/drive/items/{itemId}/workbook/worksheets/{worksheetIdOrName}/usedRange	Get used range

## Microsoft Teams

The following list provides key information for this template

- Server URL – <https://graph.microsoft.com/v1.0>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	listChats	/chats	List chats
POST	CreateChat	/chats	Create a new chat object
GET	GetIndividualChat	/chats/{chatId}	Get chat
GET	ListAllChatMessages	/chats/{chatId}/messages	List messages in a chat
POST	SendChatMessage	/chats/{chatId}/messages	Send a message in a chat
GET	listTeams	/teams	List teams
GET	GetTeam	/teams/{teamId}	Get team
GET	ListAllChannels	/teams/{teamId}/channels	List channels
POST	CreateChannel	/teams/{teamId}/channels	Create channel
GET	GetChannel	/teams/{teamId}/channels/{channelId}	Get channel
POST	InviteChannelMember	/teams/{teamId}/channels/{channelId}/members	Add conversationMember
GET	ListAllChannelMessages	/teams/{teamId}/channels/{channelId}/messages	List channel messages

REST API type	Operation name	REST API path	Description
POST	SendChannelMessage	/teams/{ <i>teamId</i> }/channels/{ <i>channelId</i> }/messages	Send a message in a channel
POST	ReplyToChannelMessage	/teams/{ <i>teamId</i> }/channels/{ <i>channelId</i> }/messages/{ <i>chatMessageId</i> }/replies	Reply to a message in a channel
GET	ListAllTeamMembers	/teams/{ <i>teamId</i> }/members	List members of team
POST	InviteUserToTeam	/teams/{ <i>teamId</i> }/members	Add member to team
GET	listUsers	/users	List users
GET	getUser	/users/{ <i>userId</i> }	Get a user
POST	CreateOnlineTeamsMeeting	/users/{ <i>userId</i> }/onlineMeetings	Create an online meeting.
GET	GetOnlineTeamsMeeting	/users/{ <i>userId</i> }/onlineMeetings/{ <i>meetingId</i> }	Get an online meeting.
GET	ListAllRecordings	/users/{ <i>userId</i> }/onlineMeetings/{ <i>meetingId</i> }/recordings	List all recordings.
GET	ListAllTranscripts	/users/{ <i>userId</i> }/onlineMeetings/{ <i>meetingId</i> }/transcripts	List all transcripts.

## PagerDuty Advance

The following list provides key information for this template

- Server URL – <https://api.pagerduty.com>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	listIncidents	/incidents	View incidents in my account
POST	createIncident	/incidents	Create new incident
GET	getIncident	/incidents/{id}	View incident details
PUT	updateIncident	/incidents/{id}	Update an incident
GET	listUsers	/users	View user list

## Salesforce Lightning Platform

The following list provides key information for this template

- Server URL – <https://{{domainName}}.develop.my.salesforce.com/services/data/v60.0>
- Outbound authentication types accepted:
  - OAUTH2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getAccountList	/sobjects/Account	View all accounts

REST API type	Operation name	REST API path	Description
POST	createAccount	/sobjects/Account	Create new account
GET	getAccount	/sobjects/Account/{ <i>id</i> }	Get account details
DELETE	deleteAccount	/sobjects/Account/{ <i>id</i> }	Remove account
PATCH	updateAccount	/sobjects/Account/{ <i>id</i> }	Edit account details
POST	createAccountTeamMember	/sobjects/AccountTeamMember	Add account team member
GET	getAccountTeamMember	/sobjects/AccountTeamMember/{ <i>id</i> }	View account team member
DELETE	deleteAccountTeamMember	/sobjects/AccountTeamMember/{ <i>id</i> }	Remove account team member
GET	getCaseList	/sobjects/Case	View all cases
POST	createCase	/sobjects/Case	Create new case
GET	getCase	/sobjects/Case/{ <i>id</i> }	View case details
DELETE	deleteCase	/sobjects/Case/{ <i>id</i> }	Remove case
PATCH	updateCase	/sobjects/Case/{ <i>id</i> }	Edit case
GET	getCampaignList	/sobjects/Campaign	View all campaigns
POST	createCampaign	/sobjects/Campaign	Create new campaign
GET	getCampaign	/sobjects/Campaign/{ <i>id</i> }	Get campaign details
DELETE	deleteCampaign	/sobjects/Campaign/{ <i>id</i> }	Remove campaign

REST API type	Operation name	REST API path	Description
PATCH	updateCampaign	/sobjects/Campaign/{id}	Edit campaign
POST	createCampaignMember	/sobjects/Campaign Member	Add campaign member
GET	getCampaignMember	/sobjects/Campaign Member/{id}	Get campaign member details
DELETE	deleteCampaignMember	/sobjects/Campaign Member/{id}	Remove campaign member
GET	getContactList	/sobjects/Contact	View all contacts
POST	createContact	/sobjects/Contact	Create new contact
GET	getContact	/sobjects/Contact/{id}	Get contact information
DELETE	deleteContact	/sobjects/Contact/{id}	Remove contact
PATCH	updateContact	/sobjects/Contact/{id}	Edit contact
POST	createFeedItem	/sobjects/FeedItem	Create new feed item
GET	getFeedItem	/sobjects/FeedItem/{id}	View feed item
DELETE	deleteFeedItem	/sobjects/FeedItem/{id}	Remove feed item
PATCH	updateFeedItem	/sobjects/FeedItem/{id}	Edit feed item
GET	getLeadList	/sobjects/Lead	View all leads

REST API type	Operation name	REST API path	Description
POST	createLead	/sobjects/Lead	Create new lead
GET	getLead	/sobjects/Lead/{ <i>id</i> }	Get lead details
DELETE	deleteLead	/sobjects/Lead/{ <i>id</i> }	Remove lead
PATCH	updateLead	/sobjects/Lead/{ <i>id</i> }	Edit lead details
GET	getOpportunityList	/sobjects/Opportunity	View list of opportunities
POST	createOpportunity	/sobjects/Opportunity	Create new opportunity
GET	getOpportunity	/sobjects/Opportunity/{ <i>id</i> }	View opportunity details
DELETE	deleteOpportunity	/sobjects/Opportunity/{ <i>id</i> }	Remove opportunity
PATCH	updateOpportunity	/sobjects/Opportunity/{ <i>id</i> }	Edit opportunity
GET	getUser	/sobjects/User	View user details
GET	describeSObject	/sobjects/{ <i>sObject</i> } / describe	Get object metadata and field details
GET	queryAccounts	/query	Executes a SOQL query to retrieve account data from Salesforce

## SAP Bill of Material

The following list provides key information for this template

- Server URL – [https://\*{host}\*/sap/opu/odata/sap/API\\_BILL\\_OF\\_MATERIAL\\_SRV;v=0002](https://<i>{host}</i>/sap/opu/odata/sap/API_BILL_OF_MATERIAL_SRV;v=0002)
- Outbound authentication types accepted:
  - OAuth2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getMaterialBOMItem	/MaterialBOMItem	View bill of material details

## SAP Business Partner (A2X)

The following list provides key information for this template

- Server URL – [https://\*{host}\*/sap/opu/odata/sap/API\\_BUSINESS\\_PARTNER](https://<i>{host}</i>/sap/opu/odata/sap/API_BUSINESS_PARTNER)
- Outbound authentication types accepted:
  - OAuth2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getBusinessPartner	/A_BusinessPartner	Retrieves business partner general data.
GET	getBusinessPartner ByID	/A_BusinessPartner ('{ <i>Business Partner</i> } ')	Retrieves business partner data by using business partner number.
GET	getBusinessPartner Address	/A_BusinessPartner Address	Retrieves business partner address data.
GET	getBusinessPartner Role	/A_BusinessPartner Role	Retrieves business partner role data.

REST API type	Operation name	REST API path	Description
GET	getBusinessPartnerRoleByID	/A_BusinessPartnerRole(BusinessPartner=' <i>{Business Partner}</i> ',BusinessPartnerRole=' <i>{Business PartnerRole}</i> ')	Retrieves business partner role data using the key fields.

## SAP Material Stock

The following list provides key information for this template

- Server URL – [https://\*{host}\*/sap/opu/odata/sap/API\\_MATERIAL\\_STOCK\\_SRV](https://<i>{host}</i>/sap/opu/odata/sap/API_MATERIAL_STOCK_SRV)
- Outbound authentication types accepted:
  - OAuth2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getMaterialStockInAccount	/A_MatlStkInAcctMod	View material stocks details for stocks that has been posted

## SAP Physical Inventory

The following list provides key information for this template

- Server URL – [https://\*{host}\*/sap/opu/odata/sap/API\\_PHYSICAL\\_INVENTORY\\_DOC\\_SRV](https://<i>{host}</i>/sap/opu/odata/sap/API_PHYSICAL_INVENTORY_DOC_SRV)
- Outbound authentication types accepted:
  - OAuth2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getPhysInventoryDocItem	/A_PhysInventoryDocItem	View physical inventory document for an item

## SAP Product Master (A2X)

The following list provides key information for this template

- Server URL – [https://{{host}}/sap/opu/odata/sap/API\\_PRODUCT\\_SRV](https://{{host}}/sap/opu/odata/sap/API_PRODUCT_SRV)
- Outbound authentication types accepted:
  - OAuth2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	getProductMaster	/A_Product	View product master general details
GET	getPlantDataByMaterial	/A_Product('{{Product}}')/to_Plant	View plant details of the product
GET	getSupplyPlanningDataByMaterial	/A_ProductSupplyPlanning(Product='{{Product}}',Plant='{{Plant}}')	View supply planning details by product number and plant

## ServiceNow

The following list provides key information for this template

- Server URL – <https://{{instance}}.service-now.com>
- Outbound authentication types accepted:

- API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	retrieveAttachment sMetadata	/api/now/attachmen t	Get all attachments info
POST	uploadBinaryAttach ment	/api/now/attachmen t/file	Upload binary file
GET	retrieveAttachment Metadata	/api/now/attachmen t/{sys_id}	Get attachment info
DELETE	deleteAttachment	/api/now/attachmen t/{sys_id}	Remove attachment
GET	retrieveAttachment Content	/api/now/attachmen t/{sys_id}/file	Get attachment content
GET	listIncidents	/api/now/table/inc ident	View all incidents
POST	createIncident	/api/now/table/inc ident	Create new incident
GET	getIncident	/api/now/table/inc ident/{sys_id}	View incident details
PATCH	updateIncident	/api/now/table/inc ident/{sys_id}	Edit incident
DELETE	deleteIncident	/api/now/table/inc ident/{sys_id}	Remove incident
GET	listProblem	/api/now/table/pro blem	View all problems

REST API type	Operation name	REST API path	Description
POST	createProblem	/api/now/table/problem	Create new problem
GET	getProblem	/api/now/table/problem/{sys_id}	View problem details
DELETE	deleteProblem	/api/now/table/problem/{sys_id}	Remove problem
PATCH	updateProblem	/api/now/table/problem/{sys_id}	Edit problem
POST	createKnowledgeBaseArticle	/api/now/table/kb_knowledge	Create KB article
DELETE	deleteKnowledgeBaseArticle	/api/now/table/kb_knowledge/{sys_id}	Remove KB article
PATCH	updateKnowledgeBaseArticle	/api/now/table/kb_knowledge/{sys_id}	Edit KB article
GET	listChoices	/api/now/table/sys_choice	View all system choices
GET	listUsers	/api/now/table/sys_user	View all users
GET	listChangeRequest	/api/sn_chg_rest/change	View all change requests
POST	createChangeRequest	/api/sn_chg_rest/change	Create new change request
GET	getChangeRequest	/api/sn_chg_rest/change/{sys_id}	View change request details

REST API type	Operation name	REST API path	Description
DELETE	deleteChangeRequest	/api/sn_chg_rest/change/{sys_id}	Remove change request
PATCH	updateChangeRequest	/api/sn_chg_rest/change/{sys_id}	Edit change request

## Slack Web

The following list provides key information for this template

- Server URL – <https://slack.com/api>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	chatPostEphemeral	/chat.postEphemeral	Send temporary message
POST	chatPostMessage	/chat.postMessage	Send new message
POST	conversationsCreate	/conversations.create	Start new channel
GET	conversationsHistory	/conversations.history	View message history
POST	conversationsInvite	/conversations.invite	Add users to channel
POST	conversationsJoin	/conversations.join	Enter existing conversation
POST	conversationsKick	/conversations.kick	Remove user from chat

REST API type	Operation name	REST API path	Description
POST	conversationsLeave	/conversations.leave	Exit conversation
GET	conversationsList	/conversations.list	View all channels
GET	conversationsMembers	/conversations.members	View chat participants
POST	conversationsOpen	/conversations.open	Start or resume direct message
GET	conversationsReplies	/conversations.replies	View message thread
POST	conversationsSetTopic	/conversations.setTopic	Set chat topic
GET	filesList	/files.list	List for a team, in a channel, or from a user with applied filters.
GET	filesInfo	/files.info	View file details
GET	searchAll	/search.all	Search messages and files
POST	userGroupsCreate	/usergroups.create	Create new user group
GET	userGroupsList	/usergroups.list	View all user groups
POST	userGroupsUsersUpdate	/usergroups.users.update	Edit user group
GET	usersList	/users.list	View team members
POST	remindersAdd	/reminders.add	Set new reminder
POST	usersProfileSet	/users.profile.set	Update user profile

REST API type	Operation name	REST API path	Description
GET	GetUploadURLExternal	/files.getUploadURLExternal	Get an upload URL for a file to be uploaded externally to Slack.
POST	completeUploadExternal	/files.completeUploadExternal	Finalize file upload to Slack. Should be used after Upload File.

## Smartsheet

The following list provides key information for this template

- Server URL – <https://api.smartsheet.com/2.0>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	listSearch	/search	Search all sheets
GET	getSheet	/sheets/{sheetId}	View sheet details
GET	listReports	/reports	View all reports
GET	getReport	/reports/{reportId}	View report information

## Tavily Search

The following list provides key information for this template

- Server URL – <https://api.tavily.com>

- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
POST	TavilySearchPost	/search	Execute a search query using TavilySearch
POST	TavilySearchExtract	/extract	Extract webpage content from URLs using TavilyExtract

## Zendesk Suite

The following list provides key information for this template

- Server URL – <https://{customerInstanceId}.zendesk.com>
- Outbound authentication types accepted:
  - OAUTH2

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	listSearchResults	/api/v2/search	List Search Results
GET	listTickets	/api/v2/tickets	List Tickets
POST	createTicket	/api/v2/tickets	Create Ticket
GET	showTicket	/api/v2/tickets/{ticket_id}	Show Ticket

REST API type	Operation name	REST API path	Description
PUT	updateTicket	/api/v2/tickets/{ticket_id}	Update Ticket
GET	ListTicketEmailCCs	/api/v2/tickets/{ticket_id}/email_ccs	List Email CCs for a Ticket
GET	ListTicketFollowers	/api/v2/tickets/{ticket_id}/followers	List Followers for a Ticket
GET	ListTicketIncidents	/api/v2/tickets/{ticket_id}/incidents	List Ticket Incidents
GET	TicketRelatedInformation	/api/v2/tickets/{ticket_id}/related	Ticket Related Information

## Zoom

The following list provides key information for this template

- Server URL – <https://api.zoom.us/v2>
- Outbound authentication types accepted:
  - API key

The following table shows the APIs that you can call if you add this target type to your gateway:

REST API type	Operation name	REST API path	Description
GET	recordingsList	/users/{userId}/recordings	List all recordings

REST API type	Operation name	REST API path	Description
GET	meeting	/meetings /{meetingId}	Get a meeting
GET	meetings	/users/{userId}/ meetings	List meetings
POST	meetingCreate	/users/{userId}/ meetings	Create a meeting
GET	recordingGet	/meetings /{meetingId} / recordings	Get meeting recordings

## Understand how AgentCore Gateway tools are named

The name of a tool in your gateway is dependent on the name of the target through which the tool can be accessed. Tool names are constructed in the following pattern:

`${target_name}__${tool_name}`

For example, if your target's name is LambdaUsingSDK and you have a tool named get\_order\_tool that is accessible at that target, the tool name that is visible through the Model Context Protocol (MCP) is LambdaUsingSDK\_\_get\_order\_tool.

You should ensure that your application code accounts for the discrepancy between the tool name visible through the MCP and the tool name itself.

For an example of a Lambda handler function that strips the target name prefix from the tool name before passing it to a handler function, see [Lambda function input format](#).

## Prerequisites for trying out Amazon Bedrock AgentCore gateway examples

To interact with the AgentCore Gateway service, you'll need to complete the following prerequisites:

## Prerequisites for using the AgentCore Gateway service

1. Install and set up the tools that you wish to use and ensure that you have the necessary permissions to use AgentCore Gateway methods and access AgentCore Gateway resources.
2. Set up and retrieve your AWS credentials. To access your AWS credentials and configure them, follow the steps at [Using IAM Identity Center to authenticate AWS SDK and Tools](#). You need AWS credentials for the following tools:
  - AWS CLI
  - The AWS SDKs
  - The AgentCore starter toolkit.
  - The Strands Agents SDK
3. Ensure you have the necessary permissions to perform AgentCore Gateway-related API operations and access AgentCore Gateway resources.
4. Set up inbound authorization to authenticate requests made to your gateway.
5. Set up at least one target for your gateway.
6. Set up outbound authorization to authenticate access to your gateway targets.

The following topics describe where you can find information about setting up the tools that you can use to interact with the AgentCore Gateway service.

### Topics

- [Set up dependencies and credentials to create, maintain, and use gateway resources](#)
- [Set up permissions for AgentCore Gateway](#)
- [Set up inbound authorization for your gateway](#)
- [Set up outbound authorization for your gateway](#)

## Set up dependencies and credentials to create, maintain, and use gateway resources

The AgentCore Gateway service involves the following main processes:

- **Creation and maintenance of gateway resources** – You can create gateway and gateway target resources through the Amazon Bedrock AgentCore Control Plane service.

- **Invocation of gateways** – After creating a gateway and gateway target, you can invoke the gateway through direct HTTP requests to the gateway or through the help of an MCP client or agent.

Select a topic to learn about setting up tools and credentials for carrying out these processes:

## Topics

- [Set up tools and credentials for the creation and maintenance of gateway resources](#)
- [Invocation of gateways](#)

## Set up tools and credentials for the creation and maintenance of gateway resources

You create, modify, delete, and retrieve information about gateway and gateway target resources through making calls to the Amazon Bedrock AgentCore Control Plane service. The [Amazon Bedrock AgentCore Control Plane service API reference](#) details information about the API operations and structures in this service.

You can interact with the Amazon Bedrock AgentCore Control Plane service in the following ways. Expand a topic to learn how to install the tool and set up authentication for it.

### AWS Management Console

The AWS Management Console lets you create and maintain gateway and gateway target resources through an interactive graphical interface in a web browser.

- **Installation** – None needed. To manage gateways through the AgentCore console, you can navigate to <https://console.aws.amazon.com/bedrock-agentcore/home#> and select **Gateways** from the left navigation pane.
- **Authentication** – Sign in with an IAM identity with permissions to use AgentCore Gateway actions.

### Direct HTTP requests

The [Amazon Bedrock AgentCore Control Plane service API reference](#) page for each API operations provides the information you need to make an API request.

- **Installation** – None needed.

- **Authentication** – You can use the [Authorization header](#) or query parameters (using [AWS Signature Version 4](#)) to authenticate.

## AWS software development kits SDKs

AWS SDKs let you make API requests to AWS services through a programming language of your choice. Refer to the following resources in the [AWS SDKs and Tools Reference Guide](#) to get set up:

- **Installation** – To learn about an SDK and how to install it, select the **AWS SDK for** link that corresponds to your programming language of choice.
- **Authentication** – To learn about configuring SDKs and authentication, refer to the links in the **This guide's relevant sections for you are:** column.
- **Other resources** – In the language-specific reference, search for the Amazon Bedrock AgentCore Core Control service to see the syntax of specific API methods.

## AWS Command Line Interface

The AWS Command Line Interface (CLI) lets you interact with the AWS API in a command line interface. To learn how to install and set up the AWS CLI, see [Getting started with the AWS CLI](#) in the [AWS Command Line Interface User Guide](#).

- **Installation** – To learn how to install the AWS CLI see [Installing or updating to the latest version of the AWS CLI](#).
- **Authentication** – To learn about configuring your credentials in the AWS CLI see [Setting up the AWS CLI](#).
- **Other resources** – To see the syntax of specific API methods in the Amazon Bedrock AgentCore control plane service, see the [bedrock-agentcore-control](#) reference.

## AgentCore starter toolkit

The AgentCore starter toolkit is a Python SDK that provides tools to help you easily interact with the AgentCore API. Refer to the following resources in the [AgentCore starter toolkit repository](#).

- **Installation** – To learn how to install the starter toolkit, follow the steps at [Installation](#).
- **Authentication** – To access your AWS credentials and configure them for the AgentCore starter toolkit, follow the steps at [Using IAM Identity Center to authenticate AWS SDK and Tools](#).

- **Other resources** – You use the Gateway client in this toolkit to interact with AgentCore Gateway. For more information, see [AgentCore Gateway client](#).

## Invocation of gateways

After you create a gateway and gateway targets, you can interact with the gateway through direct HTTP requests or through an MCP client or agent.

### Direct HTTP requests

To make an HTTP request to an AgentCore gateway, you make a POST request to a gateway endpoint that you set up when creating a gateway.

- **Installation** – None needed.
- **Authentication** – You can use the [Authorization header](#) or query parameters (using [AWS Signature Version 4](#)) to authenticate.

### MCP client

To interact with an AgentCore gateway using an MCP client, you need to install the MCP client by following the **Setting up your environment** and **Setting up your API key** steps at [Build an MCP client](#) after choosing your programming language of choice. By following the steps, you'll also retrieve an Anthropic API key for authentication.

### Strands Agents SDK

To interact with an AgentCore gateway using the Strands Agents SDK, you need to install the Strands SDK by following the steps at [Strands Agents SDK](#) to install the SDK and set up credentials.

### Langgraph agent

To interact with an AgentCore gateway using a Langgraph agent, you need to install Langgraph by navigating to [LangGraph](#), selecting **Docs**, and choosing the **LangGraph** page that corresponds to your programming language of choice. By following these steps, you'll also receive an API key to help set up your credentials.

## Set up permissions for AgentCore Gateway

Amazon Bedrock AgentCore Gateway can connect to both AWS resources and external services. This means that along with the standard AWS Identity and Access Management (IAM) for managing

permissions in Amazon Bedrock AgentCore Gateway, the permissions model supports additional external authentication mechanisms.

When working with Gateways, there are three main categories of permissions to consider:

1. [Gateway management permissions](#) - Permissions needed to create and manage Gateways
2. [Gateway Access Permissions or Inbound Auth Configuration](#) - Who can invoke what via the MCP protocol
3. [Gateway execution permissions](#) - Permissions provided to a service role to allow the Amazon Bedrock AgentCore service to perform actions on behalf of the identity that invokes the gateway.

## Topics

- [Gateway Management Permissions](#)
- [Gateway Access Permissions or Inbound Auth Configuration](#)
- [AgentCore Gateway service role permissions](#)
- [Best practices for Gateway permissions](#)

## Gateway Management Permissions

These permissions allow you to create and manage Gateways. You can create a gateway specific policy (example name BedrockAgentCoreGatewayFullAccess) which could look like:

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:*Gateway*",
 "bedrock-agentcore:*WorkloadIdentity",
 "bedrock-agentcore:*CredentialProvider",
 "bedrock-agentcore:*Token*",
 "bedrock-agentcore:*Access*"
],
 "Resource": "*"
 }
]}
```

```
 "Resource": "arn:aws:bedrock-agentcore:*:*:*gateway*"
 }
]
}
```

You may also need additional permissions for related services:

- `s3:GetObject` and `s3:PutObject` for storing and retrieving schemas when you configure targets based on S3
- `kms:Encrypt`, `kms:Decrypt`, `kms:GenerateDataKey*` for encryption operations
- Other service-specific permissions based on your Gateway's functionality or configuration

For more comprehensive permissions across all AgentCore services, consider using the `BedrockAgentCoreFullAccess` managed policy, especially when working with multiple AgentCore products.

If you prefer to follow the principle of least privilege, you can create a custom policy that grants only specific permissions. Here's an example of a `ReadOnly` Gateway permission policy:

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore>ListGateways",
 "bedrock-agentcore>GetGateway",
 "bedrock-agentcore>ListGatewayTargets",
 "bedrock-agentcore>GetGatewayTarget"
],
 "Resource": "arn:aws:bedrock-agentcore:*:*:*gateway*"
 }
]
}
```

## Gateway Access Permissions or Inbound Auth Configuration

Unlike other AWS services, which use standard AWS IAM mechanisms for access control, Amazon Bedrock AgentCore Gateway uses JWT token-based authentication as specified in the Model Context Protocol (MCP). These configurations have to be specified as a property of the gateway.

You'll configure these permissions when [Creating gateways](#) in the next section.

### AgentCore Gateway service role permissions

When creating a gateway, you need a service role that has permissions to assume an IAM role and to access AWS resources and external services on the IAM role's behalf. You can create the service role in the following ways:

- If you create a gateway in the AWS Management Console or through the AgentCore starter toolkit, you can choose to let AgentCore automatically create a service role for you with the necessary permissions. If you prefer this method, you can skip this prerequisite.
- If you prefer to create your own service role for greater customization, you'll need to configure the role with the permissions outlined in this topic. To learn how to create a service role and attach permissions to it, see [Create a role to delegate permissions to an AWS service](#).

The required permissions for a service role are in the following topics:

#### Topics

- [Trust permissions](#)
- [Outbound authorization permissions](#)
- [Permissions to access AWS resources](#)

#### Trust permissions

A service role must have a [trust policy](#) attached that allows the AgentCore service to assume an IAM identity and carry out actions on its behalf.

The following is an example of a trust policy that you can use.

JSON

```
{
```

```
"Version": "2012-10-17",
"Statement": [
 {
 "Sid": "GatewayAssumeRolePolicy",
 "Effect": "Allow",
 "Principal": {
 "Service": "bedrock-agentcore.amazonaws.com"
 },
 "Action": "sts:AssumeRole",
 "Condition": {
 "StringEquals": {
 "aws:SourceAccount": "111122223333"
 },
 "ArnLike": {
 "aws:SourceArn": "arn:aws:bedrock-agentcore:us-
east-1:111122223333:gateway/gateway-name-*"
 }
 }
 }
]
```

### Note

Because you won't know the gateway ARN before you create it, you can omit the Condition field when you first create the service role. After you create the gateway, add the Condition field back to the policy as a best security practice and do the following:

- Replace the aws:SourceAccount condition key value with the ID of the account that the gateway belongs to.
- Replace the aws:SourceArn condition key with the ARN of the gateway.

## Outbound authorization permissions

Depending on the type of outbound authorization you use for your gateway targets, you need to add permissions to the service role to allow it to invoke the target. These permissions allow the gateway service role to retrieve authorization credentials for invoking the target. You can do this in the process of [setting up outbound authorization](#).

## Permissions to access AWS resources

Depending on your gateway setup or the targets that you choose to add to the gateway, you might need to add permissions to the gateway service role to allow it to access AWS resources. The following topics cover some resources that your gateway service role might need access to:

### Access a Lambda function

If you attach a Lambda target to your gateway, you need to add permissions for the AgentCore Gateway service role to be able to invoke the function by doing the following:

- Attach an identity-based policy to the AgentCore Gateway service role that allows the `lambda:InvokeFunction` action on the Lambda function resource.
- (If the function is in a different account from the gateway service role) Attach a resource-based policy to the Lambda function that allows the gateway service role principal to perform the `lambda:InvokeFunction` action on the Lambda function resource.

Select a topic to learn how to set up the permissions:

### Topics

- [Attach an identity-based policy to the gateway service role](#)
- [\(If function is in another account\) Attach a resource-based policy to the Lambda function](#)

### Attach an identity-based policy to the gateway service role

To allow the gateway service role to access a Lambda target, attach the following identity-based policy to your AgentCore Gateway service role by choosing the topic at [Adding and removing IAM identity permissions](#) that pertains to your use case and following the steps..

```
{
 "Version": "2012-10-17",
 "Statement": [{
 "Sid": "AmazonBedrockAgentCoreGatewayLambdaProd",
 "Effect": "Allow",
 "Action": [
 "lambda:InvokeFunction"
],
 "Resource": [
 "arn:aws:lambda:us-east-1:123456789012:function:FunctionName"
]
 }]
```

```
 }]
}
```

Replace the ARN in the Resource field with the ARN of your Lambda function gateway target. If your gateway has multiple Lambda targets, you can add the ARN of each function to the Resource list.

### (If function is in another account) Attach a resource-based policy to the Lambda function

If the Lambda function target is in a different account from the gateway service role, you need to attach a resource-based policy to allow the gateway service role to access it. The following is an example policy that you can use:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "LambdaAllowGatewayServiceRoleMyFunction",
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws:iam::123456789012:role/MyGatewayExecutionRole"
 },
 "Action": "lambda:InvokeFunction",
 "Resource": "arn:aws:lambda:us-east-1:123456789012:function:MyFunction"
 }
]
}
```

Replace the values of the following fields:

- AWS – Use the ARN of your gateway service role.
- Resource – Use the ARN of your Lambda function.

To learn how to attach a resource-based policy to the Lambda function that allows your gateway service role to access the function, select one of the following methods::

Console

#### To attach a resource-based policy to your Lambda function in the AWS Management Console

1. Follow the steps in the **Console** tab at [Viewing resource-based IAM policies in Lambda](#).

2. In the **Resource-based policy statements** section, choose **Add permissions**.
3. Select **AWS account** and fill out the following fields:
  - **Statement ID** – A unique identifier for the the statement providing permissions for the gateway service role to access the function.
  - **Principal** – Specify the ARN of your gateway service role.
  - **Action** – Select `lambda:InvokeFunction`.

## CLI

To attach a resource-based policy to your Lambda function using the AWS CLI, follow the steps at [Granting Lambda function access to AWS services](#) and specify your gateway service role as the principal.

You can run the following code in a terminal to add permissions for your gateway service role to access the function in `us-east-1`:

```
aws lambda add-permission \
--function-name "MyFunction" \
--statement-id "GatewayInvoke" \
--action "lambda:InvokeFunction" \
--principal "arn:aws:iam::123456789012:role/MyGatewayServiceRole"
--region us-east-1
```

## Smithy model permissions

If you plan to add a Smithy target, you need to add permissions for the gateway service role to access AWS services that your Smithy models refer to. To determine which permissions need to be attached to the service role, refer to that service's documentation.

You can add permissions to the service role by choosing the topic at [Adding and removing IAM identity permissions](#) that pertains to your use case and following the steps.

For example, if your Smithy model target accesses a DynamoDB table, you can attach the following policy to allow the service role to perform DynamoDB operations on the table:

## JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Effect": "Allow",
 "Action": [
 "dynamodb:GetItem",
 "dynamodb:PutItem",
 "dynamodb:UpdateItem",
 "dynamodb:DeleteItem",
 "dynamodb:Query",
 "dynamodb:Scan"
],
 "Resource": "arn:aws:dynamodb:*:*:table/*"
 }
]
}
```

## Best practices for Gateway permissions

### Follow the principle of least privilege

- Grant only the permissions necessary for your Gateway to function
- Use specific resource ARNs rather than wildcards when possible
- Regularly review and audit permissions

### Separate roles by function

- Use different roles for management and execution
- Create separate roles for different Gateways with different purposes

### Secure credential storage

- Store API keys and OAuth credentials in AWS Secrets Manager
- Rotate credentials regularly

### Monitor and audit

- Enable CloudTrail logging for Gateway operations

- Regularly review access patterns and permissions usage

## Use conditions in policies

- Add conditions to limit when and how permissions can be used
- Consider using source IP restrictions for management operations

## Set up inbound authorization for your gateway

Before you create your gateway, you must set up inbound authorization. Inbound authorization validates users who attempt to access targets through your AgentCore gateway. AgentCore supports the following types of inbound authorization:

- **JSON Web Token (JWT)** – A secure and compact token used for authorization. After creating the JWT, you specify it as the authorization configuration when you create the gateway. You can create a JWT with any of the identity providers at [Provider setup and configuration](#).
- **IAM identity** – Authorizes through the credentials of the AWS IAM identity trying to access the gateway.

### Note

If you use the AWS Management Console or AgentCore starter toolkit to create your gateway, you can create a default inbound authorization configuration using Amazon Cognito during gateway creation. If you plan to use the default authorization configuration, you can skip this prerequisite.

If you don't plan to use the default authorization configuration using Amazon Cognito, select the topic that corresponds to the type of authorization that you plan to use to learn how to set it up:

### Topics

- [IAM-based inbound authorization](#)
- [JSON Web Token \(JWT\)-based inbound authorization](#)

## IAM-based inbound authorization

IAM-based inbound authorization lets you use the gateway caller's IAM credentials for authorization. You can use this option if you want to create an IAM identity through which users that call your gateway can be authenticated.

### To set up IAM-based inbound authorization

1. Create or use an existing IAM identity for your gateway callers.
2. Create an identity-based IAM policy that contains the following permissions:
  - `bedrock-agentcore:InvokeGateway` – After you create the gateway, you should modify this policy such that the `Resource` field is scoped to the gateway that you create as a security best practice.
3. Attach the policy to the gateway caller identity.

### Example policy

The following example shows a policy you could attach to an identity to allow it to invoke a gateway with the ID *my-gateway-12345*

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "AllowGatewayInvocation",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:InvokeGateway"
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:gateway/my-gateway-12345"
]
 }
]
}
```

## Resources

- For more information about AWS Identity and Access Management, see [Identity and access management for Amazon Bedrock AgentCore](#).
- For more information about Amazon Bedrock AgentCore actions, resources, and condition keys that you can specify in IAM policies, see [Actions, resources, and condition keys for Amazon Bedrock AgentCore](#).

## JSON Web Token (JWT)-based inbound authorization

A JSON Web Token (JWT) is a secure and compact token used for authorization. You can create a JWT with a supported identity provider. After you create a JWT, you can retrieve it and specify it as the authorization configuration when you create the gateway.

### Important

Using inbound authorization based on JWT tokens will result in logging of some claims of the JWT token in CloudTrail. The entry includes the [Subject](#) of the provided web identity token. We recommend that you avoid using any personally identifiable information (PII) in this field. For example, you could instead use a GUID or a pairwise identifier, as [suggested in the OIDC specification](#).

You can use the AgentCore starter toolkit to set up a default JWT, or create one manually with a supported identity provider. To learn more about different methods for setting up a JWT, select from the following topics:

### Topics

- [Set up a default JWT](#)
- [Set up a JWT manually](#)

### Set up a default JWT

The AgentCore starter toolkit lets you easily create a default authorization configuration using Amazon Cognito that you can then use when creating a gateway. To create this default JWT, run the following code example:

```
Initialize gateway client from starter toolkit
from bedrock_agentcore_starter_toolkit.operations.gateway.client import GatewayClient
```

```
client = GatewayClient()

Retrieve JWT from the create response and store as the authorization configuration.
When you create the gateway, specify it in the authorizer_config field
cognito_result = client.create_oauth_authorizer_with_cognito("my-gateway")
authorizer_configuration = cognito_result["authorizer_config"]
```

The `cognito_result` contains authentication and authorization information:

- You'll use the authorizer configuration when you create the gateway.
- For inbound authorization when invoking your gateway, you'll need to obtain an access token by using your client ID, client secret, and the token endpoint. For more information on how to obtain your access token, see [The token issuer endpoint](#) in the Amazon Cognito Developer Guide.

## Set up a JWT manually

Amazon Bedrock AgentCore supports JWTs from all identity providers. You can see some examples at [Provider setup and configuration](#).

In the process of creating the JWT, you should record the following values that will be created:

- **Discovery URL** – The URL from which login credentials and the token endpoint can be retrieved.
- **Client ID** – The public identifier of a client application that requests a token.
- **Client secret** – The private key that authenticates access for the client application to retrieve a token.
- **Allowed audience** – The identifier that validates the intended recipients or consumers of a token.

You'll need these values to do the following:

- Create the gateway by specifying values in the [authorizer configuration](#).
- Obtain authorization credentials to invoke the gateway. To learn how to obtain your credentials, look up your identity provider's documentation. For example, if you used Amazon Cognito, see [The token issuer endpoint](#) in the Amazon Cognito Developer Guide.

## Set up outbound authorization for your gateway

Outbound authorization lets Amazon Bedrock AgentCore gateways securely access gateway targets on behalf of users that were authenticated and authorized during inbound authorization.

AgentCore Gateway supports the following types of outbound authorization:

- **No authorization (not recommended)** – Some target types provide you the option to bypass outbound authorization. This less secure option is not recommended.
- **IAM-based outbound authorization** – Use the [gateway service role](#) to authenticate access to the gateway target with [AWS Signature Version 4 \(Sig V4\)](#).
- **2-legged OAuth (OAuth 2LO)** – An open authorization framework that allows a client application to access resources on the application's behalf, rather than on behalf of the user. For more information, see [OAuth 2.0](#). You can use OAuth 2LO with a [built-in identity provider](#) or with a custom one.
- **API key** – Use the AgentCore service to generate an API key to authenticate access to the gateway target.

The type of outbound authorization that you can set up is dependent on the gateway target type to which you authorize access:

Target type	No authorization	Gateway service role	OAuth client	API key
Lambda function	No	Yes	No	No
MCP server	Yes	No	Yes	No
OpenAPI schema	No	No	Yes	Yes
Smithy schema	No	Yes	No	No

 **Note**

If you use an integration provider template as a target, review the supported authorization types for different templates at [Built-in templates from integration providers as targets](#).

Before adding a target to your gateway, you must set up authorization for it through one of the supported methods.

**Note**

You can skip this prerequisite if you plan to use the AWS Management Console or AgentCore starter toolkit to create your gateway. If you use either of these tools, you can let AgentCore automatically create a service role for you with the necessary permissions to access the target. Each time you add a target, the necessary permissions will be automatically attached to your service role.

Select a topic to learn how to set up that type of authorization:

**Topics**

- [Set up IAM-based outbound authorization with a gateway service role](#)
- [Set up outbound authorization with an OAuth client](#)
- [Set up outbound authorization with an API key](#)

## **Set up IAM-based outbound authorization with a gateway service role**

IAM-based outbound authorization lets you use the gateway service role's IAM credentials to authorize with [AWS Signature Version 4 \(Sig V4\)](#). This option lets the Amazon Bedrock AgentCore service to authenticate to gateway targets on your gateway callers' behalf.

If you use this option, you don't need to do any additional set up. The service role's credentials will be used for authentication during gateway invocation.

## **Set up outbound authorization with an OAuth client**

To set up outbound authorization with an OAuth client, you use the AgentCore Identity service and specify client credentials that you receive from creating a client in either a built-in identity provider (see [Provider setup and configuration](#) or a custom identity provider).

### **To set up outbound authorization with an OAuth client**

1. Register your client application with a supported third-party provider.
2. You'll receive a client ID, client secret, and possibly other values that you'll reference when you set up the outbound authorization.
3. Follow one of the steps below, depending on your requirements:

- To configure outbound authorization in the console using a built-in identity provider, follow the steps at [Add OAuth client using included provider](#).
- To configure outbound authorization in the console using a custom identity provider, follow the steps at [Add OAuth client using custom provider](#).
- To configure outbound authorization using the API, send a [CreateOauth2CredentialProvider](#) with one of the [AgentCore control plane endpoints](#). For examples, see [Examples for setting OAuth client authorization](#).

 **Note**

The shape of the JSON object that the `oauth2ProviderConfigInput` field maps to depends on the provider that you use and must be congruent with the `credentialProviderVendor` value that you specify. To see examples of different configurations for different credential providers, see the outbound authorization examples in your credential provider of choice at [Provider setup and configuration](#).

4. Take note of the generated credential ARN (`credentialProviderArn` in the API) and the AWS Secrets Manager secret ARN (`secretArn` in the API). You'll use these values when you create your gateway target.
5. (If you're using a custom gateway service role) Attach the following identity-based policy to your gateway service role:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "GetWorkloadAccessToken",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetWorkloadAccessToken",
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:workload-identity-
 directory/default",
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:workload-identity-
 directory/default/workload-identity/GatewayName-*"
]
 },
],
}
```

```
{
 "Sid": "GetResourceOauth2Token",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetResourceOauth2Token",
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:token-
 vault/TokenVaultId/oauth2credentialprovider/CredentialName"
]
,
 {
 "Sid": "GetSecretValue",
 "Effect": "Allow",
 "Action": [

```

Replace the values of the following fields:

- In the GetWorkloadAccessToken statement, replace the *GatewayName* in the Resource list with the name of your gateway.
- In the GetResourceOauth2Token statement, replace the value in the Resource list with the ARN of the credential that you just generated.
- In the GetSecretValue statement, replace the value in the Resource list with the ARN of the AWS secret returned in the response when you generated the credential.

## Examples for setting OAuth client authorization

The following examples show you how to set authorization through an OAuth client for your gateway target:

### CLI

```
aws bedrock-agentcore-control create-oauth2-credential-provider \
```

```
--name oauth-credential-provider \
--credential-provider-vendor CustomOAuth2 \
--oauth2-provider-config-input '{
 "customOAuth2ProviderConfig": {
 "oauthDiscovery": {
 "discoveryUrl": "<DiscoveryUrl>"
 },
 "clientId": "<ClientId>",
 "clientSecret": "<ClientSecret>"
 }
}'
```

## Boto3

```
import boto3

client = boto3.client("bedrock-agentcore-control")

client.create_oauth2_credential_provider(
 name="oauth-credential-provider",
 credentialProviderVendor="CustomOAuth2",
 oauth2ProviderConfigInput={
 "oauthDiscovery": {
 "discoveryUrl": "<DiscoveryUrl>"
 },
 "clientId": "<ClientId>",
 "clientSecret": "<ClientSecret>"
 }
)
```

## Set up outbound authorization with an API key

To set up outbound authorization with an API key, you use the AgentCore Identity service and specify an API key that you receive from a supported identity provider.

### To set up outbound authorization with an OAuth client

1. Register your client application with a supported third-party provider.
2. Set up an API key for the provider's service. Take note of the following values, which you'll specify when you add the gateway target:

- **Credential location** – Whether the API key should be placed in the header or as a query parameter.
  - **Credential prefix** – The prefix for the credential (ex. Bearer).
3. Follow one of the steps below, depending on your requirements:
- To create an API key in the AgentCore console, follow the steps at [Add API key](#) and specify the value of the API key.
  - To create an API key using the AgentCore API, send a [CreateApiKeyCredentialProvider](#) request with one of the [AgentCore control plane endpoints](#) and specify the value of the API key in the apiKey field. For examples, see [Examples for setting an API key](#).
4. Take note of the following values, which you'll specify when you add the gateway target:
- **Credential provider ARN** – An Amazon Resource Name (ARN) generated for the credential provider.
  - **Name** – The name you gave to the API key.
  - **Secret ARN** – An AWS Secrets Manager secret ARN generated for the API key.
5. (If you're using a custom gateway service role) Attach the following identity-based policy to your gateway service role:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "GetWorkloadAccessToken",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetWorkloadAccessToken",
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:workload-identity-
 directory/default",
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:workload-identity-
 directory/default/workload-identity/GatewayName-*"
]
 },
 {
 "Sid": "GetResourceApiKey",
 "Effect": "Allow",
 "Action": [
]
 }
]
}
```

```
 "bedrock-agentcore:GetResourceApiKey",
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:token-
 vault/TokenVaultId/apikeycredentialprovider/Name"
]
},
{
 "Sid": "GetSecretValue",
 "Effect": "Allow",
 "Action": [
 "secretsmanager:GetSecretValue",
],
 "Resource": [
 "arn:aws:secretsmanager:us-east-1:123456789012:secret:SecretId"
]
}
]
}
```

Replace the values of the following fields:

- In the GetWorkloadAccessToken statement, replace the *GatewayName* in the Resource list with the name of your gateway.
- In the GetResourceApiKey statement, replace the value in the Resource list with the ARN of the credential that you just generated.
- In the GetSecretValue statement, replace the value in the Resource list with the ARN of the AWS secret returned in the response when you generated the credential.

## Examples for setting an API key

The following examples show you how to set an API key for your gateway target:

### CLI

```
aws bedrock-agentcore-control create-api-key-credential-provider \
--name api-key-credential-provider \
--api-key <API_KEY_VALUE>
```

## Boto3

```
import boto3

client = boto3.client("bedrock-agentcore-control")

client.create_api_key_credential_provider(
 name="api-key-credential-provider",
 apiKey=""
)
```

# Set up an Amazon Bedrock AgentCore gateway

Amazon Bedrock AgentCore Gateway provides a unified connectivity layer between agents and the tools and resources they need to interact with. Before setting up your Gateway, it's important to understand how to specify permissions so that you can secure your gateway properly.

## Gateway workflow

The Gateway workflow involves the following steps to connect your agents to external tools:

1. **Create the tools for your Gateway** - Define your tools using schemas such as OpenAPI specifications for REST APIs or JSON schemas for Lambda functions. The OpenAPI specifications or tool schemas for your tools are then parsed by Amazon Bedrock AgentCore for creating the Gateway.
2. **Create a Gateway endpoint** - Use the AWS console or AWS SDK to create the gateway that will serve as the MCP entry point. Each API endpoint or function will become an MCP-compatible tool, and will be made available through your MCP server URL. To secure the gateway, you can use inbound authorization to control the ingress to the gateway.
3. **Add targets to your Gateway** - Configure targets that define how the gateway routes requests to specific tools. To securely connect to backend resources on behalf of authenticated users, use Outbound Authorization. Together, Inbound and Outbound Authorization create a secure bridge between users and their target resources, supporting both IAM credentials and OAuth-based authentication flows.
4. **Update your agent code** - Connect your agent to the Gateway endpoint to access all configured tools through the unified MCP interface.

## Topics

- [Create an Amazon Bedrock AgentCore gateway](#)
- [Add targets to an existing AgentCore gateway](#)

# Create an Amazon Bedrock AgentCore gateway

This guide walks you through the process of creating and configuring an Amazon Bedrock AgentCore Gateway. The Gateway serves as a unified entry point for agents to access tools and resources through the Model Context Protocol (MCP) and creating it is the first step in building your tool integration platform. When you create a gateway, you create a managed service that handles authentication and invokes callable endpoints as tools.

To create a gateway, you set up inbound authorization and configure invocable targets. Targets establish the connection between your gateway and various tool types, including Lambda functions and REST API services. Each target contains configuration details that specify the tool location, authentication requirements, and any necessary request transformation rules.

You can create a gateway in the following ways:

- AWS Management Console – With the console, you can configure authorization, create the gateway, and add targets all on one page.
- Amazon Bedrock AgentCore API – You can directly invoke the [CreateGateway](#) API or through the help of a supported tool. If you use the API, you will add targets to your gateway in a separate step.

When creating a gateway, you provide the following required fields:

- A name for the gateway.
- The Amazon Resource Name (ARN) of an [AgentCore service role](#) with permissions to make requests to the gateway on your behalf.
- The type of authorizer to use for inbound requests to the gateway. AgentCore Gateway supports the following types of authentication:
  - JSON Web Token (JWT) authentication
  - AWS IAM credentials
- (If you use JWT authentication) An authorizer configuration that specifies how incoming requests to the gateway should be authenticated.

- The protocol type for the gateway.

You can optionally provide the following fields:

- A description of the gateway.
- A client token value to ensure that a request completes no more than once. If you don't include this token, one is randomly generated for you. If you don't include a value, one is randomly generated for you. For more information, see [Ensuring idempotency](#).

## Gateway features that can be set during creation

You can activate the following features of the gateway during creation:

- **Protocol configuration** – Configure how the gateway implements the protocol.
- **Custom encryption of the gateway** – Specify the Amazon Resource Name (ARN) of a customer-managed AWS KMS key for greater control over the encryption process of your resource. If you don't include one, AWS encrypts the resource with an AWS-managed key. For more information, see [Encrypt your AgentCore gateway with a customer-managed KMS key](#).
- **Debug mode** – Allow the return of specific error messages during gateway invocation to help you with debugging. For more information, see [Turn on debugging messages](#).
- **Semantic search** – Add the x\_amz\_bedrock\_agentcore\_search to the gateway so that the target can deliver tools that are relevant to the search query. For more information, see [Search for tools in your AgentCore gateway with a natural language query](#).

Select a topic to learn how to create a gateway using that method:

### Topics

- [Create an AgentCore gateway using the AWS Management Console](#)
- [Create an AgentCore gateway using the API](#)

## Create an AgentCore gateway using the AWS Management Console

### To create a gateway using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. From the left navigation pane, select **Gateways**.

3. In the **Gateways** section, choose **Create gateway**.
4. (Optional) In the **Gateway details** section, do the following:
  - a. Change the generated **Gateway name**
  - b. Expand the **Additional configurations** section and do the following:
    - i. In the **Gateway description** field, provide a description for your gateway.
    - ii. In the **Instruction** field, enter any special instructions or context that should be passed to tools when they are invoked.
    - iii. To enable a built-in tool for searching tools in the gateway, select **Enable semantic search**. If you enable this tool, you can't disable it later. For more information, see [Search for tools in your AgentCore gateway with a natural language query](#).
    - iv. To enable detailed debugging messages to be returned in the gateway response, select **Exception level debug**. You can disable debugging messages later. For more information, see [Turn on debugging messages](#).
5. In the **Inbound Auth configurations** section, select one of the following options:
  - To allow Amazon Cognito to create authorization resources for you, select **Quick create configurations with Cognito**.
  - To use an authorization configuration that you have set up already, select **Use existing identity provider configurations** and then configure the following fields:
    - **Discovery URL** – Enter the discovery URL from your identity provider.
    - **Allowed audiences** – Enter the audience value that your gateway will accept. To add more audiences, choose **Add audience**.
    - **Allowed clients** – Enter the public identifier of the client that your gateway will accept. To add more clients, choose **Add client**.
6. In the **Permissions** section, do the following:
  - a. To use an IAM service role to invoke the gateway on the user's behalf, select **Use an IAM service role**.
  - b. (If you use an IAM service role) Choose one of the following options under **IAM role**:
    - To create a service role with the necessary permissions to access your gateway, choose **Create and use a new service role** and optionally change the generated **Service role name**.

- To use an existing service role, choose **Use an existing service role** and then select a role from the **Service role name** dropdown menu. Make sure that the service role that you choose has the necessary permissions. For more information, see [AgentCore Gateway service role permissions](#).
7. (Optional) By default, your gateway is encrypted with an AWS managed key. To encrypt your gateway with a custom KMS key, expand the **KMS key** section, select **Customize encryption settings (advanced)**, and choose a customer managed key. For more information, see [Encrypt your AgentCore gateway with a customer-managed KMS key](#).
  8. In the **Target: \${target-name}** section, do the following:
    - a. (Optional) Change the generated **Target name**.
    - b. (Optional) Provide a **Target description**.
    - c. For the **Target type**, choose an option. For more information about different target types, see [Add targets to an existing AgentCore gateway](#).
    - d. Select or enter how the target type is defined.
    - e. For the **Outbound Auth configurations**, select an outbound authorization method. Then, select or provide the necessary details and any optional additional configurations. For more information, see [Set up outbound authorization for your gateway](#).
  9. To add more targets, choose **Add another target** and repeat the target configuration steps.
  10. Choose **Create gateway**.

After creating your gateway, you can view its details, including the endpoint URL and associated targets.

## Create an AgentCore gateway using the API

To create a AgentCore gateway using the API, make a [CreateGateway](#) request with one of the [AgentCore control plane endpoints](#).

To see examples of how to create a gateway, expand the section that corresponds to your use case:

### Create a gateway: basic example (Custom JWT authorization)

This section provides basic examples of creating a gateway.

Select one of the following methods:

## AgentCore starter toolkit

The AgentCore starter toolkit helps you easily create a gateway with minimal specifications.

```
from bedrock_agentcore_starter_toolkit.operations.gateway.client import
GatewayClient

Initialize the Gateway client
client = GatewayClient(region_name="us-west-2")

Automatically set up Cognito OAuth. Replace with a name of your choice
cognito_result = client.create_oauth_authorizer_with_cognito(gateway_name="my-
gateway")

Get the authorizer configuration
authorization=cognito_result["authorizer_config"]

Create the gateway.
gateway = client.create_mcp_gateway(
 name=None, # You can omit this field
 role_arn=None, # the role arn that the Gateway will use - if you don't set one,
one will be created.
 authorizer_config=authorization, # Variable from inbound authorization setup
steps. Contains the OAuth authorizer details for authorizing callers to your
Gateway (MCP only supports OAuth).
 enable_semantic_search=True, # enable semantic search.
 exception_level="DEBUG" # enable debugging
)

print(f"MCP Endpoint: {gateway.get_mcp_url()}")
print(f"OAuth Credentials:")
print(f" Client ID: {cognito_result['client_info']['client_id']}")
print(f" Scope: {cognito_result['client_info']['scope']}")
```

## CLI

The AgentCore CLI provides a simple way to create and manage gateways:

```
Create a Gateway with Lambda target
agentcore create_mcp_gateway \
--name my-gateway \
--target arn:aws:lambda:us-west-2:123456789012:function:MyFunction \
```

```
--execution-role BedrockAgentCoreGatewayRole
```

The CLI automatically:

- Detects target type from ARN patterns or file extensions
- Sets up Cognito OAuth (EZ Auth)
- Detects your AWS region and account
- Builds full role ARN from role name

## Console

### To create your Gateway endpoint

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. Choose **Gateways**.
3. Choose **Create gateway**.
4. In the **Gateway details** section:
  - a. Enter a **Gateway name**
  - b. Expand the **Additional configurations** section and:
    - i. Enter an optional **Description** for your gateway.
    - ii. (Optional) For **Instructions**, enter any special instructions or context that should be passed to tools when they are invoked.
    - iii. (Optional) Optionally enable **Semantic search** to enable the built-in tool that can be used to search the tools on the gateway.
5. In the **Inbound Identity** section, configure authentication for users accessing your gateway:
  - a. For **Discovery URL**, enter the OpenID Connect discovery URL for your identity provider (for example, <https://auth.example.com/.well-known/openid-configuration>).
  - b. For **Allowed audiences**, enter the audience values that your gateway will accept. Add multiple audiences by choosing **Add audience**.
6. In the **Permissions** section:

- a. For **Service role**, choose an existing IAM role or create a new one that allows Amazon Bedrock AgentCore to access your tools on your behalf.
  - b. (Optional) For **KMS key**, choose a customer managed key for encrypting your gateway data, or leave blank to use the default Amazon Bedrock AgentCore managed key.
7. In the **Target configuration** section:
- a. Enter a **Target name**.
  - b. (Optional) Provide an optional **Target description**.
  - c. For **Target type**, choose either:
    - **Lambda ARN** - To connect to an Lambda function that implements your tools
    - **REST API** - To connect to a REST API service
  - d. Configure the target based on your selection:
    - For **Lambda function targets**:
      - For **Lambda ARN**, enter the ARN of your Lambda function.
      - For **Tool schema**, choose to either provide the schema inline or reference an Amazon S3 location containing your tool schema.
    - For **REST API targets**:
      - For **OpenAPI schema**, choose to either provide the schema inline or reference an Amazon S3 location containing your OpenAPI specification.
- e. (Optional) In the **Outbound authentication** section, configure authentication for accessing external services:
  - For **Authentication type**, choose **OAuth client** or **API key**.
  - Select the appropriate authentication resource from your account.
8. To add more targets, choose **Add another target** and repeat the target configuration steps.
9. Choose **Create gateway**.

After creating your gateway, you can view its details, including the endpoint URL and associated targets, in the AgentCore console. The gateway endpoint URL follows the format: `https://{gatewayId}.gateway.{region}.amazonaws.com/mcp`.

## Boto3

The following Python code shows how to create a gateway with boto3 (AWS SDK for Python)

```
import boto3

Create the agentcore client
agentcore_client = boto3.client('bedrock-agentcore-control')

Create a gateway
gateway = agentcore_client.create_gateway(
 name="",
 roleArn="",
 protocolType="MCP",
 authorizerType="CUSTOM_JWT",
 authorizerConfiguration= {
 "customJWTAuthorizer": {
 "discoveryUrl": "<existing discovery URL e.g. https://cognito-idp.us-west-2.amazonaws.com/some-user-pool/.well-known/openid-configuration>",
 "allowedClients": ["<clientId>"]
 }
 }
)
```

## API

Use `CreateGateway` to create a gateway. The operation requires a gateway name and protocol type, while accepting optional parameters like role ARN for IAM permissions, authorizer configuration for JWT-based authentication, and custom transform configuration for request/response processing.

### Example request

The following example creates a Gateway with MCP protocol and JWT authorization:

```
POST /gateways/ HTTP/1.1
Content-Type: application/json

{
 "name": "my-ai-gateway",
 "description": "Gateway for AI model interactions",
```

```
"clientToken": "12345678-1234-1234-1234-123456789012",
"roleArn": "arn:aws:iam::123456789012:role/AgentCoreGatewayRole",
"protocolType": "MCP",
"protocolConfiguration": {
 "mcp": {
 "version": "1.0",
 "searchType": "SEMANTIC"
 }
},
"authorizerConfiguration": {
 "customJWTAuthorizer": {
 "discoveryUrl": "https://auth.example.com/.well-known/openid-configuration",
 "allowedAudience": ["api.example.com"],
 "allowedClients": ["client-app-123"]
 }
},
"encryptionKeyArn": "arn:aws:kms:us-east-1:123456789012:key/12345678-1234-1234-1234-123456789012"
}
```

## Create a gateway: basic example (IAM authorization)

This section provides basic examples of creating a gateway using IAM authorization. With IAM authorization, you don't need an authorizer configuration.

Select one of the following methods:

AWS CLI

Run the following in a terminal:

```
aws bedrock-agentcore create-gateway --name my-gateway --role-arn arn:aws:iam::123456789012:role/MyAgentCoreServiceRole --protocol-type MCP --authorizer-type AWS_IAM
```

Boto3

```
import boto3

Create the AgentCore client
```

```
agentcore_client = boto3.client('bedrock-agentcore-control')

Create a gateway
gateway = agentcore_client.create_gateway(
 name="MyGateway",
 roleArn="arn:aws:iam::123456789012:role/MyAgentCoreServiceRole",
 protocolType="MCP",
 authorizerType="AWS_IAM"
)
```

## Create a gateway with semantic search

Semantic search enables intelligent tool discovery so that we are not limited by typical list tools limits (typically 100 or so). Our semantic search capability delivers contextually relevant tool subsets, significantly improving tool selection accuracy through focused, relevant results, inference performance with reduced token processing and overall orchestration efficiency and response times.

To enable it, add "searchType": "SEMANTIC" to the CreateGateway request in the MCP object within the protocolConfiguration field:

```
"protocolConfiguration": {
 "mcp": {
 "searchType": "SEMANTIC"
 }
}
```

### Note

You can only enable it during create, you cannot update a gateway later to be able to support search.

For an identity to create a gateway with semantic search, ensure that it has permissions to use the "bedrock-agentcore:SynchronizeGatewayTargets" IAM action.

## Add targets to an existing AgentCore gateway

After creating a gateway, you can add targets, which define the tools that your gateway will host. AgentCore Gateway supports multiple target type that are detailed in the following topics. Each

target can have its own credential provider attached, enabling you to securely control access targets. By adding targets, your gateway becomes a single MCP URL that enables access to all of the relevant tools for an agent.

When you add a target, you provide the following required fields:

- The ID of the gateway to which to add the target.
- A name for the gateway target. To understand how the target name affects tool names, see [Understand how AgentCore Gateway tools are named](#).
- A target configuration. The configuration differs depending on your gateway target type.
- A credential provider configuration. The configuration depends on the [outbound authorization](#).

You can optionally provide the following fields:

- A description of the gateway target.
- A client token value to ensure that a request completes no more than once. If you don't include this token, one is randomly generated for you. If you don't include a value, one is randomly generated for you. For more information, see [Ensuring idempotency](#).

Select a topic to learn how to add a target to an existing gateway using that method:

## Topics

- [Add a target using the AWS Management Console](#)
- [Add a target using the API](#)

## Add a target using the AWS Management Console

In the AWS Management Console, you can add gateway targets when you create the gateway. After you've created a gateway, you can add targets by doing the following:

### To add a target to an existing gateway

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. Choose **Gateways**.
3. Select the gateway to which you want to add a target.
4. In the **Targets** section, choose **Add**.

5. (Optional) Change the auto-generated **Target name**.
6. (Optional) Provide an **Target description**.
7. Select the **Target type** and fill in the fields that appear.
8. (If applicable) Choose whether to define the target inline or by selecting an S3 location.
9. Select a supported outbound authorization configuration and choose the outbound authorization resource, if applicable.
10. (Optional, if applicable) Expand **Additional configurations** and configure them.
11. Choose **Add target**.

## Add a target using the API

To add a target using the API, make a [CreateGatewayTarget](#) request with one of the [AgentCore control plane endpoints](#).

### Note

To add an integration provider template as a gateway target, you must use the AWS Management Console. For more information, see [Built-in templates from integration providers as targets](#).

To see examples of adding different target types, expand the following sections:

### Add a Lambda target

Select one of the following methods:

#### AgentCore CLI

```
Create a gateway with Lambda target
agentcore create_mcp_gateway_target \
 --region us-east-1 \
 --gateway-arn arn:aws:bedrock-agentcore:us-east-1:123456789012:gateway/gateway-id \
 \
 --gateway-url https://gateway-id.gateway.bedrock-agentcore.us-
west-2.amazonaws.com/mcp \
 --role-arn arn:aws:iam::123456789012:role/BedrockAgentCoreGatewayRole \
 --target-type lambda
```

## AgentCore starter toolkit

With the AgentCore starter toolkit, you can easily create a Lambda target with default configurations.

```
Import dependencies
from bedrock_agentcore_starter_toolkit.operations.gateway.client import
GatewayClient

Initialize the client
client = GatewayClient(region_name="us-east-1")

Create a lambda target.
lambda_target = client.create_mcp_gateway_target(
 gateway=gateway,
 name=None, # If you don't set one, one will be generated.
 target_type="lambda",
 target_payload=None, # Define your own lambda if you pre-created one. Otherwise
 leave this as None and one will be created for you.
 credentials=None, # If you leave this as None, one will be created for you
)
```

The following is an example argument you can provide for the target\_payload. If you omit the target\_payload argument, this payload is used:

```
{
 "lambdaArn": "<insert your lambda arn>",
 "toolSchema": {
 "inlinePayload": [
 {
 "name": "get_weather",
 "description": "Get weather for a location",
 "inputSchema": {
 "type": "object",
 "properties": {
 "location": {
 "type": "string",
 "description": "the location e.g. seattle, wa"
 }
 },
 "required": [
 "location"
]
 }
 }
]
}
```

```
 },
],
{
 "name": "get_time",
 "description": "Get time for a timezone",
 "inputSchema": {
 "type": "object",
 "properties": {
 "timezone": {
 "type": "string"
 }
 },
 "required": [
 "timezone"
]
 }
}
]
```

## Boto3

The following Python code shows how to add a Lambda target using the Boto3 Python SDK:

```
import boto3

Create the agentcore client
agentcore_client = boto3.client('bedrock-agentcore-control')

Create a Lambda target
target = agentcore_client.create_gateway_target(
 gatewayIdentifier="your-gateway-id",
 name="LambdaTarget",
 targetConfiguration={
 "mcp": {
 "lambda": {
 "lambdaArn": "arn:aws:lambda:us-
west-2:123456789012:function:YourLambdaFunction",
 "toolSchema": {
 "inlinePayload": [
 {
 "name": "get_weather",
 "description": "Get weather for a location",
 }
]
 }
 }
 }
 }
)
```

```
 "inputSchema": {
 "type": "object",
 "properties": {"location": {"type": "string"}},
 "required": ["location"],
 },
],
 {
 "name": "get_time",
 "description": "Get time for a timezone",
 "inputSchema": {
 "type": "object",
 "properties": {"timezone": {"type": "string"}},
 "required": ["timezone"],
 },
 },
],
}
},
],
credentialProviderConfigurations=[
{
 "credentialProviderType": "GATEWAY_IAM_ROLE"
}
]
)
```

## Add an OpenAPI target

Select one of the following methods:

AgentCore starter toolkit

### Example with S3 definition and API key outbound authorization

The following example demonstrates adding an OpenAPI schema target to a gateway. The schema has been uploaded to an S3 location whose URI is referenced in the `target_payload`. Outbound authorization for the target is through an API key.

```
Import dependencies
from bedrock_agentcore_starter_toolkit.operations.gateway.client import
GatewayClient
```

```
Initialize the client
gateway_client = GatewayClient(region_name="us-west-2")

Create an OpenAPI target with API Key authentication
open_api_target = gateway_client.create_mcp_gateway_target(
 gateway="your-gateway-id",
 target_type="openApiSchema",
 target_payload={
 "s3": {
 "uri": "s3://your-bucket/path/to/open-api-spec.json"
 }
 },
 credentials={
 "api_key": "your-api-key",
 "credential_location": "HEADER",
 "credential_parameter_name": "X-API-Key"
 }
)
```

## Example with S3 definition and OAuth outbound authorization

The following example demonstrates adding an OpenAPI schema target to a gateway. The schema has been uploaded to an S3 location whose URI is referenced in the `target_payload`. Outbound authorization for the target is through an OAuth.

```
Import dependencies
from bedrock_agentcore_starter_toolkit.operations.gateway.client import
GatewayClient

Initialize the client
gateway_client = GatewayClient(region_name="us-west-2")

Create an OpenAPI target with OAuth authentication
open_api_with_oauth_target = gateway_client.create_mcp_gateway_target(
 gateway="your-gateway-id",
 target_type="openApiSchema",
 target_payload={
 "s3": {
 "uri": "s3://your-bucket/path/to/open-api-spec.json"
 }
 },
 credentials={
```

```
"oauth2_provider_config": {
 "customOAuth2ProviderConfig": {
 "oauthDiscovery": {
 "authorizationServerMetadata": {
 "issuer": "https://example.auth0.com",
 "authorizationEndpoint": "https://example.auth0.com/authorize",
 "tokenEndpoint": "https://example.auth0.com/oauth/token"
 }
 },
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
},
}
}
```

## Boto3

The following Python code shows how to add an OpenAPI target using the Boto3 Python SDK. The schema has been uploaded to an S3 location whose URI is referenced in the `target_payload`. Outbound authorization for the target is through an API key.

```
import boto3

Create the client
agentcore_client = boto3.client('bedrock-agentcore-control')

Create an OpenAPI target with API Key authentication
target = agentcore_client.create_gateway_target(
 gatewayIdentifier="your-gateway-id",
 name="SearchAPITarget",
 targetConfiguration={
 "mcp": {
 "openApiSchema": {
 "s3": {
 "uri": "s3://your-bucket/path/to/open-api-spec.json",
 "bucketOwnerId": "123456789012"
 }
 }
 }
 },
 credentialProviderConfigurations=[
 {
```

```
 "credentialProviderType": "API_KEY",
 "credentialProvider": {
 "apiKeyCredentialProvider": {
 "providerArn": "arn:aws:agent-credential-provider:us-
east-1:123456789012:token-vault/default/apikeycredentialprovider/abcdefgijk",
 "credentialLocation": "HEADER",
 "credentialParameterName": "X-API-Key"
 }
 }
]
)
```

## Add a Smithy target

Select one of the following methods:

AgentCore starter toolkit

The AgentCore starter toolkit lets you create a Smithy target with a default model definition in DynamoDB if you omit the `targetConfiguration` field. The following example shows the creation of the default Smithy model definition and also a custom one uploaded to S3.

```
from bedrock_agentcore_starter_toolkit.operations.gateway.client import
GatewayClient

Initialize the Gateway client
gateway_client = GatewayClient(region_name="us-west-2")

Create a Smithy model target for a built-in AWS service (this default
configuration uses a DynamoDB Smithy model)
smithy_target = gateway_client.create_mcp_gateway_target(
 gateway=gateway,
 target_type="smithyModel"
)

Or create a Smithy model target with a custom model
custom_smithy_target = gateway_client.create_mcp_gateway_target(
 gateway=gateway,
 target_type="smithyModel",
 target_payload={
 "s3": {
 "bucket": "my-smithy-model",
 "key": "smithy-model.smithy"
 }
 }
)
```

```
 "uri": "s3://your-bucket/path/to/smithy-model.json"
 }
}
)
```

## Boto3

The following Python code shows how to add a Smithy model target using the Boto3 Python SDK:

```
import boto3

Create the agentcore client
agentcore_client = boto3.client('bedrock-agentcore-control')

Create a Smithy model target
target = agentcore_client.create_gateway_target(
 gatewayIdentifier="your-gateway-id",
 name="DynamoDBTarget",
 targetConfiguration={
 "mcp": {
 "smithyModel": {
 "s3": {
 "uri": "s3://your-bucket/path/to/smithy-model.json",
 "bucketOwnerId": "123456789012"
 }
 }
 },
 credentialProviderConfigurations:[
 {
 "credentialProviderType": "GATEWAY_IAM_ROLE"
 }
]
 }
)
```

## Add an MCP server target

You can add an MCP server target and synchronize targets using the CLI.

## CLI

The AgentCore CLI provides a simple way to add MCP server targets:

```
Create MCP server as target
{gatewayUrl}/gateways/{gatewayIdentifier}/targets
{
 "name": "myMCPTarget",
 "description": "description of my MCP target",
 "credentialProviderConfigurations": [
 {
 "credentialProviderType": "OAUTH",
 "credentialProvider": {
 "oauthCredentialProvider": {
 "providerArn": "arn:aws:bedrock-agentcore:{region}:{account}:token-vault/default/oauth2credentialprovider/resource-provider-oauth-test",
 "scopes": []
 }
 }
 }
],
 "targetConfiguration": {
 "mcp": {
 "mcpServer": {
 "endpoint": "myMCPServerURL"
 }
 }
 }
}

SynchronizeGatewayTargets
{gatewayUrl}/gateways/{gatewayIdentifier}/synchronizeTargets
{
 "targetIdList": [
 "<targetId>"
]
}
```

## Use an AgentCore gateway

After [setting up your gateway with targets](#), you can configure your application or agent to use the gateway through the [Model Context Protocol \(MCP\)](#). The MCP provides a standardized way for agents to discover and invoke tools.

**Note**

AgentCore Gateway supports the following MCP versions:

- 2025-06-18
- 2025-03-26

You can use the following MCP operations with an AgentCore gateway:

Operation	Description
tools/call	Invokes a specific tool with the provided arguments
tools/list	Lists all available tools provided by the gateway

The following topics describe the capabilities that AgentCore gateways offer.

**Topics**

- [List available tools in an AgentCore gateway](#)
- [Call a tool in a AgentCore gateway](#)
- [Search for tools in your AgentCore gateway with a natural language query](#)
- [Create an agent that uses your AgentCore gateway](#)

## List available tools in an AgentCore gateway

To list all available tools that an AgentCore gateway provides, make a POST request to the gateway's MCP endpoint and specify tools/list as the method in the request body:

```
POST /mcp HTTP/1.1
Host: ${GatewayEndpoint}
Content-Type: application/json
Authorization: ${Authorization header}
```

*\${RequestBody}*

Replace the following values:

- *\${GatewayEndpoint}* – The URL of the gateway, as provided in the response of the [CreateGateway API](#).
- *\${Authorization header}* – The authorization credentials from the identity provider when you set up [inbound authorization](#).
- *\${RequestBody}* – The JSON payload of the request body, as specified in [Listing tools](#) in the [Model Context Protocol \(MCP\)](#). Include `tools/list` as the method.

 **Note**

For a list of optionally supported parameters for `tools/list`, see the `params` object in the request body at [Tools](#) in the [Model Context Protocol documentation](#). At the top of the page next to the search bar, you can select the MCP version whose documentation you want to view. Make sure that the version is one [supported by Amazon Bedrock AgentCore](#).

The response returns a list of available tools with their names, descriptions, and parameter schemas.

## Code samples for listing tools

To see examples of listing available tools in the gateway, select one of the following methods:

Python requests package

```
import requests
import json

def list_tools(gateway_url, access_token):
 headers = {
 "Content-Type": "application/json",
 "Authorization": f"Bearer {access_token}"
 }

 payload = {
 "jsonrpc": "2.0",
 }
```

```
 "id": "list-tools-request",
 "method": "tools/list"
 }

 response = requests.post(gateway_url, headers=headers, json=payload)
 return response.json()

Example usage
gateway_url = "https://${GatewayEndpoint}/mcp" # Replace with your actual gateway
endpoint
access_token = "${AccessToken}" # Replace with your actual access token
tools = list_tools(gateway_url, access_token)
print(json.dumps(tools, indent=2))
```

## MCP Client

```
import asyncio
from mcp import ClientSession
from mcp.client.streamable_http import streamablehttp_client

async def execute_mcp(
 url,
 token,
 headers=None
):
 default_headers = {
 "Authorization": f"Bearer {token}"
 }
 headers = {**default_headers, **(headers or {})}

 async with streamablehttp_client(
 url=url,
 headers=headers,
) as (
 read_stream,
 write_stream,
 callA,
):
 async with ClientSession(read_stream, write_stream) as session:
 # 1. Perform initialization handshake
 print("Initializing MCP...")
 _init_response = await session.initialize()
 print(f"MCP Server Initialize successful! - {_init_response}")
```

```
2. List available tools
print("Listing tools...")
cursor = True
tools = []
while cursor:
 next_cursor = cursor
 if type(cursor) == bool:
 next_cursor = None
 list_tools_response = await session.list_tools(next_cursor)
 tools.extend(list_tools_response.tools)
 cursor = list_tools_response.nextCursor

tool_names = []
if tools:
 for tool in tools:
 tool_names.append(tool.name)
tool_names_string = "\n".join(tool_names)
print(
 f"List MCP tools. # of tools - {len(tools)}"
 f"List of tools - \n{tool_names_string}\n"
)

async def main():
 url = "https://${GatewayEndpoint}/mcp"
 token = "your_bearer_token_here"

 # Optional additional headers
 additional_headers = {
 "Content-Type": "application/json",
 }

 await execute_mcp(
 url=url,
 token=token,
 headers=additional_headers
)

Run the async function
if __name__ == "__main__":
 asyncio.run(main())
```

## Strands MCP Client

```
from strands.tools.mcp.mcp_client import MCPClient
from mcp.client.streamable_http import streamablehttp_client
import os

def create_streamable_http_transport(mcp_url: str, access_token: str):
 return streamablehttp_client(mcp_url, headers={"Authorization": f"Bearer {access_token}'})

def get_full_tools_list(client):
 """
 List tools w/ support for pagination
 """
 more_tools = True
 tools = []
 pagination_token = None
 while more_tools:
 tmp_tools = client.list_tools_sync(pagination_token=pagination_token)
 tools.extend(tmp_tools)
 if tmp_tools.pagination_token is None:
 more_tools = False
 else:
 more_tools = True
 pagination_token = tmp_tools.pagination_token
 return tools

def run_agent(mcp_url: str, access_token: str):
 mcp_client = MCPClient(lambda: create_streamable_http_transport(mcp_url,
access_token))

 with mcp_client:
 tools = get_full_tools_list(mcp_client)
 print(f"Found the following tools: {[tool.tool_name for tool in tools]}")

run_agent(<MCP URL>, <Access token>)
```

## LangGraph MCP Client

```
import asyncio
```

```
from langchain_mcp_adapters.client import MultiServerMCPClient

def list_tools(
 url,
 headers
):
 mcp_client = MultiServerMCPClient(
 {
 "agent": {
 "transport": "streamable_http",
 "url": url,
 "headers": headers,
 }
 }
)
 tools = asyncio.run(mcp_client.get_tools())
 tool_details = []
 tool_names = []
 for tool in tools:
 tool_names.append(f"{tool.name}")
 tool_detail = f"{tool.name} - {tool.description} \n"

 tool_properties = tool.args_schema.get('properties', {})
 properties = []
 for property_name, tool_property in tool_properties.items():
 properties.append(f"{property_name} - {tool_property.get('description', None)} \n")
 tool_details.append(f"{tool_detail}{'\n'.join(properties)}")

 tool_details_string = "\n".join(tool_details)
 tool_names_string = "\n".join(tool_names)
 print(
 f"Langchain: List MCP tools. # of tools - {len(tools)}\n",
 f"Langchain: List of tool names - \n{tool_names_string}\n",
 f"Langchain: Details of tools - \n{tool_details_string}\n"
)
```

**Note**

If search is enabled on the gateway, then the search tool, `x_amz_bedrock_agentcore_search` will be listed first in the response.

## Call a tool in a AgentCore gateway

To call a specific tool, make a POST request to the gateway's MCP endpoint and specify tools/call as the method in the request body, name of the tool, and the arguments:

```
POST /mcp HTTP/1.1
Host: ${GatewayEndpoint}
Content-Type: application/json
Authorization: ${Authorization header}

${RequestBody}
```

Replace the following values:

- `${GatewayEndpoint}` – The URL of the gateway, as provided in the response of the [CreateGateway API](#).
- `${Authorization header}` – The authorization credentials from the identity provider when you set up [inbound authorization](#).
- `${RequestBody}` – The JSON payload of the request body, as specified in [Calling tools](#) in the [Model Context Protocol \(MCP\)](#). Include tools/call as the method and include the name of the tool and its arguments.

The response returns the content returned by the tool and associated metadata.

## Code samples for calling tools

To see examples of listing available tools in the gateway, select one of the following methods:

`curl`

The following curl request shows an example request to call a tool called `searchProducts` through a gateway with the ID `mygateway-abcdefgij`.

```
curl -X POST \
 https://mygateway-abcdefgij.gateway.bedrock-agentcore.us-west-2.amazonaws.com/mcp
 \
 -H "Content-Type: application/json" \
 -H "Authorization: Bearer YOUR_ACCESS_TOKEN" \
 -d '{
 "jsonrpc": "2.0",
 "id": "invoke-tool-request",
 "method": "tools/call",
 "params": {
 "name": "searchProducts",
 "arguments": {
 "query": "wireless headphones",
 "category": "Electronics",
 "maxResults": 2,
 "priceRange": {
 "min": 50.00,
 "max": 200.00
 }
 }
 }
 }'
```

## Python requests package

```
import requests
import json

def call_tool(gateway_url, access_token, tool_name, arguments):
 headers = {
 "Content-Type": "application/json",
 "Authorization": f"Bearer {access_token}"
 }

 payload = {
 "jsonrpc": "2.0",
 "id": "call-tool-request",
 "method": "tools/call",
 "params": {
 "name": tool_name,
 "arguments": arguments
 }
 }
```

```
response = requests.post(gateway_url, headers=headers, json=payload)
return response.json()

Example usage
gateway_url = "https://${GatewayEndpoint}/mcp" # Replace with your actual gateway
endpoint
access_token = "${AccessToken}" # Replace with your actual access token
result = call_tool(
 gateway_url,
 access_token,
 "openapi-target-1__get_orders_byId", # Replace with <{TargetId}__{ToolName}>
 {"orderId": "ORD-12345-67890", "customerId": "CUST-98765"}
)
print(json.dumps(result, indent=2))
```

## MCP Client

```
from mcp import ClientSession
from mcp.client.streamable_http import streamablehttp_client
import asyncio

async def execute_mcp(
 url,
 token,
 tool_params,
 headers=None
):
 default_headers = {
 "Authorization": f"Bearer {token}"
 }
 headers = {**default_headers, **(headers or {})}

 async with streamablehttp_client(
 url=url,
 headers=headers,
) as (
 read_stream,
 write_stream,
 callA,
):
 async with ClientSession(read_stream, write_stream) as session:
 # 1. Perform initialization handshake
```

```
 print("Initializing MCP...")
 _init_response = await session.initialize()
 print(f"MCP Server Initialize successful! - {_init_response}")

 # 2. Call specific tool
 print(f"Calling tool: {tool_params['name']}")
 tool_response = await session.call_tool(
 name=tool_params['name'],
 arguments=tool_params['arguments']
)
 print(f"Tool response: {tool_response}")
 return tool_response

async def main():
 url = "https://${GatewayEndpoint}/mcp"
 token = "your_bearer_token_here"
 tool_params = {
 "name": "LambdaTarget__get_order_tool",
 "arguments": {
 "orderId": "order123"
 }
 }
 await execute_mcp(
 url=url,
 token=token,
 tool_params=tool_params
)

if __name__ == "__main__":
 asyncio.run(main())
```

## Strands MCP Client

### Note

This is for invoking agent

```
from strands.tools.mcp.mcp_client import MCPClient
from mcp.client.streamable_http import streamablehttp_client
```

```
def create_streamable_http_transport(mcp_url: str, access_token: str):
 return streamablehttp_client(mcp_url, headers={"Authorization": f"Bearer {access_token}"})

def run_agent(mcp_url: str, access_token: str):
 mcp_client = MCPCClient(lambda: create_streamable_http_transport(mcp_url,
access_token))

 with mcp_client:
 result = mcp_client.call_tool_sync(
 tool_use_id="tool-123", # A unique ID for the tool call
 name="openapi-target-1__get_orders", # The name of the tool to invoke
 arguments={} # A dictionary of arguments for the tool
)
 print(result)

url = {gatewayUrl}
token = {AccessToken}
run_agent(url, token)
```

## LangGraph MCP Client

### Note

This is for invoking agent

```
import asyncio

from langgraph.prebuilt import create_react_agent

def execute_agent(
 user_prompt,
 model_id,
 region,
 tools
):
 model = ChatBedrock(model_id=model_id, region_name=region)

 agent = create_react_agent(model, tools)
 _response = asyncio.run(agent.invoke({
```

```
 "messages": user_prompt
 }))

 _response = _response.get('messages', {})[1].content
 print(
 f"Invoke Langchain Agents Response"
 f"Response - \n{_response}\n"
)
 return _response
```

## Errors

The `tools/call` operation can return the following types of errors:

- Errors returned as part of the HTTP status code:

### **AuthenticationError**

The request failed due to invalid authentication credentials.

**HTTP Status Code:** 401

### **AuthorizationError**

The caller does not have permission to invoke the tool.

**HTTP Status Code:** 403

### **ResourceNotFoundError**

The specified tool does not exist.

**HTTP Status Code:** 404

### **ValidationError**

The provided arguments do not conform to the tool's input schema.

**HTTP Status Code:** 400

### **ToolExecutionError**

An error occurred while executing the tool.

## InternalServerError

An internal server error occurred.

**HTTP Status Code:** 500

- MCP errors. For more information about these types of errors, [Error Handling in the Model Context Protocol \(MCP\)](#) documentation.

## Search for tools in your AgentCore gateway with a natural language query

If you enabled semantic search for your gateway when you created it, you can call the `x_amz_bedrock_agentcore_search` tool to search for tools in your gateway with a natural language query. Semantic search is particularly useful when you have many tools and need to find the most appropriate ones for your use case. To learn how to enable semantic search during gateway creation, see [Create an Amazon Bedrock AgentCore gateway](#).

To search for a tool using this AgentCore tool, make the following POST request with the `tools/call` method to the gateway's MCP endpoint:

```
POST /mcp HTTP/1.1
Host: ${GatewayEndpoint}
Content-Type: application/json
Authorization: ${Authorization header}

{
 "jsonrpc": "2.0",
 "id": "${RequestName}",
 "method": "tools/call",
 "params": {
 "name": "x_amz_bedrock_agentcore_search",
 "arguments": {
 "query": ${Query}
 }
 }
}
```

Replace the following values:

- ***GatewayEndpoint*** – The URL of the gateway, as provided in the response of the [CreateGateway API](#).
- ***Authorization header*** – The authorization credentials from the identity provider when you set up [inbound authorization](#).
- ***RequestName*** – A name for the request.
- ***Query*** – A natural language query to search for tools.

The response returns a list of tools that are relevant to the query.

## Code samples for tool searching

To see examples of using natural language queries to find tools in the gateway, select one of the following methods:

Python requests package

```
import requests
import json

def search_tools(gateway_url, access_token, query):
 headers = {
 "Content-Type": "application/json",
 "Authorization": f"Bearer {access_token}"
 }

 payload = {
 "jsonrpc": "2.0",
 "id": "search-tools-request",
 "method": "tools/call",
 "params": {
 "name": "x_amz_bedrock_agentcore_search",
 "arguments": {
 "query": query
 }
 }
 }

 response = requests.post(gateway_url, headers=headers, json=payload)
 return response.json()

Example usage
```

```
gateway_url = "https://${GatewayEndpoint}/mcp" # Replace with your actual gateway endpoint
access_token = "${AccessToken}" # Replace with your actual access token
results = search_tools(gateway_url, access_token, "find order information")
print(json.dumps(results, indent=2))
```

## MCP Client

```
from mcp import ClientSession
from mcp.client.streamable_http import streamablehttp_client
import asyncio

async def execute_mcp(
 url,
 token,
 tool_params,
 headers=None
):
 default_headers = {
 "Authorization": f"Bearer {token}"
 }
 headers = {**default_headers, **(headers or {})}

 async with streamablehttp_client(
 url=url,
 headers=headers,
) as (
 read_stream,
 write_stream,
 callA,
):
 async with ClientSession(read_stream, write_stream) as session:
 # 1. Perform initialization handshake
 print("Initializing MCP...")
 _init_response = await session.initialize()
 print(f"MCP Server Initialize successful! - {_init_response}")

 # 2. Call specific tool
 print(f"Calling tool: {tool_params['name']}")
```

```
 tool_response = await session.call_tool(
 name=tool_params['name'],
 arguments=tool_params['arguments']
)
```

```
 print(f"Tool response: {tool_response}")
 return tool_response

async def main():
 url = "https://${GatewayEndpoint}/mcp"
 token = "your_bearer_token_here"
 tool_params = {
 "name": "x_amz_bedrock_agentcore_search",
 "arguments": {
 "query": "How do I find order details?"
 }
 }
 await execute_mcp(
 url=url,
 token=token,
 tool_params=tool_params
)

if __name__ == "__main__":
 asyncio.run(main())
```

## Strands MCP Client

```
from strands.tools.mcp.mcp_client import MCPClient
from mcp.client.streamable_http import streamablehttp_client

def create_streamable_http_transport(mcp_url: str, access_token: str):
 return streamablehttp_client(mcp_url, headers={"Authorization": f"Bearer {access_token}"})

def get_full_tools_list(client):
 """
 List tools w/ support for pagination
 """
 more_tools = True
 tools = []
 pagination_token = None
 while more_tools:
 tmp_tools = client.list_tools_sync(pagination_token=pagination_token)
```

```
 tools.extend(tmp_tools)
 if tmp_tools.pagination_token is None:
 more_tools = False
 else:
 more_tools = True
 pagination_token = tmp_tools.pagination_token
 return tools

def run_agent(mcp_url: str, access_token: str):
 mcp_client = MCPClient(lambda: create_streamable_http_transport(mcp_url,
access_token))

 with mcp_client:
 tools = get_full_tools_list(mcp_client)
 print(f"Found the following tools: {[tool.tool_name for tool in tools]}")
 result = mcp_client.call_tool_sync(
 tool_use_id="tool-123", # A unique ID for the tool call
 name="x_amz_bedrock_agentcore_search", # The name of the tool to invoke
 arguments={"query": "find order information"} # A dictionary of
arguments for the tool
)
 print(result)

url = {gatewayUrl}
token = {AccessToken}
run_agent(url, token)
```

## LangGraph MCP Client

```
import asyncio

from langchain_mcp_adapters.client import MultiServerMCPClient
from langgraph.prebuilt import create_react_agent

url = ""
headers = {}

def filter_search_tool():
 mcp_client = MultiServerMCPClient(
 {
```

```
 "agent": {
 "transport": "streamable_http",
 "url": url,
 "headers": headers,
 }
 }
)
tools = asyncio.run(mcp_client.get_tools())
builtin_search_tool = []
for tool in tools:
 if tool.name == "x_amz_bedrock_agentcore_search":
 builtin_search_tool.append(tool)
return builtin_search_tool

def execute_agent(
 user_prompt,
 model_id,
 region,
 tools
):
 model = ChatBedrock(model_id=model_id, region_name=region)

 agent = create_react_agent(model, filter_search_tool())
 _response = asyncio.run(agent.invoke({
 "messages": user_prompt
 }))

 _response = _response.get('messages', {})[1].content
 print(
 f"Invoke Langchain Agents Response"
 f"Response - \n{_response}\n"
)
 return _response
```

## Create an agent that uses your AgentCore gateway

After creating and testing your gateway, you can create and connect AI agents to your gateway. An agent connected to your gateway is able to call the tools in the gateway and use a [Amazon Bedrock model](#) to respond to queries.

To learn how to create an agent, connect it to a gateway, and invoke it to answer queries, select one of the following methods:

## Strands

```
from strands import Agent
from strands.models import BedrockModel
from strands.tools.mcp.mcp_client import MCPClient
from mcp.client.streamable_http import streamablehttp_client

def _invoke_agent(
 bedrock_model,
 mcp_client,
 prompt
):
 with mcp_client:
 tools = mcp_client.list_tools_sync()
 agent = Agent(
 model=bedrock_model,
 tools=tools
)
 return agent(prompt)

def _create_streamable_http_transport(headers=None):
 url = {gatewayUrl}
 access_token = {AccessToken}
 headers = {**headers} if headers else {}
 headers["Authorization"] = f"Bearer {access_token}"
 return streamablehttp_client(
 url,
 headers=headers
)

def _get_bedrock_model(model_id):
 return BedrockModel(
 inference_profile_id=model_id,
 temperature=0.0,
 streaming=True,
)

mcp_client = MCPClient(_create_streamable_http_transport)

if __name__ == "__main__":
 user_prompt = "What all orders do I have?"
 _response = _invoke_agent(
```

```

 bedrock_model=_get_bedrock_model("us.anthropic.claude-sonnet-4-20250514-
v1:0"),
 mcp_client=mcp_client,
 prompt=user_prompt
)
print(_response)

```

## LangGraph

```

from mcp import ClientSession
from mcp.client.streamable_http import streamablehttp_client

from langgraph.prebuilt import create_react_agent
from langchain_mcp_adapters.tools import load_mcp_tools

Replace with actual values and the Amazon Bedrock model of your choice
gateway_url = "${GatewayUrl}"
access_token = "${AccessToken}"
model = ChatBedrock(model_id="anthropic.claude-3-sonnet-20240229-v1:0",
region_name="us-west-2")

async with streamablehttp_client(gateway_url, headers={"Authorization": f"Bearer
{access_token}"}) as (read, write, _):
 async with ClientSession(read, write) as session:
 # Initialize the connection
 await session.initialize()

 # Get tools
 tools = await load_mcp_tools(session)
 agent = create_react_agent(model, tools)
 math_response = await agent.invoke({"messages": "what's (3 + 5) x 12?"})

```

## Claude Code

```

#!/bin/bash
Script to add MCP server to Claude

Server configuration
SERVER_NAME=${ServerName} # Write your server name
GATEWAY_MCP_SERVER_URL=${GatewayUrl} # The gateway MCP URL
AUTH_TOKEN=${AuthToken} # Claude authentication token

echo "Adding MCP server to Claude..."

```

```
echo "Server Name: $SERVER_NAME"
echo "Server URL: $SERVER_URL"
echo ""

Add the MCP server
claude mcp add "$SERVER_NAME" "$GATEWAY_MCP_SERVER_URL" \
--transport http \
--header "Authorization: Bearer $AUTH_TOKEN"

Check if the command was successful
if [$? -eq 0]; then
 echo "MCP server added successfully!"
 echo ""
 echo "You can now check mcp server health with: claude mcp list"
else
 echo "Failed to add MCP server"
 exit 1
fi
```

## Q Dev CLI

Integration with Q Dev CLI is available through MCP protocol support.

```
Configure Q Dev CLI to use your gateway
q config set mcp-server-url https://${GatewayId}.gateway.bedrock-
agentcore.${Region}.amazonaws.com/mcp
q config set mcp-auth-token ${AccessToken}
```

## Debug and assess your gateway

You can use different tools to help debug your gateway before putting it into a production environment, including built-in AWS and AgentCore Gateway tools, as well as external tools such as the MCP inspector.

You can also debug, monitor, troubleshoot, and assess your gateway's performance and tool integrations with the help of Amazon CloudWatch. To learn more, see [AgentCore generated gateway observability data](#).

The following topics provide more details about different methods that you can use to debug your gateway:

## Topics

- [Turn on debugging messages](#)
- [Use the MCP Inspector](#)
- [Logging Gateway API calls with CloudTrail](#)

## Turn on debugging messages

While your gateway is in development, you can turn on debugging messages to return details on target configuration issues, including lambda function errors, egress authorizer errors, target specification parameter validation errors.

To turn on debugging messages, set the exceptionLevel value as DEBUG when you make a [CreateGateway](#) or [UpdateGateway](#) request. After turning on debugging messages, if an issue occurs when you submit a request through your gateway, the response will return messages to help you debug.

When you're done debugging your gateway, you can update the gateway and remove the exceptionLevel field, such that the message to the end user only shows an unspecified internal error.

## Example

As an example, suppose that the user doesn't have permissions to invoke a Lambda function that is targeted by the gateway. A request that calls this function would return a different message depending on whether debugging is on or off:

- **Debugging on** – A detailed error message would be returned in the content's text field and also in the \_meta field in the response, as in the following example:

```
{
 "jsonrpc": "2.0",
 "id": 24,
 "result": {
 "content": [
 {
```

```
 "type": "text",
 "text": "Access denied while invoking Lambda function arn:aws:lambda:us-
west-2:123456789012:function:TestGatewayLambda. Check the permissions on the Lambda
function and Gateway execution role, and retry the request."
 }
],
"_meta": {
 "debug": {
 "type": "text",
 "text": "Access denied while invoking Lambda function arn:aws:lambda:us-
west-2:123456789012:function:TestGatewayLambda. Check the permissions on the Lambda
function and Gateway execution role, and retry the request."
 }
},
"isError": true
}
}
```

- **Debugging off** – A generic error message would be returned in the content's text field in the response, as in the following example:

```
{
 "jsonrpc": "2.0",
 "id": 24,
 "result": {
 "content": [
 {
 "type": "text",
 "text": "An internal error occurred. Please retry later."
 }
],
 "isError": true
 }
}
```

## Use the MCP Inspector

The MCP Inspector, available through the [Model Context Protocol \(MCP\)](#), is a developer tool that helps you test and debug MCP servers by through an interactive interface. You can connect your AgentCore gateway to the MCP inspector to help you debug your gateway targets.

For more information about the MCP Inspector, see the [MCP Inspector documentation](#).

## To connect your gateway to the inspector

1. Open a terminal and run `npx @modelcontextprotocol/inspector` to do the following:
  - a. Install the inspector
  - b. Start the inspector on localhost.
  - c. Generate a session token for authentication.
  - d. Open your browser to the inspector interface.
2. In the inspector interface, configure the following fields:
  - **Transport Type** – Select **Streamable HTTP**
  - **URL** – Enter the gateway endpoint URL returned when you created your gateway.
  - Expand **Authentication**. The **Custom Headers** section should be pre-populated with one key-value pair.
    - The key's name should be **Authorization**.
    - Replace the value with your gateway's [inbound authorization credentials](#).
3. Choose **Connect**. You will be connected to your gateway. You can use the MCP Inspector as a tool to examine and test your gateway before integrating it with your agent.

For more information about how you can inspect the MCP server that your gateway is connected to, see [Feature overview](#) in the [Feature overview](#) in the [MCP Inspector documentation](#).

### Important

The MCP Inspector is a development tool and should not be used in production environments. Always secure your access tokens and gateway credentials.

## Troubleshooting

If you encounter issues when using the MCP Inspector with your gateway, check the following:

- **Connection issues:** Ensure that your gateway URL is correct and accessible from your network
- **Authentication issues:** Verify that your access token is valid and has not expired
- **Tool invocation errors:** Check the error messages in the response and ensure that your input parameters match the tool's schema

- **Proxy errors:** If you see errors related to the proxy connection, try restarting the MCP Inspector

## Logging Gateway API calls with CloudTrail

Gateway is integrated with CloudTrail, a service that provides a record of actions taken by a user, role, or an AWS service in Gateway. CloudTrail captures all API calls for Gateway as events, including calls from the Gateway console and code calls to the Gateway APIs. Using the information collected by CloudTrail, you can determine the request that was made to Gateway, who made the request, when it was made, and additional details. There are two types of events: Management events and Data events:

### Gateway Event Types

This section provides information about the types of events that Gateway logs to CloudTrail.

#### Gateway Management Events in CloudTrail

Every management event or log entry contains information about who generated the request. The identity information helps you determine the following:

- Whether the request was made with root user or user credentials.
- Whether the request was made on behalf of an IAM Identity Center user.
- Whether the request was made with temporary security credentials for a role or federated user.
- Whether the request was made by another AWS service.

CloudTrail is active in your AWS account when you create the account and you automatically have access to the CloudTrail *Event history*. The CloudTrail *Event history* provides a viewable, searchable, downloadable, and immutable record of the past 90 days of recorded management events in an AWS Region.

For an ongoing record of events in your AWS account past 90 days, create a trail or a CloudTrail Lake event data store.

Gateway logs management events for the following operations:

- `CreateGateway` - Creates a new gateway
- `UpdateGateway` - Updates an existing gateway

- DeleteGateway - Deletes a gateway
- GetGateway - Gets information about a gateway
- ListGateways - Lists all gateways
- CreateGatewayTarget - Creates a new target for a gateway
- UpdateGatewayTarget - Updates an existing gateway target
- DeleteGatewayTarget - Deletes a gateway target
- GetGatewayTarget - Gets information about a gateway target
- ListGatewayTargets - Lists all targets for a gateway

## Gateway Data Events in CloudTrail

Data events provide information about the resource operations performed on or in a resource. These are also known as data plane operations. Data events are often high-volume activities. You must explicitly enable data events as they are not logged by default. The CloudTrail *Event history* doesn't record data events.

Additional charges apply for logging data events. For more information about CloudTrail pricing, see [AWS CloudTrail Pricing](#).

You can enable logging data events for the Gateway resource types by using the CloudTrail console, AWS CLI, or CloudTrail API operations.

The following table lists the Gateway resource types for which you can enable data events:

Data event type (console)	resources.type value	Data APIs logged to CloudTrail
Bedrock-AgentCore gateway	AWS::BedrockAgentCore::Gateway	InvokeGateway

## Identity Information in Data Events

Gateway data events differ from standard AWS data events in how identity information is stored. Since the Data API follows the MCP protocol and uses JWT token-based authentication rather than SigV4, Gateway data events don't have standard AWS identity information. Instead, identity is captured by logging specific JWT claims including the "sub" claim.

**Note**

We recommend that you avoid using any personally identifiable information (PII) in this field. For example, you could use a GUID or a pairwise identifier, as suggested in the [OIDC specification](#) instead of PII data like email.

## Error Information in Data Events

Gateway provides error information as part of the `responseElements` field rather than as top-level `errorCode` and `errorMessage` fields. If you're looking for specific error types such as `AccessDenied` events, parse through the `responseElements` field in the CloudTrail event.

## Data Event Routing

Since Gateway uses JWT tokens for authentication rather than SigV4 credentials, data events are only routed to the resource owner account.

## Enabling CloudTrail Data Event Logging for Gateway

You can use CloudTrail data events to get information about Gateway requests. To enable CloudTrail data events for Gateway, you must create a trail manually in CloudTrail backed by an Amazon S3 bucket.

**Note**

- Data event logging incurs additional charges. You must explicitly enable data events as they are not captured by default. Check to ensure that you have data events enabled for your account.
- With a Gateway that is generating a high workload, you could quickly generate thousands of logs in a short amount of time. Be mindful of how long you choose to enable CloudTrail data events for a busy Gateway.

CloudTrail stores Gateway data event logs in an Amazon S3 bucket of your choosing. Consider using a bucket in a separate AWS account to better organize events from multiple resources into a central place for easier querying and analysis.

When you log data events for a trail in CloudTrail, you must use advanced event selectors to log data events for Gateway operations.

## AWS CLI

To enable CloudTrail data events for Gateway using the AWS CLI, you can use the following command:

```
aws cloudtrail put-event-selectors \
--trail-name brac-gateway-canary-trail-prod-us-east-1 \
--region us-east-1 \
--advanced-event-selectors '[
{
 "Name": "GatewayDataEvents",
 "FieldSelectors": [
 {
 "Field": "eventCategory",
 "Equals": ["Data"]
 },
 {
 "Field": "resources.type",
 "Equals": ["AWS::BedrockAgentCore::Gateway"]
 }
]
}
]'
```

## AWS CDK

Here's an example of how to create a CloudTrail trail with Gateway data events using AWS CDK:

```
import { Construct } from 'constructs';
import { Trail, CfnTrail } from 'aws-cdk-lib/aws-cloudtrail';
import { Bucket } from 'aws-cdk-lib/aws-s3';
import { Effect, PolicyStatement, ServicePrincipal } from 'aws-cdk-lib/aws-iam';
import { RemovalPolicy } from 'aws-cdk-lib';

export interface DataEventTrailProps {
 /**
 * Whether to enable multi-region trail
}
```

```
 */
isMultiRegionTrail?: boolean;

/**
 * Whether to include global service events
 */
includeGlobalServiceEvents?: boolean;

/**
 * AWS region
 */
region: string;

/**
 * Environment account ID
 */
account: string;
}

/**
 * Creates a CloudTrail trail configured to capture data events for Bedrock Agent Core Gateway
 */
export class BedrockAgentCoreDataEventTrail extends Construct {
 /**
 * The CloudTrail trail
 */
 public readonly trail: Trail;

 /**
 * The S3 bucket for CloudTrail logs
 */
 public readonly logsBucket: Bucket;

 constructor(scope: Construct, id: string, props: DataEventTrailProps) {
 super(scope, id);

 // Create S3 bucket for CloudTrail logs
 const bucketName = `brac-gateway-cloudtrail-logs-${props.account}-
${props.region}`;
 this.logsBucket = new Bucket(this, 'CloudTrailLogsBucket', {
 bucketName,
 removalPolicy: RemovalPolicy.RETAIN,
 });
 }
}
```

```
// Create trail name (suffixing region since regional trail)
const trailName = `brac-gateway-trail-${props.region}`;

// Add CloudTrail bucket policy
this.logsBucket.addToResourcePolicy(
 new PolicyStatement({
 sid: 'AWSCloudTrailAclCheck',
 effect: Effect.ALLOW,
 principals: [new ServicePrincipal('cloudtrail.amazonaws.com')],
 actions: ['s3:GetBucketAcl'],
 resources: [this.logsBucket.bucketArn],
 conditions: {
 StringEquals: {
 'aws:SourceArn': `arn:aws:cloudtrail:${props.region}:
${props.account}:trail/${trailName}`,
 },
 },
 }),
);

this.logsBucket.addToResourcePolicy(
 new PolicyStatement({
 sid: 'AWSCloudTrailWrite',
 effect: Effect.ALLOW,
 principals: [new ServicePrincipal('cloudtrail.amazonaws.com')],
 actions: ['s3:PutObject'],
 resources: [this.logsBucket.arnForObjects(`AWSLogs/${props.account}/*`)],
 conditions: {
 StringEquals: {
 's3:x-amz-acl': 'bucket-owner-full-control',
 'aws:SourceArn': `arn:aws:cloudtrail:${props.region}:
${props.account}:trail/${trailName}`,
 },
 },
 }),
);

// Create CloudTrail trail
this.trail = new Trail(this, 'GatewayDataEventTrail', {
 trailName,
 bucket: this.logsBucket,
 isMultiRegionTrail: props.isMultiRegionTrail ?? false,
 includeGlobalServiceEvents: props.includeGlobalServiceEvents ?? true,
```

```
 enableFileValidation: true,
 });

// Add advanced event selectors for Bedrock Agent Core Gateway data events
const cfnTrail = this.trail.node.defaultChild as CfnTrail;

// Define the advanced event selectors
const advancedEventSelectors = [
{
 // Log Bedrock Agent Core Gateway Data Events only
 fieldSelectors: [
 {
 field: 'eventCategory',
 equalTo: ['Data'],
 },
 {
 field: 'resources.type',
 equalTo: ['AWS::BedrockAgentCore::Gateway'],
 },
],
},
];
};

// Clear any existing event selectors and set advanced event selectors
cfnTrail.eventSelectors = undefined;
cfnTrail.advancedEventSelectors = advancedEventSelectors;
}
}
```

## Understanding Gateway CloudTrail Events

A trail is a configuration that enables delivery of events as log files to an Amazon S3 bucket that you specify. CloudTrail log files contain one or more log entries. An event represents a single request from any source and includes information about the requested action, the date and time of the action, request parameters, and so on.

### Note

The contents of the requests and responses for data events are REDACTED, and the JWT claims have HTML entities sanitized for security purposes.

## InvokeGateway Data Event With Authentication Error

The following example shows a CloudTrail log entry that demonstrates the InvokeGateway action with an authentication error:

```
{
 "eventVersion": "1.11",
 "userIdentity": {
 "type": "AWSAccount",
 "principalId": "",
 "accountId": "anonymous"
 },
 "eventTime": "2025-07-14T02:14:42Z",
 "eventSource": "bedrock-agentcore.amazonaws.com",
 "eventName": "InvokeGateway",
 "awsRegion": "us-west-2",
 "sourceIPAddress": "34.XXX.XXX.206",
 "userAgent": "python-httpx/0.28.1",
 "requestParameters": {
 "body": {
 "id": 0,
 "method": "initialize",
 "params": {
 "clientInfo": {
 "name": "mcp",
 "version": "0.1.0"
 },
 "protocolVersion": "2025-06-18",
 "capabilities": {}
 },
 "jsonrpc": "2.0"
 }
 },
 "responseElements": {
 "body": {
 "jsonrpc": "2.0",
 "id": 0,
 "error": {
 "code": -32001,
 "message": "Invalid Bearer token"
 }
 },
 "contentType": "application/json",
 }
}
```

```
 "statusCode": 401
 },
 "requestID": "1234abcd-12ab-34cd-56ef-1234567890ab",
 "eventID": "12345678-1234-5678-9abc-123456789012",
 "readOnly": false,
 "resources": [
 {
 "accountId": "XXXXXXXXXX",
 "type": "AWS::BedrockAgentCore::Gateway",
 "ARN": "arn:aws:bedrock-agentcore:us-west-2:XXXXXXXXXX:gateway/test-openapi-gateway-b24f8c26-u9p3rjw8qw"
 }
],
 "eventType": "AwsApiCall",
 "managementEvent": false,
 "recipientAccountId": "XXXXXXXXXX",
 "sharedEventID": "12345678-xxxx-xxxx-xxxx-123456789012",
 "eventCategory": "Data",
 "tlsDetails": {
 "tlsVersion": "TLSv1.2",
 "cipherSuite": "ECDHE-RSA-AES128-GCM-SHA256",
 "clientProvidedHostHeader": "test-openapi-gateway-xxxxxx-u9p3rjw8qw.gateway.bedrock-agentcore.us-west-2.amazonaws.com"
 }
}
```

## Successful InvokeGateway Data Event

The following example shows a CloudTrail log entry for a successful InvokeGateway action:

```
{
 "eventVersion": "1.11",
 "userIdentity": {
 "type": "AWSAccount",
 "principalId": "",
 "accountId": "anonymous"
 },
 "eventTime": "2025-07-14T02:14:42Z",
 "eventSource": "bedrock-agentcore.amazonaws.com",
 "eventName": "InvokeGateway",
 "awsRegion": "us-west-2",
 "sourceIPAddress": "35.88.103.184",
```

```
"userAgent": "python-httplib/0.28.1",
"requestParameters": {
 "body": {
 "id": 1,
 "method": "tools/call",
 "params": {
 "name": "SmithyTarget__ListTables",
 "arguments": "REDACTED"
 },
 "jsonrpc": "2.0"
 }
},
"responseElements": {
 "body": {
 "jsonrpc": "2.0",
 "id": 1,
 "result": {
 "isError": false,
 "content": "REDACTED"
 }
 },
 "contentType": "application/json",
 "statusCode": 200
},
"additionalEventData": {
 "targetId": "0JTXXX4YMA",
 "jwt": {
 "headers": {
 "kid": "hGrcJwz5MX6hNeuL6jdXE4hjK7sT6oj+yN7kN+arRv4=",
 "alg": "RS256"
 },
 "claims": {
 "sub": "4ammgxxxxxxxxxxxxm3b8c",
 "token_use": "access",
 "scope": "python-cognito-resource-server-id/write python-cognito-resource-server-id/read",
 "auth_time": 1752459276,
 "iss": "https://cognito-idp.us-west-2.amazonaws.com/us-west-2_Fxxxxxhtq",
 "exp": 1752462876,
 "iat": 1752459276,
 "version": 2,
 "jti": "1234abcd-12ab-34cd-56ef-1234567890ab"
 }
 }
},
```

```
 "type": "JWS"
 },
 "downstreamRequestIds": [
 "H3RDH6T03DG10996U0M2P1V1IFVV4KQNS05AEMVJF66Q9ASUAAJG"
],
},
"requestID": "1234abcd-12ab-34cd-56ef-1234567890ab",
"eventID": "12345678-1234-5678-9abc-123456789012",
"readOnly": false,
"resources": [
{
 "accountId": "XXXXXXXXXX",
 "type": "AWS::BedrockAgentCore::Gateway",
 "ARN": "arn:aws:bedrock-agentcore:us-west-2:XXXXXXXXXX:gateway/test-gateway-65129e91-mtzoadyihf"
}
],
"eventType": "AwsApiCall",
"managementEvent": false,
"recipientAccountId": "XXXXXXXXXX",
"sharedEventID": "1234abcd-12ab-34cd-56ef-1234567890ab",
"eventCategory": "Data",
"tlsDetails": {
 "tlsVersion": "TLSv1.2",
 "cipherSuite": "ECDHE-RSA-AES128-GCM-SHA256",
 "clientProvidedHostHeader": "test-gateway-65129e91-xxxxxxx.gateway.bedrock-agentcore.us-west-2.amazonaws.com"
}
}
```

## Management Event

The following example shows a CloudTrail log entry for a management event:

```
{
 "eventVersion": "1.09",
 "userIdentity": {
 "type": "AssumedRole",
 "principalId": "AROXXXXXXXXXXXXNRD7D:xxxxx",
 "arn": "arn:aws:sts::XXXXXXXXXXXX:assumed-role/HydraInvocationRole-xxxxxxxxxxxx",
 "accountId": "XXXXXXXXXXXXXX",
 "accessKeyId": "XXXXXXXXXXXXXX"
 }
}
```

```
"accessKeyId": "xxxxxxxxxx",
"sessionContext": {
 "sessionIssuer": {
 "type": "Role",
 "principalId": "xxxxxxxxxx",
 "arn": "arn:aws:iam::XXXXXXXXXXXX:role/HydraInvocationRole-xxx",
 "accountId": "XXXXXXXXXXXXXX",
 "userName": "HydraInvocationRole-xxxxx"
 },
 "attributes": {
 "creationDate": "2025-07-14T02:42:43Z",
 "mfaAuthenticated": "false"
 }
},
"invokedBy": "bedrock-agentcore.amazonaws.com"
},
"eventTime": "2025-07-14T02:47:38Z",
"eventSource": "bedrock-agentcore.amazonaws.com",
"eventName": "CreateGateway",
"awsRegion": "us-west-2",
"sourceIPAddress": "bedrock-agentcore.amazonaws.com",
"userAgent": "bedrock-agentcore.amazonaws.com",
"requestParameters": {
 "roleArn": "arn:aws:iam::XXXXXXXXXXXX:role/PythonGenesisTestGatewayRole",
 "name": "***",
 "authorizerConfiguration": {
 "customJWTAuthorizer": {
 "allowedClients": [
 "xxxxxxxxxx"
],
 "discoveryUrl": "https://cognito-idp.us-west-2.amazonaws.com/us-west-2_xxxxx/.well-known/openid-configuration"
 }
 },
 "description": "***",
 "protocolType": "MCP",
 "authorizerType": "CUSTOM_JWT"
},
"responseElements": {
 "authorizerConfiguration": {
 "customJWTAuthorizer": {
 "allowedClients": [
 "xxxxxxxxxxxxxxxxxx"
],
 "discoveryUrl": "https://cognito-idp.us-west-2.amazonaws.com/us-west-2_xxxxx/.well-known/openid-configuration"
 }
 }
}
```

```
 "discoveryUrl": "https://cognito-idp.us-west-2.amazonaws.com/us-
west-2_xxxxxx/.well-known/openid-configuration"
 }
},
"description": "***",
"protocolType": "MCP",
"gatewayArn": "arn:aws:bedrock-agentcore:us-west-2:XXXXXXXXXXXXX:gateway/test-
openapi-gateway-xxxxxx-xxxxxx",
"workloadIdentityDetails": {
 "workloadIdentityArn": "arn:aws:bedrock-agentcore:us-
west-2:XXXXXXXXXXXX:workload-identity-directory/default/workload-identity/test-
openapi-gateway-xxxxxx-xxxx"
},
"createdAt": "2025-07-14T02:47:38.302834063Z",
"gatewayUrl": "https://test-openapi-gateway-xxxxxx-8fb4mo6pqx.gateway.bedrock-
agentcore.us-west-2.amazonaws.com/mcp",
"roleArn": "arn:aws:iam::XXXXXXXXXXXX:role/PythonGenesisTestGatewayRole",
"name": "***",
"authorizerType": "CUSTOM_JWT",
"gatewayId": "test-openapi-gateway-9c8f7109-8fb4mo6pqx",
"status": "CREATING",
"updatedAt": "2025-07-14T02:47:38.302845797Z"
},
"requestID": "0fb99b0b-a4d1-xxxx-8aee-c703adaa6bd9",
"eventID": "b12bf859-xxxx-48d7-952a-d5c6ec00fb68",
"readOnly": false,
"resources": [
{
 "accountId": "XXXXXXXXXXXX",
 "type": "AWS::BedrockAgentCore::Gateway",
 "ARN": "arn:aws:bedrock-agentcore:us-west-2:XXXXXXXXXXXX:gateway/test-openapi-
gateway-xxxxxx-8fb4mo6pqx"
}
],
"eventType": "AwsApiCall",
"managementEvent": true,
"recipientAccountId": "XXXXXXXXXXXX",
"eventCategory": "Management"
}
```

## Additional Resources

For more information about using CloudTrail with Gateway, see the following resources:

- [AWS CloudTrail User Guide](#)
- [Creating a Trail for Your AWS Account](#)
- [AWS CloudTrail API Reference](#)
- [AWS CloudTrail CLI Reference](#)

## Advanced features and topics for Amazon Bedrock AgentCore Gateway

This chapter covers some advanced topics and additional information that can help supplement your knowledge of gateways and how you can use them effectively in your applications.

### Topics

- [Encrypt your AgentCore gateway with a customer-managed KMS key](#)
- [Setting up custom domain names for Gateway endpoints](#)
- [Performance optimization](#)

## Encrypt your AgentCore gateway with a customer-managed KMS key

By default, Gateway encrypts your data at rest using a service-managed AWS Key Management Service key. However, you can optionally provide your own customer managed KMS key for encrypting data at rest when you:

- Create a gateway.
- Update a gateway's configurations.

Using a customer managed key gives you more control over the encryption process, including the ability to:

- Rotate the key on your own schedule
- Control access to the key through IAM policies
- Disable or delete the key when it's no longer needed

- Audit key usage through CloudWatch logs and AWS CloudTrail

For more information, see [AWS Key Management Service Developer Guide](#).

 **Note**

If you choose to use a customer managed key, you are responsible for managing the key and its permissions. If the key is disabled or deleted, or if Gateway loses permission to use the key, you will lose access to the encrypted data.

## Prerequisites for encrypting your AgentCore gateway

Before encrypting your gateway, ensure that you have fulfilled the following prerequisites:

- You have access to a KMS key. For information about creating a KMS key, see [Create a KMS key](#).
- The KMS key has a key policy attached to it that allows the following permissions:
  - Permissions that allow the gateway service role to perform the following actions:
    - kms>CreateGrant
    - kms>DescribeKey
    - kms>Decrypt
    - kms>GenerateDataKey
  - (If you enable CloudWatch Logs for your gateway) Permissions that allow the CloudWatch Logs service to decrypt the key.

For more information about controlling IAM permissions for a KMS key, see [KMS key access and permissions](#) in the AWS Key Management Service Developer Guide.

## Example key policy

The following example policy provides the necessary permissions to encrypt a gateway and use an encrypted gateway. The fourth statement also allows CloudWatch Logs logging of key usage for the encrypted gateway. The policy contains condition keys to conform to security best practices.

## JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "AllowServiceRoleDescribeKey",
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws:iam::123456789012:role/GatewayServiceRole"
 },
 "Action": [
 "kms:DescribeKey"
],
 "Resource": "*",
 "Condition": {
 "StringEquals": {
 "kms:ViaService": [
 "bedrock-agentcore.us-east-1.amazonaws.com"
]
 }
 }
 },
 {
 "Sid": "AllowServiceRoleDecryptKey",
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws:iam::123456789012:role/GatewayServiceRole"
 },
 "Action": [
 "kms:Decrypt",
 "kms:GenerateDataKey"
],
 "Resource": "*",
 "Condition": {
 "StringEquals": {
 "kms:ViaService": [
 "bedrock-agentcore.us-east-1.amazonaws.com"
]
 },
 "StringLike": {
 "kms:EncryptionContext:aws:bedrock-agentcore-gateway:arn":
 "arn:aws:bedrock-agentcore:us-east-1:123456789012:gateway/GatewayId"
 }
 }
 }
]
}
```

```
 }
 },
},
{
 "Sid": "AllowServiceRoleCreateGrant",
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws:iam::123456789012:role/GatewayServiceRole"
 },
 "Action": "kms>CreateGrant",
 "Resource": "*",
 "Condition": {
 "StringEquals": {
 "kms:ViaService": [
 "bedrock-agentcore.us-east-1.amazonaws.com"
],
 "kms:GrantConstraintType": "EncryptionContextSubset"
 },
 "ForAllValues:StringEquals": {
 "kms:GrantOperations": [
 "Decrypt",
 "GenerateDataKey"
]
 },
 "StringLike": {
 "kms:EncryptionContext:aws:bedrock-agentcore-gateway:arn": "arn:aws:bedrock-agentcore:us-east-1:123456789012:gateway/GatewayId"
 }
 }
},
{
 "Sid": "AllowKMSDecryptionLogging",
 "Effect": "Allow",
 "Principal": {
 "Service": "delivery.logs.amazonaws.com"
 },
 "Action": [
 "kms:GenerateDataKey",
 "kms:Decrypt"
],
 "Resource": "*",
 "Condition": {
 "StringEquals": {
```

```
 "kms:EncryptionContext:SourceArn": "arn:aws:logs:us-east-1:123456789012:*"
 }
}
]
}
```

The policy contains the following statements:

- **AllowServiceRoleDescribeKKey** – Allows the specified principal to describe the key if the request is made through the AgentCore service. Replace values in the following fields:
  - Principal – Replace the AWS value with the actual ARN of your gateway service role.
  - Condition – In the kms:ViaService array, replace **us-east-1** with the actual AWS Region for which you want to allow the key to be described.
- **AllowServiceRoleDecryptKey** – Allows the specified principal to decrypt the key if the request is made through the AgentCore service and if the ARN of the gateway to which the request is made matches the one in the kmsEncryptionContext:aws:bedrock-agentcore-gateway-arn field. Replace the following values:
  - Principal – Replace the AWS value with the actual ARN of your gateway service role.
  - Condition – Do the following:
    - In the kms:ViaService array, replace **us-east-1** with the actual AWS Region for which you want to allow the key to be decrypted.
    - Replace the kmsEncryptionContext:aws:bedrock-agentcore-gateway-arn value with the actual ARN of your gateway.
- **AllowServiceRoleCreateGrant** – Allows the specified principal to create a grant for a key if the request is made through the AgentCore service and if the ARN of the gateway to which the request is made matches the one in the kmsEncryptionContext:aws:bedrock-agentcore-gateway-arn field. Replace the following values:
  - Principal – Replace the AWS value with the actual ARN of your gateway service role.
  - Condition – Do the following:
    - In the kms:ViaService array, replace **us-east-1** with the actual AWS Region for which you want to allow the key to be decrypted.
    - Replace the kmsEncryptionContext:aws:bedrock-agentcore-gateway-arn value with the actual ARN of your gateway (if you want to allow).

- **AllowKMSDecryptionLogging** – Allows the specified principal to decrypt a customer-managed KMS key for auditing key usage through CloudWatch Logs. In the `kms:EncryptionContext:SourceArn` value, replace `us-east-1` and `123456789012` values with your actual AWS Region and account ID.

## Console

### To encrypt your gateway with a customer-managed KMS key

1. Follow the **Console** steps at [Create an Amazon Bedrock AgentCore gateway](#) and expand the **KMS key - optional** section.
2. Choose **Customize encryption settings (advanced)**.
3. Select a KMS key and confirm its details.

 **Note**

If you don't see your KMS key, go over the [Prerequisites for encrypting your AgentCore gateway](#) and check that the permissions are properly configured.

4. Continue through the remaining console steps.

## CLI

To encrypt your gateway using the AWS CLI, include the `kms-key-arn` when sending either of the following requests through an [AgentCore control plane](#) client.:

- [create-gateway](#)
- [update-gateway](#)

The following example shows an example CLI request to create a gateway with a AWS KMS key specified using the `kms-key-arn` argument:

```
aws bedrock-agentcore-control create-gateway \
--name "MyGateway" \
--role-arn "arn:aws:iam::123456789012:role/GatewayRole" \
--protocol-type "MCP" \
--kms-key-arn "arn:aws:kms:us-
west-2:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab" \
```

```
--authorizer-type "CUSTOM_JWT" \
--authorizer-configuration '{
 "customJWTAuthorizer": {
 "allowedAudience": ["myAudience"],
 "discoveryUrl": "https://example.com/.well-known/openid-configuration"
 }
}'
```

## Python (Boto3)

To encrypt your gateway using the Boto3 Python SDK, include the `kms-key-arn` when sending either of the following requests through an [AgentCore control plane](#) client.:

- [`create\_gateway`](#)
- [`update\_gateway`](#)

The following example shows an example Boto3 request to create a gateway with a AWS KMS key specified using the `kmsKeyArn` argument:

```
import boto3
Create client
agentcore_client = boto3.client('bedrock-agentcore-control')

Create gateway and specify
gateway = agentcore_client.create_gateway(
 name="MyGateway",
 roleArn="arn:aws:iam::123456789012:role/GatewayRole",
 protocolType="MCP",
 kmsKeyArn="arn:aws:kms:us-
west-2:123456789012:key/1234abcd-12ab-34cd-56ef-1234567890ab"
 authorizerType="CUSTOM_JWT",
 authorizerConfiguration= {
 "customJWTAuthorizer": {
 "allowedAudience": ["myAudience"],
 "discoveryUrl": "https://example.com/.well-known/openid-configuration"
 }
 }
)
```

# Setting up custom domain names for Gateway endpoints

By default, Gateway endpoints are provided with an AWS-managed domain name in the format <gateway-id>.gateway.bedrock-agentcore.<region>.amazonaws.com. For production environments or to create a more user-friendly experience, you may want to use a custom domain name for your gateway endpoint. This section guides you through setting up a custom domain name using Amazon CloudFront as a reverse proxy.

## Prerequisites

Before you begin, ensure you have:

- A working Gateway endpoint
- DNS delegation (if your Route 53 domain needs to be publicly reachable)
- AWS CDK installed and configured (if following the CDK approach)
- Appropriate IAM permissions to create and manage CloudFront distributions, Route 53 hosted zones, and ACM certificates

## Solution overview

The solution involves the following components:

- **Route 53 Hosted Zone:** Manages DNS records for your custom domain
- **ACM Certificate:** Provides SSL/TLS encryption for your custom domain
- **CloudFront Distribution:** Acts as a reverse proxy, forwarding requests from your custom domain to the Gateway endpoint
- **Route 53 A Record:** Maps your custom domain to the CloudFront distribution

The following steps will guide you through setting up these components using AWS CDK.

## Implementation steps

### Step 1: Create a Route 53 hosted zone

First, create a Route 53 hosted zone for your custom domain:

```
import { RemovalPolicy } from 'aws-cdk-lib';
import { PublicHostedZone } from 'aws-cdk-lib/aws-route53';

const domainName = 'my.example.com';

const hostedZone = new PublicHostedZone(this, 'HostedZone', {
 zoneName: domainName,
});
this.hostedZone.applyRemovalPolicy(RemovalPolicy.RETAIN);
```

 **Note**

We apply a removal policy of RETAIN to prevent accidental deletion of the hosted zone during stack updates or deletion.

## Step 2: Create a DNS-validated certificate

Next, create an SSL/TLS certificate for your custom domain using AWS Certificate Manager (ACM) with DNS validation:

```
import { RemovalPolicy } from 'aws-cdk-lib';
import { Certificate, CertificateValidation } from 'aws-cdk-lib/aws-
certificatemanager';

const certificate = new Certificate(this, 'SSLCertificate', {
 domainName: domainName, // route53 hosted zone domain name from step 1
 validation: CertificateValidation.fromDns(hostedZone), // route53 hosted zone from
 step 1
});
this.certificate.applyRemovalPolicy(RemovalPolicy.RETAIN);
```

DNS validation automatically creates the necessary validation records in your Route 53 hosted zone.

## Step 3: Create a CloudFront distribution

Create a CloudFront distribution to act as a reverse proxy for your Gateway endpoint:

```
import {
 AllowedMethods,
 CachePolicy,
 Distribution,
 OriginProtocolPolicy,
 ViewerProtocolPolicy
} from 'aws-cdk-lib/aws-cloudfront';
import { HttpOrigin } from 'aws-cdk-lib/aws-cloudfront-origins';

const bedrockAgentCoreGatewayHostName = '<mymcpserver>.gateway.bedrock-
agentcore.<region>.amazonaws.com'
const bedrockAgentCoreGatewayPath = '/mcp' // can also be left undefined, depending on
your requirement

const distribution = new Distribution(this, 'Distribution', {
 defaultBehavior: {
 origin: new HttpOrigin(bedrockAgentCoreGatewayHostName, {
 protocolPolicy: OriginProtocolPolicy.HTTPS_ONLY,
 originPath: bedrockAgentCoreGatewayPath,
 }),
 viewerProtocolPolicy: ViewerProtocolPolicy.HTTPS_ONLY,
 cachePolicy: CachePolicy.CACHING_DISABLED, // important since caching is
enabled by default and hence is not suitable for a reverse proxy
 allowedMethods: AllowedMethods.ALLOW_ALL,
 },
 domainNames: [domainName], // route53 hosted zone domain name from step 1
 certificate: certificate, // ssl certificate for the route53 domain from step 2
});
```

## Important

Set `cachePolicy: CachePolicy.CACHING_DISABLED` to ensure that CloudFront doesn't cache responses from your Gateway endpoint, which is important for dynamic API interactions.

Replace `<mymcpserver>` with your gateway ID and `<region>` with your AWS Region (e.g., `us-east-1`).

## Step 4: Create a Route 53 A record

Create a Route 53 A record that points your custom domain to the CloudFront distribution:

```
import { ARecord, RecordTarget } from 'aws-cdk-lib/aws-route53';
import { CloudFrontTarget } from 'aws-cdk-lib/aws-route53-targets';

const aRecord = new ARecord(this, 'AliasRecord', {
 zone: hostedZone, // route53 hosted zone from step 1
 recordName: domainName, // route53 hosted zone domain name from step 1
 target: RecordTarget.fromAlias(new CloudFrontTarget(distribution)), // cloufront
 distribution from from step 3
});
```

This creates an alias record that maps your custom domain to the CloudFront distribution.

## Step 5: Deploy your infrastructure

Deploy your CDK stack to create the resources:

```
cdk deploy
```

The deployment process may take some time, especially for the certificate validation and CloudFront distribution creation.

## Testing your custom domain

After deploying your infrastructure, verify that your custom domain is properly configured:

### Verify DNS resolution

Use the dig command to verify that your custom domain resolves to the CloudFront distribution:

```
dig my.example.com
```

The output should show that your domain resolves to CloudFront's IP addresses.

## Verify SSL certificate

Use curl to verify that the SSL certificate is properly configured:

```
curl -v https://my.example.com
```

The output should show a successful SSL handshake with no certificate errors.

## Configuring MCP clients

Once your custom domain is set up and verified, you can configure your MCP clients to use it:

### Cursor configuration

For Cursor, update your configuration file:

```
{
 "mcpServers": {
 "my-mcp-server": {
 "url": "https://my.example.com"
 }
 }
}
```

### Other MCP clients

For MCP clients that don't natively support streamable HTTP:

```
{
 "mcpServers": {
 "my-mcp-server": {
 "command": "/path/to/uvx",
 "args": [
 "mcp-proxy",
 "--transport",
 "streamablehttp",
 "https://my.example.com"
]
 }
}
```

```
 }
}
}
```

## Additional considerations

### Cost implications

Using CloudFront as a reverse proxy incurs additional costs for data transfer and request handling. Review the CloudFront pricing model to understand the cost implications for your specific use case.

### Security considerations

Consider implementing additional security measures such as:

- WAF rules to protect your endpoint from common web exploits
- Geo-restrictions to limit access to specific geographic regions
- Custom headers or request signing to add an extra layer of authentication

### Monitoring and logging

Enable CloudFront access logs and configure CloudWatch alarms to monitor the health and performance of your custom domain setup.

### Certificate renewal

ACM certificates issued through DNS validation are automatically renewed as long as the DNS records remain in place. Ensure that you don't delete the validation records.

## Troubleshooting

### DNS resolution issues

If your custom domain doesn't resolve correctly:

- Verify that the A record is correctly configured in your Route 53 hosted zone
- Check that your domain's name servers are correctly set at your domain registrar
- Allow time for DNS propagation (up to 48 hours in some cases)

### SSL certificate issues

If you encounter SSL certificate errors:

- Verify that the certificate is issued and active in the ACM console
- Check that the certificate is correctly associated with your CloudFront distribution
- Ensure that the certificate covers the exact domain name you're using

## Gateway connectivity issues

If your custom domain doesn't connect to your gateway:

- Verify that the origin domain and path in your CloudFront distribution are correct
- Check that your gateway endpoint is accessible directly
- Review CloudFront distribution logs for any errors

## Conclusion

Setting up a custom domain name for your Gateway endpoint enhances the professional appearance of your application and provides flexibility in managing your API endpoints. By following the steps outlined in this guide, you can create a secure and reliable custom domain configuration using CloudFront as a reverse proxy.

For more information about Gateway features and capabilities, see [AgentCore Gateway: Securely connect to tools and resources](#).

## Performance optimization

To optimize the performance of your Gateway implementations, consider the following best practices:

### Minimize tool latency

The overall latency of your gateway is largely determined by the latency of the underlying tools. To minimize latency:

- Use Lambda functions in the same region as your gateway
- Optimize your Lambda functions for fast cold starts
- Use provisioned concurrency for Lambda functions that require low latency
- Ensure that REST APIs have low latency and high availability

### Use efficient tool schemas

Well-designed tool schemas can improve the performance of your gateway:

- Keep schemas as simple as possible
- Use appropriate data types for parameters
- Include clear descriptions for parameters to help agents use the tools correctly
- Use required fields to ensure that agents provide necessary parameters

## Enable semantic search

Semantic search helps agents find the right tools for their tasks, improving the overall performance of your agent-gateway interactions. Enable semantic search when creating your gateway:

```
from bedrock_agentcore_starter_toolkit.operations.gateway.client import
 GatewayClient

Initialize the Gateway client
gateway_client = GatewayClient(region_name="us-west-2")

Create a gateway with semantic search enabled
gateway = gateway_client.create_gateway(
 name="semantic-search-gateway",
 description="A gateway with semantic search enabled",
 protocol_configuration={
 "mcp": {
 "search_type": "SEMANTIC"
 }
 }
)
```

## Monitor and optimize

Use the observability features described in the previous section to monitor the performance of your gateway and identify opportunities for optimization:

- Set up CloudWatch alarms for key metrics
- Analyze logs to identify patterns and issues
- Regularly review performance metrics and make adjustments as needed

# Provide identity and credential management for agent applications with Amazon Bedrock AgentCore Identity

Amazon Bedrock AgentCore Identity is an identity and credential management service designed specifically for AI agents and automated workloads. It provides secure authentication, authorization, and credential management capabilities that enable agents and tools to access AWS resources and third-party services on behalf of users while helping to maintain strict security controls and audit trails. Agent identities are implemented as workload identities with specialized attributes that enable agent-specific capabilities while helping to maintain compatibility with industry-standard workload identity patterns. The service integrates natively with Amazon Bedrock AgentCore to provide identity and credential management for agent applications, including [Host agent or tools with Amazon Bedrock AgentCore Runtime](#) and [Amazon Bedrock AgentCore Gateway: Securely connect tools and other resources to your Gateway](#).

## Topics

- [Overview of Amazon Bedrock AgentCore Identity](#)
- [Get started with AgentCore Identity](#)
- [Using the AgentCore Identity console](#)
- [Manage workload identities with AgentCore Identity](#)
- [Manage credential providers with AgentCore Identity](#)
- [Provider setup and configuration](#)
- [Data protection in Amazon Bedrock AgentCore Identity](#)
- [Tagging AgentCore Identity resources](#)

## Overview of Amazon Bedrock AgentCore Identity

In the rapidly evolving landscape of AI agents, organizations need robust identity management solutions that can handle the unique challenges associated with non-human identities. Amazon Bedrock AgentCore Identity addresses these challenges by providing a centralized capability for managing agent identities, securing credentials, and enabling seamless integration with AWS and third-party services through Sigv4, standardized OAuth 2.0 flows, and API keys.

The service implements authentication and authorization controls that verify each request independently, requiring explicit verification for all access attempts regardless of source. It

integrates seamlessly with AWS services while also enabling agents to securely access external tools and services. Whether you're building simple automation scripts or complex multi-agent systems, AgentCore Identity provides the identity foundation to help your applications operate securely and efficiently.

## Topics

- [Features of AgentCore Identity](#)
- [AgentCore Identity terminology](#)
- [Example use cases](#)

## Features of AgentCore Identity

AgentCore Identity offers a set of features designed to address the unique challenges of workload identity management and credential security:

## Topics

- [Centralized agent identity management](#)
- [Secure credential storage](#)
- [OAuth 2.0 flow support](#)
- [Agent identity and access controls](#)
- [AgentCore SDK Integration](#)
- [Request verification security](#)

## Centralized agent identity management

Create, manage, and organize agent and workload identities through a unified directory service that acts as the single source of truth for all agent identities within your organization. Each agent receives a unique identity with associated metadata (such as name, ARN, OAuth return URLs, created time, last updated time) that can be managed centrally across your organization. The agent identity directory functions similarly to [Cognito User Pools](#), providing a unit of governance that allows administrators to configure policies across a common set of agent identities. Agent identities are managed as specialized workload identities with agent-specific attributes and capabilities. For detailed procedures on creating and managing agent identities, see [Manage workload identities with AgentCore Identity](#).

The centralized approach eliminates the complexity of managing agent identities across different environments and systems. Whether your agents run on AgentCore Runtime, self-hosted environments, or hybrid deployments, the service provides consistent identity management regardless of where your agents are deployed. Each agent identity receives a unique ARN (such as `arn:aws:bedrock-agentcore:region:account:workload-identity/directory/default/workload-identity/agent-name`) that enables precise access control and resource management. This centralization also enables hierarchical organization and group-based access controls, making it easier to implement enterprise-wide governance policies and maintain compliance across all agent operations. The hierarchical structure in the ARN path (with directory/default/workload-identity/agent-name components) allows administrators to organize agents logically and apply policies at different levels of the hierarchy—for example, targeting all agents within a specific directory or with similar attributes—without having to manage each agent identity individually.

## Secure credential storage

The token vault provides security for storing OAuth 2.0 tokens, OAuth client credentials, and API keys with comprehensive encryption at rest and in transit. All credentials are encrypted using either customer-managed or service-managed AWS KMS keys and access-controlled to prevent unauthorized retrieval. The vault implements strict access controls, ensuring that credentials can only be accessed by authorized agents for specific purposes and only when they present verifiable proof of workload identity.

Building on OAuth 2.0's scope-based security model, the token vault implements additional security measures where every access request is validated independently, even from callers within the same trust domain. This extra security mechanism is necessary to protect end-user data from malicious or misbehaving agent code. The vault securely stores OAuth 2.0 tokens, reducing security risks while improving your overall security posture.

## OAuth 2.0 flow support

Native support for both OAuth 2.0 client credentials grant (machine-to-machine) and OAuth 2.0 authorization code grant (user-delegated access) flows enables comprehensive authentication patterns for different use cases. The service handles the complexity of OAuth 2.0 implementations while providing simple APIs for agents to access AWS resources and third-party services. For 2LO flows, agents can authenticate themselves directly with resource servers without user interaction, while 3LO flows enable explicit user consent and authorization for accessing user-specific data from external services.

The service also provides built-in OAuth 2.0 credential providers for popular services such as Google, GitHub, Slack, Salesforce, and Atlassian (Jira), with authorization server endpoints and provider-specific parameters pre-filled to reduce development effort. For custom integrations, the service supports configurable OAuth 2.0 credential providers that can be tailored to work with any OAuth 2.0-compatible resource server. This comprehensive OAuth 2.0 support eliminates the heavy-lifting of agent developers implementing complex authorization flows and reduces the risk of security vulnerabilities in custom implementations. For comprehensive information about configuring these providers, see [Configure credential provider](#).

## Agent identity and access controls

AgentCore Identity supports impersonation flow where agents can access resources using credentials provided to them. This approach enables agents to perform actions on behalf of users while maintaining audit trails and access controls. The impersonation process allows agents to use provided credentials to access resources, with authorization decisions based on those credentials.

## AgentCore SDK Integration

Seamless integration with the AgentCore SDK through declarative annotations like `@requires_access_token` and `@requires_api_key` automatically handles credential retrieval and injection, reducing boilerplate code and potential security vulnerabilities. These annotations eliminate the need for developers to implement complex OAuth flows manually, instead providing a simple declarative interface that abstracts away the underlying complexity of token management and credential handling.

The SDK integration also provides automatic error handling for common scenarios such as token expiration and user consent requirements. When tokens expire or user consent is needed, the SDK automatically generates appropriate authorization URLs and handles the OAuth flow orchestration, presenting developers with simple success or failure responses. This integration significantly reduces development time and the likelihood of security vulnerabilities while ensuring that all credential operations follow security best practices.

## Request verification security

The service implements validation of all requests, including token signature verification, expiration checks, and scope validation.

By treating every request as requiring verification and requiring explicit proof of authorization, the service implements security validation for each request. All operations are logged with detailed context for security monitoring and compliance reporting, providing visibility into agent activities.

These features combine to provide significant benefits for organizations deploying AI agents:

- **Reduced Security Risk:** Centralized credential management eliminates the need to embed secrets in agent code or configuration files.
- **Simplified Development:** Declarative APIs and SDK integration reduce the complexity of implementing secure authentication in agent applications.
- **Enhanced Compliance:** Comprehensive audit trails and access controls support regulatory compliance requirements.
- **Operational Efficiency:** Automated credential refresh reduces operational overhead while improving security posture.

## AgentCore Identity terminology

AgentCore Identity uses specific terminology to describe the components, processes, and relationships involved in workload identity management and credential handling. Understanding these terms will help you better comprehend how the service orchestrates secure authentication and authorization across multiple parties in agent workflows.

### AgentCore Identity terminology definitions

Term	Definition
<b>Identity and Authentication</b>	
Agent	An AI-powered application or automated workload that performs tasks on behalf of users by accessing AWS resources and third-party services. Agents act with pre-authorized user consent, to accomplish user goals, such as retrieving data from APIs, processing information, or integrating with third-party systems. Unlike traditional applications that run with static credentials, agents require dynamic identity management to securely access resources across multiple trust domains while maintaining proper authentication and authorization boundaries.
Agent identity	A unique identifier and associated metadata for an AI agent or automated workload. Agent identities are implemented as workload identities with specific attributes that identify

Term	Definition
	them as agents, enabling specialized agent capabilities while maintaining compatibility with broader workload identity standards. Agent identities enable agents to authenticate as themselves rather than impersonating users, supporting delegation-based access patterns.
Agent identity directory	A centralized registry that manages agent identities and their associated metadata and access policies. Similar to Cognito User Pools, it acts as a unit of governance for organizing agent identities within an account or region.

Workload identity	The underlying technical implementation for agent identities, representing a logical application or workload that is independent of specific hardware or infrastructure. Workload identities can operate across different environments while maintaining consistent authentication. Agent identities are a specialized type of workload identity with additional agent-specific attributes and capabilities.
-------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Integration and Protocols

Cross-service agents	AI agents that perform actions across multiple services, which may include accessing system resources (using machine-to-machine authentication) or user-specific data (using user-delegated access). Examples include agents that integrate with multiple backend systems for data processing or agents that access a user's calendar, email, and document storage. These agents require sophisticated identity management to operate securely across different trust domains.
MCP client	A client component that allows agents to communicate with MCP servers to access external tools and resources. MCP clients present authentication tokens to access MCP tools securely.

Term	Definition
MCP server	An intermediate server that hosts tools and resources for MCP clients. MCP servers act as OAuth 2.0 resource servers when accessed by agents and as OAuth 2.0 clients when accessing downstream resources.
Model context protocol (MCP)	MCP is an open protocol that standardizes how applications provide context to language models. AgentCore Identity is MCP-compliant, supporting standard protocols for agent-to-tool communication and enabling secure integration with MCP servers and tools.
<b>OAuth and Token Management</b>	
OAuth 2.0	An industry-standard authorization framework (defined in <a href="#">RFC 6749</a> ) that enables applications to obtain limited access to user accounts on external services without exposing user credentials. OAuth 2.0 provides secure delegation by allowing users to grant third-party applications access to their resources through access tokens rather than sharing passwords. For agent applications, OAuth 2.0 enables secure access to user data across multiple services while maintaining proper authentication boundaries and user consent mechanisms.
OAuth 2.0 authorizer	An SDK component that authenticates and authorizes incoming OAuth 2.0 API requests to agent endpoints. It validates tokens before allowing access to agent services.
OAuth 2.0 client credentials grant (2LO)	OAuth client credentials grant used for machine-to-machine authentication where no user interaction is required. Agents use 2LO to authenticate themselves directly with resource servers.
OAuth 2.0 authorization code grant (3LO)	OAuth authorization code grant that involves user consent and interaction. Agents use 3LO when they need explicit user permission to access user-specific data from external services like Google Calendar or Salesforce.

Term	Definition
Agent access token	An AWS-signed token that contains both workload identity and user identity information, enabling downstream services to make authorization decisions based on both identities. These tokens are created through the token exchange process.
<b>Security and Trust</b>	
Identity propagation	The process of maintaining and passing identity context through a chain of service calls. This enables downstream services to make authorization decisions based on both the calling service identity and the original user identity.
Trust domain	A security boundary within which entities share common authentication and authorization mechanisms. Agent workflows often span multiple trust domains, requiring careful identity propagation and token exchange.
Request verification security	A security model where every request is authenticated and authorized regardless of source or previous trust relationships. AgentCore Identity implements request verification to ensure validation of all access requests.
<b>Service Components</b>	
Resource credential provider	A component that manages connections to external identity providers and resource servers, handling OAuth 2.0 authorization flows and credential retrieval. It orchestrates the complex process of obtaining and refreshing credentials from third-party services. For detailed configuration information, see <a href="#">Configure credential provider</a> .
Token vault	A secure storage system for OAuth 2.0 tokens, API keys, and other credentials that operates with strict access controls. The token vault ensures credentials can only be accessed by the specific agent and user combination that originally obtained them.

## Example use cases

Amazon Bedrock AgentCore Identity supports a wide range of use cases across different industries and application types. This section provides detailed examples of how the service can be applied in specific scenarios, demonstrating both user-delegated access (OAuth 2.0 authorization code grant) and machine-to-machine authentication (OAuth 2.0 client credentials grant) patterns.

### Topics

- [Personal assistant agents](#)
- [Enterprise automation agents](#)
- [Customer service agents](#)
- [Data processing and analytics agents](#)
- [Development and DevOps agents](#)

### Personal assistant agents

AI agents that help users manage their personal productivity by accessing services like Google Drive, Microsoft Office 365, or Slack represent one of the most common and valuable applications of AgentCore Identity. These agents use OAuth 2.0 authorization code grant to obtain explicit user consent (3Lo) and access user data securely across multiple systems. For example, a research agent might search the web using AgentCore Browser, generate a comprehensive report, and save it to the user's Google Drive, all while maintaining proper authentication and authorization throughout the entire workflow.

The complexity of managing credentials across multiple third-party services makes AgentCore Identity particularly valuable for personal assistant scenarios. Consider a meeting agent that needs to access a user's Google Calendar to check availability, join a Zoom meeting to take notes, schedule follow-up meetings, and draft emails for approval. Each of these services requires different authentication mechanisms and user consent, but AgentCore Identity orchestrates the entire process seamlessly while the agent maintains its own identity and the user retains control over what data is accessed.

Personal assistant agents also benefit from AgentCore Identity's token storage and secure credential management, which eliminate the need for users to repeatedly authorize access to their accounts. Once a user has granted permission for an agent to access their Google Drive, for instance, the agent can continue to access that service for subsequent tasks without requiring re-

authorization, as long as the stored tokens remain valid. This creates a smooth user experience while maintaining security through proper token management.

## Enterprise automation agents

Agents that automate business processes by integrating with enterprise systems like Salesforce, SharePoint, or internal APIs represent a critical use case for organizations seeking to improve operational efficiency. These agents typically use OAuth 2.0 client credentials grant for machine-to-machine authentication (2Lo) when accessing systems that don't require user interaction, and may require access to multiple systems with different authentication requirements. For example, an HR automation agent might need to access employee data from an HRIS system, update records in Salesforce, and generate reports in SharePoint, each requiring different credentials and authorization scopes.

Enterprise automation scenarios often involve complex workflows that span multiple trust domains and require careful identity propagation to maintain security and compliance. AgentCore Identity addresses this challenge by providing a centralized approach to credential management that works across different enterprise systems. The service supports both AWS-hosted resources with IAM-based authentication and external enterprise systems with OAuth 2.0 or API key authentication, enabling agents to operate seamlessly across hybrid environments while helping to maintain consistent security standards.

The audit and compliance capabilities of AgentCore Identity are particularly important for enterprise automation use cases, where organizations need to maintain detailed records of automated actions for regulatory compliance and security monitoring. Every action performed by an enterprise automation agent is logged with both the agent identity and any associated user context, providing complete traceability of automated business processes. This level of visibility helps with compliance requirements and enables organizations to quickly identify and respond to any unauthorized or unexpected agent behavior.

## Customer service agents

AI agents that assist customer service representatives by accessing customer data from CRM systems, knowledge bases, and support ticketing systems must authenticate securely while providing real-time assistance during customer interactions. These agents need to access sensitive customer information from multiple sources while maintaining strict security controls and audit trails. For example, a customer service agent might need to access a customer's order history from an e-commerce platform, check their support ticket status in a ticketing system, and retrieve

relevant troubleshooting information from a knowledge base, all while the customer is on the phone.

The real-time nature of customer service interactions makes credential management particularly challenging, as agents cannot afford delays caused by authentication failures or expired tokens. AgentCore Identity addresses this challenge through its comprehensive error handling, ensuring that customer service agents can access the information they need without interruption. The service also supports fine-grained access controls that can be configured to have agents only access customer data that is relevant to the specific interaction, supporting privacy requirements and regulatory compliance.

## Data processing and analytics agents

Agents that collect, process, and analyze data from multiple sources, including cloud storage services, databases, and APIs, often require long-running access to data sources. These agents typically operate on scheduled or triggered workflows that may run for hours or days, accessing large datasets from various sources to perform complex analytics operations. For example, a financial analytics agent might collect transaction data from multiple payment processors, combine it with customer data from CRM systems, and generate comprehensive reports that are stored in data warehouses and shared with business stakeholders.

The long-running nature of data processing workflows makes credential management particularly complex, as tokens may expire during processing and agents need to handle authentication failures gracefully without losing progress on lengthy operations. AgentCore Identity addresses these challenges through its robust error handling, helping data processing agents maintain access to required resources throughout their entire execution lifecycle. The service also supports batch processing scenarios where agents need to access multiple data sources simultaneously, providing efficient credential management that scales with the complexity of the data processing workflow.

Data processing and analytics use cases also benefit from AgentCore Identity's support for different authentication mechanisms across various data sources. A single analytics workflow might need to access data from AWS services using IAM credentials, third-party APIs using OAuth 2.0 tokens, and on-premise databases using API keys or other authentication methods. AgentCore Identity provides a unified interface for managing all these different credential types, enabling data processing agents to focus on their core analytics functions rather than the complexity of credential management across diverse systems.

## Development and DevOps agents

Agents that automate software development workflows by integrating with version control systems, CI/CD pipelines, and deployment systems require secure access to development tools and infrastructure while maintaining comprehensive audit trails for compliance purposes. These agents might automatically create pull requests, trigger builds, deploy applications, and update documentation across multiple development tools and systems. For example, a DevOps agent might monitor application performance, detect issues, automatically create bug reports in JIRA, generate fixes through code analysis, and deploy patches through CI/CD pipelines, all while maintaining proper authentication and authorization throughout the entire workflow.

Development and DevOps scenarios present unique security challenges because agents often need elevated privileges to perform deployment and infrastructure management tasks, while also needing to maintain strict controls to prevent unauthorized changes to production systems. AgentCore Identity addresses these challenges through its fine-grained access control capabilities and comprehensive audit logging, ensuring that DevOps agents can perform necessary automation tasks while supporting security and compliance. The service supports role-based access controls that can be configured to limit agent access to specific environments, repositories, or deployment targets based on the agent's identity and the context of the operation.

The audit and compliance capabilities of AgentCore Identity are particularly valuable for development and DevOps use cases, where organizations need to maintain detailed records of all changes to code, infrastructure, and deployment configurations. Every action performed by a DevOps agent is logged with complete context, including the agent identity, the specific resources accessed, and the changes made, providing the level of traceability that supports regulatory compliance and security auditing. This comprehensive logging also enables organizations to quickly identify the root cause of issues and roll back changes when necessary, supporting the reliability and stability of development and deployment processes.

## Get started with AgentCore Identity

If you're building AI agents that need to access external services like Google Drive, Slack, or GitHub, Amazon Bedrock AgentCore Identity provides the secure authentication infrastructure you need. This section offers two practical getting started tutorials that demonstrate how to implement identity features in your agents. Depending on your specific business needs, you can start with a complete end-to-end agent deployment, or focus on OAuth2 integration patterns with Google Drive to understand the core authentication flows.

## Primary getting started tutorial

Start here for a complete end-to-end walkthrough of AgentCore Identity features:

### [Build your first authenticated agent](#)

**Recommended starting point** for new users

**What you'll build:** A complete working agent with authentication, deployed to AgentCore Runtime

**What you'll learn:** Create Cognito user pools, configure credential providers, deploy agents, set up IAM policies, and test authentication flows

**Outcome:** Fully deployed agent that can authenticate users and obtain access tokens

## OAuth2 integration getting started tutorial

After completing the primary tutorial, explore OAuth2 patterns with external services:

### [Integrate with Google Drive using OAuth2](#)

**Focus:** OAuth2 flows and Google Drive integration

**What you'll learn:** Set up OAuth2 credential providers, obtain access tokens, and integrate with Google services

**Best for:** Understanding OAuth2 authentication patterns with real external services

## Common prerequisites

Both tutorials require the following:

- An AWS account with appropriate permissions
- Basic familiarity with Python programming
- Understanding of OAuth2 concepts (recommended)

Each tutorial includes specific setup instructions and additional prerequisites as needed.

## Topics

- [Build your first authenticated agent](#)
- [Integrate with Google Drive using OAuth2](#)

# Build your first authenticated agent

This getting started tutorial walks you through building a complete authenticated agent from the ground up using Amazon Bedrock AgentCore Identity and will help you get started with implementing identity features in your agent applications. You'll learn how to set up your development environment, create authentication infrastructure with Cognito, deploy your agent to AgentCore Runtime, and test the full authentication workflow.

By the end of this tutorial, you'll have a fully deployed agent that can authenticate users through OAuth2 flows, obtain access tokens securely, and demonstrate the complete identity management lifecycle. Your agent will be running on AgentCore Runtime with proper IAM permissions, creating a test lab environment where you can demonstrate and test the integration capabilities.

## Topics

- [Prerequisites](#)
- [Step 1: Create a Cognito user pool \(Optional\)](#)
- [Step 2: Create a credential provider](#)
- [Step 3: Create a sample agent that initiates an OAuth 2.0 flow](#)
- [Step 4: Deploy the agent to AgentCore Runtime](#)
- [Step 5: Invoke the agent](#)
- [Clean up](#)
- [Security best practices](#)

## Prerequisites

Before you begin, ensure you have:

- An AWS account with appropriate permissions
- Python 3.10+ installed
- The latest AWS CLI installed

- AWS credentials and region configured (`aws configure`)

This tutorial requires that you have an OAuth 2.0 authorization server. If you do not have one, Step 1 will create one for you using Amazon Cognito user pools. If you have an OAuth 2.0 authorization server with a client id, client secret, and a user configured, you may proceed to step 2. This authorization server will act as a resource credential provider, representing the authority that grants the agent an outbound OAuth 2.0 access token.

## Install the SDK and dependencies

Make a folder for this guide, create a Python virtual environment, and install the AgentCore SDK and the AWS Python SDK (`boto3`).

```
mkdir agentcore-identity-quickstart
cd agentcore-identity-quickstart
python3 -m venv .venv
source .venv/bin/activate
pip install bedrock-agentcore boto3 strands-agents bedrock-agentcore-starter-toolkit
pyjwt
```

Also create the `requirements.txt` file with the following content. This will be used later by the AgentCore deployment tool.

```
bedrock-agentcore
boto3
pyjwt
strands-agents
bedrock-agentcore-starter-toolkit
```

## Step 1: Create a Cognito user pool (Optional)

This tutorial requires an OAuth 2.0 authorization server. If you do not have one available for testing, or if you want to keep your test separate from your authorization server, this script will use your AWS credentials to set up an Amazon Cognito instance for you to use as an authorization server. The script will create:

- A Cognito user pool
- An OAuth 2.0 client, and client secret for that user pool
- A test user and password in that Cognito user pool

Deleting the Cognito user pool AgentCoreIdentityQuickStartPool will delete the associated client\_id and user as well.

You may choose to save this script as `create_cognito.sh` and execute it from your command line, or paste the script into your command line.

```
#!/bin/bash

REGION=$(aws configure get region)

Create user pool
USER_POOL_ID=$(aws cognito-idp create-user-pool \
--pool-name AgentCoreIdentityQuickStartPool \
--query 'UserPool.Id' \
--no-cli-pager \
--output text)

Create user pool domain
DOMAIN_NAME="agentcore-quickstart-$(LC_ALL=C tr -dc 'a-z0-9' < /dev/urandom | head -c
5)"
aws cognito-idp create-user-pool-domain \
--domain $DOMAIN_NAME \
--no-cli-pager \
--user-pool-id $USER_POOL_ID > /dev/null

Create user pool client with secret and hosted UI settings
CLIENT_RESPONSE=$(aws cognito-idp create-user-pool-client \
--user-pool-id $USER_POOL_ID \
--client-name AgentCoreQuickStart \
--generate-secret \
--callback-urls "https://bedrock-agentcore.$region.amazonaws.com/identities/oauth2/
callback" \
--allowed-o-auth-flows "code" \
--allowed-o-auth-scopes "openid" "profile" "email" \
--allowed-o-auth-flows-user-pool-client \
--supported-identity-providers "COGNITO" \
--query 'UserPoolClient.{ClientId:ClientId,ClientSecret:ClientSecret}' \
--output json)

CLIENT_ID=$(echo $CLIENT_RESPONSE | jq -r '.ClientId')
CLIENT_SECRET=$(echo $CLIENT_RESPONSE | jq -r '.ClientSecret')

Generate random username and password
```

```
USERNAME="AgentCoreTestUser$(printf "%04d" $((RANDOM % 10000)))"
PASSWORD=$(LC_ALL=C tr -dc 'A-Za-z0-9!@#$%^&*()_+=[]{}|;:,.<>?' < /dev/urandom | head -c 16)"

Create user with permanent password
aws cognito-idp admin-create-user \
--user-pool-id $USER_POOL_ID \
--username $USERNAME \
--output text > /dev/null

aws cognito-idp admin-set-user-password \
--user-pool-id $USER_POOL_ID \
--username $USERNAME \
--password $PASSWORD \
--output text > /dev/null \
--permanent

Get region

ISSUER_URL="https://cognito-idp.region.amazonaws.com/$USER_POOL_ID/.well-known/openid-configuration"
HOSTED_UI_URL="https://$DOMAIN_NAME.auth.region.amazoncognito.com"

Output results
echo "User Pool ID: $USER_POOL_ID"
echo "Client ID: $CLIENT_ID"
echo "Client Secret: $CLIENT_SECRET"
echo "Issuer URL: $ISSUER_URL"
echo "Hosted UI URL: $HOSTED_UI_URL"
echo "Test User: $USERNAME"
echo "Test Password: $PASSWORD"

echo ""
echo "# Copy and paste these exports to set environment variables for later use:"
echo "export USER_POOL_ID='$USER_POOL_ID'"
echo "export CLIENT_ID='$CLIENT_ID'"
echo "export CLIENT_SECRET='$CLIENT_SECRET'"
echo "export ISSUER_URL='$ISSUER_URL'"
echo "export HOSTED_UI_URL='$HOSTED_UI_URL'"
echo "export COGNITO_USERNAME='$USERNAME'"
echo "export COGNITO_PASSWORD='$PASSWORD'"
```

## Step 2: Create a credential provider

Credential providers are how your agent accesses external services. Create a credential provider and configure it with an OAuth 2.0 client for your authorization server.

If you are using your own authorization server, set the environment variables ISSUER\_URL, CLIENT\_ID, and CLIENT\_SECRET with their appropriate values from your authorization server. If you are using the previous script to create an authorization server for you with Cognito, copy the EXPORT statements from the output into your terminal to set the environment variables.

This credential provider will be used by your agent's code to get access tokens to act on behalf of your user.

```
#!/bin/bash
please note the expected ISSUER_URL format for Bedrock AgentCore is the full url,
including .well-known/openid-configuration
aws bedrock-agentcore-control create-oauth2-credential-provider \
--name "AgentCoreIdentityQuickStartProvider" \
--credential-provider-vendor "CustomOauth2" \
--no-cli-pager \
--oauth2-provider-config-input '{
 "customOauth2ProviderConfig": {
 "oauthDiscovery": {
 "discoveryUrl": "'$ISSUER_URL'"
 },
 "clientId": "'$CLIENT_ID'",
 "clientSecret": "'$CLIENT_SECRET'"
 }
}'
```

## Step 3: Create a sample agent that initiates an OAuth 2.0 flow

In this step, we will create an agent that initiates an OAuth 2.0 authorization flow to get tokens to act on behalf of the user. For simplicity, the agent will not make actual calls to external services on behalf of a user, but will prove to us that it has obtained consent to act on behalf of our test user.

### Agent code

Create a file named `agentcoreidentityquickstart.py`, and save this code.

```
"""
AgentCore Identity Outbound Token Agent
```

This agent demonstrates the USER\_FEDERATION OAuth 2.0 flow.

It handles the OAuth 2.0 user consent flow and inspects the resulting OAuth 2.0 access token.

"""

```
from bedrock_agentcore.runtime import BedrockAgentCoreApp
from bedrock_agentcore.identity import requires_access_token
import asyncio
import jwt
import logging

app = BedrockAgentCoreApp()

logging.basicConfig(level=logging.INFO)
logger = logging.getLogger(__name__)

def decode_jwt(token):
 try:
 decoded = jwt.decode(token, options={"verify_signature": False})
 return decoded
 except Exception as e:
 return {"error": f"Error decoding JWT: {str(e)}"}

class StreamingQueue:
 def __init__(self):
 self.finished = False
 self.queue = asyncio.Queue()

 async def put(self, item):
 await self.queue.put(item)

 async def finish(self):
 self.finished = True
 await self.queue.put(None)

 async def stream(self):
 while True:
 item = await self.queue.get()
 if item is None and self.finished:
 break
 yield item
```

```
queue = StreamingQueue()

async def handle_auth_url(url):
 await queue.put(f"Authorization URL, please copy to your preferred browser: {url}")

@requires_access_token(
 provider_name="AgentCoreIdentityQuickStartProvider",
 scopes=["openid"],
 auth_flow="USER_FEDERATION",
 on_auth_url=handle_auth_url, # streams authorization URL to client
 force_authentication=True
)
async def introspect_with_decorator(*, access_token: str):
 """Introspect token using decorator"""
 logger.info("Inside introspect_with_decorator - decorator succeeded")
 await queue.put({
 "message": "Successfully received an access token to act on behalf of your user!",
 "token_claims": decode_jwt(access_token),
 "token_length": len(access_token),
 "token_preview": f"{access_token[:50]}...{access_token[-10:]}"
 })
 await queue.finish()

@app.entrypoint
async def agent_invocation(payload, context):
 """Handler that uses only the decorator approach"""
 logger.info("Agent invocation started")

 # Start the agent task and immediately begin streaming
 task = asyncio.create_task(introspect_with_decorator())

 # Stream items as they come in
 async for item in queue.stream():
 yield item

 # Wait for task completion
 await task

if __name__ == "__main__":
 app.run()
```

## Step 4: Deploy the agent to AgentCore Runtime

We will host this agent on AgentCore Runtime. We can do this easily with the AgentCore SDK we installed earlier.

From your terminal, run `agentcore configure -e agentcoreidentityquickstart.py` and `agentcore launch`. The deployment will work with the defaults set by `agentcore configure`, but you may customize them. Ensure that you select "No" for the `Configure OAuth authorizer` instead step. We want to use IAM authorization for this guide.

### Update the IAM policy of the agent to be able to access the token vault, and client secret

You will need to update the IAM policy of your agent that was created by or used with `agentcore configure`. This script will read your agent's configuration YAML and append the appropriate policy. You can copy and paste this script, or save it to a file and execute it.

```
#!/bin/bash

Parse values from .bedrock_agentcore.yaml
EXECUTION_ROLE=$(grep "execution_role:" .bedrock_agentcore.yaml | head -1 | awk '{print $2}')
AWS_ACCOUNT=$(grep "account:" .bedrock_agentcore.yaml | head -1 | awk '{print $2}' | tr -d "'")
REGION=$(grep "region:" .bedrock_agentcore.yaml | awk '{print $2}')

echo "Parsed values:"
echo "Execution Role: $EXECUTION_ROLE"
echo "Account: $AWS_ACCOUNT"
echo "Region: $REGION"

Create the policy document with proper variable substitution
cat > agentcore-identity-policy.json << EOF
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "AccessTokenVault",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetResourceOauth2Token",
 "secretsmanager:GetSecretValue"
],
 },
]
}
```

```
"Resource": ["arn:aws:bedrock-agentcore:region:account-id:workload-identity-directory/default/workload-identity/*",
 "arn:aws:bedrock-agentcore:region:account-id:token-vault/default/
oauth2credentialprovider/AgentCoreIdentityQuickStartProvider",
 "arn:aws:bedrock-agentcore:region:account-id:workload-identity-directory/
default",
 "arn:aws:bedrock-agentcore:region:account-id:token-vault/default",
 "arn:aws:secretsmanager:region:account-id:secret:bedrock-agentcore-identity!
default/oauth2/AgentCoreIdentityQuickStartProvider"
]
}
]
}
EOF

Create the policy
POLICY_ARN=$(aws iam create-policy \
--policy-name AgentCoreIdentityQuickStartPolicy$(LC_ALL=C tr -dc '0-9' < /dev/
urandom | head -c 4) \
--policy-document file://agentcore-identity-policy.json \
--query 'Policy.Arn' \
--output text)

Extract role name from ARN and attach policy
ROLE_NAME=$(echo $EXECUTION_ROLE | awk -F'/' '{print $NF}')
aws iam attach-role-policy \
--role-name $ROLE_NAME \
--policy-arn $POLICY_ARN

echo "Policy created and attached: $POLICY_ARN"

Cleanup
rm agentcore-identity-policy.json
```

## Step 5: Invoke the agent

Now that this is all set up, you can invoke the agent. For this demo, we will use the `agentcore invoke` command and our IAM credentials. We will need to pass the `--user-id` and `--session-id` arguments when using IAM authentication.

```
agentcore invoke "TestPayload" --agent agentcoreidentityquickstart --user-id
"SampleUserID" --session-id
"ALongThirtyThreeCharacterMinimumSessionIdYouCanChangeThisAsYouNeed"
```

The agent will then return a URL to your `agentcore invoke` command. Copy and paste that URL into your preferred browser, and you will then be redirected to your authorization server's login page. The `--user-id` parameter is the user ID you are presenting to AgentCore Identity. The `--session-id` parameter is the session ID, which must be at least 33 characters long.

Enter the username and password for your user on your authorization server when prompted on your browser, or use your preferred authentication method you have configured. If you used the script from Step 1 to create a Cognito instance, you can retrieve this from your terminal history.

Your browser should redirect you to the AgentCore Identity Success Page, and you should have a success message in your terminal.

### Note

If you interrupt an invocation without completing authorization, you may need to request a new URL using a new session ID (`--session-id` parameter).

## Debugging

Should you encounter any errors or unexpected behaviors, the output of the agent is captured in Amazon CloudWatch logs. A log tailing command is provided after you run `agentcore launch`.

## Clean up

After you're done, you can delete the Amazon Cognito user pool, Amazon Elastic Container Registry repo, CodeBuild Project, IAM roles for the agent and CodeBuild project, and finally delete the agent, and credential provider.

## Security best practices

When working with identity information:

- 1. Never hardcode credentials in your agent code**
- 2. Use environment variables or Amazon SageMaker AI for sensitive information**
- 3. Apply least privilege principle when configuring IAM permissions**

4. **Regularly rotate credentials** for external services
5. **Audit access logs** to monitor agent activity
6. **Implement proper error handling** for authentication failures

## Integrate with Google Drive using OAuth2

This getting started tutorial walks you through the essential steps to start using Amazon Bedrock AgentCore Identity for your AI agents. You'll learn how to set up your development environment, install the necessary SDKs, create your first agent identity, and allow your agent to access external resources securely.

By the end of this tutorial, you'll have a working agent that can retrieve access tokens from Google with AgentCore Identity OAuth2 Credential Provider, and read files from Google Drive using access tokens. For detailed information about OAuth2 flows, see [Manage credential providers with AgentCore Identity](#).

### Topics

- [Prerequisites](#)
- [Step 1: Import Identity and Auth modules](#)
- [Step 2: Set up an OAuth 2.0 Credential Provider](#)
- [Step 3: Obtain an OAuth 2.0 access token](#)
- [Step 4: Use OAuth2 Access Token to Invoke External Resource](#)
- [What's Next?](#)

### Prerequisites

Before you start, you need:

- An AWS account with appropriate permissions (for example, `BedrockAgentCoreFullAccess`)
- Python 3.10 or higher
- Basic understanding of Python programming

### Install the SDK

To get started, install the `bedrock-agentcore` package:

```
pip install bedrock-agentcore
```

## Obtain Google Client ID and Client Secret

To allow your agent to access Google Drive, you need to obtain a Google client ID and client secret for your agent. Go to the [Google Developer Console](#) and follow these steps:

1. Enable Google Drive API
2. Create OAuth consent screen
3. Create a new web application for the agent, for example, "My Agent 1"
4. Add the following OAuth 2.0 scope to your agent application: `https://www.googleapis.com/auth/drive.metadata.readonly`
5. Create OAuth 2.0 Credentials for the new web application, and note the generated Google client ID and client secret

 **Note**

You must add the following URI to your application's redirect URI list: `https://bedrock-agentcore.us-east-1.amazonaws.com/identities/oauth2/callback`

## Step 1: Import Identity and Auth modules

Add this import statement to your Python file:

```
from bedrock_agentcore.services.identity import IdentityClient
from bedrock_agentcore.identity.auth import requires_access_token, requires_api_key
```

## Step 2: Set up an OAuth 2.0 Credential Provider

Create a new OAuth 2.0 Credential Provider with the Google client ID and client secret obtained earlier using the following AWS CLI command:

```
aws bedrock-agentcore-control create-oauth2-credential-provider \
--region us-east-1 \
--name "google-provider" \
--credential-provider-vendor "GoogleOAuth2" \
--oauth2-provider-config-input '{
```

```
"googleOauth2ProviderConfig": {
 "clientId": "<your-google-client-id>",
 "clientSecret": "<your-google-client-secret>"
}
}'
```

Behind the scenes, the SDK makes a call to the `CreateOauth2CredentialProvider` API.

## Step 3: Obtain an OAuth 2.0 access token

Once you have the Google Credential Provider created in the previous step, add the `@requires_access_token` decorator to your agent code that requires a Google access token. Copy the authorization URL from your console output, then paste it in your browser and complete the consent flow with Google Drive.


The following code sample is intended to be integrated into your agent code to invoke an authorization workflow. This is not standalone code that can be copied and run independently.

```
import asyncio

Injects Google Access Token
@requires_access_token(
 # Uses the same credential provider name created above
 provider_name="google-provider",
 # Requires Google OAuth2 scope to access Google Drive
 scopes=["https://www.googleapis.com/auth/drive.metadata.readonly"],
 # Sets to OAuth 2.0 Authorization Code flow
 auth_flow="USER_FEDERATION",
 # Prints authorization URL to console
 on_auth_url=lambda x: print("\nPlease copy and paste this URL in your browser:\n" +
 x),
 # If false, caches obtained access token
 force_authentication=False,
)
async def write_to_google_drive(*, access_token: str):
 # Prints the access token obtained from Google
 print(access_token)

asyncio.run(write_to_google_drive(access_token=""))
```

Behind the scenes, the `@requires_access_token` decorator runs through the following sequence:

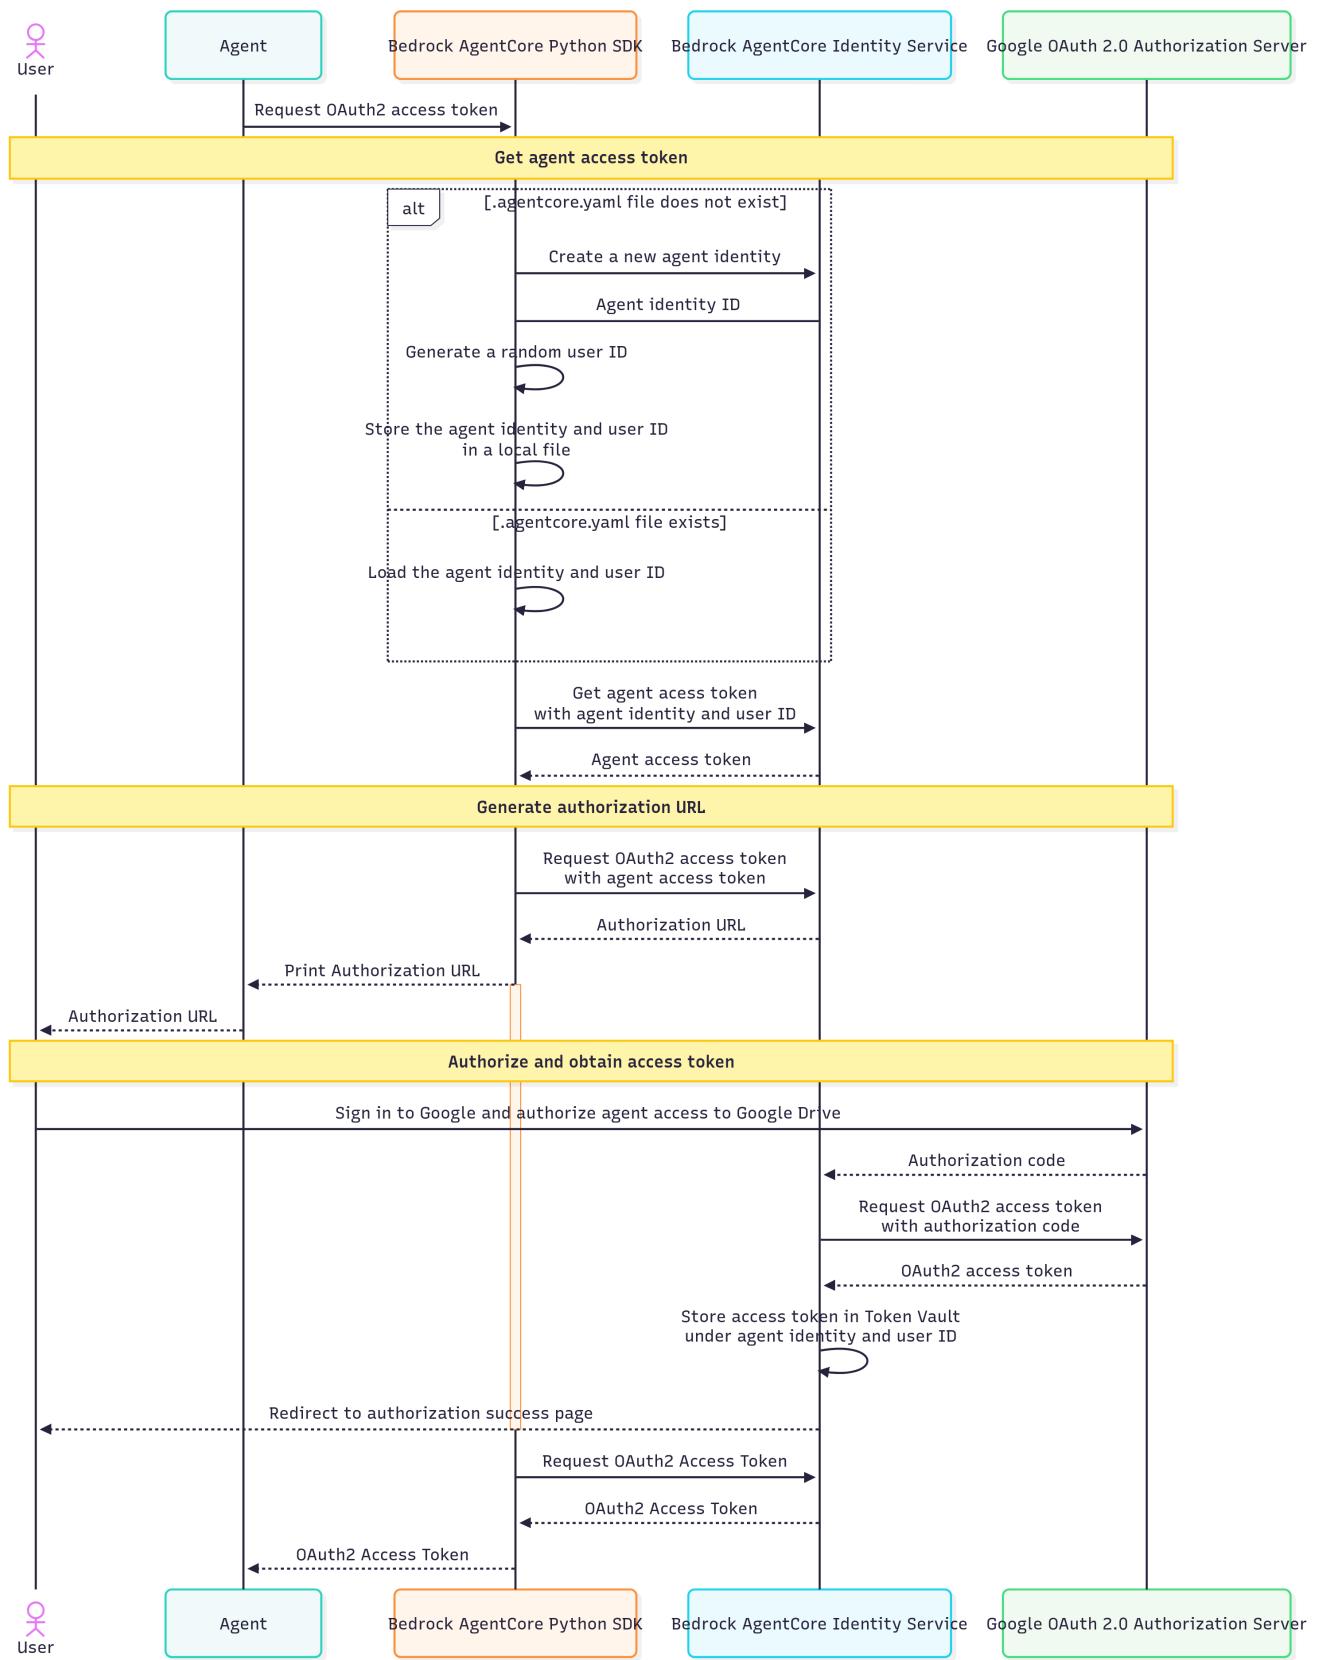

1. The SDK makes API calls to `CreateWorkloadIdentity`, `GetWorkloadAccessToken`, and `GetResourceOauth2Token`.
2. When running the agent code locally, the SDK automatically generates an agent identity ID and a random user ID for local testing, and stores them in a local file called `.agentcore.yaml`.
3. When running the agent code with AgentCore Runtime, the SDK does not generate an agent identity ID or random user ID. Instead, it uses the agent identity ID assigned, and the user ID or JWT token passed in by the agent caller.
4. Agent access token is an encrypted (opaque) token that contains the agent identity ID and user ID.
5. AgentCore Identity service stores the Google access token in the Token Vault under the agent identity ID and user ID. This creates a binding among the agent identity, user identity, and the Google access token.

## Step 4: Use OAuth2 Access Token to Invoke External Resource

Once the agent obtains a Google access token with the steps above, it can use the access token to access Google Drive. Here is a full example that lists the names and IDs of the first 10 files that the user has access to.

First, install the Google client library for Python:

```
pip install --upgrade google-api-python-client google-auth-httplib2 google-auth-oauthlib
```

Then, copy the following code:

```
import asyncio
from bedrock_agentcore.identity.auth import requires_access_token, requires_api_key
from google.auth.transport.requests import Request
from google.oauth2.credentials import Credentials
from google_auth_oauthlib.flow import InstalledAppFlow
from googleapiclient.discovery import build
from googleapiclient.errors import HttpError

SCOPES = ["https://www.googleapis.com/auth/drive.metadata.readonly"]

def main(access_token):
 """Shows basic usage of the Drive v3 API.
 Prints the names and IDs of the first 10 files.
 """
 creds = None
 if os.path.exists('token.json'):
 creds = Credentials.from_authorized_user_file('token.json', SCOPES)
```

```
Prints the names and ids of the first 10 files the user has access to.
"""

creds = Credentials(token=access_token, scopes=SCOPES)

try:
 service = build("drive", "v3", credentials=creds)

 # Call the Drive v3 API
 results = (
 service.files()
 .list(pageSize=10, fields="nextPageToken, files(id, name)")
 .execute()
)
 items = results.get("files", [])

 if not items:
 print("No files found.")
 return

 print("Files:")
 for item in items:
 print(f"{item['name']} ({item['id']})")

except HttpError as error:
 # TODO(developer) - Handle errors from drive API.
 print(f"An error occurred: {error}")

if __name__ == "__main__":
 # This annotation helps agent developer to obtain access tokens from external
 # applications
 @requires_access_token(
 provider_name="google-provider",
 # Google OAuth2 scopes
 scopes=["https://www.googleapis.com/auth/drive.metadata.readonly"],
 # 3LO flow
 auth_flow="USER_FEDERATION",
 # prints authorization URL to console
 on_auth_url=lambda x: print("Copy and paste this authorization url to your
 browser", x),
 force_authentication=True,
)
 async def read_from_google_drive(*, access_token: str):
 print(access_token) # You can see the access_token
 # Make API calls...
```

```
main(access_token)

 asyncio.run(read_from_google_drive(access_token=""))
```

## What's Next?

The example in this section focuses on practical implementation patterns that you can adapt for your specific use cases. You can embed the code as part of an agent, or a Model Context Protocol (MCP) tool. If you want to host your Agent code or MCP Tool with AgentCore Runtime, follow [Host agent or tools with Amazon Bedrock AgentCore Runtime](#) to copy the code above to AgentCore Runtime.

## Using the AgentCore Identity console

The AgentCore Identity console provides a centralized interface for managing your agent authentication configurations. You can use the console to set up outbound identity providers for external service access, configure inbound identity settings for agent authentication, and manage API keys for services that require key-based authentication. This section contains step-by-step procedures for all console-based AgentCore Identity tasks.

### Topics

- [Configure an OAuth client](#)
- [Configure an API key](#)

## Configure an OAuth client

An OAuth client enables your agent to securely access external services on behalf of users without requiring them to share their credentials directly. For example, your agent can access a user's Google Drive files or Microsoft calendar events through OAuth authentication.

### Topics

- [Add OAuth client using included provider](#)
- [Add OAuth client using custom provider](#)
- [Update OAuth client](#)
- [Delete OAuth client](#)

## Add OAuth client using included provider

Built-in providers offer streamlined setup for popular services including Google, GitHub, Slack, and Salesforce. These providers have pre-configured authorization server endpoints and provider-specific parameters to reduce development effort.

### To add an OAuth client using an included provider

1. Open the [AgentCore Identity](#) console.
2. In the **Outbound Auth** section, choose **Add OAuth client / API key**, and then select **Add OAuth client**.
3. For **Name**, you can either use the auto-generated name or enter your own descriptive name to help you identify this OAuth client in your account. Use alphanumeric characters, hyphens, and underscores only, with a maximum length of 50 characters.
4. For **Provider**, choose **Included provider**.
5. Choose your identity provider from the available options (Google, GitHub, Microsoft, Salesforce, or Slack).
6. In the **Provider configurations** section, enter your client credentials:
  - a. For **Client ID**, enter the unique identifier you received when registering your application with the identity provider.
  - b. For **Client secret**, enter the confidential key associated with your client ID. AgentCore Identity securely stores this value for authentication.
7. Choose **Add OAuth Client**.

After creating the OAuth client, AgentCore Identity provides an ARN that you can reference in your agent code to request authentication tokens without embedding sensitive credentials in your application. You can find this ARN in the properties page of the OAuth client (Choose the client name in the **Outbound Auth** section).

## Add OAuth client using custom provider

Custom providers enable you to connect to any OAuth2-compatible resource server beyond the built-in provider options. You can configure custom providers by having the system retrieve configuration details automatically, or by providing the server information manually.

## To add an OAuth client using a custom provider

1. Open the [AgentCore Identity](#) console.
2. In the **Outbound Auth** section, choose **Add OAuth client / API key**, and then select **Add OAuth client**.
3. For **Name**, you can either use the auto-generated name or enter your own descriptive name to help you identify this OAuth client in your account. Use alphanumeric characters, hyphens, and underscores only, with a maximum length of 50 characters.
4. For **Provider**, choose **Custom provider**.
5. In the **Provider configurations** section, depending on your provider requirements, choose one of the following options:
  - a. **Discovery URL** (recommended) – Choose this option to have AgentCore Identity automatically retrieve configuration details from your provider. You provide the discovery URL where your provider publishes its OpenID Connect configuration, and AgentCore Identity handles the endpoint discovery process. This is the recommended approach when available as it reduces manual configuration.
    - i. For **Client ID**, enter the unique identifier you received when registering your application with the identity provider.
    - ii. For **Client secret**, enter the confidential key associated with your client ID that AgentCore Identity securely stores for authentication.
    - iii. For **Discovery URL**, enter the URL where your provider publishes its OpenID Connect configuration. Discovery URLs must end with `.well-known/openid-configuration`. For example, `https://example.com/.well-known/openid-configuration`.
  - b. **Manual config** – Choose this option to specify server information directly when your provider doesn't support automatic discovery. You'll define each endpoint URL individually, giving you complete control over the configuration details.
    - i. For **Client ID**, enter the unique identifier you received when registering your application with the identity provider.
    - ii. For **Client secret**, enter the confidential key associated with your client ID that AgentCore Identity securely stores for authentication.
    - iii. For **Issuer**, enter the base URL that identifies your authorization server. This value appears in the `iss` claim of issued tokens and helps verify token authenticity.

- iv. For **Authorization endpoint**, enter the URL where users will be directed to grant permission to your application. This is the entry point for the OAuth authorization flow.
- v. For **Token endpoint**, enter the URL where your agent exchanges authorization codes for access tokens. This endpoint handles the credential exchange process.
- vi. (Optional) In the **Response types** section, configure how your OAuth client receives authentication responses by choosing **Add response type** and selecting the token formats your provider should return. Common types include code for authorization code flow or token for implicit flow.

## 6. Choose **Add OAuth Client**.

After completing either configuration, AgentCore Identity securely stores your OAuth settings and provides an ARN you can reference in your agent code, enabling token requests without embedding sensitive credentials in your application. You can find this ARN in the properties page of the OAuth client (Choose the client name in the **Outbound Auth** section).

## Update OAuth client

You can modify the configuration settings for your existing OAuth client. For example, you can update your client credentials (Client ID and Client secret) when they've been rotated or changed by your identity provider.

### To update an OAuth client

1. Open the [AgentCore Identity](#) console.
2. In the **Outbound Auth** section, select the OAuth client you want to update.
3. Choose **Edit**.
4. On the **Update OAuth Client** page, update the information as needed.
5. Choose **Update OAuth Client** to save your configuration settings.

The updated OAuth client configuration takes effect immediately and will be used for all subsequent authentication requests made by your agents.

## Delete OAuth client

When you no longer need an OAuth client, you can delete it from your account. Deleting an OAuth client removes the stored configuration and credentials, making them unavailable to your agents. Any invocations that reference the deleted OAuth client will fail once it's removed, and this outbound authentication might be used across multiple runtimes and gateways.

### To delete an OAuth client

1. Open the [AgentCore Identity](#) console.
2. In the **Outbound Auth** section, select the OAuth client you want to delete.
3. Choose **Delete**.
4. In the confirmation dialog, type **Delete** to confirm the deletion.
5. Choose **Delete**.

The OAuth client is permanently removed from your account. Any agents or applications that reference this OAuth client's ARN will no longer be able to access the stored credentials.

## Configure an API key

API keys provide key-based authentication for services that require direct key access with secure storage capabilities. An API key is a unique identifier used to authenticate and authorize access to a resource, enabling your agent to access external services without embedding sensitive credentials directly in your application code.

### Topics

- [Add API key](#)
- [Update API key](#)
- [Delete API key](#)

## Add API key

API keys provide key-based authentication for services that require direct key access with secure storage capabilities. An API key is a unique identifier used to authenticate and authorize access to a resource, enabling your agent to access external services without embedding sensitive credentials directly in your application code.

## To add an API key

1. Open the [AgentCore Identity](#) console.
2. In the **Outbound Auth** section, choose **Add OAuth client / API key**, then choose **Add API key**.
3. For **Name**, you can either use the auto-generated name or enter your own descriptive name to help you identify this API key in your account. Use alphanumeric characters, hyphens, and underscores only, with a maximum length of 50 characters.
4. For **API key**, enter the key value provided by your external service. AgentCore Identity securely stores this value and makes it available to your agent at runtime.
5. Choose **Add**.

After creating the API key, AgentCore Identity provides an ARN that you can reference in your agent code to access the stored key without exposing sensitive information in your application. You can find this ARN in the properties page of the API key (Choose the API key name in the **Outbound Auth** section).

## Update API key

You can update an existing API key to replace the key value when your external service provider rotates credentials. Updating the API key ensures your agents continue to have access to the external service with the current authentication information.

## To update an API key

1. Open the [AgentCore Identity](#) console.
2. In the **Outbound Auth** section, select the API key you want to update.
3. Choose **Edit**.
4. In the **Update API key** dialog, in **API key**, enter the updated key value provided by your external service. AgentCore Identity securely stores this new value and makes it available to your agent at runtime.
5. Choose **Update**.

The updated API key configuration takes effect immediately. Your agents will use the new API key for all subsequent requests to the external service.

## Delete API key

When you no longer need an API key, you can delete it from your account. Deleting an API key removes the stored credentials and makes them unavailable to your agents. Any invocations that reference the deleted API key will fail once it's removed.

### To delete an API key

1. Open the [AgentCore Identity](#) console.
2. In the **Outbound Auth** section, select the API key you want to delete.
3. Choose **Delete**.
4. In the confirmation dialog, type **Delete** to confirm the deletion.
5. Choose **Delete**.

The API key is permanently removed from your account. Any agents or applications that reference this API key's ARN will no longer be able to access the stored credentials.

## Manage workload identities with AgentCore Identity

Agent identities in AgentCore Identity are implemented as workload identities with specialized attributes that enable agent-specific capabilities. This approach follows established industry patterns where workloads have granular properties that indicate their specific type and purpose. Unlike traditional service accounts that are tied to specific infrastructure, agent identities are designed to be environment-agnostic and can support multiple authentication credentials simultaneously. The AgentCore Identity directory acts as a centralized registry and management system for all agent identities. For information about workload identity limits, see [AgentCore Identity Service Quotas](#).

### Topics

- [Understanding workload identities](#)
- [Understanding the agent identity directory](#)
- [Create and manage workload identities](#)

# Understanding workload identities

Workload identities represent the digital identity of your agents within the AWS environment. They serve as a stable anchor point that persists across different deployment environments and authentication schemes, allowing agents to maintain consistent identity whether they're using IAM roles for AWS resource access, OAuth2 tokens for external service integration, or API keys for third-party tool access. The identity system abstracts the complexity of managing multiple credential types while providing a unified interface for authentication and authorization operations.

Workload identities integrate seamlessly with the broader AgentCore Identity framework, including the token vault for secure credential storage (see [Secure credential storage](#)), Resource credential providers for external service access (see [Configure credential provider](#)), and the AgentCore Identity directory for centralized management. For more information about the directory, see [Understanding the agent identity directory](#).

## Topics

- [How workload identities are created](#)

## How workload identities are created

Workload identities are created automatically in several scenarios and can also be created manually when needed. These identities are used to obtain workload access tokens that authorize agent access to credentials. For details about how workload identities are used in the authentication flow, see [Get workload access token](#).

### Automatic creation by Runtime and Gateway

- When you deploy an agent using AgentCore Runtime, a workload identity is automatically created and associated with your agent
- AgentCore Gateway also creates workload identities automatically for agents deployed through the gateway service
- These automatically created identities are managed by the service and include the necessary settings for your deployment environment
- The workload identity ARN is returned in the deployment response and can be used for IAM policies and access control

### Manual creation for custom deployments

- For agents not hosted by Runtime or Gateway (such as self-hosted or hybrid deployments), you can manually create workload identities
- Use the [CreateWorkloadIdentity API](#) or AWS CLI to create identities for custom agent deployments
- Manual creation gives you control over the identity name and metadata
- This approach is ideal when you need specific identity names or are integrating with existing identity management systems

## When to use each approach

- Use automatic creation when deploying through AgentCore Runtime or Gateway for simplified setup
- Use manual creation when you need specific identity names or are deploying agents in non-standard environments
- Manual creation is also useful for testing scenarios or when you need multiple identities for the same agent in different environments

Workload identities are used to obtain workload access tokens that authorize agent access to credentials. For details about how workload identities are used in the authentication flow, see [Get workload access token](#).

Once you have created workload identities, you can use them to control access to credential providers. For information about implementing fine-grained access control, see [Scope down access to credential providers by workload identity](#).

## Understanding the agent identity directory

The agent identity directory is a centralized collection of all workload identities within your AWS account. It serves as the authoritative registry for managing and organizing agent identities, providing a unified view of all identities whether they were created automatically by AgentCore Runtime and Gateway or manually through the AWS CLI and SDK. For information about creating workload identities, see [Create and manage workload identities](#).

### Topics

- [Directory concepts and structure](#)
- [Directory management best practices](#)

- [Listing and viewing directory contents](#)
- [Directory access control and permissions](#)

## Directory concepts and structure

Understanding the fundamental concepts and organizational structure of the agent identity directory helps you effectively manage workload identities at scale.

### Key characteristics

- **Single directory per account** – Each AWS account has exactly one agent identity directory
- **Automatic creation** – The directory is automatically created when the first workload identity is created in your account
- **Centralized management** – All workload identities, regardless of how they were created, are stored in this directory
- **Cross-service visibility** – The directory provides visibility into identities created by Runtime, Gateway, and manual processes

### Directory structure

```
arn:aws:bedrock-agentcore:region:account-id:workload-identity-directory/default
workload-identity/runtime-created-agent-1
workload-identity/runtime-created-agent-2
workload-identity/gateway-created-agent-1
workload-identity/manually-created-agent-1
workload-identity/manually-created-agent-2
```

## Directory management best practices

Following established best practices for directory management helps maintain organization, security, and operational efficiency as your workload identity usage grows.

### Naming conventions

- Use descriptive names that indicate the agent's purpose (such as "customer-support-agent", "data-analysis-agent")
- Include environment indicators for multi-environment deployments (such as "prod-chatbot", "dev-chatbot")

- Consider team or project prefixes for large organizations (such as "marketing-content-agent")

## Organization strategies

- Regularly audit your directory to identify unused or obsolete workload identities
- Document the purpose and ownership of each workload identity
- Implement consistent tagging strategies for workload identities when available. For more information, see [Tagging AgentCore Identity resources](#).
- Monitor directory growth and establish governance processes for identity creation

## Security considerations

- Regularly review IAM policies that grant access to the directory
- Use least-privilege principles when granting directory access
- Monitor directory access through AWS CloudTrail logs
- Implement automated alerts for unauthorized directory modifications

## Listing and viewing directory contents

You can view all workload identities in your directory using the AWS CLI:

### List all workload identities

```
aws bedrock-agentcore-control list-workload-identities
```

This command returns information about all workload identities in your account, including:

- Workload identity names and ARNs
- Creation timestamps
- Associated metadata
- Creation source (Runtime, Gateway, or manual)

### Example output

```
{
```

```
"workloadIdentities": [
 {
 "workloadIdentityArn": "arn:aws:bedrock-agentcore:us-
east-1:123456789012:workload-identity-directory/default/workload-identity/my-runtime-
agent",
 "workloadIdentityName": "my-runtime-agent",
 "createdAt": "2024-01-15T10:30:00Z",
 "createdBy": "AgentCore Runtime"
 },
 {
 "workloadIdentityArn": "arn:aws:bedrock-agentcore:us-
east-1:123456789012:workload-identity-directory/default/workload-identity/my-custom-
agent",
 "workloadIdentityName": "my-custom-agent",
 "createdAt": "2024-01-16T14:20:00Z",
 "createdBy": "Manual"
 }
]
```

## Get details about a specific workload identity

```
aws bedrock-agentcore-control get-workload-identity \
--workload-identity-name my-agent-name
```

## Directory access control and permissions

The agent identity directory integrates with IAM to provide fine-grained access control over workload identities and their associated resources. For information about using workload identities to control access to credential providers, see [Scope down access to credential providers by workload identity](#).

### Directory-level permissions

- **List permissions** – Control who can view the directory contents
- **Create permissions** – Control who can create new workload identities
- **Read permissions** – Control who can view specific workload identity details
- **Delete permissions** – Control who can remove workload identities

### Example IAM policy for directory access

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "ListWorkloadIdentities",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore>ListWorkloadIdentities"
],
 "Resource": [
 "arn:aws:bedrock-agentcore:*:*:workload-identity-directory/default"
]
 },
 {
 "Sid": "ManageSpecificWorkloadIdentity",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetWorkloadIdentity",
 "bedrock-agentcore>CreateWorkloadIdentity",
 "bedrock-agentcore>DeleteWorkloadIdentity"
],
 "Resource": [
 "arn:aws:bedrock-agentcore:*:*:workload-identity-directory/default/workload-
 identity/my-agent-*"
]
 }
]
}
```

## Create and manage workload identities

You can create agent identities using several methods, including the AWS CLI and the AgentCore SDK, depending on your workflow and integration requirements. AgentCore Identity provides multiple interfaces for identity creation including command-line tools for automation and scripting and programmatic APIs for integration with existing systems. Each creation method supports the full range of identity properties while providing appropriate interfaces for different use cases and user preferences.

### Topics

- [Manage identities with AWS CLI](#)
- [Create identities with the AgentCore SDK](#)

## Manage identities with AWS CLI

The AWS CLI provides a straightforward way to create and delete agent identities.

### Create an identity

The following command creates a workload identity named *my-agent*.

```
aws bedrock-agentcore-control create-workload-identity \
--name "my-agent"
```

### List all identities

The following command lists all workload identities in your account.

```
aws bedrock-agentcore-control list-workload-identities
```

### Delete an identity

The following command deletes the workload identity named *my-agent*.

```
aws bedrock-agentcore-control delete-workload-identity \
--name "my-agent"
```

## Create identities with the AgentCore SDK

The AgentCore SDK provides support for creating workload identities in Python.

### Python example

The following Python code creates a workload identity using the AgentCore SDK.

```
from bedrock_agentcore.services.identity import IdentityClient

Initialize the client
identity_client = IdentityClient("us-east-1")

Create a new workload identity for agent
response = identity_client.create_workload_identity(name='my-python-agent')
```

```
agentArn = response['workloadIdentityArn']

print(f"Created agent identity with ARN: {agentArn}")
```

## Manage credential providers with AgentCore Identity

Credential management is a core feature of Amazon Bedrock AgentCore Identity that addresses the complex challenge of securely storing, retrieving, and managing credentials across multiple trust domains and authentication systems. The service implements defense-in-depth security measures to protect sensitive authentication tokens, API keys, and certificates while providing agents with efficient access to the credentials they need for authorized operations. AgentCore Identity's credential management architecture separates credential storage from credential access, helping to ensure that agents never have direct access to long-term secrets or refresh tokens.

The credential management system supports multiple credential types including OAuth2 access tokens, API keys, client certificates, SAML assertions, and custom authentication tokens. Each credential type has specific handling requirements for storage encryption and access patterns. All credential operations are logged and audited to provide complete visibility into credential usage and access patterns.

Integration with the Resource Credential Provider enables AgentCore Identity to support cross-capability credential vending, where agents can access resources across different cloud providers, SaaS applications, and enterprise systems using a unified credential management interface. The system maintains proper security boundaries while enabling necessary functionality, with comprehensive monitoring and alerting capabilities that detect unusual credential usage patterns or potential security threats.

### Topics

- [Supported authentication patterns](#)
- [Configure credential provider](#)
- [Obtain credentials](#)

## Supported authentication patterns

AgentCore Identity supports two primary authentication patterns that address different agent use cases. Understanding these patterns will help you choose the right approach for your specific agent implementation.

For detailed examples of how these patterns apply to specific industries and agent types, see [Example use cases](#).

## Topics

- [User-delegated access \(OAuth 2.0 authorization code grant\)](#)
- [Machine-to-machine authentication \(OAuth 2.0 client credentials grant\)](#)
- [Choosing the right authentication pattern](#)

## User-delegated access (OAuth 2.0 authorization code grant)

The OAuth 2.0 authorization code grant flow enables agents to access user-specific data with explicit user consent. This pattern is essential when agents need to access personal data or perform actions on behalf of specific users. The flow includes a user consent step where the resource owner (user) explicitly authorizes the agent to access their data within specific scopes.

### Key characteristics

- Requires explicit user consent through an authorization prompt
- Provides access to user-specific data and resources
- Maintains clear separation between agent identity and user authorization
- Supports fine-grained scopes that limit what data the agent can access

**Example scenario** – A productivity agent needs to access a user's Google Calendar to schedule meetings, their Gmail to send emails, and their Google Drive to store documents. The agent uses the OAuth 2.0 authorization code grant to obtain user consent for each service, with specific scopes that limit access to only the necessary data. The user explicitly authorizes the agent through Google's consent screen, and AgentCore Identity securely stores the resulting credentials for future use.

This pattern is ideal for personal assistant agents, customer service agents, and any scenario where agents need access to user-specific data across multiple services. For detailed industry-specific examples, see [Personal assistant agents](#) and [Customer service agents](#).

## Machine-to-machine authentication (OAuth 2.0 client credentials grant)

The OAuth 2.0 client credentials grant flow enables direct authentication between systems without user interaction. This pattern is appropriate when agents need to access resources that aren't user-specific or when agents act themselves with pre-authorized user consent.

### Key characteristics

- No user interaction or consent required
- Agent authenticates directly with resource servers using its own credentials
- Suitable for background processes, scheduled tasks, and system-level operations
- Permissions are defined at the agent level rather than per-user

**Example scenario** – An enterprise data processing agent needs to collect data from multiple internal systems, process it, and store the results in a data warehouse. The agent uses the OAuth 2.0 client credentials grant to authenticate directly with each system using its own identity and pre-configured permissions. No user interaction is required, and the agent can operate when agents act themselves with pre-authorized user consent on scheduled intervals.

This pattern is ideal for enterprise automation agents, data processing workflows, and DevOps automation. For detailed industry-specific examples, see [Enterprise automation agents](#), [Data processing and analytics agents](#), and [Development and DevOps agents](#).

## Choosing the right authentication pattern

When designing your agent authentication strategy, consider these factors to determine which pattern is most appropriate:

### Authentication pattern selection guide

Factor	User-delegated access (OAuth 2.0 authorization code grant)	Machine-to-machine authentication (OAuth 2.0 client credentials grant)
Data ownership	User-specific data (emails, documents, personal calendars)	System or organization-owned data (analytics, logs, shared resources)
User interaction	User is present and can provide consent	No user interaction required or available

Factor	User-delegated access (OAuth 2.0 authorization code grant)	Machine-to-machine authentication (OAuth 2.0 client credentials grant)
Operation timing	Interactive, real-time operations	Background, scheduled, or batch operations
Permission scope	Permissions vary by user and their consent choices	Consistent permissions defined at the agent level

Many agent implementations will require both patterns for different aspects of their functionality. For example, a customer service agent might use user-delegated access to retrieve a specific customer's data while using machine-to-machine authentication to access company knowledge bases and internal systems. AgentCore Identity supports both patterns simultaneously, allowing agents to use the most appropriate authentication mechanism for each resource they need to access.

Both authentication patterns benefit from AgentCore Identity's core capabilities:

- Secure credential storage without exposing secrets to agent code
- Consistent authentication interfaces across multiple resource types
- Comprehensive audit logging for security and compliance
- Fine-grained access controls based on identity and context
- Simplified integration through the AgentCore SDK

## Configure credential provider

Resource credential providers in AgentCore Identity act as intelligent intermediaries that manage the complex relationships between agents, identity providers, and resource servers. Each provider encapsulates the specific endpoint configuration required for a particular service or identity system. The service provides built-in providers for popular services including Google, GitHub, Slack, and Salesforce, with authorization server endpoints and provider-specific parameters pre-configured to reduce development effort. AgentCore Identity supports custom configurations through configurable OAuth2 credential providers that can be tailored to work with any OAuth2-compatible resource server. For information about OAuth2 credential provider limits, see [AgentCore Identity Service Quotas](#).

Resource credential providers integrate deeply with the token vault to provide seamless credential lifecycle management. When an agent requests access to a resource, the provider handles the authentication flow, stores the resulting credentials in the token vault, and provides the agent with the necessary access tokens.

## Creating an OAuth 2.0 credential provider

Provider configurations in AgentCore Identity define the basic parameters needed for credential management with different resources and authentication systems. The following example demonstrates how to use the AgentCore SDK to configure an OAuth 2.0 credential provider to use with GitHub.

```
from bedrock_agentcore.services.identity import IdentityClient
identity_client = IdentityClient("us-east-1")
github_provider = identity_client.create_oauth2_credential_provider({
 "name": "github-provider",
 "credentialProviderVendor": "GithubOAuth2",
 "oauth2ProviderConfigInput": {
 "githubOAuth2ProviderConfig": {
 "clientId": "your-github-client-id",
 "clientSecret": "your-github-client-secret"
 }
 }
})
```

## Creating an API key credential provider

For services that use API keys for authentication rather than OAuth, AgentCore Identity will securely store and retrieve keys for your agents. The example below illustrates using the AgentCore SDK to store an API key. For information about API key credential provider limits, see [AgentCore Identity Service Quotas](#).

```
from bedrock_agentcore.services.identity import IdentityClient
identity_client= IdentityClient("us-east-1")
apikey_provider= identity_client.create_api_key_credential_provider({
 "name": "your-service-name",
 "apiKey": "your-api-key"
})
```

## Obtain credentials

AgentCore Identity uses a workload access token to authorize agent access to credentials stored in the vault, and this token contains both the identity of the agent and the identity of the end user on whose behalf the agent is working. AgentCore Runtime will automatically provide a token when invoking an agent that it is hosting. Agents hosted on other systems can retrieve their agent token using the AgentCore SDK.

### Topics

- [Get workload access token](#)
- [Obtain OAuth 2.0 access token](#)
- [OAuth 2.0 authorization URL session binding](#)
- [Scope down access to credential providers by workload identity](#)
- [Obtain API key](#)

## Get workload access token

Understanding what workload access tokens are, how to obtain them, and the security aspects of working with them is essential for building secure agent applications. This section covers the key concepts and implementation patterns you need to know.

### Topics

- [What is a workload access token?](#)
- [How Runtime and Gateway automatically obtain tokens](#)
- [How to manually retrieve workload access tokens](#)
- [Security controls for GetWorkloadAccessTokenForUserId API](#)

### What is a workload access token?

A workload access token is an AWS-signed opaque access token that enables agents to access first-party AgentCore services, such as outbound credential providers. Runtime automatically delivers workload access tokens to agent execution instances as payload headers, eliminating the need for manual token management in most scenarios.

### Key characteristics

- **First-party services only** – Workload access tokens are exclusively for accessing AWS first-party AgentCore services and cannot be used for external services
- **Automatic delivery** – Runtime and Gateway automatically provide these tokens to agents during execution
- **Security by design** – Runtime-managed agent identities cannot retrieve workload access tokens directly, preventing token extraction and misuse
- **User and agent identity binding** – Tokens contain both user identity and agent identity information for secure credential access

## How Runtime and Gateway automatically obtain tokens

When an agent is invoked through AgentCore Runtime or Gateway with inbound authentication, the service automatically handles workload access token generation:

1. Runtime validates the inbound identity provider OAuth token (issuer, signature)
2. Runtime extracts issuer and sub claims from the OAuth token representing user identity
3. Runtime fetches the associated workload identity of the agent
4. Runtime invokes `GetWorkloadAccessTokenForJWT` with both user identity and agent workload identity
5. Runtime passes the workload access token to agent code as part of the invocation payload header

This automatic process ensures agents receive properly scoped tokens without manual intervention.

## How to manually retrieve workload access tokens

There are two patterns to use to retrieve the workload access token depending on how you are able to identify the end user of the agent:

- If the agent's caller has a JWT identifying the end user, request a workload access token based on the agent's identity and the end-user JWT. When you provide a JWT, AgentCore Identity will validate the JWT to ensure it is correctly signed and unexpired, and it will use its "iss" and "sub" claims to uniquely identify the user. Credentials stored by the agent on behalf of the user will be associated with this information, and future retrievals by the agent will require a valid workload access token containing the same information.

- If the agent's caller does not have a JWT identifying the end user, request a workload access token based on the agent's identity and a unique string identifying the user.

The examples below illustrate using the AgentCore SDK to retrieve a workload access token using these two methods:

```
from bedrock_agentcore.services.identity import IdentityClient

identity_client= IdentityClient("us-east-1")# Obtain a token using the IAM identity of
the caller to authenticate the agent and providing a JWT containing the identity of
the end user.
This is the recommended pattern whenever a JWT is available for the user.
workload_access_token= identity_client.get_workload_access_token(workload_name= "my-
demo-agent", user_token= "insert-jwt-here")# Obtain a token using the IAM identity of
the caller to authenticate the agent and providing a string representing the identity
of the end user.
Use this pattern when a JWT is not available for the user.
workload_access_token= identity_client.get_workload_access_token(workload_name= "my-
demo-agent", user_id= "insert-user-name-or-identifier")
```

## Security controls for GetWorkloadAccessTokenForUserId API

The GetWorkloadAccessTokenForUserId API implements several security controls to prevent unauthorized access:

- **Workload identity validation** – The API verifies that the requesting identity has permission to act on behalf of the specified workload identity
- **Service-managed identity restriction** – Runtime-managed and Gateway-managed workload identities cannot retrieve tokens directly. This prevents agents from extracting tokens for misuse
- **IAM permission requirements** – Callers must have appropriate IAM permissions including GetWorkloadAccessToken, GetWorkloadAccessTokenForUserId, and GetWorkloadAccessTokenForJWT
- **Token scoping** – Tokens are scoped to the specific user-agent pair, ensuring credentials stored under one user cannot be accessed by another

If you encounter the error "WorkloadIdentity is linked to a service and cannot retrieve an access token by the caller," this indicates the workload identity is managed by Runtime or Gateway and

cannot retrieve tokens directly. This restriction helps maintain security boundaries and prevents unauthorized token access.

For additional security controls, you can implement fine-grained access policies to restrict which workload identities can access specific credential providers. For more information, see [Scope down access to credential providers by workload identity](#).

## Obtain OAuth 2.0 access token

AgentCore Identity enables developers to obtain OAuth tokens for either user-delegated access or machine-to-machine authentication based on the configured OAuth 2.0 credential providers. The service will orchestrate the authentication process between the user or application to the downstream authorization server, and it will retrieve and store the resulting token. Once the token is available in the AgentCore Identity vault, authorized agents can retrieve it and use it to authorize calls to resource servers. For example, the sample code below will retrieve a token to interact with Google Drive on behalf of an end user. For more information, see [Integrate with Google Drive using OAuth2](#) for the complete example.

```
Injects Google Access Token
@requires_access_token(# Uses the same credential provider name created above
 #provider_name= "google-provider",
 ##### Requires Google OAuth2 scope to access Google Drive
 #scopes= ["https://www.googleapis.com/auth/drive.metadata.readonly"],
 ##### Sets to OAuth 2.0 Authorization Code flow
 #auth_flow= "USER_FEDERATION",
 ##### Prints authorization URL to console
 #on_auth_url= lambda x: print("\nPlease copy and paste this URL in your browser:\n" +
 x),
 # If false, caches obtained access token
 #force_authentication= False,)async#def#write_to_google_drive(*, access_token: str):
 # Use the token to call Google Drive
 asyncio.run(write_to_google_drive(access_token= ""))
```

The process is similar to obtain a token for machine-to-machine calls, as shown in the following example:

```
import#asyncio
from#bedrock_agentcore.identity.auth#import#requires_access_token, requires_api_key
@requires_access_token(provider_name= "my-api-key-provider", # replace with your own
 credential provider name
 #scopes= [],
```

```
#auth_flow= 'M2M',)async#def#need_token_2L0_async(*, access_token: str):
 ## Use the access token
 asyncio.run(need_token_2L0_async(access_token= ""))
```

## Topics

- [Automatic refresh token storage and usage](#)
- [Streaming authorization URLs to application callers](#)
- [Resource indicators in AgentCore OAuth2 flows](#)

### Automatic refresh token storage and usage

AgentCore automatically stores and uses refresh tokens when available from OAuth2 providers, reducing the frequency of user reauthorization prompts. When users initially grant consent through a standard OAuth2 authorization code flow, the system stores both access tokens and refresh tokens (if provided) in the secure token vault. This enables agents to obtain fresh access tokens automatically when the original tokens expire, improving user experience by minimizing repeated consent requests.

#### Important

Access tokens returned by AgentCore are not guaranteed to be valid. Tokens can be revoked by customers on the federated provider side, which AgentCore cannot detect. If a token is invalid, use `forceAuthentication: true` to force a new authentication flow and obtain a valid access token.

Refresh tokens typically have longer lifespans than access tokens, with a default validity period of approximately 30 days compared to the shorter lifespan of access tokens (often 1-2 hours). When an access token expires, AgentCore automatically uses the stored refresh token to request a new access token from the provider. **If a valid refresh token is stored, AgentCore skips the user federation flow and directly returns a new access token.** If the refresh token is also expired or invalid, the system falls back to prompting the user for full reauthorization.

This feature requires no configuration within AgentCore - it operates automatically when refresh tokens are present in the OAuth2 provider's token response. However, you must configure your OAuth2 provider to include refresh tokens in the authorization flow. The specific configuration depends on your provider:

Provider	Configuration Required
Google	<p>Include <b>access_type=offline</b> in customParameters when calling GetResourceOAuth2Token</p> <pre>"customParameters": { "access_type": " offline" }</pre>
Microsoft	<p>Include <b>offline_access</b> in scopes parameter when calling GetResourceOAuth2Token</p> <pre>"scopes": ["openid", "profile", " offline_access "]</pre>
Salesforce	<p>Include <b>refresh_token</b> in scopes parameter when calling GetResourceOAuth2Token</p> <pre>"scopes": ["api", "refresh_token "]</pre>
Atlassian	<p>Include <b>offline_access</b> in scopes parameter when calling GetResourceOAuth2Token</p> <pre>"scopes": ["read:jira-user", " offline_access "]</pre>
GitHub	No extra AgentCore configuration required. Enable User-to-server token expiration feature in your GitHub app settings. Refresh tokens are stored automatically when this feature is enabled.
Slack	No extra AgentCore configuration required. Enable "token rotation" feature in your Slack app settings. Refresh tokens are returned automatically when this feature is enabled.
LinkedIn	No extra AgentCore configuration required. Enable refresh token settings in your LinkedIn app configuration.
Other providers	Some providers require configuration in their provider settings rather than API parameters. Consult your provider's documentation for refresh token requirements.

If your provider supports refresh tokens and is properly configured, AgentCore will automatically store and manage them without additional setup. To clear stored refresh tokens and force users to reauthenticate, set `forceAuthentication=true` when calling `GetResourceOauth2Token`. This clears the refresh token and forces a complete federation flow. For information about configuring OAuth2 providers, see [Provider setup and configuration](#).

## Streaming authorization URLs to application callers

For three-legged OAuth (3LO) flows, your agent needs to provide the authorization URL to the calling application so users can complete the consent flow. While the examples above show printing the URL to the console, production applications require streaming the URL back to the caller through your application's response mechanism.

### Common implementation patterns

**Streaming response pattern** – For applications that support streaming responses, you can send the authorization URL as part of the response stream:

```
import asyncio
from bedrock_agentcore.identity.auth import requires_access_token

@requires_access_token(
 provider_name="google-provider",
 scopes=["https://www.googleapis.com/auth/drive.metadata.readonly"],
 auth_flow="USER_FEDERATION",
 # Stream URL back to caller instead of printing
 on_auth_url=lambda url: stream_to_caller({
 "type": "authorization_required",
 "authorization_url": url,
 "message": "Please visit this URL to authorize access"
 }),
 force_authentication=False,
)
async def agent_with_streaming_auth(*, access_token: str):
 # Agent logic continues after user completes authorization
 return {"status": "success", "token_received": True}

def stream_to_caller(data):
 # Implementation depends on your streaming mechanism
 # Examples: WebSocket, Server-Sent Events, HTTP chunked response
 response_stream.send(json.dumps(data))
```

**Callback pattern** – For applications using callbacks or webhooks, store the authorization URL and notify the caller:

```
import asyncio
from bedrock_agentcore.identity.auth import requires_access_token

@requires_access_token(
 provider_name="google-provider",
 scopes=["https://www.googleapis.com/auth/drive.metadata.readonly"],
 auth_flow="USER_FEDERATION",
 # Store URL and trigger callback
 on_auth_url=lambda url: handle_auth_callback(url),
 force_authentication=False,
)
async def agent_with_callback_auth(*, access_token: str):
 return {"status": "success", "data": "processed"}

def handle_auth_callback(authorization_url):
 # Store the URL associated with the request
 auth_store.save(request_id, {
 "authorization_url": authorization_url,
 "status": "pending_authorization"
 })

 # Notify the calling application
 callback_service.notify(callback_url, {
 "request_id": request_id,
 "authorization_url": authorization_url,
 "action_required": "user_authorization"
 })
```

**Polling pattern** – For applications that prefer polling, store the authorization URL in a retrievable location:

```
import asyncio
from bedrock_agentcore.identity.auth import requires_access_token

@requires_access_token(
 provider_name="google-provider",
 scopes=["https://www.googleapis.com/auth/drive.metadata.readonly"],
 auth_flow="USER_FEDERATION",
 # Store URL for polling retrieval
 on_auth_url=lambda url: store_auth_url_for_polling(url),
```

```
 force_authentication=False,
)
async def agent_with_polling_auth(*, access_token: str):
 return {"status": "success", "data": "processed"}

def store_auth_url_for_polling(authorization_url):
 # Store in database, cache, or session store
 session_store.set(f"auth_url:{session_id}", {
 "authorization_url": authorization_url,
 "created_at": datetime.utcnow(),
 "status": "pending"
 }, ttl=300) # 5 minute expiration
```

Choose the pattern that best fits your application architecture. Streaming responses provide the best user experience for real-time applications, while callback and polling patterns work well for asynchronous or batch processing scenarios.

## Resource indicators in AgentCore OAuth2 flows

Resource indicators provide a standardized way to specify which resource server should accept an OAuth2 access token. AgentCore uses Cognito as its authentication provider, which supports RFC 8707-compliant resource indicators that allow you to specify the intended resource server during token requests. To use resource indicators, you must first configure the authorization server to recognize specific resource servers using Cognito's CreateResourceServer API. Once configured, when you specify a resource indicator in your token request, Cognito includes the corresponding resource server identifier in the aud claim of the resulting token, enabling the resource server to verify that the token is intended for its specific use. This provides several important benefits: resource servers can validate that tokens are specifically intended for them (principle of least privilege), improved auditability by clearly identifying which resource server each token targets, and reduced risk of token misuse across different services within your application environment.

Through Cognito's [RFC 8707](#) implementation, AgentCore enables clients to specify a resource server directly in authorization and token requests, overriding the default audience parameter. In Cognito, the 'resource indicator' referred to in the RFC corresponds to the [ResourceServer's](#) 'identifier' value. Resource indicators are particularly important for Model Context Protocol (MCP) implementations, where they help mitigate specific security risks outlined in the MCP authorization specification. The resource indicator corresponds to the RFC 9728 resource parameter, ensuring proper token scoping for MCP server interactions. Note that the current implementation supports single-resource binding, meaning you can specify one resource server per token request.

Use resource indicators when your agents need to access resource servers with specific security requirements, or when you need fine-grained control over token audience validation. Resource indicators are particularly useful for multi-tenant applications where tokens should be restricted to specific customer resources.


## OAuth 2.0 authorization URL session binding

AgentCore Identity provides OAuth 2.0 access token retrievals for your agent applications to access third-party application vendors or resources protected by identity providers / authorization servers. If an application or a resource requires a user to authorize explicitly with an OAuth authorization code flow, AgentCore Identity generates an authorization URL for the user to navigate to and consent access. Then, upon user giving consent, AgentCore Identity fetches the access token from the application or resource on behalf of users, and stores it in the AgentCore Identity Token Vault.

However, since a user may accidentally send the authorization URL to another user and gain access to that user's application or resource, your application must verify that the user who initiates an authorization request is still the same as the user who has granted consent to the application or resource. To do that, you need to register a publicly available HTTPS application endpoint with AgentCore Identity that handles user verification.

### How session binding works

The following flow diagram and corresponding steps show the OAuth 2.0 authorization URL session binding process:

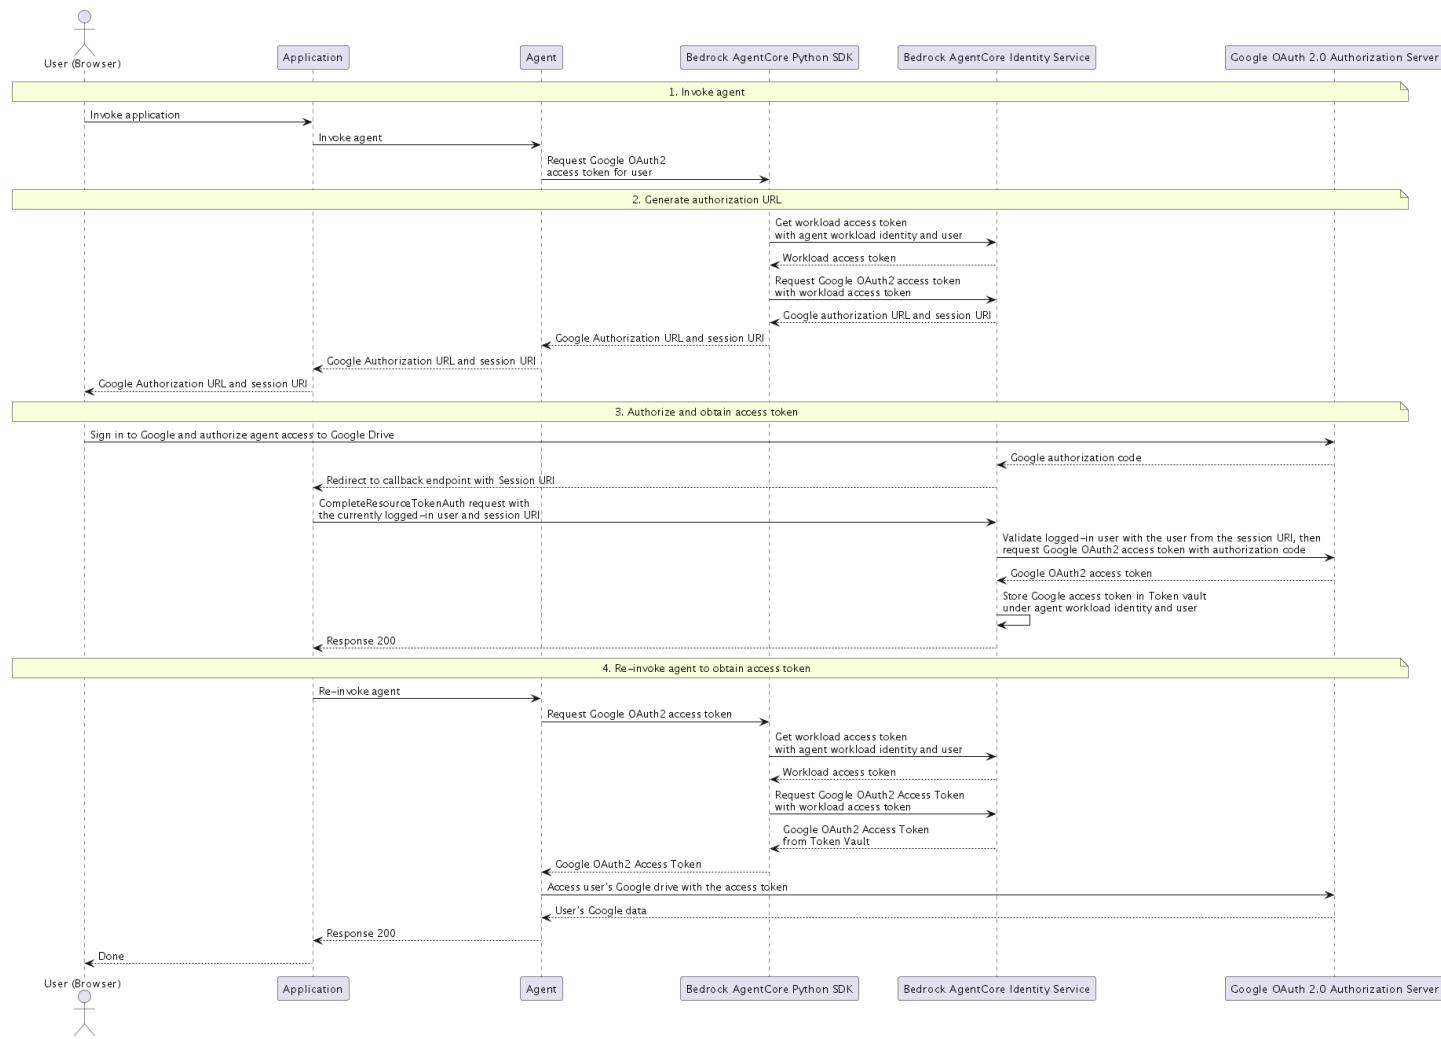

- 1. Invoke agent** – Your agent code invokes `GetResourceOauth2Token` API to retrieve an authorization URL, when an originating agent user wants to access some application or resource that he/she owns.
- 2. Generate authorization URL** – AgentCore Identity generates an authorization URL and session URI for the user to navigate to and consent access.
- 3. Authorize and obtain access token** – The user navigates to the authorization URL and grants consent for your agent to access his/her resource. After that, AgentCore Identity redirects the user's browser to your HTTPS application endpoint with information containing the originating user of the authorization request. At this point, your HTTPS application endpoint determines if the originating agent user is still the same as the currently logged in user of your application. If they match, your application endpoint invokes `CompleteResourceTokenAuth` so that AgentCore Identity can fetch and store the access token.

**4. Re-invoke agent to obtain access token** – Once the application returns a valid response, your agent application will be able to retrieve the OAuth2.0 access tokens that were originally requested for the user. If the users do not match, your application simply does nothing or logs the attempt.

By allowing your application endpoint to verify the user identity, AgentCore Identity allows your agent application to ensure that it is always the same user who initiated the authorization request and the one who consented access.

### Implementation details

When calling the CompleteResourceTokenAuth API, your application must present the original inbound identity provider Oauth token or static user identifier that was used to generate the workload access token to represent the user and the agent application involved in the OAuth2.0 authorization flow. Additionally, each authorization URL that gets generated by AgentCore Identity is uniquely identified with its own session URI. This session URI must also be presented alongside the user identifier in order to bind the session with the intended user.

#### **⚠ Important**

Prior to your application calling the CompleteResourceTokenAuth API, your application must verify that the current user has an active, valid session with your application. By doing so your application can associate the intended user with the Authorization session.

Once the application returns a valid response, your agent application will be able to retrieve the OAuth2.0 access tokens that were originally requested for the user.

#### **⚠ Important**

When you are using the [Amazon Bedrock AgentCore Starter Toolkit](#) in a local environment, the toolkit hosts the callback endpoint and calls the CompleteResourceTokenAuth API on your behalf to verify the user session to get OAuth2.0 access tokens. This is to simplify your local development and testing.

However, when deploying your agent code to AgentCore Runtime, your web application that connects to the agent runtime must host a publicly accessible HTTPS callback endpoint itself, the callback endpoint must be registered against the workload identity as an AllowedResourceOAuth2ReturnUrl by calling

UpdateWorkloadIdentity using the agent ID provided by AgentCore Runtime, and then call the CompleteResourceTokenAuth API after verifying the current user's browser session in order to secure your OAuth2.0 authorization flows.

## Additional considerations

When implementing OAuth 2.0 authorization URL session binding, keep the following considerations in mind:

- Each authorization URL and its corresponding session identifier are only valid for 10 minutes.
- In order to secure your application callback endpoint against CSRF attacks, we highly recommend that you generate an opaque state to include in your API call to GetResourceOAuth2Token. Your application should be able to parse this value in order to ensure it's serving requests that were initiated by your agent application.

## Scope down access to credential providers by workload identity

You can use IAM policies to control which workload identities have access to specific credential providers. This enables fine-grained access control, ensuring that only authorized agents can retrieve credentials for particular services.

### Access control mechanisms

- **Workload identity-based restrictions** – Limit credential provider access to specific workload identities
- **Resource-level permissions** – Control access to individual credential providers using ARN-based policies
- **Directory-level controls** – Manage access at the workload identity directory level

### Topics

- [IAM policy examples](#)
- [Implementation steps](#)

## IAM policy examples

The following examples demonstrate how to create IAM policies that restrict credential provider access based on workload identity:

### Restrict API key provider access

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "GetResourceApiKey",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetResourceApiKey"
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/
default",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/
default/workload-identity/<workload-identity-name>",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:token-vault/default"
]
 }
]
}
```

### Restrict OAuth2 credential provider access

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "GetResourceOauth2Token",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetResourceOauth2Token"
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/
default",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/
default/workload-identity/<workload-identity-name>",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/
default/token-vault/default"
]
 }
]
}
```

```
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:token-vault/default"
]
}
]
}
```

## Allow multiple workload identities access to a credential provider

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "GetResourceApiKeyMultipleIdentities",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetResourceApiKey"
],
 "Resource": [
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/default",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/default/workload-identity/agent-1",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/default/workload-identity/agent-2",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:workload-identity-directory/default/workload-identity/agent-3",
 "arn:aws:bedrock-agentcore:us-east-1:<account_id>:token-vault/default"
]
 }
]
}
```

## Implementation steps

To implement workload identity-based access control for credential providers:

- 1. Identify your workload identities** – Use `aws bedrock-agentcore-control list-workload-identities` to list all workload identities in your account. For information about creating and managing workload identities, see [Manage workload identities with AgentCore Identity](#).
- 2. Determine credential provider ARNs** – Identify the specific credential providers you want to control access to

3. **Create IAM policies** – Write IAM policies that specify which workload identities can access which credential providers
4. **Attach policies to roles** – Attach the policies to the IAM roles used by your agents or applications
5. **Test access controls** – Verify that only authorized workload identities can access the specified credential providers

## Best practices

- Use descriptive names for workload identities to make policy management easier
- Regularly audit and review access policies to ensure they align with your security requirements
- Consider using IAM policy conditions for additional access controls based on time, IP address, or other factors
- Test policies in a development environment before applying them to production workloads

## Obtain API key

Once you have stored your API keys in the AgentCore Identity vault, you can retrieve them directly in your agent using the AgentCore SDK and the `@requires_api_key` annotation. For example, the code below will retrieve the API key from the “your-service-name” API key provider so that you can use it in the `need_api_key` function.

```
import asyncio
from bedrock_agentcore.identity.auth import requires_api_key
@requires_api_key(provider_name= " your-service-name" # replace with your own
 credential provider name)async def need_api_key(*, api_key: str):
 ## Use the key in api_key
 asyncio.run(need_api_key(api_key= ""))
```

## Provider setup and configuration

Amazon Bedrock AgentCore Identity provides managed OAuth 2.0 supported providers for both inbound and outbound authentication. Each provider encapsulates the specific authentication protocols, endpoint configurations, and credential formats required for a particular service or identity system. The service provides built-in providers for popular services including Google, GitHub, Slack, and Salesforce with authorization server endpoints and provider-specific parameters

pre-configured to reduce development effort. The providers abstract away the complexity of different OAuth 2.0 implementations, API authentication schemes, and token formats, presenting a unified interface to agents while handling the underlying protocol variations and edge cases.

Built-in providers are maintained by the AgentCore Identity team and automatically updated to handle changes in external service APIs, security requirements, and best practices.

Supported providers include:

## Topics

- [Amazon Cognito](#)
- [Auth0 by Okta](#)
- [Atlassian](#)
- [CyberArk](#)
- [Dropbox](#)
- [Facebook](#)
- [FusionAuth](#)
- [GitHub](#)
- [Google](#)
- [HubSpot](#)
- [LinkedIn](#)
- [Microsoft](#)
- [Notion](#)
- [Okta](#)
- [OneLogin](#)
- [PingOne](#)
- [Reddit](#)
- [Salesforce](#)
- [Slack](#)
- [Spotify](#)
- [Twitch](#)
- [X](#)
- [Yandex](#)

- [Zoom](#)

## Amazon Cognito

Amazon Cognito can be configured as an identity provider for accessing AgentCore Gateway and Runtime, or an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate and authorize agent users with Cognito as the identity provider and authorization server, or your agents to obtain credentials to access resources authorized by Cognito.

### Inbound

To add Cognito as an identity provider and authorization server for accessing AgentCore Gateway and Runtime, you must:

- Configure discovery URL from your IDP directory. This helps AgentCore Identity get the metadata related to your OAuth authorization server and token verification keys.
- Enter valid `clientId` or `aud` claims for the token. This helps validate the tokens coming from your IDP and allow access for tokens that contain expected claims.

Use the following procedure to create a Cognito user pool as an inbound identity provider for user authentication with AgentCore Runtime. The following steps will create a Cognito user pool, a user pool client, add a user, and generate a bearer token for the user. The token is valid for 60 minutes by default.

#### To create a Cognito user pool as an inbound identity provider for Runtime authentication

1. Create a file named `setup_cognito.sh` with the following content:

 **Note**

The following script is only meant as an example. You should customize the user pool settings and user credentials as needed for your application. Do not use this script directly in production environments.

```
#!/bin/bash
```

```
Create User Pool and capture Pool ID directly
export POOL_ID=$(aws cognito-idp create-user-pool \
--pool-name "MyUserPool" \
--policies '{"PasswordPolicy":{"MinimumLength":8}}' \
--region us-east-1 | jq -r '.UserPool.Id')

Create App Client and capture Client ID directly
export CLIENT_ID=$(aws cognito-idp create-user-pool-client \
--user-pool-id $POOL_ID \
--client-name "MyClient" \
--no-generate-secret \
--explicit-auth-flows "ALLOW_USER_PASSWORD_AUTH" "ALLOW_REFRESH_TOKEN_AUTH" \
--region us-east-1 | jq -r '.UserPoolClient.ClientId')

Create User
aws cognito-idp admin-create-user \
--user-pool-id $POOL_ID \
--username "testuser" \
--temporary-password "${temp-password}" \
--region us-east-1 \
--message-action SUPPRESS > /dev/null

Set Permanent Password
aws cognito-idp admin-set-user-password \
--user-pool-id $POOL_ID \
--username "testuser" \
--password "${permanent-user-password}" \
--region us-east-1 \
--permanent > /dev/null

Authenticate User and capture Access Token
export BEARER_TOKEN=$(aws cognito-idp initiate-auth \
--client-id "$CLIENT_ID" \
--auth-flow USER_PASSWORD_AUTH \
--auth-parameters USERNAME='testuser',PASSWORD='${permanent-user-password}' \
--region us-east-1 | jq -r '.AuthenticationResult.AccessToken')

Output the required values
echo "Pool id: $POOL_ID"
echo "Discovery URL: https://cognito-idp.us-east-1.amazonaws.com/$POOL_ID/.well-known/openid-configuration"
echo "Client ID: $CLIENT_ID"
echo "Bearer Token: $BEARER_TOKEN"
```

2. Run the script to create the Cognito resources:

```
source setup_cognito.sh
```

3. Record the output values, which will look similar to:

```
Pool id: us-east-1_poolid
Discovery URL: https://cognito-idp.us-east-1.amazonaws.com/us-
east-1_userpoolid/.well-known/openid-configuration
Client ID: clientid
Bearer Token: bearertoken
```

You'll need these values in the next steps.

Use the following procedure to create a Cognito user pool as an inbound identity provider for machine-to-machine authentication with AgentCore Gateway. The following steps will create a user pool, resource server, client credentials, and discovery URL configuration. This setup enables M2M authentication flows for Gateway access.

### To create a Cognito user pool as an inbound identity provider for Gateway authentication

1. Create a user pool:

```
aws cognito-idp create-user-pool \
--region us-west-2 \
--pool-name "gateway-user-pool"
```

2. Record the user pool ID from the response or retrieve it using:

```
aws cognito-idp list-user-pools \
--region us-west-2 \
--max-results 60
```

3. Create a resource server for the user pool:

```
aws cognito-idp create-resource-server \
--region us-west-2 \
--user-pool-id <UserPoolId> \
--identifier "gateway-resource-server" \
--name "GatewayResourceServer" \
```

```
--scopes '[{"ScopeName":"read","ScopeDescription":"Read access"}, {"ScopeName":"write","ScopeDescription":"Write access"}]'
```

#### 4. Create a client for the user pool:

```
aws cognito-idp create-user-pool-client \
--region us-west-2 \
--user-pool-id <UserPoolId> \
--client-name "gateway-client" \
--generate-secret \
--allowed-o-auth-flows client_credentials \
--allowed-o-auth-scopes "gateway-resource-server/read" "gateway-resource-server/write" \
--allowed-o-auth-flows-user-pool-client \
--supported-identity-providers "COGNITO"
```

Record the client ID and client secret from the response. You'll need these values to configure the Cognito provider in AgentCore Identity.

#### 5. If needed, create a domain for your user pool:

```
aws cognito-idp create-user-pool-domain \
--domain <UserPoolIdWithoutUnderscore> \
--user-pool-id <UserPoolId> \
--region us-west-2
```

 **Note**

Remove any underscore from the UserPoolId when creating the domain. For example, if your user pool ID is "us-west-2\_gmSGKKGr9", use "us-west-2gmSGKKGr9" as the domain.

#### 6. Construct the discovery URL for your Cognito user pool:

```
https://cognito-idp.us-west-2.amazonaws.com/<UserPoolId>/.well-known/openid-configuration
```

#### 7. Configure the Gateway Inbound Auth with the following values:

- Discovery URL:** The URL constructed in the previous step
- Allowed clients:** The client ID obtained when creating the user pool client

## Outbound

To configure Cognito user pools as an outbound resource provider, use the following configuration:

```
{
 "name": "Cognito",
 "credentialProviderVendor": "CognitoOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "authorizeEndpoint": "https://{{your-cognito-domain}}.auth.us-east-1.amazoncognito.com/oauth2/authorize",
 "tokenEndpoint": "https://{{your-cognito-domain}}.auth.us-east-1.amazoncognito.com/oauth2/token",
 "issuer": "https://cognito-idp.us-east-1.amazonaws.com/{{your-user-pool-id}}"
 }
 }
}
```

## Auth0 by Okta

Auth0 can be configured as an identity provider for accessing AgentCore Gateway and Runtime, or an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate and authorize agent users with Auth0 as the identity provider and authorization server, or your agents to obtain credentials to access resources authorized by Auth0.

## Inbound

To add Auth0 as an identity provider and authorization server for accessing AgentCore Gateway and Runtime, you must:

- Configure discovery URL from your IDP directory. This helps AgentCore Identity get the metadata related to your OAuth authorization server and token verification keys.
- Enter valid aud claims for the token. This helps validate the tokens coming from your IDP and allows access for tokens that contain expected claims.

Use the following procedure to set up Auth0 and obtain the necessary configuration values for Gateway authentication.

## To configure Auth0 for inbound authentication

1. Create an API in Auth0:
  - a. Sign in to your Auth0 dashboard.
  - b. Open **APIs** and choose **Create API**.
  - c. Enter a name and identifier for your API (e.g., "gateway-api").
  - d. Select the signing algorithm (RS256 recommended).
  - e. Choose **Create**.
2. Configure API scopes:
  - a. In the API settings, go to the **Scopes** tab.
  - b. Add scopes such as "invoke:gateway" and "read:gateway".
3. Create an application:
  - a. Open **Applications** and choose **Create Application**.
  - b. Select **Machine to Machine Application**.
  - c. Select the API you created in step 1.
  - d. Authorize the application for the scopes you created.
  - e. Choose **Create**.
4. Record the client ID and client secret from the application settings. You'll need these values to configure the Auth0 provider in AgentCore Identity.
5. Construct the discovery URL for your Auth0 tenant:

```
https://your-domain/.well-known/openid-configuration
```

Where *your-domain* is your Auth0 tenant domain (e.g., "dev-example.us.auth0.com").

6. Configure Inbound Auth with the following values:
  - a. **Discovery URL:** The URL constructed in the previous step
  - b. **Allowed audiences:** The API identifier you created in step 1

## Outbound

To configure Auth0 as an outbound resource provider, use the following:

```
{
 "name": "NAME",
 "credentialProviderVendor": "Auth0oauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "authorizeEndpoint": "https://your-auth0-tenant.auth0.com/authorize",
 "tokenEndpoint": "https://your-auth0-tenant.auth0.com/oauth/token",
 "issuer": "https://your-auth0-tenant.auth0.com"
 }
 }
}
```

## Atlassian

Atlassian can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Atlassian's OAuth2 service and obtain access tokens for Atlassian API resources.

### Outbound

#### Step 1

Use the following procedure to set up an Atlassian OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure an Atlassian OAuth2 application

1. Open Atlassian's developer console and register for a developer account.
2. Create a new application.
3. Select authorization and next to **OAuth 2.0 (3LO)** select **Configure**.
4. Enter the following as a callback URL for the app:

`https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback`

5. Choose **Save changes**.
6. Select **Permissions** and choose the permissions relevant to your application.

For more details, refer to [Atlassian's OAuth 2.0 \(3LO\) apps documentation](#).

## Step 2

To configure Atlassian as an outbound resource provider, use the following:

```
{
 "name": "NAME",
 "credentialProviderVendor": "AtlassianOAuth2",
 "oauth2ProviderConfigInput": {
 "atlassianOAuth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## CyberArk

CyberArk can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through CyberArk's OAuth2 service and obtain access tokens for CyberArk API resources.

## Outbound

### Step 1

Use the following procedure to set up a CyberArk OpenID Connect application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a CyberArk OAuth2 application

1. Open the developer console for CyberArk.
2. Open **Identity Administration** and then choose **Web Apps**.
3. Open the **Custom** tab.
4. Create a custom **OpenID Connect** application.
5. Open the **Trust** page, and use the following in the **Authorized Redirect URLs**:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

6. Record the client ID and client secret generated as you'll need this information to configure the CyberArk resource provider in AgentCore Identity.

7. Configure any scopes necessary for your application.
8. Deploy the application by setting the appropriate permissions by opening the **Permissions** page and adding the relevant permissions.

For more details, refer to [CyberArk's OpenID Connect documentation](#).

## Step 2

To configure CyberArk as an outbound resource provider, use the following:

```
{
 "name": "CyberArk",
 "credentialProviderVendor": "CyberArkOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "authorizeEndpoint": "https://your-tenant-id.id.cyberark.cloud/OAuth2/Authorize/
__adaptive_cybr_user_oidc",
 "tokenEndpoint": "https://your-tenant-id.id.cyberark.cloud/OAuth2/Tokens/
__adaptive_cybr_user_oidc",
 "issuer": "https://your-tenant-id.id.cyberark.cloud/__adaptive_cybr_user_oidc"
 }
 }
}
```

## Dropbox

Dropbox can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Dropbox's OAuth2 service and obtain access tokens for Dropbox API resources.

### Note

Dropbox does not support the M2M/Client Credentials flow.

## Outbound

### Step 1

Use the following procedure to set up a Dropbox OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

### To configure a Dropbox OAuth2 application

1. Open the developer **App Console** for Dropbox.
2. Choose **Create app**.
3. Choose **Scoped access**.
4. For the access type, choose the access type appropriate for your application.
5. Provide a name for your application.
6. Choose **Create app**.
7. On the app overview page, open the OAuth2 section and add the following as a redirect URI:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

8. In the same section choose the dropdown below **Allow public clients (Implicit Grant & PKCE)** and choose **Disallow** in the options.
9. Record the app key and app secret as you'll need the information to configure the Dropbox resource provider in AgentCore Identity.
10. In the **Permissions** tab for the application, select the scopes that are needed for your application.

For more details, refer to [Dropbox's OAuth implementation guide](#).

### Step 2

To configure Dropbox as an outbound resource provider, use the following:

```
{
 "name": "DropBox",
 "credentialProviderVendor": "DropboxOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

# Facebook

Facebook can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Facebook's OAuth2 service and obtain access tokens for Facebook API resources.

## Outbound

### Step 1

Use the following procedure to set up a Facebook OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a Facebook OAuth2 application

1. Create a [developer account with Facebook](#).
2. [Sign in](#) with your Facebook credentials.
3. From the **My Apps** menu, choose **Create New App**.

 **Note**

If you don't have an existing Facebook app, you will see a different option. Choose **Create App**.

4. On the **Create an app** page, choose a use case for your app, and then choose **Next**.
5. Enter a name for your Facebook app and choose **Create App**.
6. On the left navigation bar, choose **App Settings**, and then choose **Basic**.
7. Record the **App ID** and the **App Secret**. You will use them for configuring the Facebook provider in AgentCore Identity.
8. Choose **+ Add platform** from the bottom of the page.
9. On the **Select Platform** screen, select your platforms, and then choose **Next**.
10. Choose **Save changes**.
11. For **App Domains**, enter the domain of your application and `bedrock-agentcore.region.amazonaws.com`.
12. Choose **Save changes**.
13. From the navigation bar, choose **Products**, and then choose **Configure from Facebook Login**.
14. From the **Facebook Login Configure** menu, choose **Settings**.

## 15. Enter the following redirect URL into **Valid OAuth Redirect URIs**:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

## 16. Choose **Save changes**.

### Step 2

To configure Facebook as an outbound resource provider, use the following:

```
{
 "name": "Facebook",
 "credentialProviderVendor": "FacebookOAuth2",
 "oauth2ProviderConfigInput" : {
 "includedOAuth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## FusionAuth

FusionAuth can be configured as an outbound resource credential provider for AgentCore Identity. This allows your agents to authenticate users through FusionAuth's OAuth2 service and obtain access tokens for FusionAuth API resources.

### Outbound

#### Step 1

Use the following procedure to set up a FusionAuth OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a FusionAuth OAuth2 application

1. Open the developer console for FusionAuth.
2. In the main navigation bar, choose **Applications**.
3. Choose **Add** to create a new application.
4. Enter a name for your application.

5. In the form mark the following as required: **Client Authentication, PKCE**.
6. For authorized redirect URLs, add the following:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

7. Add the necessary scopes for your application.
8. Record the client ID and client secret. You'll need this information to configure the FusionAuth resource provider in AgentCore Identity.

For more details, refer to [FusionAuth's OAuth documentation](#).

## Step 2

To configure FusionAuth as an outbound resource provider, use the following:

```
{
 "name": "FusionAuth",
 "credentialProviderVendor": "FusionAuthOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "authorizeEndpoint": "https://your-tenant-authorization-url",
 "tokenEndpoint": "https://your-tenant-token-endpoint",
 "issuer": "https://your-tenant-token-issuer"
 }
 }
}
```

## GitHub

GitHub can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through GitHub's OAuth2 service and obtain access tokens for GitHub API resources.

## Outbound

### Step 1

Use the following procedure to set up a GitHub OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

## To configure a GitHub OAuth2 application

1. Choose the profile picture of your github account and choose **Settings**.
2. Choose **Developer settings**.
3. Choose **OAuth Apps**.
4. On the OAuth2 apps page choose **New OAuth App**.
5. Enter the necessary details specific to your application. For authorization callback URL enter the following:
  - `https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback`
6. Choose **Register application** to create your Github OAuth app.
7. On Github's OAuth Apps page, go to your newly created provider.
8. Under the client secrets section, choose **Generate a new client secret**.
9. Make a note of the newly created client secret. You'll need this to configure your Github application with AgentCore Identity.

 **Note**

Github only returns the full secret when it is created. If you lose track of it you'll need to recreate the client secret to configure the provider in AgentCore Identity.

For more details, refer to Github's documentation [Creating an OAuth app](#).

## Step 2

To configure the outbound GitHub resource provider, use the following:

```
{
 "name": "NAME",
 "credentialProviderVendor": "GithubOauth2",
 "oauth2ProviderConfigInput": {
 "GithubOauth2ProviderConfigInput": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 }
 },
}
```

}

## Google

Google can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Google's OAuth2 service and obtain access tokens for Google API resources.

## Outbound

### Step 1

Use the following procedure to set up a Google OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a Google OAuth2 application

1. Create a [developer account with Google](#).
2. Sign in to the [Google Cloud Platform console](#).
3. From the top navigation bar, choose **Select a project**. If you already have a project in the Google platform, this menu displays your default project instead.
4. Choose **NEW PROJECT**.
5. Enter a name for your product and then choose **CREATE**.
6. On the left navigation bar, choose **APIs and Services**, and then choose **OAuth consent screen**.
7. Enter the app information, an **App domain**, **Authorized domains**, and **Developer contact information**. Your **Authorized domains** must include bedrock-agentcore.*region*.amazonaws.com. Choose **SAVE AND CONTINUE**.
8. Under **Scopes**, choose **Add or remove scopes**, and then choose the scopes necessary for your application.
9. Expand the left navigation bar again, choose **APIs and Services**, and then choose **Credentials**.
10. Choose **CREATE CREDENTIALS**, and then choose **OAuth client ID**.
11. Choose an **Application type** and give your client a **Name**.
12. Under **Authorized redirect URIs**, choose **ADD URI**. Enter the following:
  - [https://bedrock-agentcore.\*region\*.amazonaws.com/identities/oauth2/callback](https://bedrock-agentcore.<i>region</i>.amazonaws.com/identities/oauth2/callback)

13. Choose **CREATE**.
14. Securely store the values that Google displays under **Your client ID** and **Your client secret**.  
Provide these values to AgentCore Identity when you add a Google credential provider.

## Step 2

To configure the outbound Google resource provider, use the following:

```
{
 "name": "NAME",
 "credentialProviderVendor": "GoogleOauth2",
 "oauth2ProviderConfigInput": {
 "GoogleOauth2ProviderConfigInput": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 }
 },
}
```

## HubSpot

HubSpot can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through HubSpot's OAuth2 service and obtain access tokens for HubSpot API resources.

 **Note**

HubSpot does not support the M2M/Client Credentials flow.

## Outbound

### Step 1

Use the following procedure to set up a HubSpot OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a HubSpot OAuth2 application

1. Open the developer console for HubSpot.

2. In the main navigation bar, choose **Apps**.
3. Choose **Create App**.
4. Enter a name for your application.
5. Choose the **Auth** tab and enter the following as a Redirect URL:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

6. Configure any scopes that are required for your application.
7. Once your app has been created, go back to the **Auth** tab for your application.
8. Record the client ID and client secret, you'll need these when creating the HubSpot resource provider in AgentCore Identity.

For more details, refer to [HubSpot's OAuth quickstart guide](#).

## Step 2

To configure HubSpot as an outbound resource provider, use the following:

```
{
 "name": "Hubspot",
 "credentialProviderVendor": "HubspotOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

### Note

When calling `GetResourceOAuth2Token`, the scopes must include `oauth`.

## LinkedIn

LinkedIn can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through LinkedIn's OAuth2 service and obtain access tokens for LinkedIn API resources.

## Outbound

### Step 1

Use the following procedure to set up a LinkedIn OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a LinkedIn OAuth2 application

1. Open LinkedIn's developer portal and create an application.
2. In the Auth tab, note the client ID and client secret as you'll need this information to configure LinkedIn as a provider in AgentCore Identity.
3. Under the OAuth2 settings section, add the following as an authorized redirect URL for the application:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

4. Configure any scopes that are necessary for your application.

For more information about LinkedIn authentication, see [Authentication overview](#) on the Microsoft website.

### Step 2

To configure LinkedIn as an outbound resource provider, use the following configuration:

```
{
 "name": "NAME",
 "credentialProviderVendor": "LinkedInOAuth2",
 "oauth2ProviderConfigInput": {
 "linkedInOAuth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## Microsoft

Microsoft Entra ID can be configured as an identity provider for accessing AgentCore Gateway and Runtime, or an AgentCore Identity credential provider for outbound resource access. This

allows your agents to authenticate and authorize agent users with Microsoft Entra ID as the identity provider and authorization server, or your agents to obtain credentials to access resources authorized by Microsoft Entra ID.

## Inbound

To add Microsoft Entra ID as an identity provider and authorization server for accessing AgentCore Gateway and Runtime, you must:

- Configure discovery URL for your Microsoft Entra ID Tenant. This helps AgentCore Identity get the metadata related to your OAuth authorization server and token verification keys.
- Enter valid aud claims for the token. This helps validate the tokens coming from your IDP and allows access for tokens that contain the expected claims.

You can configure these as part of configuration of Gateway and Runtime inbound configuration.

Before configuring Microsoft Entra ID as your identity provider, we recommend completing the basic setup steps outlined in [Integrate with Google Drive using OAuth2](#). This ensures your development environment and SDK are properly configured before adding identity provider integration.

We support Microsoft Entra ID for v1.0 and v2.0 Access and ID tokens that do not have any custom claims. You can determine which token versions your Entra application is issuing by parsing the JWT and looking at the `ver` claim.

 **Note**

**Multi-tenant application requirement:** AgentCore currently supports only multi-tenant Microsoft Entra applications. Single-tenant applications are not supported at this time. When configuring your Microsoft Entra application, ensure that it is set up as a multi-tenant application to work with AgentCore identity services.

For all token types, in your custom authorizer:

- **Discovery URL:** Discovery URL should be one of the following:
  - For v1.0 tokens use: `https://login.microsoftonline.com/tenantId/.well-known/openid-configuration`

- For v2.0 tokens use: <https://login.microsoftonline.com/{tenantId}/v2.0/.well-known/openid-configuration>
- **Allowed audiences:** aud should be the Application Id.

## Configurations specific for v1.0 Access Tokens

When fetching the token from Microsoft Entra:

- Include in authorization URL a scope like *entra-application-id/.default* alongside any other scopes your application might require. This allows Microsoft to know that you intend to use the access token against resources other than Microsoft's Graph API and will result in a token that can be validated by AgentCore Identity.

## Configurations Specific for v2.0 AccessTokens

On Microsoft Entra:

- While configuring the application, go to the Application Manifest and add accessTokenAcceptedVersion=2.
- On the application, expose an API. The application ID URI and scopes can be whatever is necessary for your application; but, the scope must be included in the authorization URL when retrieving the access token.

## Configurations Specific for v1.0 and v2.0 Id Tokens

On Microsoft Entra:

- While configuring the application, Enable ID Token Issuance in Application Registration.
- Include mandatory openid scope while calling the authorize and token endpoint for Microsoft Entra Id during Ingress Flows.

## Outbound

To configure the outbound Microsoft resource provider, use the following:

```
{
 "name": "NAME",
```

```
"credentialProviderVendor": "MicrosoftOAuth2",
"oauth2ProviderConfigInput": {
 "microsoftOAuth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "tenantId": "your-microsoft-entra-tenant"
 }
}
```

## Notion

Notion can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Notion's OAuth2 service and obtain access tokens for Notion API resources.

## Outbound

### Step 1

Use the following procedure to set up a Notion OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a Notion OAuth2 application

1. Open <https://www.notion.so/my-integrations>.
2. Choose **+ New integration**.
3. Choose **Public integration**.
4. Provide a name for your integration.
5. Choose **Submit**.
6. On the integration details page, open the **OAuth Domain & URIs** section and add the following as a redirect URI:

`https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback`

7. Record the OAuth client ID and OAuth client secret as you'll need this information to configure the Notion resource provider in AgentCore Identity.

For more details, refer to [Notion's authorization documentation](#).

## Step 2

To configure Notion as an outbound resource provider, use the following:

```
{
 "name": "Notion",
 "credentialProviderVendor": "NotionOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## Okta

Okta can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Okta's OAuth2 service and obtain access tokens for Okta API resources.

## Outbound

### Step 1

Use the following procedure to set up an Okta OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure an Okta OAuth2 application

1. Open the Okta developer console.
2. In the left navigation bar, choose **Applications**.
3. Choose on **Create App Integration**.
4. Choose **OIDC - OpenID Connect** as the sign-in method for your application.
5. Choose **Web Application** as your application type.
6. Provide a name for your application.
7. Select **Authorization Code** and/or **Client Credentials** depending on your needs.
8. For **Sign-in redirect URIs** add the following:

[https://bedrock-agentcore.\*region\*.amazonaws.com/identities/oauth2/callback](https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback)

9. Adjust the **Assignments** section as necessary depending on your needs.
10. Choose **Save**.
11. Record the client ID and client secret of your application, you'll need this information to configure the Okta resource provider in AgentCore Identity.
12. For Client credential flows the following must be performed (this can optionally be done for applications only being used for user federation):
  - In the left navigation bar, choose **Security**.
  - Open **API** and choose **Add Authorization Server**.
  - Follow the flow to create an authorization server dedicated to your Okta tenant.
  - Once the authorization server has been created choose the **Access Policies** tab on the overview page to configure an appropriate access policy.
  - Define the necessary custom scopes for the authorization server that is needed for your application.

For more details, refer to [Okta's OAuth and OpenID Connect documentation](#).

## Step 2

To configure Okta as an outbound resource provider, use the following:

```
{
 "name": "Okta",
 "credentialProviderVendor": "OktaOAuth2",
 "oauth2ProviderConfigInput" : {
 "includedOAuth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "authorizeEndpoint": "https://your-tenant.okta.com/oauth2/your-authorization-server/v1/authorize",
 "tokenEndpoint": "https://your-tenant.okta.com/oauth2/your-authorization-server/v1/token",
 "issuer": "https://your-tenant.okta.com/oauth2/your-authorization-server"
 }
 }
}
```

# OneLogin

OneLogin can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through OneLogin's OAuth2 service and obtain access tokens for OneLogin API resources.

## Outbound

### Step 1

Use the following procedure to set up a OneLogin OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a OneLogin OAuth2 application

1. Open the OneLogin Administration panel.
2. Add a new app.
3. Search for OIDC and select the OpenId Connect app.
4. Choose a name for your application and choose **Save**.
5. On the page for the app, go to the **Configuration** tab and add the following as a redirect URI:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

6. Open the **SSO** tab and note the client ID and client secret as you'll need these to configure the OneLogin app in AgentCore Identity.
7. Change the Token endpoint authentication method to **POST**.
8. Choose **Save**.

### Step 2

To configure OneLogin as an outbound resource provider use the following:

```
{
 "name": "OneLogin",
 "credentialProviderVendor": "OneLoginOAuth2",
 "oauth2ProviderConfigInput": {
 "includedOAuth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "tokenEndpointAuthMethod": "POST",
 "tokenEndpointUrl": "https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/token",
 "tokenScopes": ["your-scopes"],
 "tokenScopesSeparator": " ",
 "tokenScopesType": "space-separated"
 }
 }
}
```

```
 "clientSecret": "your-client-secret",
 "authorizeEndpoint": "https://your-tenant.onelogin.com/oidc/2/auth",
 "tokenEndpoint": "https://your-tenant.onelogin.com/oidc/2/token",
 "issuer": "https://your-tenant.onelogin.com/oidc/2"
}
}
}
```

## PingOne

PingOne can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through PingOne's OAuth2 service and obtain access tokens for PingOne API resources.

## Outbound

### Note

You can only configure a PingOne OAuth2 application as either a user federation or M2M OAuth2 client but not both.

## Step 1

Use the following procedure to set up a PingOne OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

### To configure a PingOne OAuth2 application

1. Sign onto the PingOne admin console.
2. In the left navigation bar, under **Applications**, choose **Application**.
3. On the page, choose the + icon next to **Applications** to create a new application.
4. To configure your application as a M2M OAuth2 client:
  - Select **Client Credentials** for Grant Type.
  - Select **Client Secret Post** for Token Endpoint Authentication Method.
  - Create a custom resource under Applications→Resources in the tabs on the left side of the page, including a scope. Then, add that scope to the application under its

personal **Resources** tab. Then, make sure that scope is present in the 'scopes' field of GetResourceOauth2AccessToken.

## 5. To configure your application as a user federation Oauth2 client:

- Select **Code** for Response Type.
- Select **Authorization Code** for Grant Type.
- Select **Client Secret Basic** for Token Endpoint Authentication Method.

For more details, refer to [PingOne's API documentation](#).

## Step 2

To configure PingOne as an outbound resource provider use the following:

```
{
 "name": "PingOne",
 "credentialProviderVendor": "PingOneOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 "authorizeEndpoint": "https://auth.pingone.com/your-env-id/as/authorize",
 "tokenEndpoint": "https://auth.pingone.com/your-env-id/as/token",
 "issuer": "https://auth.pingone.com/your-env-id/as"
 }
 }
}
```

## Reddit

Reddit can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Reddit's OAuth2 service and obtain access tokens for Reddit API resources.

## Outbound

### Step 1

Use the following procedure to set up a Reddit OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

## To configure a Reddit OAuth2 application

1. Open Reddit's developer console: <https://www.reddit.com/prefs/apps>.
2. Choose on **create an app**.
3. Select **web app** as the application type.
4. Configure the following as the redirect URI for the application:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

5. The client ID for the application is below the high-level summary of the application and the client secret is labelled **secret**. Note these values as you'll need it to configure the Reddit provider in AgentCore Identity.

For more details, refer to [Reddit's OAuth2 documentation](#).

## Step 2

To configure Reddit as an outbound resource provider, use the following:

```
{
 "name": "Reddit",
 "credentialProviderVendor": "RedditOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## Salesforce

Salesforce can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Salesforce's OAuth2 service and obtain access tokens for Salesforce API resources.

## Outbound

### Step 1

Use the following procedure to set up a Salesforce OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

### To configure a Salesforce OAuth2 application

1. In the developer portal for Salesforce, create a connected app and enter the name and other requested information specific to your application.
2. Enable and configure the OAuth settings for the application, providing the following as the callback URL:
  - `https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback`
3. Choose the necessary scopes and permissions your application will need.
4. Choose **Require Proof Key for Code Exchange (PKCE) Extension for Supported Authorization Flows.**
5. Choose **Require Secret for the Web Server Flow.**
6. Choose **Enable Authorization Code and Credentials Flow.**
7. If you wish to use Salesforce as a ClientCredentials/M2M provider then choose **Enable Client Credentials Flow** and follow the prompts.
8. Save your application and copy the client ID and client secret that is issued for the application. You will need these to configure Salesforce in AgentCore Identity.

For more details, refer to Salesforce's documentation [Define an OpenID Connect Provider](#).

### Step 2

To configure the outbound Salesforce resource provider, use the following:

```
{
 "name": "NAME",
 "credentialProviderVendor": "SalesforceOauth2",
 "oauth2ProviderConfigInput": {
 "SalesforceOauth2ProviderConfigInput": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 }
 },
}
```

# Slack

Slack can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Slack's OAuth2 service and obtain access tokens for Slack API resources.

## Outbound

### Step 1

Use the following procedure to set up a Slack OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a Slack OAuth2 application

1. Create a Slack application, enter an app name, and choose the development workspace where the app will be built.
2. Choose the **OAuth & Permissions** section and set the following as the redirect URL for the application:
  - `https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback`
3. Copy the client ID and client secret that Slack issues for your application. You will need them for configuring the provider in AgentCore Identity.

For more details, refer to Slack's documentation [Sign in with Slack](#).

### Step 2

To configure the outbound Slack resource provider, use the following:

```
{
 "name": "NAME",
 "credentialProviderVendor": "SlackOauth2",
 "oauth2ProviderConfigInput": {
 "SlackOauth2ProviderConfigInput": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret",
 }
 },
}
```

```
}
```

## Spotify

Spotify can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Spotify's OAuth2 service and obtain access tokens for Spotify API resources.

### Outbound

#### Step 1

Use the following procedure to set up a Spotify OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

##### To configure a Spotify OAuth2 application

1. Open the developer dashboard for Spotify.
2. Choose **Create an App**.
3. Provide a name and description for your application.
4. Use the following as the **Redirect URI** for your application:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

5. Select **Web API** for the API/SDKs that you intend to use for Spotify.
6. Choose **Save**.
7. On the application overview page, choose **Settings**.
8. On the **Basic Information** tab, record the client ID and client secret. You'll need these values for configuring the Spotify resource provider in AgentCore Identity.

#### Step 2

To configure Spotify as an outbound resource provider, use the following:

```
{
 "name": "Spotify",
 "credentialProviderVendor": "SpotifyOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
```

```
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
}
}
```

## Twitch

Twitch can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Twitch's OAuth2 service and obtain access tokens for Twitch API resources.

## Outbound

### Step 1

Use the following procedure to set up a Twitch OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a Twitch OAuth2 application

1. Sign in to the Twitch developer console.
2. Choose the **Applications** tab and then choose **Register your Application**.
3. Set a name for your application.
4. For the **OAuth Redirect URLs** field, use the following:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

5. Select the application category that is appropriate for the application you're developing (most likely this will be **Chat bot**).
6. Set **Client Type** as **Confidential**.
7. Choose **Create**.
8. On the application details page, record the client ID and client secret as you'll need this information for configuring the Twitch resource provider in AgentCore Identity.

For more details, refer to [Twitch's app registration documentation](#).

### Step 2

To configure Twitch as an outbound resource provider, use the following:

```
{
 "name": "Twitch",
 "credentialProviderVendor": "TwitchOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## X

X can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through X's OAuth2 service and obtain access tokens for X API resources.

## Outbound

### Step 1

Use the following procedure to set up a X OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure an X OAuth2 application

1. Open the X developer portal.
2. In the left navigation bar, choose **Project & Apps**.
3. Choose on the X project you've created for the application.
4. Under the **Apps** header choose **Add an App**.
5. Choose **Create new**.
6. Provide a name and description for your application.
7. In the left navigation bar, choose the application that was just generated.
8. On the app details page for your new app, choose **Edit** in the User Authentication settings.
9. Select the **App permissions** necessary for your application.
10. For **Type of App** select **Web App, Automated App or Bot**.

11. Under **App Info** enter the following as the callback URL:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

12. For **Website URL** enter the URL for your application.
13. Choose **Save**.
14. Under the **Keys and token** tab for your application, go to the **OAuth 2.0 Client ID and Client Secret**.
15. Choose **Generate** and note the client ID and secret that get generated as you'll need this information to configure the X resource provider in AgentCore Identity.

 **Note**

X only displays the full client secret when it is generated, if you lose this information you'll need to re-generate the client secret in the X developer portal.

For more details, refer to [X's OAuth 2.0 documentation](#).

## Step 2

To configure X as an outbound resource provider, use the following:

```
{
 "name": "X",
 "credentialProviderVendor": "X0auth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## Yandex

Yandex can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Yandex's OAuth2 service and obtain access tokens for Yandex API resources.

## Outbound

### Step 1

Use the following procedure to set up a Yandex OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

#### To configure a Yandex OAuth2 application

1. Open the developer console for Yandex at <https://oauth.yandex.com/>.
2. Choose **Create app**.
3. Provide a name for your application.
4. For platforms, select **Web services**.
5. Choose **Save and Continue**.
6. Select the permissions necessary for your application and then choose **Save and Continue**.
7. Configure the following as the redirect URI for the application:

```
https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback
```

8. Choose **Save and Continue**.
9. Once the client has been created, note the client ID and client secret assigned to your application as you'll need them for configuring the Yandex provider in AgentCore Identity.

For more details, refer to [Yandex's OAuth documentation](#).

### Step 2

To configure Yandex as an outbound resource provider, use the following:

```
{
 "name": "Yandex",
 "credentialProviderVendor": "YandexOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

{}

## Zoom

Zoom can be configured as an AgentCore Identity credential provider for outbound resource access. This allows your agents to authenticate users through Zoom's OAuth2 service and obtain access tokens for Zoom API resources.

## Outbound

### Note

You can only configure a Zoom OAuth2 application as either a user federation or M2M OAuth2 client but not both.

## Step 1

Use the following procedure to set up a Zoom OAuth2 application and obtain the necessary client credentials for AgentCore Identity.

### To configure a Zoom OAuth2 application

1. Sign in to the Zoom App Marketplace.
2. Choose **Develop > Build App**.
3. For a user federation app, select **General app** and choose **Create**.
  - On the app details page, add a name for your application and select how your application will be managed.
  - In the **OAuth Information** section, for both the OAuth Redirect URL and OAuth Allow Lists sections, use the following as the redirect URL for the application:

`https://bedrock-agentcore.region.amazonaws.com/identities/oauth2/callback`

4. For a M2M app, select **Server to Server OAuth App** and choose **Create**.
  - Add a name for your application.
  - On the app details page, choose **Scopes** and add the necessary scopes for your application.

- Open **Information** and provide a company name, and developer contact information.
5. Record the client ID and client secret that have been generated for your application. You'll need these values to configure the Zoom credential provider in AgentCore Identity.

For more details, refer to [Zoom's integration documentation](#).

## Step 2

To configure Zoom as an outbound resource provider, use the following:

```
{
 "name": "Zoom",
 "credentialProviderVendor": "ZoomOauth2",
 "oauth2ProviderConfigInput" : {
 "includedOauth2ProviderConfig": {
 "clientId": "your-client-id",
 "clientSecret": "your-client-secret"
 }
 }
}
```

## Data protection in Amazon Bedrock AgentCore Identity

The AWS [shared responsibility model](#) applies to data protection in Amazon Bedrock AgentCore Identity. As described in this model, AWS is responsible for protecting the global infrastructure that runs all of the AWS Cloud. You are responsible for maintaining control over your content that is hosted on this infrastructure. This content includes the security configuration and management tasks for the AWS services that you use. For more information about data privacy, see the [Data Privacy FAQ](#).

For data protection purposes, we recommend that you protect AWS account credentials and set up individual user accounts with IAM. That way each user is given only the permissions necessary to fulfill their job duties. We also recommend that you secure your data in the following ways:

- Use multi-factor authentication (MFA) with each account.
- Use SSL/TLS to communicate with AWS resources.
- Set up API and user activity logging with AWS CloudTrail.
- Use AWS encryption solutions, along with all default security controls within AWS services.

- Use advanced managed security services such as Amazon Macie, which assists in discovering and securing personal data that is stored in Amazon S3.

We strongly recommend that you never put sensitive identifying information, such as your customers' account numbers, into free-form fields such as a **Name** field. This includes when you work with Amazon Bedrock AgentCore Identity or other AWS services using the console, API, AWS CLI, or AWS SDKs. Any data that you enter into Amazon Bedrock AgentCore Identity or other services might get picked up for inclusion in diagnostic logs. When you provide a URL to an external server, don't include credentials information in the URL to validate your request to that server.

## Topics

- [Data encryption](#)
- [Set customer managed key policy](#)
- [Configure with API operations or an AWS SDK](#)

## Data encryption

Data encryption typically falls into two categories: encryption at rest and encryption in transit.

### Encryption at rest

Data within Amazon Bedrock AgentCore Identity is encrypted at rest in accordance with industry standards.

By default, Amazon Bedrock AgentCore Identity encrypts customer data in token vaults with AWS owned keys. You can also configure your token vaults to instead encrypt your information with customer managed keys.

#### AWS owned key

Amazon Bedrock AgentCore Identity encrypts the data in your token vault with an AWS owned KMS key. Keys of this type aren't visible in AWS KMS.

#### Customer managed key

Amazon Bedrock AgentCore Identity encrypts the data in your token vault with a customer managed key. You own the administration of customer managed key policies, rotation, and scheduled deletion.

## Things to know about token vault encryption with customer managed keys

- Data in your token vault (access tokens) are encrypted at rest with the customer managed key you configure. The token vault ARN is captured in the EncryptionContext.
- All customer data in your token vault is encrypted at rest, even if you take no action to configure encryption settings.
- You can't configure token vault encryption at rest with [multi-Region keys](#) or [asymmetric keys](#). Amazon Bedrock AgentCore Identity supports only single-region symmetric KMS keys for token vault encryption at rest.
- You can configure token vault encryption only with a KMS key ARN, not an alias.
- You can configure CMK for credential provider secrets using AWS Secrets Manager. [Learn more](#).

The following procedures configure encryption at rest in your token vault. For more information about KMS key policies that delegate access to AWS services like Amazon Cognito, see [Permissions for AWS services in key policies](#).

## Set customer managed key policy

 **Note**

Currently we don't support configuring CMK on token vault through console.

To use a customer managed key, your key must trust an Amazon Bedrock AgentCore Identity service principal to perform encryption and decryption operations on the key. Configure the [key policy](#) of your KMS key as shown in the following example. The IAM principal that writes this policy must have write access to your KMS key, with kms:PutKeyPolicy permission.

## Configure with API operations or an AWS SDK

Set your key configuration in a SetTokenVaultCMK API request. The following partial example request body sets the token vault to use the provided customer managed key.

```
"KmsConfiguration": {
 "KeyType": "CUSTOMER_MANAGED_KEY",
 "KmsKeyArn": "arn:aws:kms:us-east-1:111122223333:key/a1b2c3d4-5678-90ab-cdef-
EXAMPLE22222"
```

```
}
```

The following partial example request body sets a token vault to use an AWS owned key.

```
"KmsConfiguration": {
 "KeyType": "AWS_OWNED_KEY"
}
```

If your `GetTokenVault` response doesn't include a `KmsConfiguration` parameter, your token vault is configured to encrypt data at rest with an AWS owned key.

## Tagging AgentCore Identity resources

Amazon Bedrock AgentCore Identity supports comprehensive tagging capabilities across its resource hierarchy to enable better resource management, cost allocation, access control, and operational visibility. For general information about tags, including syntax and usage, see [Tagging AgentCore resources](#).

### Benefits of tagging AgentCore Identity resources

Tags help you accomplish the following key objectives with your AgentCore Identity resources:

#### Identify and organize AWS resources

Many AWS services support tagging, allowing you to assign the same tag to resources from different services. This helps indicate which resources are related. You could assign the same tag to a workload identity that you assign to an DynamoDB table or Lambda function that uses those credentials.

**Example scenario:** Tag all resources for a customer service application with `Application=customer-service-bot` to easily identify and manage related resources across different AWS services, as shown in the following sample code.

```
{
 "name": "customer-service-workload-identity",
 "tags": {
 "Application": "customer-service-bot",
 "Component": "authentication",
 "Owner": "customer-experience-team"
```

```
}
```

## Track AWS costs

You can activate cost allocation tags on the AWS Billing and Cost Management dashboard. AWS uses these tags to categorize your costs and deliver a monthly cost allocation report. This enables you to:

- Allocate identity service costs to specific projects or teams
- Track spending patterns across different environments
- Optimize costs based on usage analysis

**Example scenario:** Use `CostCenter=ai-platform` and `Project=bedrock-agents` tags to track how much your AI platform team spends on identity services for the Bedrock agents project, as shown in the following sample code.

```
{
 "name": "customer-service-workload-identity",
 "tags": {
 "CostCenter": "ai-platform",
 "Project": "bedrock-agents",
 "Environment": "production",
 "Team": "customer-experience"
 }
}
```

## Control access based on tags

You can control access by specifying tag keys and values in the conditions for IAM policies. This enables attribute-based access control (ABAC) where permissions are granted based on resource tags.

**Example scenario:** Allow a user to access workload identities only if they have an `Owner` tag with a value matching the user's team name, or restrict access to production credential providers based on `Environment=production` tags, as shown in the following sample code.

```
{
 "Version": "2012-10-17",
```

```
"Statement": [
 {
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetWorkloadIdentity",
 "bedrock-agentcore:UpdateWorkloadIdentity"
],
 "Resource": "*",
 "Condition": {
 "StringEquals": {
 "bedrock-agentcore:ResourceTag/Owner": "${aws:PrincipalTag/Team}"
 }
 }
 }
]
```

## Resource architecture

Amazon Bedrock AgentCore Identity manages five distinct resource types organized in a hierarchical structure:

### Primary resources

The following are the primary resources in the AgentCore Identity service hierarchy:

- **Workload Identity Directory:** arn:aws:bedrock-agentcore:\${Region}: \${Account}:workload-identity-directory/default
- **Token Vault:** arn:aws:bedrock-agentcore:\${Region}:\${Account}:token-vault/ default

### Sub-resources

The following are the sub-resources that exist within the primary resource hierarchy:

- **Workload Identity:** arn:aws:bedrock-agentcore:\${Region}:\${Account}:workload- identity-directory/default/workload-identity/\${workload identity name}
- **OAuth2 Credential Provider:** arn:aws:bedrock-agentcore:\${Region}: \${Account}:token-vault/default/oauth2credentialprovider/ \${oauth2CredentialProviderName}

- **API Key Credential Provider:** arn:\${Partition}:bedrock-agentcore:\${Region}:\${Account}:token-vault/default/apikeycredentialprovider/\${APIkeyCredentialproviderName}

## Tagging support matrix

The following table shows the tagging capabilities for each AgentCore Identity resource type:

### Tagging support for AgentCore Identity resources

Resource Type	Tag on Create	Basic Tagging	TBAC Support
Workload Identity	#	#	#
OAuth2 Credential Provider	#	#	#
API Key Credential Provider	#	#	#
Workload Identity Directory	#	#	#
Token Vault	#	#	#

 **Note**

TBAC (Tag-Based Access Control) support means you can use resource tags in IAM policy conditions to control access to these resources.

# Use Amazon Bedrock AgentCore built-in tools to interact with your applications

Amazon Bedrock AgentCore provides several built-in tools to enhance your development and testing experience. These tools are designed to help you interact with your application in various ways, providing capabilities for code execution and web browsing within the Amazon Bedrock AgentCore environment.

Built-in tools are a key component of Amazon Bedrock AgentCore, allowing you to enhance agents by adding hosted capabilities such as browser use and code execution. You can execute your code in a secure environment. This is critical in Agentic AI applications where the agents may execute arbitrary code that can lead to data compromise or security risks.

These tools are fully managed by Amazon Bedrock AgentCore, eliminating the need to set up and maintain your own tool infrastructure.

## Built-in Tools Overview

Amazon Bedrock AgentCore offers the following built-in tools:

### Code Interpreter

A secure environment for executing code and analyzing data. The Amazon Bedrock AgentCore Code Interpreter supports multiple programming languages including Python, TypeScript, and JavaScript, allowing you to process data and perform calculations within the AgentCore environment.

### Browser Tool

A secure, isolated browser environment that allows you to interact with and test web applications while minimizing potential risks to your system, access online resources, and perform web-based tasks.

These built-in tools are part of AgentCore's build phase, alongside other components such as Memory, Gateways, and Identity. They provide secure, managed capabilities that can be integrated into your agents without requiring additional infrastructure setup.

## Security and Access Control

Built-in tools in Amazon Bedrock AgentCore are designed with security in mind. They provide:

- Isolated execution environments to help prevent cross-contamination
- Configurable session timeouts to limit resource usage
- Integration with IAM for access control
- Network security controls to help restrict external access

## Key components

The built-in tools are designed with a secure, scalable architecture that integrates with the broader AgentCore services. Each tool operates within its own isolated environment to support security and resource management.

### Tool Resources

The base configuration for a tool, including network settings, permissions, and feature configuration. Tool resources are created once and can be used for multiple sessions.

### Sessions

Temporary runtime environments created from tool resources. Sessions have a defined lifecycle and timeout period, and they maintain state during their lifetime.

### APIs

Each tool provides APIs for creating and managing tool resources, starting and stopping sessions, and interacting with the tool's functionality.

## Integrating built-in tools with Agents

Built-in tools can be integrated with your agents to enhance their capabilities. The integration process involves:

1. Creating a tool resource (Code Interpreter or Browser Tool) or using a system resource
2. Creating a session to interact with the tool
3. Using the tool's API to perform operations
4. Terminating the session when finished

# Execute code and analyze data using Amazon Bedrock AgentCore Code Interpreter

The Amazon Bedrock AgentCore Code Interpreter enables AI agents to write and execute code securely in sandbox environments, enhancing their accuracy and expanding their ability to solve complex end-to-end tasks. This is critical in Agentic AI applications where the agents may execute arbitrary code that can lead to data compromise or security risks. The AgentCore Code Interpreter tool provides secure code execution, which helps you avoid running into these issues.


The Code Interpreter comes with pre-built runtimes for multiple languages and advanced features, including large file support and internet access, and CloudTrail logging capabilities. For inline upload, the file size can be up to 100 MB. And for uploading to Amazon S3 through terminal commands, the file size can be as large as 5 GB.

Developers can customize environments with session properties and network modes to meet their enterprise and security requirements. The AgentCore Code Interpreter reduces manual intervention while enabling sophisticated AI development without compromising security or performance.

## Overview

The AgentCore Code Interpreter is a capability that allows AI agents to write, execute, and debug code securely in sandbox environments. It provides a bridge between natural language understanding and computational execution, enabling agents to manipulate data and perform calculations programmatically.

The AgentCore Code Interpreter runs in a containerized environment within Amazon Bedrock AgentCore, ensuring that code execution remains isolated and secure.

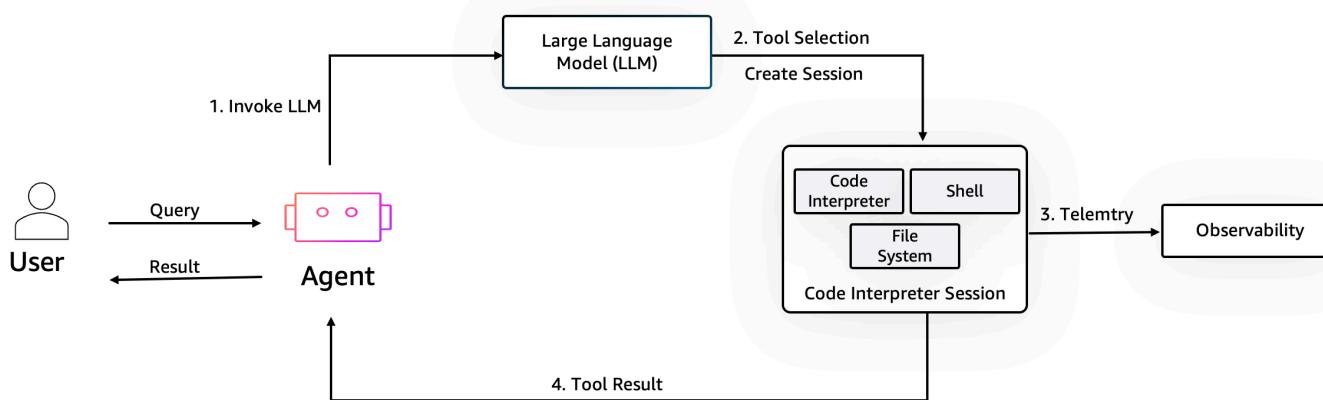

## Why use Code Interpreter in agent development

The AgentCore Code Interpreter enhances agent development in the following ways:

- Execute code securely: Develop agents that can perform complex workflows and data analysis in isolated sandbox environments, while accessing internal data sources without exposing sensitive data or compromising security.
- Multiple programming languages: The Code Interpreter supports various programming languages including Python, JavaScript, and TypeScript, making it versatile for different use cases.
- Monitoring and large-scale data processing: Track and troubleshoot code execution. When working with large datasets, you can easily reference files stored in Amazon S3, enabling efficient processing of gigabyte-scale data without API limitations.
- Ease of use: Use a fully managed default mode with pre-built execution runtimes that support popular programming languages with common libraries pre-installed.
- Extends problem-solving capabilities: Allows agents to solve computational problems that are difficult to address through reasoning alone and enables precise mathematical calculations and data processing at scale.
- Long execution duration support: The Code Interpreter tool provides support for a default execution time of 15 minutes, which can be extended for up to eight hours.
- Handles structured data: Processes CSV, Excel, JSON, and other data formats, and performs data cleaning, and analysis.
- Enables complex workflows: Allows multi-step problem solving that combines reasoning with computation and facilitates iterative development and debugging.

The AgentCore Code Interpreter makes agents more powerful by complementing their reasoning abilities with computational execution, allowing them to tackle a much wider range of tasks effectively.

## Best practices

To get the most out of the AgentCore Code Interpreter:

- Keep code snippets concise and focused on specific tasks
- Use comments to document your code

- Optimize code for performance when working with large datasets
- Save intermediate results when performing complex operations
- Use the `code_session` context manager to ensure proper cleanup
- Include try/except blocks in code to handle errors gracefully
- Code execution results are returned and processed as streams
- Clean up temporary files when no longer needed
- Close sessions when you're done to release resources

## Pre-installed libraries

The AgentCore Code Interpreter comes with a comprehensive set of pre-installed Python libraries to support various data analysis, machine learning, and development tasks. These libraries are available immediately without requiring additional installation.

## Data Analysis and Visualization

### Data Analysis and Visualization libraries

Library	Description
pandas	Data manipulation and analysis
numpy	Numerical computing
matplotlib	Plotting and visualization
matplotlib-inline	Matplotlib backend for Jupyter
matplotlib-venn	Venn diagram plotting
plotly	Interactive visualizations
bokeh	Interactive visualization library
scipy	Scientific computing
statsmodels	Statistical modeling
sympy	Symbolic mathematics

Library	Description
numba	Just-in-time compilation for numerical functions
pyarrow	Columnar data processing
numexpr	Fast numerical expression evaluator
mizani	Scales for Python graphics
contourpy	Contour line generation
cycler	Composable style cycles
fonttools	Font manipulation library
kiwisolver	Constraint solver
pyparsing	Parsing library
python-dateutil	Date/time utilities
pytz	Timezone definitions
tzdata	Timezone data
patsy	Statistical model specification
threadpoolctl	Thread pool control
joblib	Parallel computing utilities
mpmath	Arbitrary-precision arithmetic
llvmlite	LLVM binding for Numba

## Machine Learning and AI

### Machine Learning and AI libraries

Library	Description
scikit-learn	Machine learning algorithms
scikit-image	Image processing
torch	PyTorch deep learning framework
torchvision	Computer vision for PyTorch
torchaudio	Audio processing for PyTorch
xgboost	Gradient boosting framework
openai	OpenAI API client
spacy	Natural language processing
spacy-legacy	Legacy components for spaCy
spacy-loggers	Logging utilities for spaCy
nltk	Natural language toolkit
textblob	Text processing
catalogue	Tiny library for function registries
confection	Configuration system
cymem	Memory management for Cython
murmurhash	Cython bindings for MurmurHash
preshed	Cython hash tables
srsly	Serialization utilities

Library	Description
thinc	Machine learning library
wasabi	Lightweight console printing
weasel	Command-line interface for spaCy projects
blis	BLAS-like linear algebra library
langcodes	Language code utilities
language_data	Language data for langcodes
marisa-trie	Trie data structure
absl-py	Abseil Python common libraries
mcp	Model Context Protocol

## Mathematical and Optimization

### Mathematical and Optimization libraries

Library	Description
cvxpy	Convex optimization
ortools	Operations research tools
pulp	Linear programming
galois	Galois field arithmetic
z3-solver	Theorem prover
python_constraint2	Constraint satisfaction problems
gapstatistics	Gap statistic for clustering
oeis	Online Encyclopedia of Integer Sequences

Library	Description
networkx	Network analysis
igraph	Graph analysis and visualization

## Web and API Development

### Web and API Development libraries

Library	Description
requests	HTTP library
beautifulsoup4	Web scraping
fastapi	Modern web framework
Flask	Lightweight web framework
Flask-Cors	Cross-origin resource sharing for Flask
Flask-Login	User session management for Flask
Django	Full-featured web framework
httpx	Async HTTP client
httpcore	HTTP core library
starlette	ASGI framework
uvicorn	ASGI server
gunicorn	WSGI HTTP server
Hypercorn	ASGI server
asgiref	ASGI reference implementation
Werkzeug	WSGI utility library

Library	Description
Jinja2	Template engine
MarkupSafe	Safe string handling
itsdangerous	Cryptographic signing
blinker	Signal/event dispatching
click-plugins	Click plugin system
tornado	Web framework and async networking
sqlparse	SQL parser
greenlet	Lightweight coroutines
aiosignal	Async signal dispatching
anyio	Async compatibility layer
certifi	Certificate bundle
dnspython	DNS toolkit
email_validator	Email validation
frozenlist	Immutable list implementation
h11	HTTP/1.1 protocol implementation
h2	HTTP/2 protocol implementation
hpack	HTTP/2 header compression
http tools	Fast HTTP parsing
hyperframe	HTTP/2 framing layer
idna	Internationalized domain names

Library	Description
multidict	Multi-value dictionary
priority	HTTP/2 priority tree
python-dotenv	Environment variable management
python-multipart	Multipart form data parser
shellingham	Shell detection library
sniffio	Async library detection
sse-starlette	Server-sent events for Starlette
urllib3	HTTP client library
uvloop	Fast event loop for asyncio
watchfiles	File watching library
wsproto	WebSocket protocol implementation
yarl	URL parsing library

## Cloud and Database

### Cloud and Database libraries

Library	Description
boto3	AWS SDK for Python (boto3)
duckdb	In-process SQL database
SQLAlchemy	SQL toolkit and ORM
pymongo	MongoDB driver
redis	Redis client

Library	Description
psycopg2-binary	PostgreSQL adapter

## File Processing and Documents

### File Processing and Documents libraries

Library	Description
openpyxl	Excel file processing
xlrd	Excel file reading
XlsxWriter	Excel file writing
pyxlsb	Excel binary format reader
et-xmlfile	XML file handling for openpyxl
PyPDF2	PDF processing
pdfplumber	PDF text extraction
pdf2image	PDF to image conversion
pdfkit	HTML to PDF conversion
pypdfium2	PDF processing library
pdfminer.six	PDF text extraction
pdfrw	PDF reader/writer
python-docx	Word document processing
docx2txt	Word document text extraction
reportlab	PDF generation
fpdf	Simple PDF generation

Library	Description
rarfile	RAR archive processing
xml-python	XML processing
svglib	SVG to PDF(bitmap conversion)
svgwrite	SVG creation library
proglog	Progress logging
lazy_loader	Lazy module loading

## Image and Media Processing

### Image and Media Processing libraries

Library	Description
pillow	Image processing
opencv-python	Computer vision
imageio	Image I/O
imageio-ffmpeg	FFmpeg plugin for imageio
moviepy	Video editing
ffmpeg-python	FFmpeg wrapper
ffmpy	FFmpeg wrapper
pydub	Audio manipulation
gtts	Google Text-to-Speech
mutagen	Audio metadata handling
Wand	ImageMagick binding

Library	Description
imgkit	HTML to image conversion
pypng	PNG image processing
PyWavelets	Wavelet transforms
tifffile	TIFF file processing

## Development Tools and Utilities

### Development Tools and Utilities libraries

Library	Description
pydantic	Data validation using type hints
pydantic-settings	Settings management for Pydantic
pydantic_core	Core validation logic for Pydantic
jsonschema	JSON schema validation
PyYAML	YAML processing
orjson	Fast JSON library
ujson	Ultra fast JSON encoder/decoder
click	Command line interface creation
typer	Modern CLI framework
tqdm	Progress bars
loguru	Logging library
rich	Rich text and beautiful formatting
ipython	Interactive Python shell

Library	Description
Faker	Fake data generation
qrcode	QR code generation
retrying	Retry decorator
tenacity	Retry library
backoff	Backoff and retry
more_itertools	Additional iterator tools
cryptography	Cryptographic recipes and primitives
bcrypt	Password hashing
PyNaCl	Networking and Cryptography library
pyOpenSSL	OpenSSL wrapper
cffi	C Foreign Function Interface
pycparser	C parser in Python
annotated-types	Reusable constraint types
typing_extensions	Backported typing features
typing_inspection	Runtime inspection of typing
astor	AST to source code converter
asttokens	Annotate AST with source tokens
executing	Get currently executing AST node
pure-eval	Safe evaluation of expressions
stack-data	Extract data from stack frames

Library	Description
decorator	Decorator utilities
entrypoints	Discover entry points
jedi	Code completion library
parso	Python parser
prompt_toolkit	Interactive command line toolkit
traitlets	Configuration system
wcwidth	Terminal width calculation
Pygments	Syntax highlighting
mdurl	URL utilities for Markdown
texttable	Text table formatting
xyzservices	Source of XYZ tile services
attrs	Classes without boilerplate
cachetools	Extensible memoizing collections
cloudpathlib	Cloud storage path library
cloudpickle	Pickle for cloud computing
distro	Linux distribution information
filelock	Platform independent file locking
fsspec	Filesystem specification
future	Python 2/3 compatibility
httpx-sse	Server-sent events for HTTPX

Library	Description
<code>importlib_metadata</code>	Library metadata access
<code>importlib_resources</code>	Resource access for packages
<code>jsonschema-specifications</code>	JSON Schema specifications
<code>packaging</code>	Core utilities for Python packages
<code>pexpect</code>	Expect-like subprocess control
<code>platformdirs</code>	Platform-specific directories
<code>ptyprocess</code>	Pseudoterminal utilities
<code>referencing</code>	JSON reference resolution
<code>rpds-py</code>	Persistent data structures
<code>six</code>	Python 2/3 compatibility utilities
<code>smart-open</code>	Utils for streaming large files
<code>zipp</code>	Backport of pathlib-compatible object wrapper

## Text and Markup Processing

### Text and Markup Processing libraries

Library	Description
<code>markdown-it-py</code>	Markdown parser
<code>markdown2</code>	Markdown processor
<code>markdownify</code>	HTML to Markdown converter

Library	Description
lxml	XML and HTML processing
cssselect2	CSS selector implementation
tiny.css2	CSS parser
webencodings	Character encoding for web
soupsieve	CSS selector library
regex	Alternative regular expression module
chardet	Character encoding detection
charset-normalizer	Character encoding detection

## Geospatial and Mapping

### Geospatial and Mapping libraries

Library	Description
shapely	Geometric objects manipulation
pyshp	Shapefile library
branca	HTML/JS template library for maps

For a complete list of all pre-installed libraries with their specific versions, you can run the following code in your Code Interpreter session:

```
import pkg_resources
installed_packages = [d for d in pkg_resources.working_set]
for package in sorted(installed_packages, key=lambda x: x.project_name.lower()):
 print(f'{package.project_name}=={package.version}')
```

# Get started with AgentCore Code Interpreter

AgentCore Code Interpreter enables your agents to execute Python code in a secure, managed environment. The agent can perform calculations, analyze data, generate visualizations, and validate answers through code execution.

This page covers the prerequisites and provides two approaches to get started:

- **Using AWS Strands** - A high-level agent framework that simplifies building AI agents with built-in tool integration, conversation management, and automatic session handling.
- **Direct usage** - SDK and Boto3 approaches that provide more control over session management and code execution for custom implementations.

## Topics

- [Prerequisites](#)
- [Configuring your credentials](#)
- [Using AgentCore Code Interpreter via AWS Strands](#)
- [Using AgentCore Code Interpreter directly](#)

## Prerequisites

Before you start, ensure you have:

- AWS account with credentials configured. See [Configuring your credentials](#).
- Python 3.10+ installed
- Boto3 installed. See [Boto3 documentation](#).
- IAM execution role with the required permissions. See [Configuring your credentials](#).
- Model access: Anthropic Claude Sonnet 4.0 [enabled](#) in the Amazon Bedrock console. For information about using a different model with the Strands Agents see the *Model Providers* section in the [Strands Agents SDK documentation](#).
- AWS Region where Amazon Bedrock AgentCore is available. See [AWS Regions](#).

## Configuring your credentials

Perform the following steps to configure your AWS credentials and attach the required permissions.

### 1. Verify your AWS credentials

Confirm your AWS credentials are configured:

```
aws sts get-caller-identity
```

 **Note**

Take note of the user or credentials returned here, as you'll be using it when attaching the required permissions.

If this command fails, configure your credentials. For more information, see [Configuration and credential file settings in the AWS CLI](#).

### 2. Attach required permissions

Your IAM user or role needs permissions to use AgentCore Code Interpreter. Attach this policy to your IAM identity:

 **Note**

Replace <region> with your chosen region (for example, us-west-2) and <account\_id> with your AWS account ID in the policy below:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "BedrockAgentCoreCodeInterpreterFullAccess",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:CreateCodeInterpreter",
 "bedrock-agentcore:ListCodeInterpreters"
]
 }
]
}
```

```
 "bedrock-agentcore:StartCodeInterpreterSession",
 "bedrock-agentcore:InvokeCodeInterpreter",
 "bedrock-agentcore:StopCodeInterpreterSession",
 "bedrock-agentcore:DeleteCodeInterpreter",
 "bedrock-agentcore>ListCodeInterpreters",
 "bedrock-agentcore:GetCodeInterpreter",
 "bedrock-agentcore:GetCodeInterpreterSession",
 "bedrock-agentcore>ListCodeInterpreterSessions"
],
 "Resource": "arn:aws:bedrock-agentcore:<region>:<account_id>:code-
interpreter/*"
}
]
```

## To attach this policy

Follow these steps:

1. Go to the IAM console.
2. Find your user or role from the response returned for the get-caller-identity API operation.
3. Choose **Add permissions** and then choose **Create inline policy**
4. Switch to JSON view and paste the policy above
5. Name it AgentCoreCodeInterpreterAccess and save

### Note

If you're deploying agents to Amazon Bedrock AgentCore Runtime, you'll also need to create an IAM execution role with a service trust policy. For more information, see [Get started with AgentCore Runtime](#).

The following sections show you how to use the Amazon Bedrock AgentCore Code Interpreter with and without the agent framework. Using the Code Interpreter directly without an agent framework is especially useful when you want to execute specific code snippets programmatically.

## Topics

- [Using AgentCore Code Interpreter via AWS Strands](#)
- [Using AgentCore Code Interpreter directly](#)

## Using AgentCore Code Interpreter via AWS Strands

The following sections show you how to use the Amazon Bedrock AgentCore Code Interpreter with the Strands SDK. Before you go through the examples in this section, see [Prerequisites](#).

### Topics

- [Step 1: Install dependencies](#)
- [Step 2: Create your agent with AgentCore Code Interpreter](#)
- [Step 3: Run the agent](#)

### Step 1: Install dependencies

Create a project folder and install the required packages:

 **Note**

On Windows, use: .\venv\Scripts\activate

```
mkdir agentcore-tools-quickstart
cd agentcore-tools-quickstart
python3 -m venv .venv
source .venv/bin/activate
```

Install the required packages:

```
pip install bedrock-agentcore strands-agents strands-agents-tools
```

These packages provide:

- **bedrock-agentcore**: The SDK for Amazon Bedrock AgentCore tools including AgentCore Code Interpreter
- **strands-agents**: The Strands agent framework
- **strands-agents-tools**: The tools that the Strands agent framework offers

## Step 2: Create your agent with AgentCore Code Interpreter

Create a file named `code_interpreter_agent.py` and add the following code:

```
from strands import Agent
from strands_tools.code_interpreter import AgentCoreCodeInterpreter

Initialize the Code Interpreter tool
code_interpreter_tool = AgentCoreCodeInterpreter(region+"<Region>")

Define the agent's system prompt
SYSTEM_PROMPT = """You are an AI assistant that validates answers through code
execution.
When asked about code, algorithms, or calculations, write Python code to verify your
answers."""

Create an agent with the Code Interpreter tool
agent = Agent(
 tools=[code_interpreter_tool.code_interpreter],
 system_prompt=SYSTEM_PROMPT
)

Test the agent with a sample prompt
prompt = "Calculate the first 10 Fibonacci numbers."
print(f"\n\nPrompt: {prompt}\n\n")

response = agent(prompt)
print(response.message["content"][0]["text"])
```

This code:

- Initializes the AgentCore Code Interpreter tool for your region
- Creates an agent configured to use code execution for validation
- Sends a prompt asking the agent to calculate Fibonacci numbers
- Prints the agent's response

## Step 3: Run the agent

Execute the script:

```
python code_interpreter_agent.py
```

## Expected output

You should see the agent's response containing the first 10 Fibonacci numbers. The agent will write Python code to calculate the sequence and return both the code and the results.

If you encounter errors, verify:

- Your IAM role has the correct permissions and trust policy
- You have model access enabled in the Amazon Bedrock console
- Your AWS credentials are properly configured

## Using AgentCore Code Interpreter directly

The following sections show you how to use the Amazon Bedrock AgentCore Code Interpreter directly without an agent framework. This is especially useful when you want to execute specific code snippets programmatically. Before you go through the examples in this section, see [Prerequisites](#).

### Topics

- [Step 1: Choose your approach and install dependencies](#)
- [Step 2: Execute code](#)

### Step 1: Choose your approach and install dependencies

Amazon Bedrock AgentCore provides two ways to interact with AgentCore Code Interpreter: using the high-level SDK client or using boto3 directly.

- **SDK Client:** The bedrock\_agentcore SDK provides a simplified interface that handles session management details. Use this approach for most applications.
- **Boto3 Client:** The AWS SDK gives you direct access to the AgentCore Code Interpreter API operations. Use this approach when you need fine-grained control over session configuration or want to integrate with existing boto3-based applications.

Create a project folder (if you didn't create one before) and install the required packages:

```
mkdir agentcore-tools-quickstart
cd agentcore-tools-quickstart
python3 -m venv .venv
```

```
source .venv/bin/activate
```

On Windows, use: .venv\Scripts\activate

Install the required packages:

```
pip install bedrock-agentcore boto3
```

These packages provide:

- **bedrock-agentcore**: The SDK for Amazon Bedrock AgentCore tools including AgentCore Code Interpreter
- **boto3**: AWS SDK for Python (Boto3) to create, configure, and manage AWS services

## Step 2: Execute code

Choose one of the following approaches to execute code with AgentCore Code Interpreter:

### Note

Replace <Region> with your actual AWS Region (for example, us-east-1 or us-west-2).

### SDK Client

Create a file named direct\_code\_execution\_sdk.py and add the following code:

```
from bedrock_agentcore.tools.code_interpreter_client import CodeInterpreter
import json

Initialize the Code Interpreter client for your region
code_client = CodeInterpreter('<Region>')

Start a Code Interpreter session
code_client.start()

try:
 # Execute Python code
 response = code_client.invoke("executeCode", {
 "language": "python",
 "code": 'print("Hello World!!!")'
```

```
 })

 # Process and print the response
 for event in response["stream"]:
 print(json.dumps(event["result"], indent=2))

finally:
 # Always clean up the session
 code_client.stop()
```

This code:

- Creates a AgentCore Code Interpreter client for your region
- Starts a session (required before executing code)
- Executes Python code and streams the results with full event details
- Stops the session to clean up resources

## Run the script

Execute the following command:

```
python direct_code_execution_sdk.py
```

## Expected output

You should see a JSON response containing the execution result with Hello World!!! in the output content.

## Boto3

Create a file named direct\_code\_execution\_boto3.py and add the following code:

```
import boto3
import json

Code to execute
code_to_execute = """
print("Hello World!!!")
"""

Initialize the bedrock-agentcore client
client = boto3.client(
```

```
"bedrock-agentcore",
region_name=<Region>
)

Start a Code Interpreter session
session_response = client.start_code_interpreter_session(
 codeInterpreterIdentifier="aws.codeinterpreter.v1",
 name="my-code-session",
 sessionTimeoutSeconds=900
)
session_id = session_response["sessionId"]

print(f"Started session: {session_id}\n\n")

try:
 # Execute code in the session
 execute_response = client.invoke_code_interpreter(
 codeInterpreterIdentifier="aws.codeinterpreter.v1",
 sessionId=session_id,
 name="executeCode",
 arguments={
 "language": "python",
 "code": code_to_execute
 }
)

 # Extract and print the text output from the stream
 for event in execute_response['stream']:
 if 'result' in event:
 result = event['result']
 if 'content' in result:
 for content_item in result['content']:
 if content_item['type'] == 'text':
 print(content_item['text'])

finally:
 # Stop the session when done
 client.stop_code_interpreter_session(
 codeInterpreterIdentifier="aws.codeinterpreter.v1",
 sessionId=session_id
)
 print(f"\n\nStopped session: {session_id}")
```

This code:

- Creates a boto3 client for the bedrock-agentcore service
- Starts a AgentCore Code Interpreter session with a 900-second timeout
- Executes Python code using the session ID
- Parses the streaming response to extract text output
- Properly stops the session to release resources

The boto3 approach requires explicit session management. You must call `start_code_interpreter_session` before executing code and `stop_code_interpreter_session` when finished.

### Run the script

Execute the following command:

```
python direct_code_execution_boto3.py
```

### Expected output

You should see `Hello World!!!` printed as the result of the code execution, along with the session ID information.

## Run code in Code Interpreter from Agents

You can build agents that use the Code Interpreter tool to execute code and analyze data. This section demonstrates how to build agents using different frameworks.

### Strands

You can build an agent that uses the Code Interpreter tool using the Strands framework:

#### Install dependencies

Run the following commands to install the required packages:

```
pip install strands-agents
pip install bedrock-agentcore
```

## Write an agent with Code Interpreter tool

The following Python code shows how to write an agent using Strands with the Code Interpreter tool:

```
strands_ci_agent.py

import json
from strands import Agent, tool
from bedrock_agentcore.tools.code_interpreter_client import code_session
import asyncio

#Define the detailed system prompt for the assistant
SYSTEM_PROMPT = """You are a helpful AI assistant that validates all answers through
code execution.
```

### VALIDATION PRINCIPLES:

1. When making claims about code, algorithms, or calculations - write code to verify them
2. Use execute\_python to test mathematical calculations, algorithms, and logic
3. Create test scripts to validate your understanding before giving answers
4. Always show your work with actual code execution
5. If uncertain, explicitly state limitations and validate what you can

### APPROACH:

- If asked about a programming concept, implement it in code to demonstrate
- If asked for calculations, compute them programmatically AND show the code
- If implementing algorithms, include test cases to prove correctness
- Document your validation process for transparency
- The state is maintained between executions, so you can refer to previous results

### TOOL AVAILABLE:

- execute\_python: Run Python code and see output

**RESPONSE FORMAT:** The execute\_python tool returns a JSON response with:

- sessionId: The code interpreter session ID
- id: Request ID
- isError: Boolean indicating if there was an error
- content: Array of content objects with type and text/data
- structuredContent: For code execution, includes stdout, stderr, exitCode, executionTime

For successful code execution, the output will be in content[0].text and also in structuredContent.stdout.

Check isError field to see if there was an error.

Be thorough, accurate, and always validate your answers when possible."""

```
#Define and configure the code interpreter tool
@tool
def execute_python(code: str, description: str = "") -> str:
 """Execute Python code"""

 if description:
 code = f"# {description}\n{code}"

 #Print code to be executed
 print(f"\n Code: {code}")

 # Call the Invoke method and execute the generated code, within the initialized
 # code interpreter session
 with code_session("<Region>") as code_client:
 response = code_client.invoke("executeCode", {
 "code": code,
 "language": "python",
 "clearContext": False
 })

 for event in response["stream"]:
 return json.dumps(event["result"])

#configure the strands agent including the tool(s)
agent=Agent(
 tools=[execute_python],
 system_prompt=SYSTEM_PROMPT,
 callback_handler=None)

query="Can all the planets in the solar system fit between the earth and moon?"

Invoke the agent asynchronously and stream the response
async def main():
 response_text = ""
 async for event in agent.stream_async(query):
 if "data" in event:
```

```
Stream text response
chunk = event["data"]
response_text += chunk
print(chunk, end="")

asyncio.run(main())
```

# LangChain

You can build an agent that uses the Code Interpreter tool using the LangChain framework:

## Install dependencies

Run the following commands to install the required packages:

```
pip install langchain
pip install langchain_aws
pip install bedrock-agentcore
```

## **Write an agent with Code Interpreter tool**

The following Python code shows how to write an agent using LangChain with the Code Interpreter tool:

```
langchain_ci_agent.py

#Please ensure that the latest Bedrock-AgentCore and Boto SDKs are installed
#Import Bedrock-AgentCore and other libraries

import json
from bedrock_agentcore.tools.code_interpreter_client import code_session
from langchain.agents import AgentExecutor, create_tool_calling_agent,
 initialize_agent, tool
from langchain_aws import ChatBedrockConverse
from langchain_core.prompts import ChatPromptTemplate, MessagesPlaceholder

#Define and configure the code interpreter tool
@tool
def execute_python(code: str, description: str = "") -> str:
 """Execute Python code"""
 pass
```

```
if description:
 code = f"# {description}\n{code}"

#Print the code to be executed
print(f"\nGenerated Code: \n{code}")

Call the Invoke method and execute the generated code, within the initialized code
interpreter session
with code_session("<Region>") as code_client:
 response = code_client.invoke("executeCode", {
 "code": code,
 "language": "python",
 "clearContext": False
 })
 for event in response["stream"]:
 return json.dumps(event["result"])

Initialize the language model
Please ensure access to anthropic.claude-3-5-sonnet model in Amazon Bedrock
llm = ChatBedrockConverse(
 model_id="anthropic.claude-3-5-sonnet-20240620-v1:0",
 region_name=<Region>
)

#Define the detailed system prompt for the assistant
SYSTEM_PROMPT = """You are a helpful AI assistant that validates all answers through
code execution.
```

#### VALIDATION PRINCIPLES:

1. When making claims about code, algorithms, or calculations - write code to verify them
2. Use execute\_python to test mathematical calculations, algorithms, and logic
3. Create test scripts to validate your understanding before giving answers
4. Always show your work with actual code execution
5. If uncertain, explicitly state limitations and validate what you can

#### APPROACH:

- If asked about a programming concept, implement it in code to demonstrate
- If asked for calculations, compute them programmatically AND show the code

- If implementing algorithms, include test cases to prove correctness
- Document your validation process for transparency
- The code interpreter maintains state between executions, so you can refer to previous results

**TOOL AVAILABLE:**

- execute\_python: Run Python code and see output

**RESPONSE FORMAT:** The execute\_python tool returns a JSON response with:

- sessionId: The code interpreter session ID
- id: Request ID
- isError: Boolean indicating if there was an error
- content: Array of content objects with type and text/data
- structuredContent: For code execution, includes stdout, stderr, exitCode, executionTime

For successful code execution, the output will be in content[0].text and also in structuredContent.stdout.

Check isError field to see if there was an error.

Be thorough, accurate, and always validate your answers when possible."""

```
Create a list of our custom tools
tools = [execute_python]

Define the prompt template
prompt = ChatPromptTemplate.from_messages([
 ("system", SYSTEM_PROMPT),
 ("user", "{input}"),
 MessagesPlaceholder(variable_name="agent_scratchpad"),
])

Create the agent
agent = create_tool_calling_agent(llm, tools, prompt)
Create the agent executor
agent_executor = AgentExecutor(agent=agent, tools=tools, verbose=True)

query="Can all the planets in the solar system fit between the earth and moon?"
resp=agent_executor.invoke({"input": query})

#print the result
```

```
print(resp['output'][0]['text'])
```

## Write files to a session

You can use the Code Interpreter to read and write files in the sandbox environment. This allows you to upload data files, process them with code, and retrieve the results.

### Install dependencies

Run the following command to install the required package:

```
pip install bedrock-agentcore
```

### Upload Code and Data using the file tool

The following Python code shows how to upload files to the Code Interpreter session and execute code that processes those files. The files that are required are `data.csv` and `stats.py` that are available [in this package](#).

```
file_mgmt_ci_agent.py

from bedrock_agentcore.tools.code_interpreter_client import CodeInterpreter
import json
from typing import Dict, Any, List

#Configure and Start the code interpreter session
code_client = CodeInterpreter('<Region>')
code_client.start()

#read the content of the sample data file
data_file = "data.csv"

try:
 with open(data_file, 'r', encoding='utf-8') as data_file_content:
 data_file_content = data_file_content.read()
 #print(data_file_content)
except FileNotFoundError:
 print(f"Error: The file '{data_file}' was not found.")
except Exception as e:
 print(f"An error occurred: {e}")
```

```
#read the content of the python script to analyze the sample file
code_file = "stats.py"
try:
 with open(code_file, 'r', encoding='utf-8') as code_file_content:
 code_file_content = code_file_content.read()
 #print(code_file_content)
except FileNotFoundError:
 print(f"Error: The file '{code_file}' was not found.")
except Exception as e:
 print(f"An error occurred: {e}")

files_to_create = [
 {
 "path": "data.csv",
 "text": data_file_content
 },
 {
 "path": "stats.py",
 "text": code_file_content
 }
]

#define the method to call the invoke API
def call_tool(tool_name: str, arguments: Dict[str, Any]) -> Dict[str, Any]:
 response = code_client.invoke(tool_name, arguments)
 for event in response["stream"]:
 return json.dumps(event["result"], indent=2)

#write the sample data and analysis script into the code interpreter session
writing_files = call_tool("writeFiles", {"content": files_to_create})
print(f"writing files: {writing_files}")

#List and validate that the files were written successfully
listing_files = call_tool("listFiles", {"path": ""})
print(f"listing files: {listing_files}")

#Run the python script to analyze the sample data file
execute_code = call_tool("executeCode", {
```

```
 "code": files_to_create[1]['text'],
 "language": "python",
 "clearContext": True})
print(f"code execution result: {execute_code}")

#Clean up and stop the code interpreter session
code_client.stop()
```

## Using Terminal Commands with an execution role

You can create a custom Code Interpreter tool with an execution role to upload/download files from Amazon S3. This allows your code to interact with S3 buckets for storing and retrieving data.

### Prerequisites

Before creating a custom Code Interpreter with S3 access, you need to:

1. Create an S3 bucket (e.g., codeinterpreterartifacts-<awsaccountid>)
2. Create a folder within the bucket (e.g., output\_artifacts)
3. Create an IAM role with the following trust policy:

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "Service": "bedrock-agentcore.amazonaws.com"
 },
 "Action": "sts:AssumeRole"
 }
]
}
```

4. Add the following permissions to the role:

## JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "VisualEditor0",
 "Effect": "Allow",
 "Action": [
 "s3:PutObject",
 "s3:GetObject"
],
 "Resource": "arn:aws:s3:::codeinterpreterartifacts-111122223333/*"
 }
]
}
```

## Sample Python code

You can implement S3 integration using boto3 (AWS SDK for Python). The following example uses boto3 to create a custom Code Interpreter with an execution role that can upload files to or download files from Amazon S3.

### Note

Before running this code, make sure to replace REGION and <awsaccountid> with your AWS Region and AWS account number.

```
import boto3
import json
import time

REGION = "<Region>"
CP_ENDPOINT_URL = f"https://bedrock-agentcore-control.{REGION}.amazonaws.com"
DP_ENDPOINT_URL = f"https://bedrock-agentcore.{REGION}.amazonaws.com"

Update the accountId to reflect the correct S3 path.
```

```
S3_BUCKET_NAME = "codeinterpreterartifacts-<awsaccountid>"

bedrock_agentcore_control_client = boto3.client(
 'bedrock-agentcore-control',
 region_name=REGION,
 endpoint_url=CP_ENDPOINT_URL
)
bedrock_agentcore_client = boto3.client(
 'bedrock-agentcore',
 region_name=REGION,
 endpoint_url=DP_ENDPOINT_URL
)

unique_name = f"s3InteractionEnv_{int(time.time())}"
create_response = bedrock_agentcore_control_client.create_code_interpreter(
 name=unique_name,
 description="Combined test code sandbox",
 executionRoleArn="arn:aws:iam::123456789012:role/S3InteractionRole",
 networkConfiguration={
 "networkMode": "SANDBOX"
 }
)
code_interpreter_id = create_response['codeInterpreterId']
print(f"Created custom interpreter ID: {code_interpreter_id}")

session_response = bedrock_agentcore_client.start_code_interpreter_session(
 codeInterpreterIdentifier=code_interpreter_id,
 name="combined-test-session",
 sessionTimeoutSeconds=1800
)
session_id = session_response['sessionId']
print(f"Created session ID: {session_id}")

print(f"Downloading CSV generation script from S3")
command_to_execute = f"aws s3 cp s3://{S3_BUCKET_NAME}/generate_csv.py ."
response = bedrock_agentcore_client.invoke_code_interpreter(
 codeInterpreterIdentifier=code_interpreter_id,
 sessionId=session_id,
 name="executeCommand",
 arguments={
 "command": command_to_execute
 }
)
```

```
for event in response["stream"]:
 print(json.dumps(event["result"], default=str, indent=2))

print(f"Executing the CSV generation script")
response = bedrock_agentcore_client.invoke_code_interpreter(
 codeInterpreterIdentifier=code_interpreter_id,
 sessionId=session_id,
 name="executeCommand",
 arguments={
 "command": "python generate_csv.py 5 10"
 }
)

for event in response["stream"]:
 print(json.dumps(event["result"], default=str, indent=2))

print(f"Uploading generated artifact to S3")
command_to_execute = f"aws s3 cp generated_data.csv s3://{S3_BUCKET_NAME}/output_artifacts/"
response = bedrock_agentcore_client.invoke_code_interpreter(
 codeInterpreterIdentifier=code_interpreter_id,
 sessionId=session_id,
 name="executeCommand",
 arguments={
 "command": command_to_execute
 }
)

for event in response["stream"]:
 print(json.dumps(event["result"], default=str, indent=2))

print(f"Stopping the code interpreter session")
stop_response = bedrock_agentcore_client.stop_code_interpreter_session(
 codeInterpreterIdentifier=code_interpreter_id,
 sessionId=session_id
)

print(f"Deleting the code interpreter")
delete_response = bedrock_agentcore_control_client.delete_code_interpreter(
 codeInterpreterId=code_interpreter_id
)
print(f"Code interpreter status from response: {delete_response['status']}")
```

```
print(f"Clean up completed, script run successful")
```

This example shows you how to:

- Create a custom Code Interpreter with an execution role
- Configure network access - Choose PUBLIC mode if your Code Interpreter needs to connect to the public internet. If your Code Interpreter supports connection to Amazon S3, and if you want your Code Interpreter session to remain isolated from the public internet, choose SANDBOX mode.
- Upload and download files between the Code Interpreter environment and S3
- Execute commands and scripts within the Code Interpreter environment
- Clean up resources when finished

## Resource and session management

The following topics show how the Amazon Bedrock AgentCore Code Interpreter works and how you can create the resources and manage sessions.

### IAM permissions

The following IAM policy provides the necessary permissions for using the AgentCore Code Interpreter:

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:CreateCodeInterpreter",
 "bedrock-agentcore:StartCodeInterpreterSession",
 "bedrock-agentcore:InvokeCodeInterpreter",
 "bedrock-agentcore:StopCodeInterpreterSession",
 "bedrock-agentcore:DeleteCodeInterpreter",
 "bedrock-agentcore>ListCodeInterpreters",
]
 }
]
}
```

```
 "bedrock-agentcore:GetCodeInterpreter",
 "bedrock-agentcore:GetCodeInterpreterSession",
 "bedrock-agentcore>ListCodeInterpreterSessions"
],
 "Resource": "arn:aws:bedrock-agentcore:us-east-1:111122223333:code-interpreter/*"
}
]
```

You should also add the following trust policy to the execution role:

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "BedrockAgentCoreBuiltInTools",
 "Effect": "Allow",
 "Principal": {
 "Service": "bedrock-agentcore.amazonaws.com"
 },
 "Action": "sts:AssumeRole",
 "Condition": {
 "StringEquals": {
 "aws:SourceAccount": "111122223333"
 },
 "ArnLike": {
 "aws:SourceArn": "arn:aws:bedrock-agentcore:us-east-1:111122223333:/*"
 }
 }
 }
]
}
```

## How it works

### 1. Create a Code Interpreter

Build your own Code Interpreter or use the System Code Interpreter to enable capabilities such as writing and running code or performing complex calculations. The Code Interpreter allows you to augment your agent runtime to securely execute code in a fully managed environment with low latency.

## 2. Integrate it within an agent to invoke

Copy the built-in tool resource ID into your runtime agent code to invoke it as part of your session. For Code Interpreter tools, you can execute code and view the results in real-time.

## 3. Assess performance using observability

Monitor key metrics for each tool in CloudWatch to get real-time performance insights.

# Creating a Code Interpreter and starting a session

## 1. Create a Code Interpreter

When configuring a Code Interpreter, you can choose network settings (Sandbox or Public), and the execution role role that defines what AWS resources the Code Interpreter can access.

## 2. Start a session

The Code Interpreter uses a session-based model. After creating a Code Interpreter, you start a session with a configurable timeout period (default is 15 minutes). Sessions automatically terminate after the timeout period. Multiple sessions can be active simultaneously for a single Code Interpreter, with each session maintaining its own state and environment.

## 3. Execute code

Within an active session, you can execute code in supported languages (Python, JavaScript, TypeScript), and maintain state between executions. You can also perform file upload/download operations, and use the support provided for the shell commands and AWS CLI commands.

## 4. Stop session and clean up

When you're finished using a session, you should stop it to release resources and avoid unnecessary charges. You can also delete the Code Interpreter if you no longer intend to use it.

# Resource management

The AgentCore Code Interpreter provides two types of resources:

## System ARNs

System ARNs are default resources pre-created for ease of use. These ARNs have default configuration with the most restrictive options and are available for all regions where Amazon Bedrock AgentCore is available.

Field	Value
ID	aws.codeinterpreter.v1
ARN	arn:aws:bedrock-agentcore:<region>:aws:code-interpreter/aws.codeinterpreter.v1
Name	Amazon Bedrock AgentCore Code Interpreter
Description	AWS built-in code interpreter for secure code execution
Status	READY

## Custom ARNs

Custom ARNs allow you to configure a code interpreter with your own settings. You can choose network settings (Sandbox or Public), and the execution role that defines what AWS resources the code interpreter can access.

### Network settings

The AgentCore Code Interpreter supports the following network modes:

#### Sandbox mode

Provides complete isolation with no external network access. This is the most secure option but limits the tool's ability to access external resources. S3 access is available in Sandbox mode.

#### Public network mode

Allows the tool to access public internet resources. This option enables integration with external APIs and services but introduces potential security considerations.

## VPC mode

Connects the tool to your Virtual Private Cloud (VPC), allowing access to private resources within your AWS environment such as databases, internal APIs, and other services while maintaining network isolation from the public internet. This option requires additional VPC configuration.

The following topics show you how to create and manage Code Interpreters, start and stop sessions, and how to execute code.

### Topics

- [Creating an AgentCore Code Interpreter](#)
- [Listing AgentCore Code Interpreter tools](#)
- [Deleting an AgentCore Code Interpreter](#)

### Creating an AgentCore Code Interpreter

You can create a Code Interpreter using the Amazon Bedrock AgentCore console, AWS CLI, or AWS SDK.

#### Console

##### To create a Code Interpreter using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. In the navigation pane, choose **Built-in tools**.
3. Choose **Create Code Interpreter tool**.
4. Provide a unique **Tool name** and optional **Description**.
5. Under **Network settings**, choose one of the following options:
  - **Sandbox** - Isolated environment with no external network access (most secure)
  - **Public network** - Allows access to public internet resources
6. Under **Permissions**, specify an IAM runtime role that defines what AWS resources the Code Interpreter can access.
7. Choose **Create**.

After creating a Code Interpreter tool, the console displays important details about the tool:

#### Tool Resource ARN

The Amazon Resource Name (ARN) that uniquely identifies the Code Interpreter tool resource (e.g., arn:aws:bedrock-agentcore:<Region>:123456789012:code-interpreter/code-interpreter-custom).

#### Code Interpreter Tool ID

The unique identifier for the Code Interpreter tool, used in API calls (e.g., code-interpreter-custom-abc123).

#### IAM Role

The IAM role that the Code Interpreter assumes when executing code, determining what AWS resources it can access.

#### Network Mode

The network configuration for the Code Interpreter (Sandbox or Public).

#### Creation Time

The date and time when the Code Interpreter tool was created.

### AWS CLI

To create a Code Interpreter using the AWS CLI, use the `create-code-interpreter` command:

```
aws bedrock-agentcore create-code-interpreter \
--region <Region> \
--name "my-code-interpreter" \
--description "My Code Interpreter for data analysis" \
--network-configuration '{
 "networkMode": "PUBLIC"
}' \
--execution-role-arn "arn:aws:iam::123456789012:role/my-execution-role"
```

### Boto3

To create a Code Interpreter using the AWS SDK for Python, use the `create_code_interpreter` method:

```
import boto3

Initialize the boto3 client
cp_client = boto3.client(
 'bedrock-agentcore-control',
 region_name=<Region>,
 endpoint_url="https://bedrock-agentcore-control.<Region>.amazonaws.com"
)

Create a Code Interpreter
response = cp_client.create_code_interpreter(
 name="myTestSandbox1",
 description="Test code sandbox for development",
 executionRoleArn="arn:aws:iam::123456789012:role/my-execution-role",
 networkConfiguration={
 "networkMode": "PUBLIC"
 }
)

Print the Code Interpreter ID
code_interpreter_id = response["codeInterpreterId"]
print(f"Code Interpreter ID: {code_interpreter_id}")
```

## API

To create a new Code Interpreter instance using the API, use the following call:

```
Using awscurl
awscurl -X PUT "https://bedrock-agentcore-control.<Region>.amazonaws.com/code-interpreters" \
-H "Content-Type: application/json" \
--region <Region> \
--service bedrock-agentcore \
-d '{
 "name": "codeinterpreter'$(date +\%m\%d\%H\%M\%S)'",
 "description": "Test code sandbox for development",
 "executionRoleArn": "'${ROLE_ARN}'",
 "networkConfiguration": {
 "networkMode": "PUBLIC"
 }
}'
```

## Listing AgentCore Code Interpreter tools

You can view a list of all your Code Interpreter tools to manage and monitor them.

### Console

#### To list code interpreters using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. In the navigation pane, choose **Built-in tools**.
3. The console displays a list of all your Code Interpreter tools, including their names, IDs, creation dates, and status.
4. You can use the search box to filter the list by name or other attributes.
5. Select a Code Interpreter to view its details, including active sessions and configuration settings.

### AWS CLI

To list Code Interpreters using the AWS CLI, use the `list-code-interpreters` command:

```
aws bedrock-agentcore list-code-interpreters \
--region <Region> \
--max-results 10
```

You can use the `--next-token` parameter for pagination if you have more than the maximum results:

```
aws bedrock-agentcore list-code-interpreters \
--region <Region> \
--max-results 10 \
--next-token "<your-pagination-token>"
```

### Boto3

To list Code Interpreters using the AWS SDK for Python, use the `list_code_interpreters` method:

```
import boto3
```

```
Initialize the boto3 client
cp_client = boto3.client(
 'bedrock-agentcore-control',
 region_name=<Region>,
 endpoint_url="https://bedrock-agentcore-control.<Region>.amazonaws.com"
)

List Code Interpreters
response = cp_client.list_code_interpreters()

Print the Code Interpreters
for interpreter in response.get('codeInterpreterSummaries', []):
 print(f"Name: {interpreter.get('name')}")
 print(f"ID: {interpreter.get('codeInterpreterId')}")
 print(f"Creation Time: {interpreter.get('createdAt')}")
 print(f"Status: {interpreter.get('status')}")
 print("---")

If there are more results, get the next page using the next_token
if 'nextToken' in response:
 next_page = cp_client.list_code_interpreters(
 nextToken=response['nextToken']
)
 # Process next_page...
```

## API

To list Code Interpreter instances using the API, use the following call:

 **Note**

For pagination, include the `nextToken` parameter.

```
Using awscurl
awscurl -X POST "https://bedrock-agentcore-control.<Region>.amazonaws.com/code-
interpreters" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region>
```

## Deleting an AgentCore Code Interpreter

When you no longer need a Code Interpreter, you can delete it to free up resources and avoid unnecessary charges.

### **⚠️ Important**

Deleting a Code Interpreter permanently removes it and all its configuration. This action cannot be undone. Make sure all active sessions are stopped before deleting a Code Interpreter.

## Console

### To delete a Code Interpreter using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. In the navigation pane, choose **Built-in tools**.
3. From the list of code interpreter tools, select the tool you want to delete.
4. Choose **Delete**.
5. In the confirmation dialog, enter the name of the code interpreter to confirm deletion.
6. Choose **Delete** to permanently delete the Code Interpreter.

## AWS CLI

To delete a Code Interpreter using the AWS CLI, use the `delete-code-interpreter` command:

```
aws bedrock-agentcore delete-code-interpreter \
--region <Region> \
--code-interpreter-id "<your-code-interpreter-id>"
```

## Boto3

To delete a Code Interpreter using the AWS SDK for Python, use the `delete_code_interpreter` method:

```
import boto3
```

```
Initialize the boto3 client
cp_client = boto3.client(
 'bedrock-agentcore-control',
 region_name=<Region>,
 endpoint_url="https://bedrock-agentcore-control.<Region>.amazonaws.com"
)

Delete a Code Interpreter
response = cp_client.delete_code_interpreter(
 codeInterpreterId=<your-code-interpreter-id>
)

print("Code Interpreter deleted successfully")
```

## API

To delete a Code Interpreter instance using the API, use the following call:

```
Using awscurl
awscurl -X DELETE "https://bedrock-agentcore-control.<Region>.amazonaws.com/code-
interpreters/<your-code-interpreter-id>" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region>
```

## Session management

The AgentCore Code Interpreter sessions have the following characteristics:

### Session timeout

Default: 900 seconds (15 minutes)

Configurable: Can be adjusted when creating sessions, up to 8 hours

### Session persistence

Files and data created during a session are available throughout the session's lifetime. When the session is terminated, the session no longer persists and the data is cleaned up.

### Automatic termination

Sessions automatically terminate after the configured timeout period

## Multiple sessions

Multiple sessions can be active simultaneously for a single code interpreter. Each session maintains its own state and environment

## Retention policy

The time to live (TTL) retention policy for the session data is 30 days.

## Using isolated sessions

AgentCore Tools enable isolation of each user session to ensure secure and consistent reuse of context across multiple tool invocations. Session isolation is especially important for AI agent workloads due to their dynamic and multi-step execution patterns.

Each tool session runs in a dedicated microVM with isolated CPU, memory, and filesystem resources. This architecture guarantees that one user's tool invocation cannot access data from another user's session. Upon session completion, the microVM is fully terminated, and its memory is sanitized, thereby eliminating any risk of cross-session data leakage.

## Starting a AgentCore Code Interpreter session

After creating a Code Interpreter, you can start a session to execute code.

### AWS CLI

To start a Code Interpreter session using the AWS CLI, use the `start-code-interpreter-session` command:

```
aws bedrock-agentcore start-code-interpreter-session \
 --region <Region> \
 --code-interpreter-id "<your-code-interpreter-id>" \
 --name "my-code-session" \
 --description "My Code Interpreter session for data analysis" \
 --session-timeout-seconds 900
```

### Boto3

To start a Code Interpreter session using the AWS SDK for Python, use the `start_code_interpreter_session` method:

```
import boto3
```

```
Initialize the boto3 client
dp_client = boto3.client(
 'bedrock-agentcore',
 region_name=<Region>,
 endpoint_url="https://bedrock-agentcore.<Region>.amazonaws.com"
)

Start a Code Interpreter session
response = dp_client.start_code_interpreter_session(
 codeInterpreterIdentifier="aws.codeinterpreter.v1",
 name="sandbox-session-1",
 sessionTimeoutSeconds=3600
)

Print the session ID
session_id = response["sessionId"]
print(f"Session created: {session_id}")
```

## API

To start a new Code Interpreter session using the API, use the following call:

```
Using awscurl
awscurl -X PUT \
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/sessions/start" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "name": "code-session-abc12345",
 "description": "code sandbox session",
 "sessionTimeoutSeconds": 900
}'
```

### Note

You can use the managed resource ID `aws.codeinterpreter.v1` or a resource ID you get by creating a code interpreter with `CreateCodeInterpreter`.

## Executing code

Once you have started a Code Interpreter session, you can execute code in the session.

### Boto3

To execute code using the AWS SDK for Python, use the `invoke_code_interpreter` method:

```
import boto3
import json

Initialize the boto3 client
dp_client = boto3.client(
 'bedrock-agentcore',
 region_name=<Region>,
 endpoint_url="https://bedrock-agentcore.<Region>.amazonaws.com"
)

Execute code in the Code Interpreter session
response = dp_client.invoke_code_interpreter(
 codeInterpreterIdentifier="aws.codeinterpreter.v1",
 sessionId=<your-session-id>,
 name="executeCode",
 arguments={
 "language": "python",
 "code": 'print("Hello World!!!!")'
 }
)

Process the event stream
for event in response["stream"]:
 if "result" in event:
 result = event["result"]
 if "content" in result:
 for content_item in result["content"]:
 if content_item["type"] == "text":
 print(content_item["text"])
```

### API

To execute code in a code interpreter session using the API, use the following call:

```
Using awscurl
awscurl -X POST \
```

```
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "x-amzn-code-interpreter-session-id: your-session-id" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "id": "1",
 "name": "executeCode",
 "arguments": {
 "language": "python",
 "code": "print(\"Hello, world!\")"
 }
}'
```

## Stopping a AgentCore Code Interpreter session

When you are finished using a Code Interpreter session, you should stop it to release resources and avoid unnecessary charges.

### AWS CLI

To stop a code interpreter session using the AWS CLI, use the `stop-code-interpreter-session` command:

```
aws bedrock-agentcore stop-code-interpreter-session \
--region <Region> \
--code-interpreter-id "<your-code-interpreter-id>" \
--session-id "<your-session-id>"
```

### Boto3

To stop a Code Interpreter session using the AWS SDK for Python, use the `stop_code_interpreter_session` method:

```
import boto3

Initialize the boto3 client
dp_client = boto3.client(
 'bedrock-agentcore',
 region_name="<Region>",


```

```
 endpoint_url="https://bedrock-agentcore.<Region>.amazonaws.com"
)

Stop the Code Interpreter session
response = dp_client.stop_code_interpreter_session(
 codeInterpreterIdentifier="aws.codeinterpreter.v1",
 sessionId=<your-session-id>
)

print("Session stopped successfully")
```

## API

To stop a code interpreter session using the API, use the following call:

```
Using awscurl
awscurl -X PUT \
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/sessions/stop?sessionId=<your-session-id>" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region>
```

## Code Interpreter API Reference Examples

This section provides reference examples for common Code Interpreter operations using different approaches. Each example shows how to perform the same operation using AWS CLI, Boto3 SDK, and direct API calls.

### Code Execution

These examples demonstrate how to execute code in a Code Interpreter session.

#### Boto3

```
params = {
 "language": "python",
 "code": "print(\"Hello, world!\")"
}

client.invoke_code_interpreter(
```

```
**{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "executeCode",
 "arguments": params
})
```

## API

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "x-amzn-code-interpreter-session-id: your-session-id" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "name": "executeCode",
 "arguments": {
 "language": "python",
 "code": "print(\"Hello, world!\")"
 }
}'
```

## Terminal Commands

These examples demonstrate how to execute terminal commands in a Code Interpreter session.

### Execute Command

#### Boto3

```
params = {
 "command": "ls -l"
}

client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 }
)
```

```
 "name": "executeCommand",
 "arguments": params
 })
```

## API

```
Using awscurl
awscurl -X POST \
 "https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 -H "x-amzn-code-interpreter-session-id: your-session-id" \
 --service bedrock-agentcore \
 --region <Region> \
 -d '{
 "name": "executeCommand",
 "arguments": {
 "command": "ls -l"
 }
 }'
```

## Start Command Execution

### Boto3

```
params = {
 "command": "sleep 15 && echo Task completed successfully"
}

client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "startCommandExecution",
 "arguments": params
 })
}
```

## API

```
Using awscurl
awscurl -X POST \
```

```
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "x-amzn-code-interpreter-session-id: your-session-id" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "name": "startCommandExecution",
 "arguments": {
 "command": "sleep 15 && echo Task completed successfully"
 }
}'
```

## Get Task

### Boto3

```
params = {
 "taskId": "<your-task-id>"
}

client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "getTask",
 "arguments": params
 }
)
```

### API

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "x-amzn-code-interpreter-session-id: your-session-id" \
--service bedrock-agentcore \
--region <Region> \
-d '{'
```

```
"name": "getTask",
"arguments": {
 "taskId": "<your-task-id>"
}
}'
```

## Stop Command Execution Task

### Boto3

```
params = {
 "taskId": "<your-task-id>"
}

client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "stopTask",
 "arguments": params
 }
)'
```

### API

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "x-amzn-code-interpreter-session-id: your-session-id" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "name": "stopTask",
 "arguments": {
 "taskId": "<your-task-id>"
 }
}'
```

## File Management

These examples demonstrate how to manage files in a Code Interpreter session.

### Write Files

#### Boto3

```
params = {
 "content": [{"path": "dir1/samename.txt", "text": "File in dir1"}]
}

client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "writeFiles",
 "arguments": params
 }
)
```

#### API

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "x-amzn-code-interpreter-session-id: your-session-id" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "name": "writeFiles",
 "arguments": {
 "content": [{"path": "dir1/samename.txt", "text": "File in dir1"}]
 }
}'
```

## Read Files

### Boto3

```
params = {
 "paths": ["tmp.txt"]
}

client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "readFiles",
 "arguments": params
 })
}
```

### API

```
Using awscurl
awscurl -X POST \
 "https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 -H "x-amzn-code-interpreter-session-id: your-session-id" \
 --service bedrock-agentcore \
 --region <Region> \
 -d '{
 "name": "readFiles",
 "arguments": {
 "paths": ["tmp.txt"]
 }
 }'
```

## Remove Files

### Boto3

```
params = {
 "paths": ["tmp.txt"]
}
```

```
client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "removeFiles",
 "arguments": params
 })
```

## API

```
Using awscurl
awscurl -X POST \
 "https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 -H "x-amzn-code-interpreter-session-id: your-session-id" \
 --service bedrock-agentcore \
 --region <Region> \
 -d '{
 "name": "removeFiles",
 "arguments": {
 "paths": ["tmp.txt"]
 }
 }'
```

## List Files

### Boto3

```
params = {
 "directoryPath": ""
}

client.invoke_code_interpreter(
 **{
 "codeInterpreterIdentifier": "aws.codeinterpreter.v1",
 "sessionId": "<your-session-id>",
 "name": "listFiles",
 "arguments": params
 })
```

## API

```
Using awscurl
awscurl -X POST \
 "https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
aws.codeinterpreter.v1/tools/invoke" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 -H "x-amzn-code-interpreter-session-id: your-session-id" \
 --service bedrock-agentcore \
 --region <Region> \
 -d '{
 "name": "listFiles",
 "arguments": {
 "directoryPath": ""
 }
}'
```

## Observability

The AgentCore Code Interpreter provides the following observability features:

### Execution logs

Code interpreter execution console logs are not available in CloudWatch, but stdout/stderr details are directly available in each invocation.

### Metrics

You can view the following metrics in Amazon CloudWatch:

- Session counts: The number of sessions that Code Interpreter session has been requested
- Duration: The duration of sessions that Code Interpreter is running
- Invocations: The total number of times for each tool has been invoked
- Request latency: The latency of each request
- Throttles: The number of times requests to the tool have been throttled due to exceeding limits, with percentage change compared to the previous week
- User errors/system errors: The number of times requests failed due to either user error or system error

These metrics can be used to monitor the usage and performance of your code interpreter sessions, set up alarms for abnormal behavior, and optimize your resource allocation.


For more information, see [AgentCore generated built-in tools observability data](#).

## Interact with web applications using Amazon Bedrock AgentCore Browser

The Amazon Bedrock AgentCore Browser provides a secure, cloud-based browser that enables AI agents to interact with websites. It includes security features such as session isolation, built-in observability through live viewing, CloudTrail logging, and session replay capabilities.

### Overview

The Amazon Bedrock AgentCore Browser provides a secure, isolated browser environment that allows you to interact with web applications while minimizing potential risks to your system. It runs in a containerized environment within AgentCore, and isolates web activity from your local system.

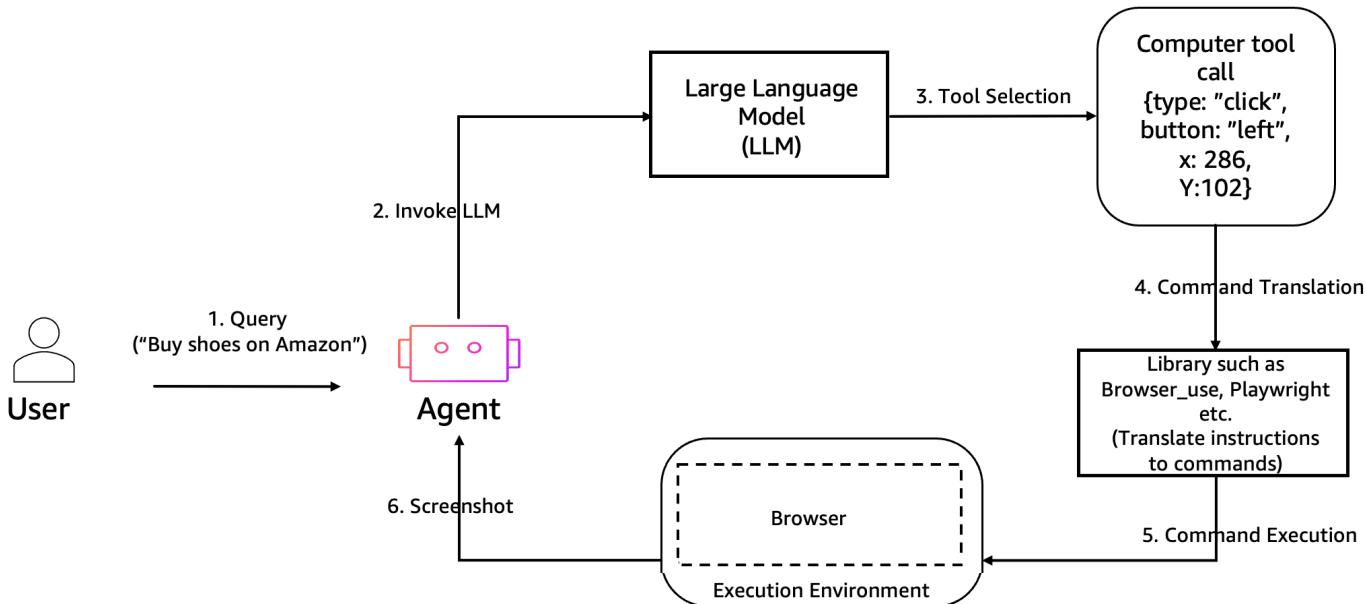

### Why use remote browsers for agent development?

A remote browser runs in a separate environment rather than on the local machine. For agent development, remote browsers allow AI agents to interact with the web as humans do.

Remote browsers provide the following capabilities for agent development:

- Web interaction capabilities for navigating websites, filling forms, clicking buttons, and parsing dynamic content
- Serverless browser infrastructure that automatically scales without infrastructure overhead
- Visual understanding through screenshots that allow agents to interpret websites as humans do
- Human intervention with live interactive view capabilities
- Isolation and security by running web interactions for each session in a separate environment
- Complex web application navigation for interfaces that require browser capabilities
- Security through session isolation and audit capabilities
- Observability with real-time visibility and recorded history of browser interactions

Remote browsers bridge the gap between AI agents and the human web, allowing agents to interact with websites designed for human users rather than being limited to APIs or static content.

## Security Features

The Browser Tool includes several security features to help protect your environment:

- Isolation: The browser runs in a containerized environment, isolated from your local system
- Ephemeral sessions: Browser sessions are temporary and reset after each use
- Session timeouts: Sessions are terminated either by client or when the time to live (ttl) expires

## How it works

The Amazon Bedrock AgentCore Browser provides a session-based model for secure web browsing with comprehensive observability features. Here's how the complete workflow operates:

### 1. Create a Browser Tool

Create a Browser Tool to enable web browsing capabilities. You can choose between the AWS managed Browser (`aws.browser.v1`) for quick setup, or create a custom browser with advanced features like session recording, custom network settings, and specific IAM execution roles. The Browser Tool allows you to augment your agent runtime to securely interact with web applications, fill forms, navigate websites, and extract information in a fully managed environment.

### 2. Start a browser session

The Browser Tool uses a session-based model where each session runs in an isolated environment. After creating a Browser Tool, you start a session with a configurable timeout period (default is 15 minutes, extendable up to 8 hours). Sessions automatically terminate after the timeout period, and multiple sessions can be active simultaneously for a single Browser Tool.

### 3. Interact with the browser

Once a session is started, you can interact with the browser using WebSocket-based streaming APIs. The Automation endpoint enables your agent to perform browser actions such as navigating to websites, clicking elements, filling out forms, taking screenshots, and more. Libraries like Strands, Nova Act, or Playwright can be used to simplify these interactions. Meanwhile, the Live View endpoint allows an end user to watch the browser session in real time and interact with it directly through the live stream.

### 4. Monitor and record sessions

All browser sessions provide built-in observability through live viewing capabilities and optional session recording. Live view allows real-time monitoring of browser activity, while session recording (available for custom browsers) captures comprehensive interaction data including DOM changes, user actions, console logs, and network events. Recorded sessions are stored in your Amazon S3 bucket and can be replayed through the AWS Console or accessed programmatically for debugging and analysis.

### 5. Assess performance using observability

Monitor key metrics for each tool in CloudWatch to get real-time performance insights. Session recordings provide detailed analysis capabilities including video playback, timeline navigation, user action tracking, and comprehensive logs for troubleshooting and optimization.

## Use cases

The AgentCore Browser can be used for a wide range of use cases, enabling AI agents to interact with web applications just as humans do. This section describes common use cases.

With the AgentCore Browser, you can:

- Test web applications in a secure environment
- Access online resources and services
- Perform web-based tasks and workflows

- Interact with web interfaces
- Capture screenshots and record browser sessions
- Build AI agents that can navigate the web
- Automate form submissions and data entry
- Extract information from websites
- Perform e-commerce transactions
- Monitor website changes and updates

## Get started with AgentCore Browser

AgentCore Browser enables your agents to interact with web pages through a managed Chrome browser. The agent can navigate websites, search for information, extract content, and interact with web elements in a secure, managed environment.

This page covers the prerequisites and helps you get started using *AWS Strands*. Strands provides a high-level agent framework that simplifies building AI agents with built-in tool integration, conversation management, and automatic session handling.

### Topics

- [Prerequisites](#)
- [Using AgentCore Browser via AWS Strands](#)
- [Find your resources](#)
- [Next steps](#)

## Prerequisites

Before you start, ensure you have:

- AWS account with credentials configured. See [Configuring your credentials](#).
- Python 3.10+ installed
- Boto3 installed. See [Boto3 documentation](#).
- IAM execution role with the required permissions. See [Configuring your credentials](#).
- Model access: Anthropic Claude Sonnet 4.0 [enabled](#) in the Amazon Bedrock console. For information about using a different model with the Strands Agents see the *Model Providers* section in the [Strands Agents SDK documentation](#).

- AWS Region where Amazon Bedrock AgentCore is available. See [AWS Regions](#).
- Your network allows secure WebSocket connections

## Configuring your credentials

Perform the following steps to configure your AWS credentials and attach the required permissions to use AgentCore Browser.

### 1. Verify your AWS credentials

Confirm your AWS credentials are configured:

```
aws sts get-caller-identity
```

Take note of the user or credentials returned here, as you'll be attaching permissions to this identity in the next step.

If this command fails, configure your credentials. For more information, see [Configuration and credential file settings](#) in the AWS CLI documentation.

### 2. Attach required permissions

Your IAM user or role needs permissions to use AgentCore Browser. Attach this policy to your IAM identity:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "BedrockAgentCoreBrowserFullAccess",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:CreateBrowser",
 "bedrock-agentcore>ListBrowsers",
 "bedrock-agentcore:GetBrowser",
 "bedrock-agentcore>DeleteBrowser",
 "bedrock-agentcore:StartBrowserSession",
 "bedrock-agentcore>ListBrowserSessions",
 "bedrock-agentcore:GetBrowserSession",
 "bedrock-agentcore:StopBrowserSession",
 "bedrock-agentcore:UpdateBrowserStream",
]
 }
]
}
```

```
 "bedrock-agentcore:ConnectBrowserAutomationStream",
 "bedrock-agentcore:ConnectBrowserLiveViewStream"
],
 "Resource": "arn:aws:bedrock-agentcore:<Region>:<account_id>:browser/*"

},
{
 "Sid": "BedrockModelAccess",
 "Effect": "Allow",
 "Action": [
 "bedrock:InvokeModel",
 "bedrock:InvokeModelWithResponseStream"
],
 "Resource": [
 "*"
]
}
]
```

### To attach this policy:

- Navigate to the IAM Console
- Find your user or role (the one returned by `aws sts get-caller-identity`)
- Click **Add permissions** → **Create inline policy**
- Switch to JSON view and paste the policy above
- Name it `AgentCoreBrowserAccess` and save

 **Note**

Replace `<Region>` with your actual AWS Region and `<account_id>` with your AWS account ID.

### 3. Verify your setup

Confirm your setup is correct by checking:

- Your AWS credentials are properly configured
- The IAM policy is attached to your user or role

- Model access is enabled in the Amazon Bedrock console

The following sections show you how to use the Amazon Bedrock AgentCore Browser with and without the agent framework. Using the Browser directly without an agent framework is especially useful when you want to execute specific browser automation tasks programmatically.

## Using AgentCore Browser via AWS Strands

The following sections show you how to use the Amazon Bedrock AgentCore Browser with the Strands SDK. Before you go through the examples in this section, see [Prerequisites](#).

### Topics

- [Step 1: Install dependencies](#)
- [Step 2: Create your agent with AgentCore Browser](#)
- [Step 3: Run the agent](#)
- [Step 4: View the browser session live](#)

### Step 1: Install dependencies

Create a project folder and install the required packages:

 **Note**

On Windows, use: .venv\Scripts\activate

```
mkdir agentcore-browser-quickstart
cd agentcore-browser-quickstart
python3 -m venv .venv
source .venv/bin/activate
```

Install the required packages:

```
pip install bedrock-agentcore strands-agents strands-agents-tools playwright nest-asyncio
```

These packages provide:

- **bedrock-agentcore:** The SDK for Amazon Bedrock AgentCore tools including AgentCore Browser
- **strands-agents:** The Strands agent framework
- **strands-agents-tools:** The tools that the Strands agent framework offers including Browser tool
- **playwright:** Python library for browser automation. Strands uses playwright for browser automation
- **nest-asyncio:** Allows running asyncio event loops within existing event loops

## Step 2: Create your agent with AgentCore Browser

Create a file named `browser_agent.py` and add the following code:

 **Note**

Replace `<Region>` with your actual AWS Region (for example, `us-west-2` or `us-east-1`).

```
from strands import Agent
from strands_tools.browser import AgentCoreBrowser

Initialize the Browser tool
browser_tool = AgentCoreBrowser(region="<Region>")

Create an agent with the Browser tool
agent = Agent(tools=[browser_tool.browser])

Test the agent with a web search prompt
prompt = "what are the services offered by Bedrock AgentCore? Use the documentation link if needed: https://docs.aws.amazon.com/bedrock-agentcore/latest/devguide/what-is-bedrock-agentcore.html"
print(f"\n\nPrompt: {prompt}\n\n")

response = agent(prompt)
print("\n\nAgent Response:")
print(response.message["content"][0]["text"])
```

This code:

- Initializes the Browser tool for your region
- Creates an agent that can use the browser to interact with websites
- Sends a prompt asking the agent to search AgentCore documentation and answer question
- Prints the agent's response with the information found

### Step 3: Run the agent

Execute the following command:

```
python browser_agent.py
```

### Expected output

You should see the agent's response containing details about AgentCore services from the documentation. The agent navigates the website and extracts the requested information.

If you encounter errors, verify:

- Your IAM role/user has the correct permissions
- You have model access enabled in the Amazon Bedrock console
- Your AWS credentials are properly configured

### Step 4: View the browser session live

While your browser script is running, you can view the session in real-time through the AWS Console:

1. Open the [AgentCore Browser Console](#)
2. Navigate to **Built-in tools** in the left navigation
3. Select the Browser tool (for example, AgentCore Browser Tool, or your custom browser)
4. In the **Browser sessions** section, find your active session with status **Ready**
5. In the **Live view / recording** column, click the provided "View live session" URL
6. The live view opens in a new browser window, displaying the real-time browser session

The live view interface provides:

- Real-time video stream of the browser session
- Interactive controls to take over or release control from automation
- Ability to terminate the session

This example:

- Creates a browser session using the `browser_session` client
- Retrieve the WebSocket connection details required for automation and live view.
- Start the viewer server, which launches a browser window to display the remote browser session via Live View.
- Connect Playwright to the remote browser via automation endpoint and navigate to Amazon.com.
- Keep the session alive until manually interrupted.
- Handle cleanup gracefully by terminating the session and releasing resources when the program exits.

The `BrowserViewerServer` component provides a local web server that connects to the remote browser session and displays it in a browser window, allowing you to see and interact with the browser in real-time.

## Find your resources

After using AgentCore Browser, view your resources in the AWS Console:

#	Resource	Location
1	Live View	Browser Console > Tool Name > <b>View live session</b>
2	Session Recordings	Browser Console > Tool Name > <b>View recording</b>
3	Browser Logs	<b>CloudWatch &gt; Log groups</b> > /aws/bedrock-agent core/browser/

#	Resource	Location
4	Recording Files	S3 > Your bucket > browser-recordings/ prefix
5	Custom Browsers	AgentCore Console > Built-in tools > Your custom browser
6	IAM Roles	IAM > Roles > Search for your execution role

## Next steps

Now that you have AgentCore Browser working, explore these advanced features:

- [Browser session recording and replay](#) - Record and replay sessions for debugging
- [Using AgentCore Browser with other Browser libraries and tools](#) - Use other frameworks like Nova Act or Playwright
- [Use cases](#) - See real-world implementation examples
- [Resource and session management](#) - Learn about API operations and custom browsers

## Using AgentCore Browser with other Browser libraries and tools

You can build browser agents using various frameworks and libraries to automate web interactions. This section demonstrates how to build browser agents using different frameworks.

### Nova Act

You can build a browser agent using Nova Act to automate web interactions:

#### Step 1: Install dependencies

Create a project folder (if you have not already):

```
mkdir agentcore-browser-quickstart
cd agentcore-browser-quickstart
python3 -m venv .venv
source .venv/bin/activate
```

**Note**

On Windows, use: .venv\Scripts\activate

Install the required packages:

```
pip install bedrock-agentcore nova-act rich boto3
```

These packages provide:

- **bedrock-agentcore**: The SDK for Amazon Bedrock AgentCore tools including AgentCore Browser
- **nova-act**: The SDK for Nova Act which includes the model and orchestrator for browser automation
- **rich**: Library for rich text and beautiful formatting in the terminal
- **boto3**: AWS SDK for Python (Boto3) to create, configure, and manage AWS services

## Step 2: Get Nova Act API Key

Navigate to [Nova Act](#) page and generate an API key using your amazon.com credentials. (Note this currently works only for US based amazon.com accounts)

Create a file named `nova_act_browser_agent.py` and add the following code:

### Write a browser agent using Nova Act

The following Python code shows how to write a browser agent using Nova Act. For information about obtaining the API key for Nova Act, see [Amazon Nova Act documentation](#).

```
from bedrock_agentcore.tools.browser_client import browser_session
from nova_act import NovaAct
from rich.console import Console
import argparse
import json
import boto3
```

```
console = Console()

from boto3.session import Session

boto_session = Session()
region = boto_session.region_name
print("using region", region)

def browser_with_nova_act(prompt, starting_page, nova_act_key, region="us-west-2"):
 result = None
 with browser_session(region) as client:
 ws_url, headers = client.generate_ws_headers()
 try:
 with NovaAct(
 cdp_endpoint_url=ws_url,
 cdp_headers=headers,
 nova_act_api_key=nova_act_key,
 starting_page=starting_page,
) as nova_act:
 result = nova_act.act(prompt)
 except Exception as e:
 console.print(f"NovaAct error: {e}")
 finally:
 return result

if __name__ == "__main__":
 parser = argparse.ArgumentParser()
 parser.add_argument("--prompt", required=True, help="Browser Search instruction")
 parser.add_argument("--starting-page", required=True, help="Starting URL")
 parser.add_argument("--nova-act-key", required=True, help="Nova Act API key")
 parser.add_argument("--region", default="us-west-2", help="AWS region")
 args = parser.parse_args()

 result = browser_with_nova_act(
 args.prompt, args.starting_page, args.nova_act_key, args.region
)
 console.print(f"\n[cyan] Response[/cyan] {result.response}")
 console.print(f"\n[bold green]Nova Act Result:[/bold green] {result}")
```

## Step 3: Run the agent

Execute the script (Replace with your Nova Act API key in the command):

```
python nova_act_browser_agent.py --prompt "What are the common usecases of Bedrock AgentCore?" --starting-page "https://docs.aws.amazon.com/bedrock-agentcore/latest/devguide/what-is-bedrock-agentcore.html" --nova-act-key "your-nova-act-API-key"
```

## Expected output

You should see the agent's response containing details of the common usecases of Amazon Bedrock AgentCore. The agent navigates the website, performs the search, and extracts the requested information.

If you encounter errors, verify:

- Your IAM role/user has the correct permissions
- Your Nova Act API key is correct
- Your AWS credentials are properly configured

## Step 4: View the browser session live

While your browser script is running, you can view the session in real-time through the AWS Console:

1. Open the [Amazon Bedrock AgentCore Browser Console](#)
2. Navigate to **Built-in tools** in the left navigation
3. Select the Browser tool (for example, AgentCore Browser Tool, or your custom browser)
4. In the **Browser sessions** section, find your active session with status **Ready**
5. In the **Live view / recording** column, click the provided "View live session" URL
6. The live view opens in a new browser window, displaying the real-time browser session

The live view interface provides:

- Real-time video stream of the browser session
- Interactive controls to take over or release control from automation
- Ability to terminate the session

## Strands

You can build an agent that uses the Browser Tool as one of its tools using the Strands framework:

### Step 1: Install dependencies

Create a project folder (if you have not already):

```
mkdir agentcore-browser-quickstart
cd agentcore-browser-quickstart
python3 -m venv .venv
source .venv/bin/activate
```

 **Note**

On Windows, use: .venv\Scripts\activate

Install the required packages:

```
pip install bedrock-agentcore strands-agents strands-agents-tools playwright nest-asyncio
```

These packages provide:

- **bedrock-agentcore**: The SDK for Amazon Bedrock AgentCore tools including AgentCore Browser
- **strands-agents**: The Strands agent framework
- **strands-agents-tools**: The tools that the Strands agent framework offers including Browser tool
- **playwright**: Python library for browser automation. Strands uses playwright for browser automation
- **nest-asyncio**: Allows running asyncio event loops within existing event loops

### Step 2: Create your agent with AgentCore Browser

Create a file named `browser_agent.py` and add the following code:

```
from strands import Agent
from strands_tools.browser import AgentCoreBrowser

Initialize the Browser tool
browser_tool = AgentCoreBrowser(region="us-west-2")

Create an agent with the Browser tool
agent = Agent(tools=[browser_tool.browser])

Test the agent with a web search prompt
prompt = "what are the services offered by Bedrock AgentCore? Use the documentation link if needed: https://docs.aws.amazon.com/bedrock-agentcore/latest/devguide/what-is-bedrock-agentcore.html"
print(f"\n\nPrompt: {prompt}\n\n")

response = agent(prompt)
print("\n\nAgent Response:")
print(response.message["content"][0]["text"])
```

This code:

- Initializes the Browser tool for your region
- Creates an agent that can use the browser to interact with websites
- Sends a prompt asking the agent to search AgentCore documentation and answer question
- Prints the agent's response with the information found

### Step 3: Run the agent

Execute the script:

```
python browser_agent.py
```

### Expected output

You should see the agent's response containing details about AgentCore services from the documentation. The agent navigates the website and extracts the requested information.

If you encounter errors, verify:

- Your IAM role/user has the correct permissions
- You have model access enabled in the Amazon Bedrock console
- Your AWS credentials are properly configured

## Step 4: View the browser session live

While your browser script is running, you can view the session in real-time through the AWS Console:

1. Open the [Amazon Bedrock AgentCore Browser Console](#)
2. Navigate to **Built-in tools** in the left navigation
3. Select the Browser tool (for example, AgentCore Browser Tool, or your custom browser)
4. In the **Browser sessions** section, find your active session with status **Ready**
5. In the **Live view / recording** column, click the provided "View live session" URL
6. The live view opens in a new browser window, displaying the real-time browser session

The live view interface provides:

- Real-time video stream of the browser session
- Interactive controls to take over or release control from automation
- Ability to terminate the session

## Playwright

You can use the Playwright automation framework with the Browser Tool:

### Step 1: Install dependencies

Create a project folder (if you didn't create one before) and install the required packages:

```
mkdir agentcore-browser-quickstart
cd agentcore-browser-quickstart
python3 -m venv .venv
source .venv/bin/activate
```

**Note**

On Windows, use: .venv\Scripts\activate

Install the required packages:

```
pip install bedrock-agentcore playwright boto3 nest-asyncio
```

These packages provide:

- **bedrock-agentcore**: The SDK for Amazon Bedrock AgentCore tools including AgentCore Browser
- **playwright**: Python library for browser automation
- **boto3**: AWS SDK for Python (Boto3) to create, configure, and manage AWS services
- **nest-asyncio**: Allows running asyncio event loops within existing event loops

## Step 2: Control browser with Playwright

You can use Browser directly without an agent framework or an LLM. This is useful when you want programmatic control over browser automation. Amazon Bedrock AgentCore provides integration with Playwright for browser automation.

### Async Playwright example

Create a file named `direct_browser_playwright.py` and add the following code:

```
from playwright.async_api import async_playwright, Playwright, BrowserType
from bedrock_agentcore.tools.browser_client import browser_session
import asyncio

async def run(playwright: Playwright):
 # Create and maintain a browser session
 with browser_session('us-west-2') as client:
 # Get WebSocket URL and authentication headers
 ws_url, headers = client.generate_ws_headers()

 # Connect to the remote browser
 chromium: BrowserType = playwright.chromium
```

```
browser = await chromium.connect_over_cdp(
 ws_url,
 headers=headers
)

Get the browser context and page
context = browser.contexts[0]
page = context.pages[0]

try:
 # Navigate to a website
 await page.goto("https://docs.aws.amazon.com/bedrock-agentcore/latest/devguide/what-is-bedrock-agentcore.html")

 # Print the page title
 title = await page.title()
 print(f"Page title: {title}")

 # Keep the session alive for 2 minutes to allow viewing
 print("\n\nBrowser session is active. Check the AWS Console for live view.")
 await asyncio.sleep(120)

finally:
 # Clean up resources
 await page.close()
 await browser.close()

async def main():
 async with async_playwright() as playwright:
 await run(playwright)

Run the async function
if __name__ == "__main__":
 asyncio.run(main())
```

## Sync Playwright example with live view

Alternatively, you can use the sync API with integrated live view server:

```
from playwright.sync_api import sync_playwright, Playwright, BrowserType
from bedrock_agentcore.tools.browser_client import browser_session
from browser_viewer import BrowserViewerServer
```

```
import time

def run(playwright):
 # Create the browser session and keep it alive
 with browser_session('us-west-2') as client:
 ws_url, headers = client.generate_ws_headers()

 # Start viewer server
 viewer = BrowserViewerServer(client, port=8005)
 viewer_url = viewer.start(open_browser=True)

 # Connect using headers
 chromium: BrowserType = playwright.chromium
 browser = chromium.connect_over_cdp(
 ws_url,
 headers=headers
)

 context = browser.contexts[0]
 page = context.pages[0]

 try:
 page.goto("https://amazon.com/")
 print(page.title())
 time.sleep(120)
 finally:
 page.close()
 browser.close()

 with sync_playwright() as playwright:
 run(playwright)
```

## Run the script

Execute either script:

```
python direct_browser_playwright.py
```

## Expected output

You should see the page title printed (for example, Page title: What is Amazon Bedrock AgentCore? - Amazon Bedrock AgentCore). The script keeps the browser session active for 2 minutes before closing.

Both examples:

- Create a managed browser session using Amazon Bedrock AgentCore Browser
- Connect to the remote Chrome browser using Playwright's Chrome DevTools Protocol (CDP)
- Navigate to AgentCore documentation and print the page title
- Keep the session alive for 2 minutes, allowing you to view it in the AWS Console
- Properly close the browser and clean up resources

## Resource and session management

The following topics show how the Amazon Bedrock AgentCore Browser works and how you can create the resources and manage sessions.

### Permissions

To use the Amazon Bedrock AgentCore Browser, you need the following permissions in your IAM policy:

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "BedrockAgentCoreInBuiltToolsFullAccess",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:CreateBrowser",
 "bedrock-agentcore>ListBrowsers",
 "bedrock-agentcore:GetBrowser",
 "bedrock-agentcore>DeleteBrowser",
 "bedrock-agentcore:StartBrowserSession",
 "bedrock-agentcore>ListBrowserSessions",
 "bedrock-agentcore:GetBrowserSession",
 "bedrock-agentcore:StopBrowserSession",
 "bedrock-agentcore:UpdateBrowserStream",
 "bedrock-agentcore:ConnectBrowserAutomationStream",
 "bedrock-agentcore:ConnectBrowserLiveViewStream"
],
 "Resource": "*"
 }
]
}
```

```
 "Resource": "arn:aws:bedrock-agentcore:us-
east-1:111122223333:browser/*"
 }
]
```

If you're using session recording with S3, the execution role you provide when creating a browser needs the following permissions:

```
{
 "Sid": "BedrockAgentCoreBuiltInToolsS3Policy",
 "Effect": "Allow",
 "Action": [
 "s3:PutObject",
 "s3>ListMultipartUploadParts",
 "s3:AbortMultipartUpload"
],
 "Resource": "arn:aws:s3:::example-s3-bucket/example-prefix/*",
 "Condition": {
 "StringEquals": {
 "aws:ResourceAccount": "{{accountId}}"
 }
 }
}
```

You should also add the following trust policy to the execution role:

JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "BedrockAgentCoreBuiltInTools",
 "Effect": "Allow",
 "Principal": {
 "Service": "bedrock-agentcore.amazonaws.com"
 },
 "Action": "sts:AssumeRole",
 "Condition": {
 "StringEquals": {
 "aws:SourceAccount": "111122223333"
 }
 }
 }
]
}
```

```
 },
 "ArnLike": {
 "aws:SourceArn": "arn:aws:bedrock-agentcore:us-
east-1:111122223333:*"
 }
 }
}
```

## Browser setup for API operations

Run the following commands to set up your Browser Tool that is common to all control plane and data plane API operations.

```
import boto3
import uuid

REGION = "<Region>"
CP_ENDPOINT_URL = f"https://bedrock-agentcore-control.{REGION}.amazonaws.com"
DP_ENDPOINT_URL = f"https://bedrock-agentcore.{REGION}.amazonaws.com"

cp_client = boto3.client(
 'bedrock-agentcore-control',
 region_name=REGION,
 endpoint_url=CP_ENDPOINT_URL
)

dp_client = boto3.client(
 'bedrock-agentcore',
 region_name=REGION,
 endpoint_url=DP_ENDPOINT_URL
)
```

## Creating a Browser Tool and starting a session

### 1. Create a Browser Tool

When configuring a Browser Tool, choose the public network setting, recording configuration for session replay, and permissions through an IAM runtime role that defines what AWS resources the Browser Tool can access.

### 2. Start a session

The Browser Tool uses a session-based model. After creating a Browser Tool, you start a session with a configurable timeout period (default is 15 minutes). Sessions automatically terminate after the timeout period. Multiple sessions can be active simultaneously for a single Browser Tool, with each session maintaining its own state and environment.

### 3. Interact with the browser

Once a session is started, you can interact with the browser using WebSocket-based streaming APIs. The Automation endpoint enables your agent to perform browser actions such as navigating to websites, clicking elements, filling out forms, taking screenshots, and more. Libraries like `browser-use` or `Playwright` can be used to simplify these interactions.

Meanwhile, the Live View endpoint allows an end user to watch the browser session in real time and interact with it directly through the live stream.

### 4. Stop the session

When you're finished using the browser session, you should stop it to release resources and avoid unnecessary charges. Sessions can be stopped manually or will automatically terminate after the configured timeout period.

## Resource management

The AgentCore Browser provides two types of resources:

### System ARNs

System ARNs are default resources pre-created for ease of use. These ARNs have default configuration with the most restrictive options and are available for all regions where Amazon Bedrock AgentCore is available.

Field	Value
ID	<code>aws.browser.v1</code>
ARN	<code>arn:aws:bedrock-agentcore:us-east-1:aws:browser/aws.browser.v1</code>
Name	Amazon Bedrock AgentCore Browser Tool

Field	Value
Description	AWS built-in browser for secure web browsing
Status	READY

## Custom ARNs

Custom ARNs allow you to configure a browser tool with your own settings. You can choose the public network setting, recording configuration, security settings, and permissions through an IAM runtime role that defines what AWS resources the browser tool can access.

## Network settings

The AgentCore Browser supports the public network mode. This mode allows the tool to access public internet resources. This option enables integration with external APIs and services.

## Creating an AgentCore Browser

You can create a Browser Tool using the Amazon Bedrock AgentCore console, AWS CLI, or AWS SDK.

### Console

#### To create a Browser Tool using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. In the navigation pane, choose **Built-in tools**.
3. Choose **Create browser tool**.
4. Provide a unique **Tool name** and optional **Description**.
5. Under **Network settings**, choose **Public network** which allows access to public internet resources. VPC is not supported.
6. Under **Session recording**, you can enable recording of browser sessions to an S3 bucket for later review.

7. Under **Permissions**, specify an IAM execution role that defines what AWS resources the Browser Tool can access.
8. Choose **Create**.

## AWS CLI

To create a Browser Tool using the AWS CLI, use the `create-browser` command:

```
aws bedrock-agentcore-control create-browser \
--region <Region> \
--name "my-browser" \
--description "My browser for web interaction" \
--network-configuration '{
 "networkMode": "PUBLIC"
}' \
--recording '{
 "enabled": true,
 "s3Location": {
 "bucket": "my-bucket-name",
 "prefix": "sessionreplay"
 }
}' \
--execution-role-arn "arn:aws:iam::123456789012:role/my-execution-role"
```

## Boto3

To create a Browser Tool using the AWS SDK for Python (Boto3), use the `create_browser` method:

### Request Syntax

The following shows the request syntax:

```
response = cp_client.create_browser(
 name="my_custom_browser",
 description="Test browser for development",
 networkConfiguration={
 "networkMode": "PUBLIC"
 },
 executionRoleArn="arn:aws:iam::123456789012:role/Sessionreplay",
```

```
clientToken=str(uuid.uuid4()),
recording={
 "enabled": True,
 "s3Location": {
 "bucket": "session-record-123456789012",
 "prefix": "replay-data"
 }
}
)
```

## API

To create a new browser instance using the API, use the following call:

```
Using awscurl
awscurl -X PUT \
"https://bedrock-agentcore-control.<Region>.amazonaws.com/browsers" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "name": "test_browser_1",
 "description": "Test sandbox for development",
 "networkConfiguration": {
 "networkMode": "PUBLIC"
 },
 "recording": {
 "enabled": true,
 "s3Location": {
 "bucket": "<your-bucket-name>",
 "prefix": "sessionreplay"
 }
 },
 "executionRoleArn": "arn:aws:iam::123456789012:role/my-execution-role"
}'
```

## Get AgentCore Browser tool

You can get information about the Browser tool in your account and view their details, status, and configurations.

## Console

### To get information about the Browser tool using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. In the navigation pane, choose **Built-in tools**.
3. The browser tools are listed in the **Browser tools** section.
4. You can choose a tool that you created to view its details such as name, ID, status, and creation date for each browser tool.

## AWS CLI

To get information about a Browser tool using the AWS CLI, use the `get-browser` command:

```
aws bedrock-agentcore-control get-browser \
--region <Region> \
--browser-id "<your-browser-id>"
```

## Boto3

To get information about the Browser tool using the AWS SDK for Python (Boto3), use the `get_browser` method:

### Request Syntax

The following shows the request syntax:

```
response = cp_client.get_browser(
 browserId="<your-browser-id>"
)
```

## API

To get the browser tool using the API, use the following call:

```
Using awscurl
awscurl -X GET \
```

```
"https://bedrock-agentcore-control.<Region>.amazonaws.com/browsers/<your-browser-id>" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region>
```

## List AgentCore Browser tools

You can list all browser tools in your account to view their details, status, and configurations.

### Console

#### To list browser tools using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. In the navigation pane, choose **Built-in tools**.
3. The browser tools are listed in the **Browser tools** section.
4. You can view details such as name, ID, status, and creation date for each browser tool.

### AWS CLI

To list browser tools using the AWS CLI, use the `list-browsers` command:

```
aws bedrock-agentcore-control list-browsers \
--region <Region>
```

You can filter the results by type:

```
aws bedrock-agentcore-control list-browsers \
--region <Region> \
--type SYSTEM
```

You can also limit the number of results and use pagination:

```
aws bedrock-agentcore-control list-browsers \
--region <Region> \
--max-results 10 \
--next-token "<your-pagination-token>"
```

## Boto3

To list browser tools using the AWS SDK for Python (Boto3), use the `list_browsers` method:

### Request Syntax

The following shows the request syntax:

```
response = cp_client.list_browsers(type="CUSTOM")
```

## API

To list browser tools using the API, use the following call:

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore-control.<Region>.amazonaws.com/browsers" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region>
```

You can filter the results by type:

```
awscurl -X POST \
"https://bedrock-agentcore-control.<Region>.amazonaws.com/browsers?type=SYSTEM" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region>
```

You can also limit the number of results and use pagination:

```
awscurl -X POST \
 "https://bedrock-agentcore-control.<Region>.amazonaws.com/browsers?
maxResults=1&nextToken=<your-pagination-token>" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 --service bedrock-agentcore \
 --region <Region>
```

## Deleting an AgentCore Browser

When you no longer need a browser tool, you can delete it to free up resources. Before deleting a browser tool, make sure to stop all active sessions associated with it.

### Console

#### To delete a Browser tool using the console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. Navigate to **Built-in tools** and select your browser tool.
3. Choose **Delete** from the **Actions** menu.
4. Confirm the deletion by typing the browser tool name in the confirmation dialog.
5. Choose **Delete**.

#### Note

You cannot delete a browser tool that has active sessions. Stop all sessions before attempting to delete the tool.

### AWS CLI

To delete a Browser tool using the AWS CLI, use the `delete-browser` command:

```
aws bedrock-agentcore-control delete-browser \
 --region <Region> \
 --browser-id "<your-browser-id>"
```

## Boto3

To delete a Browser tool using the AWS SDK for Python (Boto3), use the `delete_browser` method:

### Request Syntax

The following shows the request syntax:

```
response = cp_client.delete_browser(
 browserId="<your-browser-id>"
)
```

## API

To delete a browser tool using the API, use the following call:

```
Using awscurl
awscurl -X DELETE \
 "https://bedrock-agentcore-control.<Region>.amazonaws.com/browsers/<your-browser-
id>" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 --service bedrock-agentcore-control \
 --region <Region>
```

## Session management

The AgentCore Browser sessions have the following characteristics:

### Session timeout

Default: 900 seconds (15 minutes)

Configurable: Can be adjusted when creating sessions, up to 8 hours

### Session recording

Browser sessions can be recorded for later review

Recordings include network traffic and console logs

Recordings are stored in an S3 bucket specified during browser creation

## Live view

Sessions can be viewed in real-time using the live view feature

Live view is available at: /browser-streams/aws.browser.v1/sessions/{session\_id}/live-view

## Automatic termination

Sessions automatically terminate after the configured timeout period

## Multiple sessions

Multiple sessions can be active simultaneously for a single browser tool. Each session maintains its own state and environment. There can be up to a maximum of 500 sessions.

## Retention policy

The time to live (TTL) retention policy for the session data is 30 days.

## Using isolated sessions

AgentCore Tools enable isolation of each user session to ensure secure and consistent reuse of context across multiple tool invocations. Session isolation is especially important for AI agent workloads due to their dynamic and multi-step execution patterns.

Each tool session runs in a dedicated microVM with isolated CPU, memory, and filesystem resources. This architecture guarantees that one user's tool invocation cannot access data from another user's session. Upon session completion, the microVM is fully terminated, and its memory is sanitized, thereby eliminating any risk of cross-session data leakage.

## Starting a browser session

After creating a browser, you can start a session to interact with web applications.

### AWS CLI

To start a Browser session using the AWS CLI, use the `start-browser-session` command:

```
aws bedrock-agentcore start-browser-session \
--region <Region> \
--browser-identifier "my-browser" \
--name "my-browser-session" \
```

```
--session-timeout-seconds 900 \
--view-port width=1456,height=819
```

## Boto3

To start a Browser session using the AWS SDK for Python (Boto3), use the `start_browser_session` method:

### Request Syntax

The following shows the request syntax:

```
response = dp_client.start_browser_session(
 browserIdentifier="aws.browser.v1",
 name="browser-session-1",
 sessionTimeoutSeconds=3600,
 viewPort={
 'height': 819,
 'width': 1456
 }
)
```

## BrowserClient

To start a browser session using the `BrowserClient` class for more control over the session lifecycle:

```
from bedrock_agentcore.tools.browser_client import BrowserClient

Create a browser client
client = BrowserClient(region="us-west-2")

Start a browser session
client.start()
print(f"Session ID: {client.session_id}")

try:
 # Generate WebSocket URL and headers
 url, headers = client.generate_ws_headers()

 # Perform browser operations with your preferred automation tool

```

```
finally:
 # Always close the session when done
 client.stop()
```

## API

To create a new browser session using the API, use the following call:

```
Using awscurl
awscurl -X PUT \
 "https://bedrock-agentcore.<Region>.amazonaws.com/browsers/aws.browser.v1/
sessions/start" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 --service bedrock-agentcore \
 --region <Region> \
 -d '{
 "name": "browser-session-abc12345",
 "description": "browser sandbox session",
 "sessionTimeoutSeconds": 300,
 "viewPort": {
 "height": 819,
 "width": 1456
 }
 }'
```

## Get Browser session

You can get information about a browser session that you have created.

### AWS CLI

To get information about a browser session using the AWS CLI, use the `get-browser-session` command:

```
aws bedrock-agentcore get-browser-session \
 --region <Region> \
 --browser-identifier "aws.browser.v1" \
 --session-id "<your-session-id>"
```

## Boto3

To get information about a browser session using the AWS SDK for Python (Boto3), use the `get_browser_session` method:

### Request Syntax

The following shows the request syntax:

```
response = dp_client.get_browser_session(
 browserIdentifier="aws.browser.v1",
 sessionId=<your-session-id>
)
```

## API

To get information about a browser session using the API, use the following call:

```
Using awscurl
awscurl -X GET \
 "https://bedrock-agentcore.<Region>.amazonaws.com/browsers/aws.browser.v1/
sessions/get?sessionId=<your-session-id>" \
 -H "Content-Type: application/json" \
 -H "Accept: application/json" \
 --service bedrock-agentcore \
 --region <Region>

{
 "browserIdentifier": "aws.browser.v1",
 "createdAt": "2025-07-14T22:16:40.713152248Z",
 "lastUpdatedAt": "2025-07-14T22:16:40.713152248Z",
 "name": "testBrowserSession1752531400",
 "sessionId": "<your-session-id>",
 "sessionReplayArtifact": null,
 "sessionTimeoutSeconds": 900,
 "status": "TERMINATED",
 "streams": {
 "automationStream": {
 "streamEndpoint": "wss://bedrock-agentcore.<Region>.amazonaws.com/browser-
streams/aws.browser.v1/sessions/<your-session-id>/automation",
 "streamStatus": "ENABLED"
```

```
 },
 "liveViewStream": {
 "streamEndpoint": "https://bedrock-agentcore.<Region>.amazonaws.com/browser-
streams/aws.browser.v1/sessions/<your-session-id>/live-view"
 }
},
"viewPort": {
 "height": 819,
 "width": 1456
}
}
```

## Interacting with a browser session

Once you have started a Browser session, you can interact with it using the WebSocket API.

### Console

#### To interact with a Browser session using the console

1. Navigate to your active Browser session.
2. Use the browser interface to navigate to websites, interact with web elements, and perform other browser actions.
3. You can view the browser activity in real-time through the live view feature.

### SDK

To interact with a Browser session programmatically, use the WebSocket-based streaming API with the following URL format:

```
https://bedrock-agentcore.<Region>.amazonaws.com/browser-streams/{browser_id}/
sessions/{session_id}/automation
```

You can use libraries like Playwright to establish a connection with the WebSocket and control the browser. Here's an example:

```
from playwright.sync_api import sync_playwright, Playwright, BrowserType
import os
```

```
import base64
from bedrock_agentcore.tools.browser_client import browser_session

def main(playwright):
 # Keep browser session alive during usage
 with browser_session('us-west-2') as client:

 # Generate CDP endpoint and headers
 ws_url, headers = client.generate_ws_headers()

 # Connect to browser using headers
 chromium: BrowserType = playwright.chromium
 browser = chromium.connect_over_cdp(ws_url, headers=headers)

 # Use the first available context or create one
 context = browser.contexts[0] if browser.contexts else browser.new_context()
 page = context.pages[0] if context.pages else context.new_page()

 page.goto("https://amazon.com/")
 print("Navigated to Amazon")

 # Create CDP session for screenshot
 cdp_client = context.new_cdp_session(page)
 screenshot_data = cdp_client.send("Page.captureScreenshot", {
 "format": "jpeg",
 "quality": 80,
 "captureBeyondViewport": True
 })

 # Decode and save screenshot
 image_data = base64.b64decode(screenshot_data['data'])
 with open("screenshot.jpeg", "wb") as f:
 f.write(image_data)

 print("# Screenshot saved as screenshot.jpeg")
 page.close()
 browser.close()

with sync_playwright() as p:
 main(p)
```

The following example code shows how you can perform live view using the WebSocket-based streaming API.

```
https://bedrock-agentcore.<Region>.amazonaws.com/browser-streams/{browser_id}/sessions/{session_id}/live-view
```

Below is the code.

```
import time
from rich.console import Console
from bedrock_agentcore.tools.browser_client import browser_session
from browser_viewer import BrowserViewerServer

console = Console()

def main():
 try:
 # Step 1: Create browser session
 with browser_session('us-west-2') as client:
 print("\r # Browser ready! ")
 ws_url, headers = client.generate_ws_headers()

 # Step 2: Start viewer server
 console.print("\n[cyan]Step 3: Starting viewer server...[/cyan]")
 viewer = BrowserViewerServer(client, port=8005)
 viewer_url = viewer.start(open_browser=True)

 # Keep running
 while True:
 time.sleep(1)

 except KeyboardInterrupt:
 console.print("\n\n[yellow]Shutting down...[/yellow]")
 if 'client' in locals():
 client.stop()
 console.print("# Browser session terminated")
 except Exception as e:
 console.print(f"\n[red]Error: {e}[/red]")
 import traceback
 traceback.print_exc()

if __name__ == "__main__":
 main()
```

## Listing browser sessions

You can list all active browser sessions to monitor and manage your resources. This is useful for tracking active sessions, identifying long-running sessions, or finding sessions that need to be stopped.

### AWS CLI

To list Browser sessions using the AWS CLI, use the `list-browser-sessions` command:

```
aws bedrock-agentcore list-browser-sessions \
--region <Region> \
--browser-id "<your-browser-id>" \
--max-results 10
```

You can also filter sessions by status:

```
aws bedrock-agentcore list-browser-sessions \
--region <Region> \
--browser-id "<your-browser-id>" \
--status "READY"
```

### Boto3

To list Browser sessions using the AWS SDK for Python (Boto3), use the `list_browser_sessions` method:

#### Request Syntax

The following shows the request syntax:

```
response = dp_client.list_browser_sessions(
 browserIdentifier="aws.browser.v1"
)
```

You can also filter sessions by status:

```
List only active sessions
filtered_response = dp_client.list_browser_sessions(
 browserIdentifier="aws.browser.v1",
 status="READY"
)

Print filtered session information
for session in filtered_response['items']:
 print(f"Ready Session ID: {session['sessionId']}")
 print(f"Name: {session['name']}")
 print("---")
```

## API

To list browser sessions using the API, use the following call:

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore.<Region>.amazonaws.com/browsers/<your-browser-id>/sessions/list" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "maxResults": 10
}'
```

You can also filter sessions by status:

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore.<Region>.amazonaws.com/browsers/aws.browser.v1/sessions/list" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "maxResults": 10,
```

```
 "status": "READY"
}'
```

## Stopping a browser session

When you are finished using a Browser session, you should stop it to release resources and avoid unnecessary charges.

### AWS CLI

To stop a Browser session using the AWS CLI, use the `stop-browser-session` command:

```
aws bedrock-agentcore stop-browser-session \
 --region <Region> \
 --browser-id "<your-browser-id>" \
 --session-id "<your-session-id>"
```

### Boto3

To stop a Browser session using the AWS SDK for Python (Boto3), use the `stop_browser_session` method:

#### Request Syntax

The following shows the request syntax:

```
response = dp_client.stop_browser_session(
 browserIdentifier="aws.browser.v1",
 sessionId="<your-session-id>",
)
```

### API

To stop a browser session using the API, use the following call:

```
Using awscurl
awscurl -X PUT \
 "https://bedrock-agentcore.<Region>.amazonaws.com/browsers/aws.browser.v1/\
sessions/stop?sessionId=<your-session-id>" \
"
```

```
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region>
```

## Updating browser streams

You can update browser streams to enable or disable automation. This is useful when you need to enter sensitive information like login credentials that you don't want the agent to see.

### Boto3

```
response = dp_client.update_browser_stream(
 browserIdentifier="aws.browser.v1",
 sessionId="<your-session-id>",
 streamUpdate={
 "automationStreamUpdate": {
 "streamStatus": "DISABLED" # or "ENABLED"
 }
 }
)
```

### API

```
awscurl -X PUT \
"https://bedrock-agentcore.<Region>.amazonaws.com/browsers/aws.browser.v1/
sessionsstreams/update?sessionId=<your-session-id>" \
-H "Content-Type: application/json" \
-H "Accept: application/json" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "streamUpdate": {
 "automationStreamUpdate": {
 "streamStatus": "ENABLED"
 }
 }
}'
```

### CLI

```
aws bedrock-agentcore update-browser-stream \
```

```
--region <Region> \
--browser-id "<your-browser-id>" \
--session-id "<your-session-id>" \
--stream-update automationStreamUpdate={streamStatus=ENABLED}
```

## Rendering live view using AWS DCV Web Client

Amazon Bedrock AgentCore's live view is powered by **AWS DCV**. Each browser session launches a dedicated DCV server that streams the browser interface and enables real-time user interaction.

To render the live view, you must use the **AWS DCV Web Client**, which supports interactive display within a browser. Authentication is handled via **IAM SigV4-signed query parameters**, which must be appended to the live view URL to authorize access.

The example SDK includes a lightweight **web server** that hosts the DCV Web Client and connects to the live view, enabling an end-to-end interactive experience out of the box.

If you want to directly integrate the live view experience into their own web applications, they can embed the **DCV Web Client** and generate the signed connection URL using the SDK's helper methods. This allows full customization of the UI while leveraging Amazon Bedrock AgentCore's Browser Tool capabilities.

## Using Callbacks to Customize URL Parameters

The DCV Web SDK supports custom callbacks that you can use to modify the URLs used during authentication and session establishment. This feature enables advanced integration scenarios, including the ability to append custom query parameters and add AWS Signature Version 4 (SigV4) signed values to secure and authorize connections through external systems.

### Customizing Authentication and connection URL:`httpExtraSearchParamsCallback`

The authenticate method supports a callback parameter, `httpExtraSearchParamsCallback`. Before initiating the request, you can use this callback to inject custom query parameters into the authentication URL.

When establishing a WebSocket connection to the DCV server, you can use the `httpExtraSearchParamsCallback` in the connect method to customize the URL used.

Example:

## Example

The following shows a sample code:

```
async function startAndConnect() {
 const response = await fetch('/presigned-url');
 const { sessionId, presignedUrl: url } = await response.json();
 presignedUrl = url; // Set global variable

 dcv.setLogLevel(dcv.LogLevel.INFO);
 auth = dcv.authenticate(presignedUrl, {
 promptCredentials: onPromptCredentials,
 error: onError,
 success: (auth, result) => {
 const { sessionId, authToken } = result[0];
 connect(presignedUrl, sessionId, authToken);
 },
 httpExtraSearchParams: httpExtraSearchParamsCb
 });
}

function connect(serverUrl, sessionId, authToken) {
 dcv.connect({
 url: serverUrl,
 sessionId,
 authToken,
 divId: 'dcv-display',
 observers: {
 httpExtraSearchParams: httpExtraSearchParamsCb,
 displayLayout: displayLayoutCallbackCb,
 }
 })
 .then((conn) => {
 console.log('Connection established');
 connection = conn;
 })
 .catch((error) => {
 console.error('Connection failed:', error.message);
 });
}

function httpExtraSearchParamsCb(method, url, body) {
```

```
const presignedUrl = getPresignedUrlForLiveViewEndpoint();
const searchParams = new URL(presignedUrl).searchParams;

return searchParams;
}
```

These callbacks offer fine-grained control over the URL and headers used by the SDK during key stages of session negotiation and connection, supporting advanced use cases and integration with existing security infrastructure.

## Observability and session replay

The AgentCore Browser provides the following observability features:

### Session replay

You can replay browser sessions using the Amazon Bedrock AgentCore SDK to view session recordings stored in Amazon S3. This feature enables you to review past browser interactions for debugging, auditing, or training purposes. The recordings in S3 include DOM change events, browser network activity, and console logs for comprehensive session analysis.

### Metrics

You can view browser session metrics in Amazon CloudWatch, including session counts, durations, and error rates to monitor usage and performance.

### Topics

- [CloudWatch Metrics for AgentCore Browser](#)
- [Browser session recording and replay](#)

## CloudWatch Metrics for AgentCore Browser

You can view the following metrics in Amazon CloudWatch:

- Session counts: The number of browser sessions that have been requested
- Session duration: The length of time browser sessions are active
- Error rates: The frequency of errors encountered during browser sessions
- Resource utilization: CPU, memory, and network usage by browser sessions

These metrics can be used to monitor the usage and performance of your browser sessions, set up alarms for abnormal behavior, and optimize your resource allocation.

For more information, see [AgentCore generated built-in tools observability data](#).

## Browser session recording and replay

Browser session recording and replay provides comprehensive observability for debugging, auditing, or training purposes. When you create a browser with session recording enabled, Amazon Bedrock AgentCore automatically captures browser interactions and stores them in your specified Amazon S3 bucket for later analysis.

Session replay captures comprehensive browser interaction data that enables you to view replays and understand the actions that occurred during browser sessions. This functionality helps you resolve errors and improve future invocations by providing detailed insights into browser behavior.

Information collected during session replay includes:

- Session DOM changes and mutations
- User actions including clicks, scrolls, and form interactions
- Console logs and error messages
- Chrome DevTools Protocol (CDP) events
- Network events and HTTP requests

## Prerequisites for session recording

To enable session recording, you need:

- An Amazon S3 bucket to store recording data
- An IAM execution role with permissions to write to your Amazon S3 bucket
- A custom browser tool configured with recording enabled

## Configure IAM role for recording

To enable session recording, you need an IAM execution role with permissions to write recording data to Amazon S3 and log activity to CloudWatch. For detailed instructions on setting up permissions, see [Permissions](#).

The execution role requires additional permissions beyond the standard browser permissions:

```
{
 "Sid": "S3Permissions",
 "Effect": "Allow",
 "Action": [
 "s3:PutObject",
 "s3:GetObject",
 "s3>ListBucket",
 "s3>ListMultipartUploadParts",
 "s3:AbortMultipartUpload"
],
 "Resource": [
 "arn:aws:s3::::your-recording-bucket",
 "arn:aws:s3::::your-recording-bucket/*"
]
},
{
 "Sid": "CloudWatchLogsPermissions",
 "Effect": "Allow",
 "Action": [
 "logs>CreateLogGroup",
 "logs>CreateLogStream",
 "logs>PutLogEvents",
 "logs>DescribeLogStreams"
],
 "Resource": "*"
}
```

Replace `your-recording-bucket` with your actual Amazon S3 bucket name.

The following sections show you how to use session replay and some programmatic examples.

## Topics

- [How to use session replay](#)
- [Session replay programmatic examples](#)

## How to use session replay

Session recording captures all browser interactions and allows you to replay sessions for debugging, analysis, and monitoring. This feature requires a custom browser tool with recording enabled.

**Note**

- Session replay captures DOM mutations and reconstructs them during playback. The browser may make cross-origin HTTP requests to fetch external assets during replay.
- Session replay is not available in the AWS managed Browser (aws.browser.v1).

Session replay in AgentCore Browser involves the following steps:

1. **Create a Browser Tool with Recording** - Create a custom browser with recording enabled and specify your Amazon S3 bucket for storage
2. **Use the Recording-Enabled Browser** - Start browser sessions and perform browsing activities through automation or live view
3. **Replay and Inspect Recorded Sessions** - Access recordings through the AWS Console with comprehensive analysis tools
4. **Access Recordings Programmatically** - Retrieve and analyze recording data directly from Amazon S3 for custom workflows

**Important**

Before you perform these steps, make sure that you've configured the IAM Role for recording. You must set up permissions for Amazon Bedrock AgentCore to write recording data to Amazon S3 and log activity to CloudWatch. For more information, see [Configure IAM role for recording](#).

### Step 1: Create a browser tool with recording

Create a custom browser tool with recording enabled. For detailed instructions on creating browser tools, see [Creating an AgentCore Browser](#).

When creating your browser tool, ensure you:

- Enable session recording in the configuration
- Specify your Amazon S3 bucket and prefix for storing recordings
- Use the IAM execution role from Step 1

## Example using Python SDK:

```
import boto3
import uuid

region = "us-west-2"
bucket = "your-recording-bucket"

client = boto3.client("bedrock-agentcore-control", region_name=region)

response = client.create_browser(
 name="MyRecordingBrowser",
 description="Browser with session recording enabled",
 networkConfiguration={"networkMode": "PUBLIC"},
 executionRoleArn="arn:aws:iam::123456789012:role/AgentCoreBrowserRecordingRole",
 clientToken=str(uuid.uuid4()),
 recording={
 "enabled": True,
 "s3Location": {
 "bucket": bucket,
 "prefix": "browser-recordings"
 }
 }
)

browser_identifier = response.get("browserId") or response.get("browserIdentifier")
print(f"Created browser with recording: {browser_identifier}")
print(f"Recordings will be stored at: s3://{bucket}/browser-recordings/")
```

## Step 2: Use the recording-enabled browser

Use your recording-enabled browser with any automation framework. All browser interactions will be automatically recorded. Example using Strands:

```
from strands import Agent
from strands_tools.browser import AgentCoreBrowser

Use the browser created with recording
browser_identifier = "your-browser-identifier"
region = "us-west-2"
browser_tool = AgentCoreBrowser(region=region, identifier=browser_identifier)

agent = Agent(tools=[browser_tool.browser])
```

```
prompt = (
 "Navigate to https://docs.aws.amazon.com/bedrock-agentcore/latest/devguide/what-is-
 bedrock-agentcore.html "
 "and summarize the key features of AgentCore."
)

response = agent(prompt)
print("Agent Response:")
print(response.message["content"][0]["text"])
```

All interactions during this session will be automatically recorded and uploaded to your Amazon S3 bucket when the session ends.

### Step 3: Monitor live sessions and replay recordings

The AWS Console provides comprehensive tools for both real-time monitoring and recorded session analysis.

#### Live view monitoring

Monitor browser sessions in real-time and interact with active sessions:

##### To access live view in the console

1. Open the Amazon Bedrock AgentCore console and navigate to **Built-in tools**
2. Select your browser tool from the list (for example, MyRecordingBrowser)
3. In the **Browser sessions** section, locate an active session with status **Ready** or **In progress**
4. In the **Live view / recording** column, click the provided "View live session" URL
5. The live view opens in a new browser window, displaying the real-time browser session

The live view interface provides:

- Real-time video stream of the browser session
- Interactive controls to take over or release control from automation
- Session status indicators and connection information
- Ability to interact directly with the browser when control is enabled

## Session replay and analysis

Access detailed session recordings and analysis through the console replay interface:

### To access session replay in the console

1. Navigate to your browser tool and select a completed session with **Terminated** status
2. Click **View Recording** for the session you want to analyze
3. The session replay page displays with comprehensive analysis tools

### Session analysis features

The console provides multiple analysis tools:

- **Video Player:** Interactive playback with timeline scrubber for navigation
- **Pages Navigation:** Panel showing all visited pages with time ranges
- **User Actions:** All user interactions with timestamps, methods, and details
- **Page DOM:** DOM structure and HTML content for each page
- **Console Logs:** Browser console output, errors, and log messages
- **CDP Events:** Chrome DevTools Protocol events with parameters and results
- **Network Events:** HTTP requests, responses, status codes, and timing

### Navigate recordings

Use these methods to navigate through recordings:

- Click on pages in the Pages panel to jump to specific moments
- Click on user actions to see where they occurred in the timeline
- Use the video timeline scrubber for precise navigation
- Choose **View recording** links in action tables to jump to specific interactions

### Step 4: Access recordings programmatically

Access live view and recording insights programmatically using the Amazon Bedrock AgentCore SDK and APIs for custom integration and automated analysis.

## Programmatic live view access

Connect to live browser sessions using the browser client and viewer server:

```
import time
from rich.console import Console
from bedrock_agentcore.tools.browser_client import browser_session
from browser_viewer import BrowserViewerServer

console = Console()

def main():
 try:
 # Create browser session
 with browser_session('us-west-2') as client:
 print("# Browser ready!")
 ws_url, headers = client.generate_ws_headers()

 # Start viewer server
 console.print("[cyan]Starting viewer server...[/cyan]")
 viewer = BrowserViewerServer(client, port=8005)
 viewer_url = viewer.start(open_browser=True)

 # Keep running
 while True:
 time.sleep(1)

 except KeyboardInterrupt:
 console.print("[yellow]Shutting down...[/yellow]")
 if 'client' in locals():
 client.stop()
 console.print("# Browser session terminated")

if __name__ == "__main__":
 main()
```

## Programmatic recording access

Access recording data directly from Amazon S3 for custom analysis workflows:

```
import boto3

s3_client = boto3.client('s3', region_name='us-west-2')
```

```
List recordings in your bucket
bucket_name = "your-recording-bucket"
prefix = "browser-recordings/"

response = s3_client.list_objects_v2(Bucket=bucket_name, Prefix=prefix)

print(f"Recordings in s3://{{bucket_name}}/{{prefix}}:")
for obj in response.get('Contents', []):
 print(f" {{obj['Key']}} ({{obj['Size']}} bytes)")
 print(f" Last Modified: {{obj['LastModified']}}")
 print()
```

Recording data structure:

```
s3://your-recording-bucket/browser-recordings/
 ### session-id/
 ### batch_1.ndjson.gz
 ### batch_2.ndjson.gz
 ### batch_3.ndjson.gz
```

Each session creates a folder with the session ID, and recording data is uploaded in chunks as the session progresses.

## Session replay programmatic examples

For advanced use cases, you can build custom session replay viewers and integrate recording data into your own analysis workflows.

The following GitHub examples show a standalone session replay viewer and what the complete browser experience looks like when using the browser session replay feature.

For additional examples, see [AgentCore Browser examples on GitHub](#).

## Standalone Session Replay Viewer

The standalone session replay viewer is a separate tool for viewing recorded browser sessions directly from Amazon S3 without creating a new browser.

- Connect directly to S3 to view recordings
- View any past recording by specifying its session ID

- Display error messages when artifacts are missing from S3, with console replay URLs specific to session ID
- Interactive video playback interface with timeline navigation
- Action markers on timeline showing form fills, clicks, and navigation events
- Observability table displaying pages traveled with duration and URL details
- Console events, CDP logs, and network logs for each page interaction
- Session duration tracking integrated at page level
- Real-time action verification with visual correlation between video and action data

```
View the latest recording in a bucket
python view_recordings.py --bucket session-record-test-123456789012 --prefix replay-data

View a specific recording
python view_recordings.py --bucket session-record-test-123456789012 --prefix replay-data --session 01JZVDG02M8MXZY2N7P3PKDQ74

Use a specific AWS profile
python view_recordings.py --bucket session-record-test-123456789012 --prefix replay-data --profile my-profile
```

For reference, see [Standalone session replay viewer on GitHub](#).

## Complete Browser Experience with Recording and Replay

A comprehensive tool for creating browser sessions with recording capabilities and advanced replay features.

- Create browser sessions with automatic recording to S3
- Live view with interactive control (take/release)
- Adjust display resolution on the fly
- Automatic session recording to S3
- Integrated session replay viewer with video player interface
- Timeline scrubbing with precise action location tracking
- Page-by-page analysis with navigation timeline and URL copying
- Form filling action verification with click location details

- Session duration tracking integrated at page level
- Real-time action verification with visual correlation between video and action data

```
View the latest recording in a bucket
python -m live_view_sessionreplay.browser_interactive_session
```

For reference, see [Interactive browser session on GitHub](#).

## Troubleshoot AgentCore built-in tools

This section provides solutions to common issues you might encounter when using Amazon Bedrock AgentCore built-in tools.

### Browser tool issues

#### Permission denied errors

**Symptom:** Errors mentioning access denied or insufficient permissions.

##### Solution:

- Verify your IAM user or role has the required Browser permissions
- Check your AWS credentials: `aws sts get-caller-identity`
- For recording: Verify the execution role has Amazon S3 write permissions
- For recording: Confirm the trust policy allows `bedrock-agentcore.amazonaws.com` to assume the role

### Model access denied

**Symptom:** Errors about model access or authorization when running agents.

##### Solution:

- Navigate to the Amazon Bedrock console
- Go to **Model access** in the left navigation
- Enable **Anthropic Claude Sonnet 4**

- Verify you're in the correct region (match the region in your code)

## Browser session timeout

**Symptom:** Browser sessions end unexpectedly or timeout errors occur.

**Solution:**

- Check the `sessionTimeoutSeconds` parameter when starting sessions
- Default timeout is 900 seconds (15 minutes)
- Increase timeout for longer sessions: `sessionTimeoutSeconds=1800`
- Sessions automatically stop after the timeout period

## Recording not appearing in Amazon S3

**Symptom:** No recording files in your Amazon S3 bucket after session completes.

**Solution:**

- Verify the execution role has correct Amazon S3 permissions
- Confirm the Amazon S3 bucket name and prefix are correct
- Check the execution role trust policy includes bedrock-agentcore service
- Review CloudWatch Logs for Amazon S3 upload errors
- Ensure the session ran for at least a few seconds (very short sessions may not generate recordings)

## Playwright connection errors

**Symptom:** Cannot connect to browser with Playwright or WebSocket errors.

**Solution:**

- Verify you installed playwright: `pip install playwright`
- Confirm the browser session started successfully before connecting
- Check that the session is still active (not timed out)
- Verify your network allows WebSocket connections

## Agent cannot make progress due to CAPTCHA checks

**Issue:** Your agent gets blocked by CAPTCHA verification when using the Browser tool to interact with websites.

**Cause:** Anti-bot measures on popular websites detect automated browsing and require human verification.

**Solution:** Structure your agent to avoid search engines and implement the following architecture pattern:

- Use the Browser tool only for specific page actions, not general web searching
- Use non-browser MCP tools like Tavily search for general web search operations
- Consider adding a live view feature to your agent application that allows end users to take control and solve CAPTCHAs when needed

## CORS errors when integrating with browser applications

**Issue:** Cross-Origin Resource Sharing (CORS) errors occur when building browser-based web applications that call a custom Amazon Bedrock AgentCore runtime server.

**Cause:** Browser security policies block cross-origin requests to your runtime server during local development or self-hosted deployment.

**Solution:** Add CORS middleware to your BedrockAgentCoreApp to handle cross-origin requests from your frontend:

```
from bedrock_agentcore.runtime import BedrockAgentCoreApp
from fastapi.middleware.cors import CORSMiddleware

app = BedrockAgentCoreApp()

Add CORS middleware to allow browser requests
app.add_middleware(
 CORSMiddleware,
 allow_origins=["*"], # Customize in production
 allow_credentials=True,
 allow_methods=["*"],
 allow_headers=["*"],
```

```
)

Handle browser preflight requests to /invocations
@app.options("/invocations")
async def options_handler():
 return {"message": "OK"}

@app.entrypoint
def my_agent(payload):
 return {"response": "Hello from agent"}
```

### Important

In production environments, replace `allow_origins=[ "*" ]` with specific domain origins for better security.

## Code Interpreter issues

For general Code Interpreter troubleshooting, see the specific documentation for [the section called "AgentCore Code Interpreter: Execute code and analyze data".](#)

Common issues with Code Interpreter typically relate to:

- Code execution timeouts
- Memory limitations during data processing
- Package installation restrictions

For detailed troubleshooting steps, refer to the Code Interpreter tool documentation.

# Observe your agent applications on Amazon Bedrock

## AgentCore Observability

With AgentCore, you can trace, debug, and monitor AI agents' performance in production environments.

AgentCore Observability helps you trace, debug, and monitor agent performance in production environments. It offers detailed visualizations of each step in the agent workflow, enabling you to inspect an agent's execution path, audit intermediate outputs, and debug performance bottlenecks and failures.

AgentCore Observability gives you real-time visibility into agent operational performance through access to dashboards powered by Amazon CloudWatch and telemetry for key metrics such as session count, latency, duration, token usage, and error rates. Rich metadata tagging and filtering simplify issue investigation and quality maintenance at scale. AgentCore emits telemetry data in standardized OpenTelemetry (OTEL)-compatible format, enabling you to easily integrate it with your existing monitoring and observability stack.

By default, AgentCore outputs a set of key built-in metrics for agents, gateway resources, and memory resources. For memory resources, AgentCore also outputs spans and log data if you enable it. You can also instrument your agent code to provide additional span and trace data and custom metrics and logs. See [the section called “Add observability to your agents”](#) to learn more.

All of the metrics, spans, and logs output by AgentCore are stored in Amazon CloudWatch, and can be viewed in the CloudWatch console or downloaded from CloudWatch using the AWS CLI or one of the AWS SDKs.

In addition to the raw data stored in CloudWatch Logs, for agent runtime data only, the CloudWatch console provides an observability dashboard containing trace visualizations, graphs for custom span metrics, error breakdowns, and more. To learn more about viewing your agents' observability data, see [the section called “View metrics for your agents”](#)

### Topics

- [Get started with AgentCore Observability](#)
- [Add observability to your Amazon Bedrock AgentCore resources](#)
- [Understand observability for agentic resources in AgentCore](#)

- [Amazon Bedrock AgentCore generated observability data](#)
- [View observability data for your Amazon Bedrock AgentCore agents](#)

## Get started with AgentCore Observability

Amazon Bedrock Amazon Bedrock AgentCore Observability helps you trace, debug, and monitor agent performance in production environments. This guide helps you implement observability features in your agent applications.

### Topics

- [Prerequisites](#)
- [Step 1: Enable transaction search on CloudWatch](#)
- [Step 2: Enable observability for Amazon Bedrock AgentCore Runtime hosted agents](#)
- [Step 3: Enable observability for non-Amazon Bedrock AgentCore-hosted agents](#)
- [Step 4: Observe your agent with GenAI observability on Amazon CloudWatch](#)
- [Best practices](#)

## Prerequisites

Before starting, make sure you have:

- **AWS Account** with credentials configured (`aws configure`) with model access enabled to the Foundation Model you would like to use.
- **Python 3.10+** installed
- **Enable transaction search** on Amazon CloudWatch. Only once, first-time users must enable [CloudWatch Transaction Search](#) to view Bedrock Amazon Bedrock AgentCore spans and traces
- **Add the OpenTelemetry library** Include `aws-opentelemetry-distro` (ADOT) in your `requirements.txt` file.
- Make sure that your framework is configured to emit traces (eg. `strands-agents[otel]` package), you may sometimes need to include `<your-agent-framework-auto-instrumentor>` # e.g., `opentelemetry-instrumentation-langchain`

Amazon Bedrock AgentCore Observability offers two ways to configure monitoring to match different infrastructure needs:

1. Amazon Bedrock AgentCore Runtime-hosted agents
2. Non-runtime hosted agents

As a one time setup per AWS account, first time users need to enable Transaction Search on Amazon CloudWatch. There are two ways to do this, via the API and via the CloudWatch Console.

## Step 1: Enable transaction search on CloudWatch

After you enable Transaction Search, it can take ten minutes for spans to become available for search and analysis. Choose one of the options below:

### Option 1: Enable transaction search using an API

#### To enable transaction search using the API

1. Create a policy that grants access to ingest spans in CloudWatch Logs using AWS CLI.

An example is shown below on how to format your AWS CLI command with PutResourcePolicy.

```
aws logs put-resource-policy --policy-name MyResourcePolicy --policy-document '{ "Version": "2012-10-17" , "Statement": [{ "Sid": "TransactionSearchXRayAccess", "Effect": "Allow", "Principal": { "Service": "xray.amazonaws.com" }, "Action": "logs:PutLogEvents", "Resource": ["arn:partition:logs:region:account-id:log-group:aws/spans:*", "arn:partition:logs:region:account-id:log-group:/aws/application-signals/data:/*"], "Condition": { "ArnLike": { "aws:SourceArn": "arn:partition:xray:region:account-id:/*" }, "StringEquals": { "aws:SourceAccount": "account-id" } }]}'
```

2. Configure the destination of trace segments.

An example is shown below on how to format your AWS CLI command with UpdateTraceSegmentDestination.

```
aws xray update-trace-segment-destination --destination CloudWatchLogs
```

3. **Optional** Configure the amount of spans to index.

Configure your desired sampling percentage with UpdateIndexingRule.

```
aws xray update-indexing-rule --name "Default" --rule '{"Probabilistic": {"DesiredSamplingPercentage": number}}'
```

## Option 2: Enable transaction search in the CloudWatch console

### To enable transaction search in the CloudWatch console

1. Open the CloudWatch console at <https://console.aws.amazon.com/cloudwatch/>.
2. From the navigation pane, under **Application Signals**, choose **Transaction Search**.
3. Choose **Enable Transaction Search**.
4. Select the box to ingest spans as structured logs, and enter a percentage of spans to be indexed. You can index spans at 1% for free and change the percentage later based on your requirements.

Now proceed to exploring the two ways to configure observability.

## Step 2: Enable observability for Amazon Bedrock AgentCore Runtime hosted agents

Amazon Bedrock AgentCore Runtime-hosted agents are deployed and executed directly within the Amazon Bedrock AgentCore environment, providing automatic instrumentation with minimal configuration. This approach offers the fastest path to deployment and is ideal for rapid development and testing.

For a complete example, refer to this [notebook](#)

### Set up folder and virtual environment

Create a new folder for your agent. Then create and initialize a new python virtual environment.

```
mkdir agentcore-observability-quickstart
cd agentcore-observability-quickstart
python3 -m venv .venv
source .venv/bin/activate
```

## Create your agent

The following is an example of using the Strands Agents SDK.

To enable OTEL exporting, install [Strands Agents](#) with otel extra dependencies:

```
pip install 'strands-agents[otel]'
```

Use the following steps to host a strands agent on an AgentCore Runtime:

```
Save this as strands_claude.py
from strands import Agent, tool
from strands_tools import calculator # Import the calculator tool
import argparse
import json
from bedrock_agentcore.runtime import BedrockAgentCoreApp
from strands.models import BedrockModel

app = BedrockAgentCoreApp()

Create a custom tool
@tool
def weather():
 """ Get weather """ # Dummy implementation
 return "sunny"

model_id = "us.anthropic.claude-3-7-sonnet-20250219-v1:0"
model = BedrockModel(
 model_id=model_id,
)
agent = Agent(
 model=model,
 tools=[calculator, weather],
 system_prompt="You're a helpful assistant. You can do simple math calculation, and tell the weather."
)

@app.entrypoint
def strands_agent_bedrock(payload):
 """
 Invoke the agent with a payload
 """

```

```
user_input = payload.get("prompt")
print("User input:", user_input)
response = agent(user_input)
return response.message['content'][0]['text']

if __name__ == "__main__":
 app.run()
```

## Deploy and invoke your agent on Amazon Bedrock AgentCore Runtime

Use the following code to deploy the agent to AgentCore Runtime by using the bedrock\_agentcore\_starter\_toolkit package.

```
from bedrock_agentcore_starter_toolkit import Runtime
from boto3.session import Session
boto_session = Session()
region = boto_session.region_name

agentcore_runtime = Runtime()
agent_name = "strands_claude_getting_started"
response = agentcore_runtime.configure(
 entrypoint="strands_claude.py",
 auto_create_execution_role=True,
 auto_create_ecr=True,
 requirements_file="requirements.txt", # make sure aws-opentelemetry-distro exists
 along with your libraries required to run your agent
 region=region,
 agent_name=agent_name
)

launch_result = agentcore_runtime.launch()
launch_result
```

In these steps you deployed your strands agent to an AgentCore Runtime with the starter toolkit. When you invoke your agent, it is automatically instrumented using Open Telemetry.

Invoke your agent using the following command and view the Traces, sessions and metrics on GenAI Observability dashboard on Amazon CloudWatch.

```
invoke_response = agentcore_runtime.invoke({"prompt": "How is the weather now?"})
invoke_response
```

## Step 3: Enable observability for non-Amazon Bedrock AgentCore-hosted agents

For agents running outside of the Amazon Bedrock AgentCore runtime, you can deliver the same monitoring capabilities for agents deployed on your own infrastructure. This allows consistent observability regardless of where your agents run. Use the following steps to configure the environment variables needed to observe your agents.

For a complete example, refer to this [notebook](#)

### Configure AWS environment variables

```
export AWS_ACCOUNT_ID=<account id>
export AWS_DEFAULT_REGION=<default region>
export AWS_REGION=<region>
export AWS_ACCESS_KEY_ID=<access key id>
export AWS_SECRET_ACCESS_KEY=<secret key>
```

### Configure CloudWatch logging

Create a log group and log stream for your agent in Amazon CloudWatch which you can use to configure below environment variables.

### Configure OpenTelemetry environment variables

```
export AGENT_OBSERVABILITY_ENABLED=true # Activates the ADOT pipeline
export OTEL_PYTHON_DISTRO=aws_distro # Uses AWS Distro for OpenTelemetry
export OTEL_PYTHON_CONFIGURATOR=aws_configurator # Sets AWS configurator for ADOT SDK
export OTEL_EXPORTER_OTLP_PROTOCOL=http/protobuf # Configures export protocol
export OTEL_EXPORTER_OTLP_LOGS_HEADERS=x-aws-log-group=<YOUR-LOG-GROUP>,x-aws-log-stream=<YOUR-LOG-STREAM>,x-aws-metric-namespace=<YOUR-NAMESPACE>
Directs logs to CloudWatch groups
export OTEL_RESOURCE_ATTRIBUTES=service.name=<YOUR-AGENT-NAME> # Identifies your agent in observability data
```

Replace `<YOUR-AGENT-NAME>` with a unique name to identify this agent in the GenAI Observability dashboard and logs.

### Create an agent locally

```
Create agent.py - Strands agent that is a weather assistant
```

```
from strands import Agent
from strands_tools import http_request

Define a weather-focused system prompt
WEATHER_SYSTEM_PROMPT = """You are a weather assistant with HTTP capabilities. You can:

1. Make HTTP requests to the National Weather Service API
2. Process and display weather forecast data
3. Provide weather information for locations in the United States

When retrieving weather information:
1. First get the coordinates or grid information using https://api.weather.gov/points/
{latitude},{longitude} or https://api.weather.gov/points/{zipcode}
2. Then use the returned forecast URL to get the actual forecast

When displaying responses:
- Format weather data in a human-readable way
- Highlight important information like temperature, precipitation, and alerts
- Handle errors appropriately
- Convert technical terms to user-friendly language

Always explain the weather conditions clearly and provide context for the forecast.

"""

Create an agent with HTTP capabilities
weather_agent = Agent(
 system_prompt=WEATHER_SYSTEM_PROMPT,
 tools=[http_request], # Explicitly enable http_request tool
)

response = weather_agent("What's the weather like in Seattle?")
print(response)
```

## Run your agent with automatic instrumentation command

With aws-opentelemetry-distro in your requirements.txt, the opentelemetry-instrument command will:

- Load your OTEL configuration from your environment variables
- Automatically instrument Strands, Amazon Bedrock calls, agent tool and databases, and other requests made by agent
- Send traces to CloudWatch

- Enable you to visualize the agent's decision-making process in the GenAI Observability dashboard

```
opentelemetry-instrument python agent.py
```

You can now view your traces, sessions and metrics on GenAI Observability Dashboard on Amazon CloudWatch with the value of **YOUR-AGENT-NAME** that you configured in your [environment variables](#).

To correlate traces across multiple agent runs, you can associate a session ID with your telemetry data using OpenTelemetry baggage:

```
from opentelemetry import baggage, context
ctx = baggage.set_baggage("session.id", session_id)
```

Run the session-enabled version following command, complete implementation provided in the [notebook](#):

```
opentelemetry-instrument python strands_travel_agent_with_session.py --session-id
"user-session-123"
```

## Step 4: Observe your agent with GenAI observability on Amazon CloudWatch

After implementing observability, you can view the collected data in CloudWatch:

### Observe your agent

1. Open the [GenAI Observability on CloudWatch console](#)
2. You can view the data related to model invocations and agents on Bedrock Amazon Bedrock AgentCore on the dashboard.
3. In the Bedrock Agentcore tab you can view Agents View, Sessions View and Traces View.
4. Agents View lists all your Agents that are on and not on runtime, you can also choose an agent and view further details like runtime metrics, sessions and traces specific to an agent.
5. In the **Sessions View** tab, you can navigate across all the sessions associated with agents.

6. In the **Trace View** tab, you can look into the traces and span information for agents. Also explore the trace trajectory and timeline by choosing a trace.

## View logs in CloudWatch

### To view logs in CloudWatch

1. Open the [CloudWatch console](#)
2. In the left navigation pane, expand **Logs** and select **Log groups**
3. Search for your agent's log group:
  - Standard logs (stdout/stderr) Location: /aws/bedrock-agentcore/runtimes/<agent\_id>-<endpoint\_name>/[runtime-logs] <UUID>
  - OTEL structured logs: /aws/bedrock-agentcore/runtimes/<agent\_id>-<endpoint\_name>/runtime-logs

## View traces and spans

### To view traces and spans

1. Open the [CloudWatch console](#)
2. Select **Transaction Search** from the left navigation
3. Location: /aws/spans/default
4. Filter by service name or other criteria
5. Select a trace to view the detailed execution graph

## View metrics

### To view metrics

1. Open the [CloudWatch console](#)
2. Select **Metrics** from the left navigation
3. Browse to the bedrock-agentcore namespace
4. Explore the available metrics

## Best practices

1. **Start simple, then expand** - The default observability provided by Amazon Bedrock AgentCore captures most critical metrics automatically, including model calls, token usage, and tool execution.
2. **Configure for development stage** - Tailor your observability configuration to match your current development phase and progressively adjust.
3. **Use consistent naming** - Establish naming conventions for services, spans, and attributes from the start
4. **Filter sensitive data** - Prevent exposure of confidential information by filtering sensitive data from observability attributes and payloads.
5. **Set up alerts** - Configure CloudWatch alarms to notify you of potential issues before they impact users

## Add observability to your Amazon Bedrock AgentCore resources

Amazon Bedrock AgentCore provides a number of built-in metrics to monitor the performance of resources for the AgentCore runtime, memory, gateway, built-in tools, and identity resource types. This default data is available in Amazon CloudWatch. To view the full range of observability data in the CloudWatch console, or to output custom runtime metrics for agents, you need to instrument your code using the AWS Distro for Open Telemetry (ADOT) SDK.

To view the observability dashboard in CloudWatch, open the [Amazon CloudWatch GenAI Observability](#) page.

See the following sections to learn more about configuring your resources to view observability metrics in the CloudWatch console generative AI observability page and in CloudWatch Logs.

### Tip

Use of the ADOT SDK to output custom metrics is also supported for agents running outside the AgentCore runtime. To learn how to enable observability for these agents, see the section called “[Enabling observability for agents hosted outside of AgentCore](#)”.

## Topics

- [Enabling AgentCore observability](#)
- [Enabling observability in agent code for AgentCore-hosted agents](#)
- [Enabling observability for agents hosted outside of AgentCore](#)
- [Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources](#)
- [Enhanced AgentCore runtime observability with custom headers](#)
- [Enhanced AgentCore built-in tools observability with custom headers](#)
- [Enhanced AgentCore identity observability with custom headers](#)
- [Observability best practices](#)
- [Using other observability platforms](#)

## Enabling AgentCore observability

To view metrics, spans, and traces generated by the AgentCore service, you first need to complete a one-time setup to turn on Amazon CloudWatch Transaction Search. To view service-provided spans for memory resources, you also need to enable tracing when you create a memory. See [the section called “Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources”](#) to learn more.

The following sections describe how to perform these setup actions and to enable observability in your agent code.

### Enabling CloudWatch Transaction Search

You can enable CloudWatch Transaction Search either by using the CloudWatch console, or by using an API through the AWS Command Line Interface (AWS CLI) or one of the AWS SDKs.

Use one of the following procedures to enable Transaction Search.

#### CloudWatch console

##### To enable CloudWatch Transaction Search in the CloudWatch console

1. Open the [CloudWatch](#) console.
2. In the navigation pane, expand **Application Signals (APM)** and choose **Transaction search**.
3. Choose **Enable Transaction Search**.

4. Select the checkbox to ingest spans as structured logs.
5. Choose **Save**.

## API

### To enable CloudWatch Transaction Search using an API

1. When using the AWS CLI or an AWS SDK to enable Transaction Search, first configure the necessary permissions to ingest spans in CloudWatch Logs by adding a resource-based policy with [PutResourcePolicy](#).

The following AWS CLI command adds a resource policy that gives AWS X-Ray permissions to send traces to CloudWatch Logs.

```
aws logs put-resource-policy --policy-name MyResourcePolicy --policy-document '{ "Version": "2012-10-17", "Statement": [{ "Sid": "TransactionSearchXRayAccess", "Effect": "Allow", "Principal": { "Service": "xray.amazonaws.com" }, "Action": "logs:PutLogEvents", "Resource": ["arn:partition:logs:region:account-id:log-group:aws/spans:*", "arn:partition:logs:region:account-id:log-group:/aws/application-signals/data:/*"], "Condition": { "ArnLike": { "aws:SourceArn": "arn:partition:logs:region:account-id:/*" }, "StringEquals": { "aws:SourceAccount": "account-id" } } }]}'
```

For clarity, the inline JSON policy in this command is shown expanded in the following example:

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "TransactionSearchXRayAccess",
 "Effect": "Allow",
 "Principal": {
 "Service": "xray.amazonaws.com"
 },
 "Action": "logs:PutLogEvents",
 "Resource": [
 "arn:aws:logs:us-east-1:123456789012:log-group:aws/spans:*,
```

```
 "arn:aws:logs:us-east-1:123456789012:log-group:/aws/
application-signals/data:*"
],
 "Condition": {
 "ArnLike": {
 "aws:SourceArn": "arn:aws:xray:us-east-1:123456789012:*"
 },
 "StringEquals": {
 "aws:SourceAccount": "123456789012"
 }
 }
}
```

## 2. Configure the destination of your trace segments using [UpdateTraceSegmentDestination](#).

To use the AWS CLI, run the following command.

```
aws xray update-trace-segment-destination --destination CloudWatchLogs
```

## 3. (Optional) Configure your desired sampling percentage using [UpdateIndexingRule](#).

To use the AWS CLI, run the following command.

```
aws xray update-indexing-rule --name "Default" --rule '{"Probabilistic": {"DesiredSamplingPercentage": number}}'
```

## Enabling observability in agent code for AgentCore-hosted agents

In addition to the service-generated metrics, with AgentCore you can also gather span and trace data as well as custom metrics emitted from your agent code.

When you use agent frameworks like [Strands](#), [LangChain](#), or [CrewAI](#) with supported third-party instrumentation libraries, the framework itself comes with built in support for OTEL and GenAI semantic conventions, and it can also be instrumented with an auto-instrumentation package such as `opentelemetry-instrument-langchain`. It is also possible to send Generative AI semantic conventions [telemetry](#) and [spans](#) by defining a custom tracer. AgentCore supports use of the following instrumentation libraries in your agent framework:

- [OpenInference](#)
- [OpenMetrics](#)
- [OpenLit](#)
- [Traceloop](#)

To view this data in the CloudWatch console generative AI observability page and in Amazon CloudWatch, you need to add the AWS Distro for Open Telemetry (ADOT) SDK to your agent code.

 **Note**

With AgentCore, you can also view metrics for agents that aren't running in the AgentCore runtime. Additional setup steps are required to configure telemetry outputs for non-AgentCore agents. See the instructions in [the section called “Enabling observability for agents hosted outside of AgentCore”](#) to learn more.

To add ADOT support and enable AgentCore observability, follow the steps in the following procedure.

### Add observability to your AgentCore agent

1. Ensure that your framework is configured to emit traces. For example, in the Strands framework, the tracer object must be configured to instruct Strands to emit Open Telemetry (OTEL) logs.
2. Add the ADOT SDK and boto3 to your agent's dependencies. For Python, add the following to your `requirements.txt` file:

```
aws-opentelemetry-distro>=0.10.0
boto3
```

Alternatively, you can install the dependencies directly:

```
pip install aws-opentelemetry-distro>=0.10.0 boto3
```

3. Execute your agent code using the OpenTelemetry auto-instrumentation command:

```
opentelemetry-instrument python my_agent.py
```

This auto-instrumentation approach automatically adds the SDK to the Python path. You may already be using this approach as part of your standard OpenTelemetry implementation.

For containerized environment (such as docker) add the following command:

```
CMD ["opentelemetry-instrument", "python", "main.py"]
```

When using ADOT, in order to propagate session id correctly, define the X-Amzn-Bedrock-AgentCore-Runtime-Session-Id in the request header. ADOT then sets the session\_id correctly in the downstream headers.

To propagate a trace ID, invoke the AgentCore runtime with the parameter `traceId=<traceId>` set.

You can also invoke your agent with additional headers for additional observability options. See [the section called “Enhanced AgentCore runtime observability with custom headers”](#) to learn more.

## Enabling observability for agents hosted outside of AgentCore

To enable observability for agents hosted outside of the AgentCore runtime, first follow the steps in the previous sections to enable CloudWatch Transaction Search and add the ADOT SDK to your code.

For agents running outside of the AgentCore runtime, you also need to create an agent log-group which you include in your environment variables.

Configure your AWS environment variables, and then set your Open Telemetry environment variables as shown in the following.

### AWS environment variables

```
AWS_ACCOUNT_ID=<account id>
AWS_DEFAULT_REGION=<default region>
AWS_REGION=<region>
AWS_ACCESS_KEY_ID=<access key id>
AWS_SECRET_ACCESS_KEY=<secret key>
```

### OTEL environment variables

```
AGENT_OBSERVABILITY_ENABLED=true
OTEL_PYTHON_DISTRO=aws_distro
OTEL_PYTHON_CONFIGURATOR=aws_configurator # required for ADOT Python only
OTEL_RESOURCE_ATTRIBUTES=service.name=<agent-name>,aws.log.group.names=/aws/bedrock-
agentcore/runtimes/<agent-id>,cloud.resource_id=<AgentEndpointArn:AgentEndpointName> #
endpoint is optional
OTEL_EXPORTER_OTLP_LOGS_HEADERS=x-aws-log-group=/aws/bedrock-agentcore/runtimes/<agent-
id>,x-aws-log-stream=runtime-logs,x-aws-metric-namespace=bedrock-agentcore
OTEL_EXPORTER_OTLP_PROTOCOL=http/protobuf
OTEL_TRACES_EXPORTER=otlp
```

Replace <agent-name> with your agent's name and <agent-id> with a unique identifier for your agent.

### Note

(Optional) For Agent Frameworks other than Strands, LangChain, CrewAI: You may need to add an additional SDK and code to send Generative AI semantic conventions telemetry and spans. CloudWatch AgentCore Observability supports use of the following instrumentation libraries in your agent framework:

- [OpenInference](#)
- [OpenMetrics](#)
- [OpenLit](#)
- [Traceloop](#)

## Session ID support

To propagate session ID, you need to invoke using session identifier in the OTEL baggage:

```
from opentelemetry import baggage

ctx = baggage.set_baggage("session.id", session_id) # Set the session.id in baggage
attach(ctx) # Attach the context to make it active token
```

# Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources

When you create an AgentCore runtime resource (agent), by default, AgentCore runtime creates a CloudWatch log group for the service-provided logs. However, for memory, gateway, and built-in tool resources, AgentCore doesn't configure log destinations for you automatically.

For memory and gateway resources, you can configure log destinations either in the console or by using an AWS SDK. If you use the console to configure a CloudWatch Logs destination, the default log group name for memory and gateway resources has the form /aws/vendedlogs/bedrock-agentcore/{resource-type}/APPLICATION\_LOGS/{resource-id}, where {resource-type} is either memory or gateway.

For memory and gateway logs, you can also configure log destinations in Amazon S3 logs or Firehose stream logs using the AgentCore console. To learn more about storing logs in Amazon S3 or Firehose, see [Uploading, downloading, and working with objects in Amazon S3](#) and [Creating an Amazon Data Firehose delivery stream](#).

To learn more about the log data output by AgentCore for memory and gateway resources see [Provided log data \(memory\)](#) or [Provided log data \(gateway\)](#).

For built-in tool resources, the AgentCore service doesn't provide logs by default, but you can output your own logs from your code. If you supply your own log outputs, you need to manually configure log destinations to store this data.

To see what observability data AgentCore provides by default for each resource type, see [the section called "AgentCore generated observability data"](#).

## Configure log destinations using the console

To configure log destinations for memory or gateway logs in the AgentCore console, use the following procedures.

### Memory

#### To configure log delivery for memory resources (console)

1. Open the [Memory](#) page in the AgentCore console.
2. In the **Memory** pane, select the memory you want to configure a log destination for.
3. Scroll down to the **Log delivery** pane and choose **Add**.

4. From the dropdown list, select the type of log destination you want to add (CloudWatch Logs group, Amazon S3 bucket, or Amazon Data Firehose).
5. For **Log type**, select **APPLICATION\_LOGS**.
6. For Amazon S3 and Firehose destinations, enter a **Delivery destination ARN**. For CloudWatch Logs, the **Destination log group** is already populated with a default value.
7. (Optional) For CloudWatch Logs destinations, to change the default log group, enter a new log group name or select an existing log group under **Destination log group**.
8. (Optional) To change the fields that are captured in each log record or the logs' output format, expand **Additional settings - optional**, and modify the **Field selection**, **Output format**, and **Field delimiter** to your desired configuration.
9. Choose **Add**.

## Gateway

### To configure log delivery for gateway resources (console)

1. Open the [Gateways](#) page in the AgentCore console.
2. In the **Gateways** pane, select the gateway you want to configure a log destination for.
3. Scroll down to the **Log delivery** pane and choose **Add**.
4. From the dropdown list, select the type of log destination you want to add (CloudWatch Logs group, Amazon S3 bucket, or Amazon Data Firehose).
5. For Amazon S3 and Firehose destinations, enter a **Delivery destination ARN**. For CloudWatch Logs, the **Destination log group** is already populated with a default value.
6. (Optional) For CloudWatch Logs destinations, to change the default log group, enter a new log group name or select an existing log group under **Destination log group**.
7. (Optional) To change the fields that are captured in each log record or the logs' output format, expand **Additional settings - optional**, and modify the **Field selection**, **Output format**, and **Field delimiter** to your desired configuration.
8. Choose **Add**.

## Runtime

### To configure log delivery for agent runtime resources (console)

1. Open the [Agent Runtime](#) page in the AgentCore console.

2. In the **Runtime agents** pane, select the runtime agent for which you want to configure a log destination.
3. Scroll down to the **Log delivery** pane and from the **Add** drop-down, choose the **Logging destination** - either Amazon CloudWatch Logs, Amazon S3, or Amazon Data Firehose.
4. Configure the following log delivery details and then choose **Add**:
  - For **Log type**, choose **APPLICATION\_LOGS**.
  - If using Amazon CloudWatch Logs as the logging destination, specify the destination log group.
  - If using Amazon S3 as the logging destination, specify the destination Amazon S3 bucket.
  - If using Amazon Data Firehose as the logging destination, specify a destination delivery stream.
5. Verify that the log delivery status is set to **Delivery active**.

## Built-in tools

### To configure log delivery for built-in tools resources (console)

1. Open the [Built-in tools](#) page in the AgentCore console.
2. In the **Built-in tools** pane, either in the **Code interpreter tools** or the **Browser tools** tab, select the code interpreter tool or browser tool for which you want to configure a log destination.
3. Scroll down to the **Log delivery** pane and from the **Add** drop-down, choose the **Logging destination** - either Amazon CloudWatch Logs, Amazon S3, or Amazon Data Firehose.
4. Configure the following log delivery details and then choose **Add**:
  - For **Log type**, choose **APPLICATION\_LOGS**.
  - If using Amazon CloudWatch Logs as the logging destination, specify the destination log group.
  - If using Amazon S3 as the logging destination, specify the destination Amazon S3 bucket.
  - If using Amazon Data Firehose as the logging destination, specify a destination delivery stream.
5. Verify that the log delivery status is set to **Delivery active**.

## Identity

WorkloadIdentity log delivery enablement is handled at the associated resource level, including agent runtime or agent gateway resources.

### To configure WorkloadIdentity log delivery for associated resources (console)

1. Open either the [Gateway](#) or the [Agent Runtime](#) page in the AgentCore console and select an agent or a gateway for which you want to enable WorkloadIdentity logging.
2. In the **Identity** tab, scroll down to the **Log delivery** pane and from the **Add** drop-down, choose the **Logging destination** - either Amazon CloudWatch Logs, Amazon S3, or Amazon Data Firehose.
3. Configure the following log delivery details and then choose **Add**:
  - For **Log type**, choose **APPLICATION\_LOGS**.
  - If using Amazon CloudWatch Logs as the logging destination, specify the destination log group.
  - If using Amazon S3 as the logging destination, specify the destination Amazon S3 bucket.
  - If using Amazon Data Firehose as the logging destination, specify a destination delivery stream.
4. Verify that the log delivery status is set to **Delivery active**.

## Configure tracing delivery to CloudWatch using the console

This section describes how to enable trace delivery to CloudWatch to track the flow of interactions through your application allowing you to visualize requests, identify performance bottlenecks, troubleshoot errors, and optimize performance.

## Memory

### To configure tracing for memory resources (console)

1. Open the [Memory](#) page in the AgentCore console.
2. In the **Memory** pane, select the memory resource for which you want to enable tracing.
3. In the **Tracing** pane, choose **Edit**, toggle the widget to **Enable**, and then choose **Save**.

## Runtime

### To configure tracing for runtime resources (console)

1. Open the [Agents runtime](#) page in the AgentCore console.
2. In the **Runtime agents** pane, select the agent for which you want to enable tracing.
3. In the **Tracing** pane, choose **Edit**, toggle the widget to **Enable**, and then choose **Save**.

Tracing will be enabled for the selected agent and spans will be available in the aws/spans log group.

### To configure WorkloadIdentity tracing for runtime resources (console)

1. Open the [Agents runtime](#) page in the AgentCore console.
2. In the **Runtime agents** pane, choose the **Identity** tab, and then select the agent for which you want to enable WorkloadIdentity tracing.
3. In the **Tracing** pane, choose **Edit**, toggle the widget to **Enable**, and then choose **Save**.

WorkloadIdentity tracing will be enabled for the selected agent and spans will be available in the aws/spans log group.

## Built-in tools

### To configure tracing for built-in tools (console)

1. Open the [Built-in tools](#) page in the AgentCore console.
2. In the **Built-in tools** pane, either in the **Code interpreter tools** or the **Browser tools** tab, select the code interpreter tool or browser tool for which you want to enable tracing.
3. In the **Tracing** pane, choose **Edit**, toggle the widget to **Enable**, and then choose **Save**.

Tracing will be enabled for the selected code interpreter or browser tool and spans will be available in the aws/spans log group.

## Gateway

### To configure tracing for gateway resources (console)

1. Open the [Gateways](#) page in the AgentCore console.

2. In the **Gateways** pane, select the gateway for which you want to enable tracing.
3. In the **Tracing** pane, choose **Edit**, toggle the widget to **Enable**, and then choose **Save**.

Tracing will be enabled for the selected gateway and spans will be available in the aws/ spans log group.

### To configure WorkloadIdentity tracing for gateway resources (console)

1. Open the [Gateways](#) page in the AgentCore console.
2. In the **Gateways** pane, choose the **Identity** tab, and then select the gateway for which you want to enable WorkloadIdentity tracing.
3. In the **Tracing** pane, choose **Edit**, toggle the widget to **Enable**, and then choose **Save**.

WorkloadIdentity tracing will be enabled for the selected gateway and spans will be available in the aws/spans log group.

 **Note**

You must have [CloudWatch Transaction Search](#) enabled before you can enable tracing.

## Identity

### To configure tracing for identity resources (console)

1. Open the [Identity](#) page in the AgentCore console.
2. In the **Identity** pane, select the OAuth client or the API key for which you want to enable tracing.
3. In the **Tracing** pane, choose **Edit**, toggle the widget to **Enable**, and then choose **Save**.

## Configure CloudWatch resources using an AWS SDK

### To configure a delivery source for logs and traces (SDK)

- Run the following Python code to configure CloudWatch for your memory, gateway, and built-in tool resources. Note that delivery sources and destinations for tracing are only applicable for memory and gateway resources.

```
import boto3

def enable_observability_for_resource(resource_arn, resource_id, account_id,
region='us-east-1'):
 """
 Enable observability for a Bedrock AgentCore resource (e.g., Memory Store)
 """
 logs_client = boto3.client('logs', region_name=region)

 # Step 0: Create new log group for vended log delivery
 log_group_name = f'/aws/vendedlogs/bedrock-agentcore/{resource_id}'
 logs_client.create_log_group(logGroupName=log_group_name)
 log_group_arn = f'arn:aws:logs:{region}:{account_id}:log-group:{log_group_name}'

 # Step 1: Create delivery source for logs
 logs_source_response = logs_client.put_delivery_source(
 name=f'{resource_id}-logs-source',
 logType="APPLICATION_LOGS",
 resourceArn=resource_arn
)

 # Step 2: Create delivery source for traces
 traces_source_response = logs_client.put_delivery_source(
 name=f'{resource_id}-traces-source',
 logType="TRACES",
 resourceArn=resource_arn
)

 # Step 3: Create delivery destinations
 logs_destination_response = logs_client.put_delivery_destination(
 name=f'{resource_id}-logs-destination',
 deliveryDestinationType='CWL',
 deliveryDestinationConfiguration={
 'destinationResourceArn': log_group_arn,
 }
)

 # Traces required
 traces_destination_response = logs_client.put_delivery_destination(
 name=f'{resource_id}-traces-destination',
 deliveryDestinationType='XRAY'
)
```

```
Step 4: Create deliveries (connect sources to destinations)
logs_delivery = logs_client.create_delivery(
 deliverySourceName=logs_source_response['deliverySource']['name'],
 deliveryDestinationArn=logs_destination_response['deliveryDestination']['arn']
)

Traces required
traces_delivery = traces_client.create_delivery(
 deliverySourceName=traces_source_response['deliverySource']['name'],
 deliveryDestinationArn=traces_destination_response['deliveryDestination']
['arn']
)

print(f"Observability enabled for {resource_id}")
return {
 'logs_delivery_id': logs_delivery['id'],
 'traces_delivery_id': traces_delivery['id']
}

Usage example
resource_arn = "arn:aws:bedrock-agentcore:us-east-1:123456789012:memory/my-memory-id"
resource_id = "my-memory-id"
account_id = "123456789012"

delivery_ids = enable_observability_for_resource(resource_arn, resource_id, account_id)
```

## Enhanced AgentCore runtime observability with custom headers

You can invoke your agent with additional HTTP headers to provide enhanced observability options. The following example shows invocations including optional additional header requests for agents hosted in the AgentCore runtime.

### Example Boto3 invocation

```
def invoke_agent(agent_id, payload, session_id=None):
 client = boto3.client("bedrock-agentcore", region="us-west-2")
 response = client.invoke_agent_runtime(
 agentRuntimeArn="arn:aws:bedrock-agentcore:us-west-2:111122223333:runtimetest_agent_boto2-nIg2xk3VSR",
 runtimeSessionId="12345678-1234-5678-9abc-123456789012",
 payload='{"query": "Plan a weekend in Seattle"}',
)
```

You can include the following optional headers when invoking your agent to enhance observability and tracing capabilities:

### Optional request headers for observability

Header	Description	Sample Value	Technical Explanation
X-Amzn-Tr ace-Id	Trace ID for request tracking (X-Ray Format)	Root=1-5759e988-bd862e3fe1be46a994272793;Parent=53995c3f42cd8ad8;Sampled=1	Used for distributed tracing across AWS services. Contains root ID (request origin), parent ID (previous service), and sampling decision for tracing. Sampling=1 means 100% sampling. Parent is X-Ray Trace format as well. OTEL will auto-generate trace IDs if not supplied.
traceparent	W3C standard tracing header	00-4bf92f3577b34da6a3ce929d0e0e4736-00f067aa0ba902b7-01	W3C format that includes version, trace ID, parent ID, and flags. Required for cross-service trace correlation when using modern tracing systems.
X-Amzn-Bed rock-Age ntCore-Ru ntime-Ses sion-Id	AgentCore session identifier	a1b2c3d4-5678-90ab-cdef-EXA MPLEaaaaaa	Identifies a user session within the AgentCore system. Helps with session-based analytics and troubleshooting.
mcp-session-id	MCP session identifier	mcp-a1b2c3d4-5678-90ab-cdef-EXAMPLEaaaaaa	Identifies a session in the Managed Cloud Platform. Enables tracing of operations across the MCP ecosystem.
tracestate	Additional tracing state information	congo=t61rcWkgMzE, rojo=00f0	Vendor-specific tracing information. Conveys additional context for tracing systems beyond what's in traceparent.

Header	Description	Sample Value	Technical Explanation
		67aa0ba90 2b7	
baggage	Context propagation for distributed tracing	userId=alice,serveRegion=us-east-1	Key-value pairs that propagate user-defined properties across service boundaries for contextual logging and analysis.

## Enhanced AgentCore built-in tools observability with custom headers

You can invoke your Build-in Tools with additional HTTP headers to provide enhanced observability options. You can include the following optional headers when integrating following Build-in Tools APIs to enhance observability and tracing capabilities:

The following APIs support custom headers:

- StartCodeInterpreterSession
- InvokeCodeInterpreter
- StopCodeInterpreterSession
- StartBrowserSession
- StopBrowserSession

### Optional request headers for observability

Header	Description	Sample Value	Technical Explanation
X-Amzn-Trace-Id	Trace ID for request tracking (X-Ray Format)	Root=1-5759e988-bd862e3fe1be46a994272793;Parent=53995c	Used for distributed tracing across AWS services. Contains root ID (request origin), parent ID (previous service), and sampling decision for tracing. Sampling=1 means 100% sampling. Parent is X-Ray Trace format as well. OTEL will auto-generate trace IDs if not supplied.

Header	Description	Sample Value	Technical Explanation
		3f42cd8ad 8;Sampled=1	
traceparent	W3C standard tracing header	00-4bf92f 3577b34da 6a3ce929d 0e0e4736- 00f067aa0 ba902b7-01	W3C format that includes version, trace ID, parent ID, and flags. Required for cross-service trace correlation when using modern tracing systems.

## Enhanced AgentCore identity observability with custom headers

You can invoke your identity resources with additional HTTP headers to provide enhanced observability options. You can include the following optional headers when integrating following identity APIs to enhance observability and tracing capabilities:

The following APIs support custom headers:

- GetWorkloadAccessToken
- GetWorkloadAccessTokenForJWT
- GetWorkloadAccessTokenForUserId
- GetResourceOauth2Token
- GetResourceAPIKey

### Optional request headers for observability

Header	Description	Sample Value	Technical Explanation
X-Amzn-Tr ace-Id	Trace ID for request tracking (X-Ray Format)	Root=1-57 59e988-bd 862e3fe1b e46a99427 2793;Pare	Used for distributed tracing across AWS services. Contains root ID (request origin), parent ID (previous service), and sampling decision for tracing. Sampling=1 means 100% sampling. Parent is X-Ray Trace format as

Header	Description	Sample Value	Technical Explanation
		nt=53995c 3f42cd8ad 8;Sampled=1	well. OTEL will auto-generate trace IDs if not supplied.

## Observability best practices

Consider the following best practices when implementing observability for agents in AgentCore:

- Use consistent session IDs - When possible, reuse the same session ID for related requests to maintain context across interactions.
- Implement distributed tracing - Use the provided headers to enable end-to-end tracing across your application components.
- Add custom attributes - Enhance your traces and metrics with custom attributes that provide additional context for troubleshooting and analysis.
- Monitor resource usage - Pay attention to memory usage metrics to optimize your agent's performance.
- Set up alerts - Configure CloudWatch alarms to help notify you of potential issues before they impact your users.

## Using other observability platforms

To integrate agents hosted in the AgentCore runtime with other observability platforms to capture and view telemetry outputs, set the following environment variable:

```
DISABLE_ADOT_OBSERVABILITY=true
```

Setting this variable to `true` unsets the AgentCore runtime's default ADOT environment variables, ensuring that none of the default ADOT configurations are set.

## Understand observability for agentic resources in AgentCore

This section defines the concepts of sessions, traces and spans as they relate to monitoring and observability of agents.

## Topics

- [Sessions](#)
- [Traces](#)
- [Spans](#)
- [Relationship Between Sessions, Traces, and Spans](#)

## Sessions

A session represents a complete interaction context between a user and an agent. Sessions encapsulate the entire conversation or interaction flow, maintaining state and context across multiple exchanges. Each session has a unique identifier and captures the full lifecycle of user engagement with the agent, from initialization to termination.

Sessions provide the following capabilities for agents:

- Context persistence across multiple interactions within the same conversation
- State management for maintaining user-specific information
- Conversation history tracking for contextual understanding
- Resource allocation and management for the duration of the interaction
- Isolation between different user interactions with the same agent

From an observability perspective, sessions provide a high-level view of user engagement patterns, allowing you to monitor agent performance across metrics, traces, and spans and to understand how users interact with your agents over time and across different use cases.

By default, AgentCore provides a set of observability metrics at the session level for agents that are running in the AgentCore runtime. You can view the runtime metrics in the Amazon CloudWatch console on the generative AI observability page. This page offers a variety of graphs and visualizations to help you interpret your agents' data. AgentCore also outputs a default set of metrics for memory resources, gateway resources, and built-in tools. All of these metrics can be viewed in CloudWatch. In addition to the provided metrics, logs and spans are provided by default for memory resources, and by instrumenting your agent code, you can capture custom metrics, logs, and spans for your agent which can also be viewed on the CloudWatch generative AI observability page. See the following sections and [the section called "View metrics for your agents"](#) to learn more.

## Traces

A trace represents a detailed record of a single request-response cycle beginning from with an agent invocation and may include additional calls to other agents. Traces capture the complete execution path of a request, including all internal processing steps, external service calls, decision points, and resource utilization. Each trace is associated with a specific session and provides granular visibility into the agent's behavior for a particular interaction.

Traces include the following components for agents:

- Request details including timestamps, input parameters, and context
- Processing steps showing the sequence of operations performed
- Tool invocations with input/output parameters and execution times
- Resource utilization metrics such as processing time
- Error information including exception details and recovery attempts
- Response generation details and final output

From an observability perspective, traces provide deep insights into the internal workings of your agents, allowing you to troubleshoot issues, optimize performance, and understand behavior patterns. By analyzing trace data, you can identify bottlenecks, detect anomalies, and verify that your agent is functioning as expected across different scenarios and inputs.

To gather trace data, you need to instrument your agent code using the AWS Distro for Open Telemetry (ADOT). See [the section called “Enabling observability in agent code for AgentCore-hosted agents”](#) and [the section called “Enabling observability for agents hosted outside of AgentCore”](#) to learn more.

## Spans

A span represents a discrete, measurable unit of work within an agent's execution flow. Spans capture fine-grained operations that occur during request processing, providing detailed visibility into the internal components and steps that make up a complete trace. Each span has a defined start and end time, creating a precise timeline of agent activities and their durations.

Spans include the following essential attributes for agent observability:

- Operation name identifying the specific function or process being executed
- Timestamps marking the exact start and end times of the operation

- Parent-child relationships showing how operations nest within larger processes
- Tags and attributes providing contextual metadata about the operation
- Events marking significant occurrences within the span's lifetime
- Status information indicating success, failure, or other completion states
- Resource utilization metrics specific to the operation

Spans form a hierarchical structure within traces, with parent spans encompassing child spans that represent more granular operations. For example, a high-level "process user query" span might contain child spans for "parse input," "retrieve context," "generate response," and "format output." This hierarchical organization creates a detailed execution tree that reveals the complete flow of operations within the agent.

By default, AgentCore outputs a set of span data for memory resources only. This data can be viewed in CloudWatch Logs and CloudWatch Application signals. To record span data for your agents or gateway resources, you need to instrument your agent. See [the section called "Enabling observability in agent code for AgentCore-hosted agents"](#) and [the section called "Enabling observability for agents hosted outside of AgentCore"](#) to learn more.

## Relationship Between Sessions, Traces, and Spans

Sessions, traces, and spans form a three-tiered hierarchical relationship in the observability framework for agents. A session contains multiple traces, with each trace representing a discrete interaction within the broader context of the session. Each trace, in turn, contains multiple spans that capture the fine-grained operations and steps within that interaction. This hierarchical structure allows you to analyze agent behavior at different levels of granularity, from high-level session patterns to mid-level interaction flows to detailed execution paths for specific operations.

The relationship between these three observability components can be visualized as:

- Sessions (highest level) - Represent complete user conversations or interaction contexts
- Traces (middle level) - Represent individual request-response cycles within a session
- Spans (lowest level) - Represent specific operations or steps within a trace

This multi-tiered relationship enables several important observability capabilities:

- Contextual analysis of individual interactions within their broader conversation flow
- Correlation of related requests across a user's interaction journey

- Progressive troubleshooting from session-level anomalies to trace-level patterns to span-level root causes
- Comprehensive performance profiling across different temporal and functional dimensions
- Holistic understanding of agent behavior patterns and evolution throughout a conversation
- Precise identification of performance bottlenecks at the operation level through span analysis

While traces provide visibility into complete request-response cycles, spans offer deeper insights into the internal workings of those cycles. Spans reveal exactly which operations consume the most time, where errors originate, and how different components interact within a single trace. This granularity is particularly valuable when troubleshooting complex issues or optimizing performance in sophisticated agent implementations.

By leveraging session, trace, and span data in your observability strategy, you can gain comprehensive insights into your agent's behavior, performance, and effectiveness at multiple levels of detail. This multi-layered approach to observability supports continuous improvement, robust troubleshooting, and informed optimization of your agent implementations, from high-level conversation patterns down to individual operation performance.

## Amazon Bedrock AgentCore generated observability data

For agents running in the AgentCore runtime, AgentCore automatically generates a set of session metrics which you can view in the Amazon CloudWatch Logs generative AI observability page. You can also use AgentCore observability to monitor the performance of memory, gateway, and built-in tool resources, even if you're not using the AgentCore runtime to host your agents. For memory, gateway, and built-in tool resources, AgentCore outputs a default set of data to CloudWatch.

The following table summarizes the default data provided for each resource type, and where the data is available.

Resource type	Service-provided data	Available in CloudWatch gen AI observability	Available in CloudWatch (Logs or metrics)
Agent	Metrics	Yes	Yes
Memory	Metrics, Spans*, Logs*	No	Yes

Resource type	Service-provided data	Available in CloudWatch gen AI observability	Available in CloudWatch (Logs or metrics)
Gateway	Metrics	No	Yes
Tools	Metrics	No	Yes

\* memory spans and logs require enablement. See [the section called “Add observability to your agents”](#) to learn more.

 **Note**

To view metrics, spans, and traces for AgentCore, you need to perform a one-time setup process to enable CloudWatch Transaction Search. To learn more see [the section called “Enabling AgentCore observability”](#).

Refer to the following topics to learn about the default service-provided observability metrics for AgentCore runtime, memory, and gateway resources.

## Topics

- [AgentCore generated runtime observability data](#)
- [AgentCore generate memory observability data](#)
- [AgentCore generated gateway observability data](#)
- [AgentCore generated built-in tools observability data](#)
- [AgentCore generated identity observability data](#)

By instrumenting your agent code, you can also gather more detailed trace and span data as well as custom metrics. See [the section called “Enabling observability in agent code for AgentCore-hosted agents”](#) to learn more.

# AgentCore generated runtime observability data

The runtime metrics provided by AgentCore give you visibility into your agent execution activity levels, processing latency, resource utilization, and error rates. AgentCore also provides aggregated metrics for total invocations and sessions.

## Topics

- [Observability runtime metrics](#)
- [Resource usage metrics and logs](#)
- [Provided span data](#)
- [Application log data](#)
- [Error types](#)

## Observability runtime metrics

The following list describes the runtime metrics provided by AgentCore. Runtime metrics are batched at one minute intervals. To learn more about viewing runtime metrics, see [the section called “View metrics for your agents”](#).

### Invocations

Shows the total number of requests made to the Data Plane API. Each API call counts as one invocation, regardless of the request payload size or response status.

### Invocations (aggregated)

Shows the total number of invocations across all resources

### Throttles

Displays the number of requests throttled by the service due to exceeding allowed TPS (Transactions Per Second) or quota limits. These requests return ThrottlingException with HTTP status code 429. Monitor this metric to determine if you need to review your service quotas or optimize request patterns.

### System Errors

Shows the number of server-side errors encountered by AgentCore during request processing. High levels of server-side errors can indicate potential infrastructure or service issues that require investigation. See [the section called “Error types”](#) for a list of possible error codes.

## User Errors

Represents the number of client-side errors resulting from invalid requests. These require user action to resolve. High levels of client-side errors can indicate issues with request formatting or permissions that need to be addressed. See [the section called “Error types”](#) for a list of possible error codes.

## Latency

The total time elapsed between receiving the request and sending the final response token. Represents complete end-to-end processing time of the request.

## Total Errors

The total number of system and user errors. In the Amazon Bedrock AgentCore console, this metric displays the number of errors as a percentage of the total number of invocations.

## Session Count

Shows the total number of agent sessions. Useful for monitoring overall platform usage, capacity planning, and understanding user engagement patterns.

## Sessions (aggregated)

Shows the total number of sessions across all resources.

## Resource usage metrics and logs

Amazon Bedrock AgentCore runtime provides comprehensive resource usage telemetry, including CPU and memory consumption metrics for your runtime resources.

### Note

Resource usage data may be delayed by up to 60 minutes and precision might differ across metrics.

## Vended metrics

Amazon Bedrock AgentCore runtime automatically provides resource usage metrics at account, agent runtime, and agent endpoint levels. These metrics are published at 1-minute resolution.

Amazon CloudWatch aggregation and metric data retention will follow standard Amazon CloudWatch data retention policies. For more information, see [https://docs.aws.amazon.com/AmazonCloudWatch/latest/monitoring/cloudwatch\\_concepts.html#Metric](https://docs.aws.amazon.com/AmazonCloudWatch/latest/monitoring/cloudwatch_concepts.html#Metric).

Here are the dimension sets and metrics available for monitoring your resources:

Name	Dimensions	Description
CPUUsed-vCPUHours	Service; Service, Resource; Service, Resource, Name	The total amount of virtual CPU consumed in vCPU-Hours unit, available at the resource and account levels. Useful for resource tracking and estimated billing visibility.
MemoryUsed-GBHours	Service; Service, Resource; Service, Resource, Name	The total amount of memory consumed in GB-Hours unit, available at the resource and account levels. Useful for resource tracking and estimated billing visibility.

#### Dimension explanation

- **Service** - AgentCore.Runtime
- **Resource** - Agent Arn
- **Name** - Agent Endpoint name, in the format of AgentName::EndpointName

Account level metrics are available in Amazon CloudWatch Bedrock AgentCore Observability Console under the **Runtime** tab. The dashboard displays Memory and CPU usage graphs generated from these metrics, representing total resource usage across all agents in your account within the region.

Agent Endpoint level metrics are available in AgentEndpoint page of Amazon CloudWatch Bedrock AgentCore Observability Console. The dashboard displays Memory and CPU usage graphs generated from these metrics, representing total resource usage across all sessions invoked by the specified Agent Endpoint.

**Note**

Telemetry data is provided for monitoring purposes. Actual billing is calculated based on metered usage data and may differ from telemetry values due to aggregation timing, reconciliation processes, and measurement precision. Refer to your AWS billing statement for authoritative charges.

## Vended logs

Bedrock AgentCore Runtime provides vended logs for session-level usage metrics at 1-second granularity. Each log record contains resource consumption data including CPU usage (`agent.runtime.vcpu.hours.used`) and memory consumption (`agent.runtime.memory.gb_hours.used`).

Each log record will have following schema:

Log type	Log fields	Description
USAGE_LOGS	event_timestamp, resource_arn, service.name, cloud.provider, cloud.region, account.id, region, resource.id, session.id, agent.name, elapsed_time_seconds, agent.runtime.vcpu.hours.used, agent.runtime.memory.gb_hours.used	Resource Usage Logs for session-level resource tracking.

To enable USAGE\_LOG log type for your agents, see [Add observability to your Amazon Bedrock AgentCore resources](#). The logs are then displayed in the configured destination (AWS LogGroup, Amazon S3 or Amazon Kinesis Firehose) as configured.

In the Agent Session page of the Amazon CloudWatch Bedrock AgentCore Observability Console, you can see resource usage metrics generated from these logs. To optimize your metric viewing experience, select your desired time range using the selector in the top right to focus on specific CPU and Memory Usage data.

**Note**

Telemetry data is provided for monitoring purposes. Actual billing is calculated based on metered usage data and may differ from telemetry values due to aggregation timing, reconciliation processes, and measurement precision. Refer to your AWS billing statement for authoritative charges.

## Provided span data

To enhance observability, AgentCore provides structured spans that provide visibility into agent runtime invocations. To enable this span data, you need to enable observability on your agent resource. See [Add observability to your Amazon Bedrock AgentCore resources](#) for steps and details. This span data is available in AWS CloudWatch Logs aws/spans log group. The following table defines the operation for which spans are created and the attributes for each captured span.

Operation name	Span attributes	Description
InvokeAgentRuntime	aws.operation.name, aws.resource.arn, aws.request_id, aws.agent.id, aws.endpoint.name, aws.account.id, session.id, latency_ms, error_type, aws.resource.type, aws.xray.origin, aws.region	Invokes the agent runtime.

- aws.operation.name - the operation name (InvokeAgentRuntime)
- aws.resource.arn - the Amazon resource name for the agent runtime
- aws.request\_id - request ID for the invocation
- aws.agent.id - the unique identifier for the agent runtime
- aws.endpoint.name - the name of the endpoint used to invoke the agent runtime
- aws.account.id - customer's account id
- session.id - the session ID for the invocation
- latency\_ms - the latency of the request in milliseconds
- error\_type - either throttle, system, or user (only present if error)

- `aws.resource.type` - the CFN resource type
- `aws.xray.origin` - the CFN resource type used by x-ray to identify the service
- `aws.region` - the region the customer resource exists in

## Application log data

AgentCore provides structured Application logs that help you gain visibility into your agent runtime invocations and session-level resource consumption. This log data is provided when enabling observability on your agent resource. See [Add observability to your Amazon Bedrock AgentCore resources](#) for steps and details. AgentCore can output logs to CloudWatch Logs, Amazon S3, or Firehose stream. If you use a CloudWatch Logs destination, these logs are stored under your agent's application logs or under your own custom log group.

Log type	Log fields	Description
APPLICATION_LOGS	timestamp, resource_arn, event_timestamp, account_id, request_id, session_id, trace_id, span_id, service_name, operation, request_payload, response_payload	Application logs for InvokeRuntimeOperation with tracing fields, request, and response payloads

- `request_payload` - the request payload of the agent invocation
- `response_payload` - the response from the agent invocation

## Error types

The following list defines the possible error types for user, system, and throttling errors.

### User error codes

- `InvocationError.Validation` - Client provided invalid input (400)
- `InvocationError.ResourceNotFound` - Requested resource doesn't exist (404)
- `InvocationError.AccessDenied` - Client lacks permissions (403)
- `InvocationError.Conflict` - Resource conflict (409)

## System error codes

- `InvocationError.Internal` - Internal server error (500)

## Throttling error codes

- `InvocationError.Throttling` - Rate limiting (429)
- `InvocationError.ServiceQuota` - Service-side quota/limit reached (402)

## AgentCore generate memory observability data

For the AgentCore memory resource type, AgentCore outputs metrics to Amazon CloudWatch by default. AgentCore also outputs a default set of spans and logs, if you enable these. See [the section called “Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources”](#) to learn more about enabling spans and logs.

Refer to the following sections to learn more about the provided observability data for your agent memory stores.

## Provided memory metrics

The AgentCore memory resource type provides the following metrics by default.

### Latency

The total time elapsed between receiving the request and sending the final response token.  
Represents complete end-to-end processing of the request.

### Invocations

The total number of API requests made to the data plane and control plane. This metric also tracks the number of memory ingestion events.

### System Errors

Number of invocations that result in AWS server-side errors.

### User Errors

Number of invocations that result in client-side errors.

## Errors

Total number of errors that occur while processing API requests in the data plane and control plane. This metric also tracks the total errors that occur during memory ingestion.

## Throttles

Number of invocations that the system throttled. Throttled requests count as invocations, errors, and user errors.

## Creation Count

Counts the number of created memory events and memory records.

## Provided span data

To enhance observability, AgentCore provides structured spans that trace the relationship between events and the memories they generate or access. To enable this span data, you need to instrument your agent code. See [the section called “Add observability to your agents”](#) to learn more.

This span data is available in full in CloudWatch Logs and CloudWatch Application Signals. To learn more about viewing observability data, see [the section called “View metrics for your agents”](#).

The following table defines the operations for which spans are created and the attributes for each captured span.

Operation name	Span attributes	Description
CreateEvent	memory.id , session.id , event.id, actor.id, throttled , error, fault	Creates a new event within a memory session
GetEvent	memory.id , session.id , event.id, actor.id, throttled , error, fault	Retrieves an existing memory event
ListEvents	memory.id , session.id , event.id, actor.id, throttled , error, fault	Lists events within a session

Operation name	Span attributes	Description
DeleteEvent	memory.id , session.i d , event.id, actor.id, throttled , error, fault	Deletes an event from memory
RetrieveMemoryRecords	memory.id , namespace , throttled , error, fault	Retrieves memory records for a given namespace
ListMemoryRecords	memory.id , namespace , throttled , error, fault	Lists available memory records

## Provided log data

AgentCore provides structured logs that help you monitor and troubleshoot key AgentCore Memory resource processes. To enable this log data, you need to instrument your agent code. See [the section called "Add observability to your agents"](#) to learn more.

AgentCore can output logs to CloudWatch Logs, Amazon S3, or Firehose stream. If you use a CloudWatch Logs destination, these logs are stored under the default log group /aws/vendedlogs/bedrock-agentcore/memory/APPLICATION\_LOGS/{memory\_id} or under a custom log group starting with /aws/vendedlogs/. See [the section called "Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources"](#) to learn more.

When the DeleteMemory operation is called, logs are generated for the start and completion of the deletion process. Any corresponding deletion error logs will be provided with insights into why the call failed.

We also provide logs for various stages in the long-term memory creation process, namely extraction and consolidation. When new short term memory events are provided, AgentCore extracts key concepts from responses to begin the formation of new long-term memory records. Once these have been created, they are integrated with existing memory records to create a unified store of distinct memories.

See the following breakdown to learn how each workflow helps you monitor the formation of new memories:

## Extraction logs

- Start and completion of extraction processing
- Number of memories successfully extracted
- Any errors in deserializing or processing input events

## Consolidation logs:

- Start and completion of consolidation processing
- Number of memories requiring consolidation
- Success/failure of memory additions and updates
- Related memory retrieval status

The following table provides a more detailed breakdown of how different memory resource workflows use log fields alongside the log body itself to provide request-specific information.

Workflow name	Log fields	Description
Extraction	resource_arn, event_timestamp, memory_strategy_id, namespace, actor_id, session_id, event_id, requestId, isError	Analyzes incoming conversations to generate new memories
Consolidation	resource_arn, event_timestamp, memory_strategy_id, namespace, session_id, requestId, isError	Combines extracted memories with existing memories

## AgentCore generated gateway observability data

The following sections describe the gateway metrics, logs, and spans output by AgentCore to Amazon CloudWatch. These metrics aren't available on the CloudWatch generative AI observability page. Gateway metrics are batched at one minute intervals. To learn more about viewing gateway metrics, see [the section called "View metrics for your agents"](#).

### Note

To enable service-provided logs for AgentCore gateways, you need to configure the necessary CloudWatch resources. See [the section called “Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources”](#) to learn more.

## Topics

- [Provided metrics](#)
- [Provided log data](#)
- [Provided spans](#)

## Provided metrics

Gateway publishes invocation and usage metrics to CloudWatch. You can view these metrics and also set up alarms to alert you when certain metrics exceed thresholds. To learn more, select a topic:

## Topics

- [Invocation metrics](#)
- [Usage metrics](#)
- [View gateway CloudWatch metrics](#)
- [Setting up CloudWatch alarms](#)

## Invocation metrics

These metrics provide information about API invocations, performance, and errors.

For these metrics, the following dimensions are used:

- **Operation** – The name of the API operation (ex. InvokeGateway).
- **Protocol** – The name of the protocol (ex. MCP).
- **Method** – Represents the MCP operation being invoked (ex. tools/list).
- **Resource** – Represents the identifier of the resource (ex. gateway ARN).
- **Name** – Represents the name of the tool.

Metric	Description	Statistics	Units
Invocations	The total number of requests made to each Data Plane API. Each API call counts as one invocation regardless of the response status.	Sum	Count
Throttles	The number of requests throttled (status code 429) by the service.	Sum	Count
SystemErrors	The number of requests which failed with 5xx status code.	Sum	Count
UserErrors	The number of requests which failed with 4xx status code except 429.	Sum	Count
Latency	The time elapsed between when the service receives the request and when it begins sending the first response token. In other words, initial response time.	Average, Minimum, Maximum, p50, p90, p99	Milliseconds
Duration	The total time elapsed between receiving the request and sending the final response token. Represents complete end-to-end processing time of the request.	Average, Minimum, Maximum, p50, p90, p99	Milliseconds
TargetExecutionTime	The total time taken to execute the target over Lambda / OpenAPI / etc. This helps determine the contribution of the target to the total Latency.	Average, Minimum, Maximum, p50, p90, p99	Milliseconds

## Usage metrics

These metrics provide information about how your gateway is being used.

Metric	Description	Statistics	Units
TargetType	The total number of requests served by each type of target (MCP, Lambda, OpenAPI).	Sum	Count

## View gateway CloudWatch metrics

For more information about viewing CloudWatch metrics, see [View available metrics](#) in the [Amazon CloudWatch User Guide](#). The following procedure shows you how to view metrics for your gateways:

### To view gateway metrics in the console

1. Open the CloudWatch console at <https://console.aws.amazon.com/cloudwatch/>.
2. In the left navigation pane, choose **All metrics** under the **Metrics** section.
3. Under **Browse**, from the dropdown menu that displays the current AWS Region, select the Region for which you want metrics.
4. Choose the **Bedrock-AgentCore** namespace.
5. Choose a dimension (ex. **Operation**) or combination of dimensions (ex. **Method, Operation, Protocol**) to view the metrics for it.
6. To add a metric to the CloudWatch graph, select the checkbox next to it.

## Setting up CloudWatch alarms

You can use the [PutMetricAlarm](#) API operation to set up CloudWatch alarms to alert you when certain metrics exceed thresholds. For example, you might want to be notified when the error rate exceeds 5% or when the latency exceeds 1 second.

The following example shows you how to create an alarm for high error rates using the AWS CLI:

```
aws cloudwatch put-metric-alarm \
--alarm-name "HighErrorRate" \
--alarm-description "Alarm when error rate exceeds 5%" \
--metric-name "SystemErrors" \
--namespace "Bedrock-AgentCore" \
--statistic "Sum" \
```

```
--dimensions "Name=Resource,Value=my-gateway-arn" \
--period 300 \
--evaluation-periods 1 \
--threshold 5 \
--comparison-operator "GreaterThanThreshold" \
--alarm-actions "arn:aws:sns:us-west-2:123456789012:my-topic"
```

This alarm will trigger when the number of system errors exceeds 5 in a 5-minute period. When the alarm triggers, it will send a notification to the specified SNS topic.

## Provided log data

AgentCore provides logs that help you monitor and troubleshoot key AgentCore gateway resource processes. To enable this log data, you need to create a log destination.

AgentCore can output logs to CloudWatch Logs, Amazon S3, or Firehose stream. If you use a CloudWatch Logs destination, these logs are stored under the default log group /aws/vendedlogs/bedrock-agentcore/gateway/APPLICATION\_LOGS/{gateway\_id} or under a custom log group starting with /aws/vendedlogs/. See [the section called “Enabling observability for AgentCore runtime, memory, gateway, built-in tools, and identity resources”](#) to learn more.

AgentCore logs the following information for gateway resources:

- Start and completion of gateway requests processing
- Error messages for Target configurations
- MCP Requests with missing or incorrect authorization headers
- MCP Requests with incorrect request parameters (tools, method)

You can also see request and response bodies as part of your Vended Logs integration when any of the MCP Operations are performed on the Gateway. They can do further analysis on these logs, using the span\_id and trace\_id fields to connect the vended spans and logs being emitted. For more information about encrypting your gateways with customer-managed KMS keys, see [Advanced features and topics for Amazon Bedrock AgentCore Gateway](#).

Sample log:

```
{
```

```
"resource_arn": "arn:aws:bedrock-agentcore:us-east-1:123456789012:gateway/<gatewayid>",
 "event_timestamp": 1759370851622,
 "body": {
 "isError": false,
 "log": "Started processing request with requestId: 1",
 "requestBody": "{id=1, jsonrpc=2.0, method=tools/call, params={name=target-quick-start-f9scus__LocationTool, arguments={location=seattle}}}",
 "id": "1"
 },
 "account_id": "123456789012",
 "request_id": "12345678-1234-1234-1234-123456789012",
 "trace_id": "160fc209c3befef4857ab1007d041db0",
 "span_id": "81346de89c725310"
}
```

Sample log with response body:

```
{
 "resource_arn": "arn:aws:bedrock-agentcore:us-east-1:123456789012:gateway/<gatewayid>",
 "event_timestamp": 1759370853807,
 "body": {
 "isError": false,
 "responseBody": "{jsonrpc=2.0, id=1, result={isError=false, content=[{type=text, text=\"good\"]}]}",
 "log": "Successfully processed request with requestId: 2",
 "id": "1"
 },
 "account_id": "123456789012",
 "request_id": "12345678-1234-1234-1234-123456789012",
 "trace_id": "160fc209c3befef4857ab1007d041db0",
 "span_id": "81346de89c725310"
}
```

## Provided spans

AgentCore supports OTEL compliant vended spans that you can use to track invocations across different primitives that are being used.

Sample vended Spans for Tool Invocation:

- kind: SERVER - tracks the overall execution details, tool invoked, gateway details, AWS request ID, trace and span ID.
- kind: CLIENT - covers the specific target that was invoked and details around it like target type, target execution time, target execution start and end times, etc.

For other MCP method invocations, only the kind: SERVER span is emitted.

While these spans emit metrics, to investigate why a failure occurred for a specific span, a Gateway user must check the logs that are vended. Various fields, for example, spanId or aws.request.id can help in stitching these spans and logs together.

Operation	Span attributes	Description
List Tools	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, gateway.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type, jsonrpc.error.code, http.method, http.response.status_code, gateway.name, url.path, overhead_latency_ms	List tools attached to a gateway
Call Tool	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, gateway.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type, jsonrpc.error.code, http.method, http.response.status_code, gateway.name, url.path, overhead_latency_ms, tool.name	Call a specific tool. Two spans are emitted: 1. kind: SERVER which tracks the overall execution details (success / not), tool invoked, gateway details, AWS request ID, trace and span ID. 2. kind: CLIENT which covers the specific target that was invoked and details around it like target type, target execution time,

Operation	Span attributes	Description
		target execution start and end times, etc.
Search Tools	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, gateway.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type, jsonrpc.error.code, http.method, http.response.status_code, gateway.name, url.path, overhead_latency_ms, tool.name	Search for ten most relevant tools given an input query

## AgentCore generated built-in tools observability data

### Topics

- [Observability tools metrics](#)
- [Resource usage metrics and logs](#)
- [Provided span data](#)
- [Application log data](#)

### Observability tools metrics

AgentCore provides the following built-in metrics for the code interpreter and browser tools. Built-in tool metrics are batched at one minute intervals. To learn more about AgentCore tools, see [\*AgentCore Built-in Tools: Interact with your applications using built-in tools.\*](#)

#### Invoke tool:

##### Invocations

The total number of requests made to the Data Plane API. Each API call counts as one invocation, regardless of the request payload size or response status.

## Throttles

The number of requests throttled by the service due to exceeding allowed TPS (Transactions Per Second) or quota limits. These requests return ThrottlingException with HTTP status code 429.

## SystemErrors

The number of server-side errors encountered during request processing.

## UserErrors

The number of client-side errors resulting from invalid requests. This require user action in order to resolve.

## Latency

The time elapsed between when the service receives the request and when it begins sending the first response token. Important for measuring initial response time.

## Create tool session:

### Invocations

The total number of requests made to the Data Plane API. Each API call counts as one invocation, regardless of the request payload size or response status.

## Throttles

The number of requests throttled by the service due to exceeding allowed TPS (Transactions Per Second) or quota limits. These requests return ThrottlingException with HTTP status code 429.

## SystemErrors

The number of server-side errors encountered during request processing.

## UserErrors

The number of client-side errors resulting from invalid requests. This require user action in order to resolve.

## Latency

The time elapsed between when the service receives the request and when it begins sending the first response token. Important for measuring initial response time.

## Duration

The duration of tool session (Operation becomes CodeInterpreterSession/BrowserSession).

## Browser user takeover:

TakerOverCount

The total number of user taking over

TakerOverReleaseCount

The total number of user releasing control

TakerOverDuration

The duration of user taking over

## Resource usage metrics and logs

Amazon Bedrock AgentCore Built-in Tools provides comprehensive resource usage telemetry, including CPU and memory consumption metrics for your runtime resources.

 **Note**

Resource usage data may be delayed by up to 60 minutes and precision might differ across metrics.

## Vended metrics

By default, Bedrock AgentCore Built-in Tools vends metrics for Account level and Tool level at 1-minute resolution. Amazon CloudWatch aggregation and metric data retention follow standard Amazon CloudWatch data retention polices. For more information, see [https://docs.aws.amazon.com/AmazonCloudWatch/latest/monitoring/cloudwatch\\_concepts.html#Metric](https://docs.aws.amazon.com/AmazonCloudWatch/latest/monitoring/cloudwatch_concepts.html#Metric).

Name	Dimensions	Description
CPUUsed-vCPUHours	Service; Service, Resource	The total amount of virtual CPU consumed in vCPU-Hours unit, available at the resource and account level. Useful for resource tracking and estimated billing visibility.

Name	Dimensions	Description
MemoryUsed-GBHours	Service; Service, Resource	The total amount of memory consumed in GB-Hours unit, available at the resource and account levels. Useful for resource tracking and estimated billing visibility.

### Dimension explanation

- **Service** - AgentCore.CodeInterpreter or AgentCore.Browser
- **Resource** - Built-in tool Id

Account level metrics are available in the Amazon CloudWatch Bedrock AgentCore Observability Console under **Built-in Tools** tab. The dashboard on the console will contain a Memory usage graph and a CPU usage graph generated from the usage metrics. These graphs represent the total resource usage across all tools of the selected tool type in the account in the region.

Tool level metrics are available in **Tools** page of the Amazon CloudWatch Bedrock AgentCore Observability Console. The dashboard on the console will contain a Memory usage graph and a CPU usage graph generated from the usage metrics. The graphs represent the total resource usage across all sessions of the selected tool.

#### Note

Telemetry data is provided for monitoring purposes. Actual billing is calculated based on metered usage data and may differ from telemetry values due to aggregation timing, reconciliation processes, and measurement precision. Refer to your AWS billing statement for authoritative charges.

## Vended Logs

Amazon Bedrock AgentCore Built-in Tools provides the ability to enable vended logs for session level usage telemetry at 1-second granularity. Each log record contains 1 second Resource Usage datum. Currently supported metrics include:

- Code Interpreter codeInterpreter.vcpu.hours.used and codeInterpreter.memory.gb\_hours.used
- Browser browser.vcpu.hours.used and browser.memory.gb\_hours.used

Each resource usage datum will use the following schema in the log record.

## Code Interpreter

Log type	Log fields	Description
USAGE_LOGS	event_timestamp, resource_arn, service.name, cloud.provider, cloud.region, account.id, region, resource.id, session.id, elapsed_time_seconds, codeInterpreter.vcpu.hours.used, codeInterpreter.memory.gb_hours.used	Resource Usage Logs for session-level resource tracking.

## Browser

Log type	Log fields	Description
USAGE_LOGS	event_timestamp, resource_arn, service.name, cloud.provider, cloud.region, account.id, region, resource.id, session.id, elapsed_time_seconds, browser.vcpu.hours.used, browser.memory.gb_hours.used	Resource Usage Logs for session-level resource tracking.

For more information about enabling logs, see [Add observability to your Amazon Bedrock AgentCore resources](#). These logs are then displayed in the destination as configured (AWS LogGroup, Amazon S3, or Amazon Kinesis Firehose).

In the Built-in Tools Session page of the Amazon CloudWatch Bedrock AgentCore Observability Console, you can see resource usage metrics generated from these logs. To optimize your metric viewing experience, select your desired time range using the selector in the top right to focus on specific CPU and Memory Usage data.

### Note

Telemetry data is provided for monitoring purposes. Actual billing is calculated based on metered usage data and may differ from telemetry values due to aggregation timing, reconciliation processes, and measurement precision. Refer to your AWS billing statement for authoritative charges.

## Provided span data

To enhance observability, AgentCore provides structured spans that provide visibility into built-in tools APIs. To enable this span data, you need to enable observability on your built-in tool resource. See [Add observability to your Amazon Bedrock AgentCore resources](#) for steps and details. This span data is available in full in AWS CloudWatch Logs in the aws/spans log group. The following table defines the operation for which spans are created and the attributes for each captured span.

### Code interpreter

Operation name	Span attributes	Description
StartCodeInterpreterSession	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type	Starts a code interpreter session.
StopCodeInterpreterSession	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id, aws.xray.origin, aws.resource.type, aws.region	Stops a code interpreter session.

Operation name	Span attributes	Description
	n, latency_ms, error_type, session_duration_s	
InvokeCodeInterpreter	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type	Invokes a code interpreter with input code.
CodeInterpreterSessionExpire	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type, session_duration_s	Expires a code interpreter session if StopCodeInterpreterSession is not called and the session times out.

- toolsession.id - the id of the tool session
- session\_duration\_s - the duration of the session in seconds before it ended

## Browser

Operation name	Span attributes	Description
StartBrowserSession	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type	Starts a browser session.
StopBrowserSession	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id	Stops a browser session.

Operation name	Span attributes	Description
	on.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type, session_duration_s	
ConnectBrowserAutomationStream	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type	Connect to a browser automation stream.
BrowserSessionExpire	aws.operation.name, aws.resource.arn, aws.request.id, aws.account.id, toolsession.id, aws.xray.origin, aws.resource.type, aws.region, latency_ms, error_type, session_duration_s	Expires a code interpreter session if StopBrowserSession is not called and the session times out.

## Application log data

AgentCore provides structured Application logs that help you gain visibility into your agent runtime invocations and session-level resource consumption. This log data is provided when enabling observability on your agent resource. See [Add observability to your Amazon Bedrock AgentCore resources](#) for steps and details. AgentCore can output logs to CloudWatch Logs, Amazon S3, or Firehose stream. If you use a CloudWatch Logs destination, these logs are stored under your agent's application logs or under your own custom log group.

Log type	Log fields	Description
APPLICATION_LOGS	timestamp, resource_arn, event_timestamp, account_id, request_id, session_id, trace_id, span_id, service_name	Application logs for InvokeCodeInterpreter with tracing fields, request, and response payloads

Log type	Log fields	Description
	ame, operation, request_p ayload, response_payload	

## AgentCore generated identity observability data

This document described observability data emitted by the Bedrock AgentCore Identity Service. This data provides visibility into the performance, usage, and operational health of the service, allowing your to monitor authorization activities for your AI agents and workloads.

You can use the identity observability data described in this section in the following ways:

- Monitor usage: track API call volume and throttling events across workload identities and credential providers
- Track inbound authorization: monitor success/failure rates for workload access token operations
- Analyze Resource Access Patterns: gain insights into OAuth2 providers and API key usage patterns by provider type and flow
- Troubleshoot issues: identify and diagnose errors by type, operation, and resource
- Capacity planning: use metrics to understand usage patterns and plan for scaling

These metrics can be viewed in the Amazon CloudWatch console, retrieved via the Amazon CloudWatch API, or incorporated into Amazon CloudWatch dashboards and alarms for proactive monitoring.

### Topics

- [Usage, authorization, and resource access metrics](#)
- [Provided span data](#)
- [Provided log data](#)

## Usage, authorization, and resource access metrics

The following dimensions reference applies to the metrics described in this section:

- **WorkloadIdentity**: the workload identity name making the request.

- **WorkloadIdentityDirectory**: the directory containing the workload identity (typically default).
- **TokenVault**: the token vault being accessed (typically default).
- **ProviderName**: the name of the credential provider (for example, `MyGoogleProvider`, `MySlackProvider`).
- **FlowType**: the OAuth2 flow type (`USER_FEDERATION`, `M2M`).
- **ExceptionType**: the specific error type (`ValidationException`, `ThrottlingException`, etc.)

## Usage metrics

These metrics are emitted in the AWS/Usage namespace and track service usage at the AWS account level.

Metric name	Dimensions	Description		
CallCount	Service, Type, Class, Resource	Tracks the number of calls made to Identity Service operations. This can be used for service quotas.		
ThrottleCount	Service, Type, Class, Resource	Tracks the number of throttled calls for Identity Service operations.		

## Authorization metrics

These metrics are emitted in the AWS/Bedrock-AgentCore namespace and provide insights into authentication and authorization operations.

Metric name	Dimensions	Description		
WorkloadAccessTokenFetchSuccess	WorkloadIdentity, WorkloadIdentityDirectory, Operation	Tracks successful workload access token fetch operations.		
WorkloadAccessTokenFetchFailures	WorkloadIdentity, WorkloadIdentityDirectory, Operation, ExceptionType	Tracks failed workload access token fetch operations by exception type.		
WorkloadAccessTokenFetchThrottles	WorkloadIdentity, WorkloadIdentityDirectory, Operation	Tracks throttled workload access token fetch operations.		

## Resource access metrics

These metrics track credential provider operations for accessing external resources.

Metric name	Dimensions	Description		
ResourceAccessTokenFetchSuccess	WorkloadIdentity, WorkloadIdentityDirectory, TokenVault, ProviderName, Type	Tracks successful OAuth2 token fetch operations from credential providers.		

Metric name	Dimensions	Description		
ResourceAccessTokenFetchFailures	WorkloadIdentity, WorkloadIdentityDirectory, TokenVault, ProviderName, Type, ExceptionType	Tracks failed OAuth2 token fetch operations by exception type.		
ResourceAccessTokenFetchThrottles	WorkloadIdentity, WorkloadIdentityDirectory, TokenVault, ProviderName, Type	Tracks throttled OAuth2 token fetch operations.		
ApiKeyFetchSuccess	WorkloadIdentity, WorkloadIdentityDirectory, TokenVault, ProviderName	Tracks successful API key fetch operations.		
ApiKeyFetchFailures	WorkloadIdentity, WorkloadIdentityDirectory, TokenVault, ProviderName, ExceptionType	Tracks failed API key fetch operations by exception type.		

Metric name	Dimensions	Description		
ApiKeyFetchThrottles	WorkloadIdentity, WorkloadIdentityDirectory, TokenVault, ProviderName	Tracks throttled API key fetch operations.		

## Provided span data

To enhance observability, AgentCore Identity provides structured spans that give visibility into identity service operations. To enable span data, you need to enable observability on your workload identity or credential provider resource.

This span data is available in Amazon CloudWatch Logs aws/spans log group. The following table defines operations for which spans are created and their attributes.

The following attribute explanations apply to the information in the tables below:

- aws.operation.name - the operation name being performed
- aws.resource.arn - the Amazon Resource Name for the identity resource
- aws.request\_id - unique request ID for the operation
- aws.account.id - user's AWS account ID
- workload.identity.id - the workload identity name
- workload.identity.directory - the workload identity directory
- credential.provider.name - name of the credential provider
- credential.provider.type - type of credential provider (OAuth2, API Key)
- token.vault.name - token vault name
- oauth2.flow - OAuth2 flow type (USER\_FEDERATION, M2M)
- latency\_ms - operation latency in milliseconds
- error\_type - error classification (throttle, system, user, null if successful)
- aws.region - AWS region where the operation occurred

## Workload Identity Operations

Operation	Span attributes	Description
GetWorkloadAccessToken	aws.operation.name, aws.resource.arn, aws.request_id, aws.account.id, workload.identity.id, workload.identity.directory, aws.region, latency_ms, error_type	Fetches workload access token for machine-to-machine authentication
GetWorkloadAccessTokenForJWT	aws.operation.name, aws.resource.arn, aws.request_id, aws.account.id, workload.identity.id, workload.identity.directory, issuer, user_sub, aws.region, latency_ms, error_type	Fetches workload access token using JWT user token
GetWorkloadAccessTokenForUserId	aws.operation.name, aws.resource.arn, aws.request_id, aws.account.id, workload.identity.id, workload.identity.directory, aws.region, latency_ms, error_type	Fetches workload access token for specific user ID

## Credential Provider Operations

Operation	Span attributes	Description
GetResourceOAuth2Token	aws.operation.name, aws.resource.arn, aws.request_id, aws.account.id, workload.identity.id, credential.provider.name, credential.provider.type,	Fetches OAuth2 access token from credential provider

Operation	Span attributes	Description
	token.vault.name, oauth2.flow, aws.region, latency_ms, error_type	
GetResourceAPIKey	aws.operation.name, aws.resource.arn, aws.request_id, aws.account.id, workload.identity.id, credential.provider.name, token.vault.name, aws.region, latency_ms, error_type	Fetches API key from credential provider

## Provided log data

AgentCore Identity provides structured application logs that help you gain visibility into identity service operations. This log data is provided when enabling observability on your identity resources.

AgentCore can output logs to Amazon CloudWatch Logs, Amazon S3, or Amazon Kinesis Firehose stream. If you use a CloudWatch Logs destination, these logs are stored under your resource's application logs or under your own custom log group.

Log type	Log fields	Description
Application Logs	timestamp, resource_arn, event_timestamp, account_id, request_id, trace_id, span_id, service_name, operation, request_payload, response_payload	Application logs for Identity Service operations with tracing fields, request, and response payloads

Log field explanations:

- timestamp - Unix timestamp of the log event
- resource\_arn - ARN of the identity resource

- event\_timestamp - ISO 8601 timestamp string
- account\_id - AWS account ID
- request\_id - unique request identifier
- trace\_id - distributed tracing ID
- span\_id - span identifier for the operation
- service\_name - service name (BedrockAgentCore.Identity)
- operation - operation name (GetWorkloadAccessToken, etc.)
- request\_payload - request payload
- response\_payload - response payload

## View observability data for your Amazon Bedrock AgentCore agents

After implementing observability in your agent, you can view the collected metrics and traces in both the CloudWatch console generative AI observability page and in CloudWatch Logs. Refer to the following sections to learn how to view metrics for your agents.

### View data using generative AI observability in Amazon CloudWatch

The CloudWatch generative AI observability page displays all of the service-provided metrics output by the AgentCore agent runtime, as well as span- and trace-derived data if you have enabled instrumentation in your agent code. To view the observability dashboard in CloudWatch, open the [Amazon CloudWatch GenAi Observability](#) page.

With generative AI observability in CloudWatch, you can view tailored dashboards with graphs and other visualizations of your data, as well as error breakdowns, trace visualizations and more. To learn more about using generative AI observability in CloudWatch, including how to look at your agents' individual session and trace data, see [Amazon Bedrock AgentCore agents](#) in the *Amazon CloudWatch user guide*.

### View other data in CloudWatch

All of the service-provided metrics and spans can also be viewed in CloudWatch, along with any metrics that your instrumented agent code outputs.

To view this data, refer to the following sections.

## Logs

1. Open the [CloudWatch](#) console.
2. In the left hand navigation pane, expand **Logs** and select **Log groups**
3. Use the search field to find the log group for your agent, memory, or gateway resource.

AgentCore agent log groups have the following format:

- **Standard logs** - stdout/stderr output
  - **Location:** /aws/bedrock-agentcore/runtimes/<agent\_id>-<endpoint\_name>/[runtime-logs] <UUID>
  - **Contains:** Runtime errors, application logs, debugging statements
  - **Example Usage:**
    - print("Processing request...") # Appears in standard logs
    - logging.info("Request processed successfully") # Appears in standard logs
- **OTEL structured logs** - Detailed operation information
  - **Location:** /aws/bedrock-agentcore/runtimes/<agent\_id>-<endpoint\_name>/otel-rt-logs
  - **Contains:** Execution details, error tracking, performance data
  - **Automatic collection:** No additional code required - generated by ADOT instrumentation
  - **Benefits:** Can include correlation IDs linking logs to relevant traces

## Traces and Spans

Traces provide visibility into request execution paths through your agent:

- **Location:** /aws/spans/default
- **Access via:** CloudWatch Transaction Search console
- **Requirements:** CloudWatch Transaction Search must be enabled

Traces automatically capture:

- Agent invocation sequences
- Integration with framework components (LangChain, etc.)

- LLM calls and responses
- Tool invocations and results
- Error paths and exceptions

For distributed tracing across services, you can use standard HTTP headers:

- AWS X-Ray format: X-Amzn-Trace-Id: Root=1-5759e988-bd862e3fe1be46a994272793;Parent=53995c3f42cd8ad8;Sampled=1
- W3C format: traceparent:  
00-4bf92f3577b34da6a3ce929d0e0e4736-00f067aa0ba902b7-01

To view traces:

- Navigate to CloudWatch console
- Select **Transaction Search** from the left navigation
- Filter by service name or other criteria
- Select a trace to view the detailed execution graph

## Metrics

If you have enabled observability by instrumenting your agent code as described in [the section called “Enabling AgentCore observability”](#), your agent automatically generates OTEL metrics, which are sent to CloudWatch using Enhanced Metric Format (EMF):

- Namespace: bedrock-agentcore
- Access via: CloudWatch Metrics console
- Contents: Custom metrics generated by your agent code and frameworks
- Automatic collection: No additional code required - generated by ADOT instrumentation

In addition to agent-emitted metrics, the AgentCore service publishes standard service metrics to CloudWatch. Refer to [the section called “Runtime observability data”](#) for a list of these metrics.

# Amazon Bedrock AgentCore MCP Server: Vibe coding with your coding assistant

The Amazon Bedrock AgentCore Model Context Protocol (MCP) server helps you transform, deploy, and test Amazon Bedrock AgentCore-compatible agents directly from your preferred development environment. With built-in support for runtime integration, gateway connectivity, and agent lifecycle management, the MCP server simplifies moving from local development to production deployment on Amazon Bedrock AgentCore services.

The MCP server works with popular MCP clients including Kiro, Cursor, Claude Code, and Amazon Q CLI, providing conversational commands to automate complex agent development workflows.

## Topics

- [Prerequisites](#)
- [Step 1: Install the MCP server](#)
- [Step 2: Transform an existing agent for AgentCore runtime](#)
- [Step 3: Deploy your agent to AgentCore runtime](#)
- [Step 4: Test your deployed agent](#)
- [Next steps](#)

## Prerequisites

Before you begin, verify that you have the following:

- An AWS account with Amazon Bedrock AgentCore permissions
- AWS CLI installed and configured with appropriate credentials. For setup instructions, see [Installing or updating to the latest version of the AWS CLI](#).
- One of the supported MCP clients:
  - Kiro
  - Cursor
  - Claude Code
  - Amazon Q CLI

- An existing AgentCore agent built with a supported framework (Strands Agents, LangGraph, CrewAI, or similar)

For more information about Amazon Bedrock AgentCore, see the [Amazon Bedrock AgentCore documentation](#).

## Install required dependencies

Install the necessary packages for Amazon Bedrock AgentCore development.

To install the required packages, run the following commands:

```
Install AgentCore dependencies
pip install bedrock-agentcore
pip install bedrock-agentcore-starter-toolkit
```

## Step 1: Install the MCP server

To install the AgentCore MCP server, add it to your MCP client's configuration file. Each MCP client stores this configuration in a different location.

### Add MCP server configuration

Choose your MCP client and add the corresponding configuration:

#### For Kiro

Add to `.kiro/settings/mcp.json` (if it doesn't exist, see [Creating Configuration Files](#)):

```
{
 "mcpServers": {
 "bedrock-agentcore-mcp-server": {
 "command": "uvx",
 "args": [
 "awslabs.amazon-bedrock-agentcore-mcp-server@latest"
],
 "env": {
 "FASTMCP_LOG_LEVEL": "ERROR"
 }
 }
 }
}
```

```
 },
 "disabled": false,
 "autoApprove": [
 "search_agentcore_docs",
 "fetch_agentcore_doc"
]
}
}
```

## For Cursor

Add to `.cursor/mcp.json`:

```
{
 "mcpServers": {
 "bedrock-agentcore-mcp-server": {
 "command": "uvx",
 "args": [
 "awslabs.amazon-bedrock-agentcore-mcp-server@latest"
],
 "env": {
 "FASTMCP_LOG_LEVEL": "ERROR"
 },
 "disabled": false,
 "autoApprove": [
 "search_agentcore_docs",
 "fetch_agentcore_doc"
]
 }
 }
}
```

## For Amazon Q

The best practice is to configure MCP servers for individual Q CLI agents. For configuration instructions, see [Configuring MCP servers for Amazon Q CLI](#).

For Amazon Q in IDEs (VS Code and JetBrains), see [Using MCP servers with Amazon Q in your IDE](#).

## For Claude Code

Configuration depends on your installation:

- **Standalone app:** Add to `~/.claude/mcp.json`
- **VS Code extension:** Configure MCP servers through the Claude Code CLI first, then the extension will automatically use them. See the [Claude Code VS Code documentation](#) for setup details.

For standalone Claude Code app:

```
{
 "mcpServers": {
 "bedrock-agentcore-mcp-server": {
 "command": "uvx",
 "args": [
 "awslabs.amazon-bedrock-agentcore-mcp-server@latest"
],
 "env": {
 "FASTMCP_LOG_LEVEL": "ERROR"
 },
 "disabled": false,
 "autoApprove": [
 "search_agentcore_docs",
 "fetch_agentcore_doc"
]
 }
 }
}
```

## Verify MCP server installation

To verify that the MCP server is connected and working successfully, restart your MCP client after adding the configuration and confirm that the following tools are available:

- `search_agentcore_docs` - Search Amazon Bedrock AgentCore documentation
- `fetch_agentcore_doc` - Fetch specific Amazon Bedrock AgentCore documentation pages

## Step 2: Transform an existing agent for AgentCore runtime

To make your existing AgentCore agent code compatible with Amazon Bedrock AgentCore Runtime, use the MCP server to guide the transformation process. For example, if you have a Strands AgentCore agent, the transformation helps convert it to be Amazon Bedrock AgentCore-compatible by updating imports, dependencies, and application structure.

### Transform your agent code

The MCP server guides your MCP client to make the following changes to your AgentCore agent code:

#### Add runtime library imports

The MCP server adds the required AgentCore imports:

```
from bedrock_agentcore.runtime import BedrockAgentCoreApp
```

#### Update dependencies

The MCP server updates your requirements.txt file:

```
bedrock-agentcore
strands-agents
```

#### Initialize the AgentCore application

The MCP server adds application initialization:

```
app = BedrockAgentCoreApp()
```

#### Decorate the main entrypoint

The MCP server converts your handler function:

```
@app.entrypoint
def handler(event, context):
 # Your agent logic here
 pass
```

## Add application runner

The MCP server adds the application runner:

```
if __name__ == "__main__":
 app.run()
```

## Transformation procedure

To transform your AgentCore agent, open your existing AgentCore agent file (for example, `weather_agent.py`) in your MCP client and use your MCP client's AI assistant with the following prompt:

Transform this AgentCore agent code to be compatible with AgentCore runtime. Update the imports, dependencies, and application structure as needed.

## Step 3: Deploy your agent to AgentCore runtime

After you transform your AgentCore agent for AgentCore compatibility, deploy it using the AgentCore CLI through your MCP client.

### Deploy using the AgentCore CLI

The MCP server uses the AgentCore CLI to deploy your AgentCore agent. The deployment process includes:

- Creating the deployment configuration
- Building and containerizing the AgentCore agent

- Deploying to Amazon Bedrock AgentCore Runtime
- Providing the deployment details and AgentCore agent ARN

To deploy your AgentCore agent, use your MCP client's AI assistant with the following prompt:

Deploy this AgentCore agent to AgentCore runtime using the AgentCore CLI.

The MCP server executes the necessary CLI commands automatically.

## Verify deployment

After deployment completes, you receive confirmation with the following details:

- AgentCore agent ARN
- Runtime configuration
- Deployment status

## Step 4: Test your deployed agent

Test your deployed AgentCore agent by invoking it through Amazon Bedrock AgentCore Runtime.

### Invoke the agent

The MCP server uses the AgentCore CLI to invoke your AgentCore agent and display results including:

- AgentCore agent response
- Execution logs
- Performance metrics

To test your deployed AgentCore agent, use your MCP client's AI assistant with the following prompt:

Test the deployed AgentCore agent with a sample request.

Review the invocation output:

```
AgentCore Agent Response: Hello! I can help you with weather information.
Execution Time: 1.2s
Status: Success
```

## Next steps

After you successfully deploy and test your first AgentCore agent with the AgentCore MCP server, you can explore additional capabilities:

- *Tool integration* - Connect your AgentCore agent to Amazon Bedrock AgentCore Gateway for external tool access
- *Memory integration* - Add Amazon Bedrock AgentCore Memory for conversation context
- *Identity management* - Implement Amazon Bedrock AgentCore Identity for secure access control
- *Advanced frameworks* - Explore integration with LangGraph, CrewAI, and other frameworks

For more information, see the following:

- [the section called “Get started with AgentCore Runtime”](#)
- [the section called “Get started with AgentCore Gateway”](#)
- [AgentCore CLI reference](#)

# Security in Amazon Bedrock AgentCore

Cloud security at AWS is the highest priority. As an AWS customer, you benefit from data centers and network architectures that are designed to help meet the requirements of the most security-sensitive organizations.

Security is a shared responsibility between AWS and you. The [shared responsibility model](#) describes this as security *of* the cloud and security *in* the cloud:

- **Security of the cloud** – AWS is responsible for protecting the infrastructure that runs AWS services in the AWS Cloud. AWS also provides you with services that you can use securely. Third-party auditors regularly test and verify the effectiveness of our security as part of the [AWS Compliance Programs](#). To learn about the compliance programs that apply to Amazon Bedrock AgentCore, see [AWS Services in Scope by Compliance Program](#).
- **Security in the cloud** – Your responsibility is determined by the AWS service that you use. You are also responsible for other factors including the sensitivity of your data, your company's requirements, and applicable laws and regulations.

This documentation helps you understand how to apply the shared responsibility model when using AgentCore. The following topics show you how to configure AgentCore to help meet your security and compliance objectives. You also learn how to use other AWS services that help you to monitor and secure your AgentCore resources.

## Topics

- [Data protection in Amazon Bedrock AgentCore](#)
- [Identity and access management for Amazon Bedrock AgentCore](#)
- [Compliance validation for Amazon Bedrock AgentCore](#)
- [Resilience in Amazon Bedrock AgentCore](#)
- [Cross-service confused deputy prevention](#)

## Data protection in Amazon Bedrock AgentCore

The AWS [shared responsibility model](#) applies to data protection in Amazon Bedrock AgentCore. As described in this model, AWS is responsible for protecting the global infrastructure that runs all of the AWS Cloud. You are responsible for maintaining control over your content that is hosted on

this infrastructure. You are also responsible for the security configuration and management tasks for the AWS services that you use. For more information about data privacy, see the [Data Privacy FAQ](#). For information about data protection in Europe, see the [AWS Shared Responsibility Model and GDPR](#) blog post on the [AWS Security Blog](#).

For data protection purposes, we recommend that you protect AWS account credentials and set up individual users with AWS IAM Identity Center or AWS Identity and Access Management (IAM). That way, each user is given only the permissions necessary to fulfill their job duties. We also recommend that you secure your data in the following ways:

- Use multi-factor authentication (MFA) with each account.
- Use SSL/TLS to communicate with AWS resources. We require TLS 1.2 and recommend TLS 1.3.
- Set up API and user activity logging with AWS CloudTrail. For information about using CloudTrail trails to capture AWS activities, see [Working with CloudTrail trails](#) in the *AWS CloudTrail User Guide*.
- Use AWS encryption solutions, along with all default security controls within AWS services.
- Use advanced managed security services such as Amazon Macie, which assists in discovering and securing sensitive data that is stored in Amazon S3.
- If you require FIPS 140-3 validated cryptographic modules when accessing AWS through a command line interface or an API, use a FIPS endpoint. For more information about the available FIPS endpoints, see [Federal Information Processing Standard \(FIPS\) 140-3](#).

We strongly recommend that you never put confidential or sensitive information, such as your customers' email addresses, into tags or free-form text fields such as a **Name** field. This includes when you work with AgentCore or other AWS services using the console, API, AWS CLI, or AWS SDKs. Any data that you enter into tags or free-form text fields used for names may be used for billing or diagnostic logs. If you provide a URL to an external server, we strongly recommend that you do not include credentials information in the URL to validate your request to that server.

## AgentCore Gateway-specific considerations

- AgentCore Gateway accepts inputs from customers for tool definitions and service details, which can potentially contain personally identifiable information (PII).
- Customer data and metadata are stored in Amazon DynamoDB and Amazon Simple Storage Service and are encrypted either with a service key or a customer-managed KMS key.
- Customer content is not used to provide and maintain the AgentCore Gateway service.

- Metadata doesn't include customer information (such as PII).
- Metrics and logs are stored in CloudWatch.

## Topics

- [Data encryption](#)
- [Protecting your data using VPC and AWS PrivateLink](#)
- [Cross-region inference in Amazon Bedrock AgentCore Memory](#)

## Data encryption

### Encryption at rest

Amazon Bedrock AgentCore stores data at rest using Amazon DynamoDB and Amazon Simple Storage Service (Amazon S3). The data at rest is encrypted using AWS encryption solutions by default. AgentCore encrypts your data using AWS owned encryption keys from AWS Key Management Service. You don't have to take any action to protect the AWS managed keys that encrypt your data. For more information, see [AWS owned keys](#) in the *AWS Key Management Service Developer Guide*.

### Key considerations

- The following data is not encrypted by default:
  - Gateway names
  - Gateway target names
  - Gateway tool names
  - Gateway CloudWatch logs
- Customers can encrypt the following resources with a customer-managed KMS key:
  - Gateways – For more information, see [Encrypt your AgentCore gateway with a customer-managed KMS key](#).

### Encryption in transit

All communication between customers and Amazon Bedrock AgentCore and between AgentCore and its downstream dependencies is protected using TLS 1.2 or higher connections.

Encryption in transit is configured by default for the following services:

## Key considerations

- All outbound traffic for AgentCore Gateway is protected using TLS.
- When invoking a gateway, note the following about the data that is transferred:
  - During a *call tool* request, the service transforms the data in the request and makes a call to the customer-configured web service. The response from the web service is transformed and returned as a *call tool* response to the invoker.
  - During a *list tools* request, the request is a standard MCP list/tools operation request and the response contains a list of tools configured on the gateway by the customer during control plane operations.

## Key management

You can use AWS KMS customer managed keys for the following Amazon Bedrock AgentCore resources:

### Resources that support AWS KMS customer managed keys

- Memories. For more information, see [Create an AgentCore Memory](#).
- Gateways. For more information, see [Encrypt your AgentCore gateway with a customer-managed KMS key](#). Note the following:
  - For AgentCore Gateway resources, AWS managed keys are single-tenant use and different for each region.
  - If a key encrypting your gateway is compromised, you should rotate the key or delete the gateway and create a new one with a new key.
  - AgentCore Gateway integrates with AWS Certificate Manager. For more information, see [AWS Certificate Manager User Guide](#)

## Protecting your data using VPC and AWS PrivateLink

You can use Amazon Virtual Private Cloud (Amazon VPC) and AWS PrivateLink to create private connections between your VPC and Amazon Bedrock AgentCore.

### Topics

- [Use interface VPC endpoints \(AWS PrivateLink\) to create a private connection between your VPC and your Amazon Bedrock AgentCore resources](#)
  - [Configure Amazon Bedrock AgentCore Runtime and tools for VPC](#)

## Use interface VPC endpoints (AWS PrivateLink) to create a private connection between your VPC and your Amazon Bedrock AgentCore resources

You can use AWS PrivateLink to create a private connection between your VPC and Amazon Bedrock AgentCore. You can access AgentCore as if it were in your VPC, without the use of an internet gateway, NAT device, VPN connection, or AWS Direct Connect connection. Instances in your VPC don't need public IP addresses to access AgentCore.

You establish this private connection by creating an *interface endpoint*, powered by AWS PrivateLink. We create an endpoint network interface in each subnet that you enable for the interface endpoint. These are requester-managed network interfaces that serve as the entry point for traffic destined for AgentCore.

For more information, see [Access AWS services through AWS PrivateLink](#) in the *AWS PrivateLink Guide*.

## Considerations for AgentCore

Before you set up an interface endpoint for AgentCore, review [Considerations](#) in the *AWS PrivateLink Guide*.

AgentCore supports the following primitives through the singular interface endpoint `com.amazonaws.region.bedrock-agentcore`:

- **Runtime** - Agent runtime operations
- **Built-in Tools** - Code Interpreter and Browser Tool operations
- **Memory** - Memory store operations
- **Identity** - Identity management operations

The following primitive uses a separate endpoint:

- **AgentCore Gateway** - Uses endpoint `com.amazonaws.region.bedrock-agentcore.gateway`

**Note**

AWS PrivateLink is currently not supported for AgentCore control plane endpoints.

For a list of AWS Regions in which AgentCore interface endpoints are available, see [AWS Regions](#).

**⚠ Authorization considerations for data plane APIs**

The data plane APIs support both AWS Signature Version 4 (SigV4) headers for authentication and Bearer Token (OAuth) authentication. VPC endpoint policies can only restrict callers based on IAM principals and not OAuth users. For OAuth-based requests to succeed through the VPC endpoint, the principal must be set to \* in the endpoint policy. Otherwise, only SigV4 allowlisted callers can make successful calls over the VPC endpoint.

AWS IAM global condition context keys are supported. By default, full access to AgentCore is allowed through the interface endpoint. You can control access by attaching an endpoint policy to the interface endpoint or by associating a security group with the endpoint network interfaces.

## Create an interface endpoint for AgentCore

You can create an interface endpoint for AgentCore using either the Amazon VPC console or the AWS Command Line Interface (AWS CLI). For more information, see [Create an interface endpoint](#) in the *AWS PrivateLink Guide*.

Create an interface endpoint for AgentCore using the following service name format:

- All primitives (Runtime, Built-in Tools, Memory, Identity): com.amazonaws.*region*.bedrock-agentcore
- For AgentCore Gateway: com.amazonaws.*region*.bedrock-agentcore.gateway

If you enable private DNS for the interface endpoint, you can make API requests to AgentCore using its default Regional DNS name. For example, bedrock-agentcore.us-east-1.amazonaws.com.

## Create an endpoint policy for your interface endpoint

An endpoint policy is an IAM resource that you can attach to an interface endpoint. The default endpoint policy allows full access to AgentCore through the interface endpoint. To control the access allowed to AgentCore from your VPC, attach a custom endpoint policy to the interface endpoint.

An endpoint policy specifies the following information:

- The principals that can perform actions (AWS accounts, IAM users, and IAM roles).
  - For AgentCore Gateway, if your gateway ingress isn't [AWS Signature Version 4 \(SigV4\)](#)-based (for example, if you use OAuth instead), you must specify the Principal field as the wildcard \*. SigV4 -based authentication allows you to define the Principal as a specific AWS identity. This also applies to AgentCore Runtime.
- The actions that can be performed.
- The resources on which the actions can be performed.

For more information, see [Control access to services using endpoint policies](#) in the *AWS PrivateLink Guide*.

### Endpoint policies for various primitives

The following examples show endpoint policies for different AgentCore components:

#### Runtime

The following endpoint policy allows specific IAM principals to invoke agent runtime resources.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws::iam::ACCOUNT_ID:user/USERNAME"
 },
 "Action": [
 "bedrock-agentcore:InvokeAgentRuntime"
],
 "Resource": "arn:aws:bedrock-agentcore:us-
east-1:ACCOUNT_ID:runtime/RUNTIME_ID"
 }
]
}
```

```
 }
]
}
```

## Mixed IAM and OAuth authentication

The `InvokeAgentRuntime` API supports two modes of VPC endpoint authorization. The following example policy allows both IAM principals and OAuth callers to access different agent runtime resources.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws::iam::ACCOUNT_ID:root"
 },
 "Action": [
 "bedrock-agentcore:InvokeAgentRuntime"
],
 "Resource": "arn:aws::bedrock-agentcore:us-
east-1:ACCOUNT_ID:runtime/customAgent1"
 },
 {
 "Effect": "Allow",
 "Principal": "*",
 "Action": [
 "bedrock-agentcore:InvokeAgentRuntime"
],
 "Resource": "arn:aws::bedrock-agentcore:us-
east-1:ACCOUNT_ID:runtime/customAgent2"
 }
]
}
```

The above policy allows only the IAM principal to make `InvokeAgentRuntime` calls to `customAgent1`. It also allows both IAM principals and OAuth callers to make `InvokeAgentRuntime` calls to `customAgent2`.

## Code Interpreter Tool

The following endpoint policy allows specific IAM principals to invoke Code Interpreter resources.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws::iam::ACCOUNT_ID:root"
 },
 "Action": [
 "bedrock-agentcore:InvokeCodeInterpreter"
],
 "Resource": "arn:aws::bedrock-agentcore:us-east-1:ACCOUNT_ID:code-
interpreter/CODE_INTERPRETER_ID"
 }
]
}
```

## Memory

### All data plane operations

The following endpoint policy allows specific IAM principals to access us-east-1 data plane operations for a specific AgentCore Memory.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws::iam::ACCOUNT_ID:root"
 },
 "Action": [
 "bedrock-agentcore>CreateEvent",
 "bedrock-agentcore>DeleteEvent",
 "bedrock-agentcore:GetEvent",
 "bedrock-agentcore>ListEvents",
 "bedrock-agentcore>DeleteMemoryRecord",
 "bedrock-agentcore:GetMemoryRecord",
 "bedrock-agentcore>ListMemoryRecords",
 "bedrock-agentcore>RetrieveMemoryRecords",
 "bedrock-agentcore>ListActors",
 "bedrock-agentcore>ListSessions",
 "bedrock-agentcore>BatchCreateMemoryRecords",
 "bedrock-agentcore>BatchDeleteMemoryRecords",
]
 }
]
}
```

```
 "bedrock-agentcore:BatchUpdateMemoryRecords"
],
 "Resource": "arn:aws::bedrock-agentcore:us-
east-1:ACCOUNT_ID:memory/MEMORY_ID"
}
]
```

## Access to all memories

The following endpoint policy allows specific IAM principals access to all memories.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws::iam::ACCOUNT_ID:root"
 },
 "Action": [
 "bedrock-agentcore:CreateEvent",
 "bedrock-agentcore:DeleteEvent",
 "bedrock-agentcore:GetEvent",
 "bedrock-agentcore>ListEvents",
 "bedrock-agentcore>DeleteMemoryRecord",
 "bedrock-agentcore:GetMemoryRecord",
 "bedrock-agentcore>ListMemoryRecords",
 "bedrock-agentcore>RetrieveMemoryRecords",
 "bedrock-agentcore>ListActors",
 "bedrock-agentcore>ListSessions",
 "bedrock-agentcore>BatchCreateMemoryRecords",
 "bedrock-agentcore>BatchDeleteMemoryRecords",
 "bedrock-agentcore>BatchUpdateMemoryRecords"
],
 "Resource": "arn:aws::bedrock-agentcore:us-east-1:ACCOUNT_ID:memory/*"
 }
]
}
```

## Access restriction by APIs

The following endpoint policy grants permission for a specific IAM principal to create events in a specific AgentCore Memory resource.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws::iam::ACCOUNT_ID:root"
 },
 "Action": [
 "bedrock-agentcore:CreateEvent"
],
 "Resource": "arn:aws::bedrock-agentcore:us-
east-1:ACCOUNT_ID:memory/MEMORY_ID"
 }
]
}
```

## Browser Tool

The following endpoint policy allows specific IAM principals to connect to Browser Tool resources.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": {
 "AWS": "arn:aws::iam::ACCOUNT_ID:root"
 },
 "Action": [
 "bedrock-agentcore:ConnectBrowserAutomationStream"
],
 "Resource": "arn:aws::bedrock-agentcore:us-
east-1:ACCOUNT_ID:browser/BROWSER_ID"
 }
]
}
```

## Gateway

The following is an example of a custom endpoint policy. When you attach this policy to your interface endpoint, it allows all principals to invoke the gateway specified in the Resource field.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": "*",
 "Action": [
 "bedrock:InvokeGateway"
],
 "Resource": "arn:aws::bedrock-agentcore:us-east-1::gateway/my-gateway"
 }
]
}
```

## Identity

The following endpoint policy allows access to Identity resources.

```
{
 "Statement": [
 {
 "Effect": "Allow",
 "Principal": "*",
 "Action": [
 "*"
],
 "Resource": "arn:aws:bedrock-agentcore:us-east-1:ACCOUNT_ID:workload-
identity-directory/default/workload-identity/WORKLOAD_IDENTITY_ID"
 }
]
}
```

## Configure Amazon Bedrock AgentCore Runtime and tools for VPC

You can configure Amazon Bedrock AgentCore Runtime and built-in tools (Code Interpreter and Browser Tool) to connect to resources in your Amazon Virtual Private Cloud (VPC). By configuring VPC connectivity, you enable secure access to private resources such as databases, internal APIs, and services within your VPC.

## VPC connectivity for Amazon Bedrock AgentCore Runtime and tools

To enable Amazon Bedrock AgentCore Runtime and built-in tools to securely access resources in your private VPC, AgentCore provides VPC connectivity capabilities. This feature allows your runtime and tools to:

- Connect to private resources without exposing them to the internet
- Maintain secure communications within your organization's network boundaries
- Access enterprise data stores and internal services while preserving security

When you configure VPC connectivity for Amazon Bedrock AgentCore Runtime and tools:

- Amazon Bedrock creates elastic network interfaces (ENIs) in your VPC using the service-linked role `AWSServiceRoleForBedrockAgentCoreNetwork`
- These ENIs enable your Amazon Bedrock AgentCore Runtime and tools to securely communicate with resources in your VPC
- Each ENI is assigned a private IP address from the subnets you specify
- Security groups attached to the ENIs control which resources your runtime and tools can communicate with

### Note

VPC connectivity impacts inbound and outbound network traffic from AgentCore services.

When you host your application in an AWS VPC, you can establish private connectivity to the AgentCore Runtime and AgentCore Gateway APIs by adding the AgentCore VPC endpoint to your VPC. This enables secure API calls, without internet traversal, through VPC PrivateLink inbound connections.

## Prerequisites

Before configuring Amazon Bedrock AgentCore Runtime and tools for VPC access, ensure you have:

- An Amazon VPC with appropriate subnets for your runtime and tool requirements. For example, to configure your subnets to have internet access, see [Internet access considerations](#).
- Subnets located in supported Availability Zones for your region. For information about supported Availability Zones, see [Supported Availability Zones](#).

- Appropriate security groups defined in your VPC for runtime and tool access patterns. For example, to configure your security groups to connect to Amazon RDS, see [Example: Connecting to an Amazon RDS database](#).
- Required IAM permissions to create and manage the service-linked role (already included in the AWS managed policy [BedrockAgentCoreFullAccess](#)). For information about required permissions, see [IAM permissions](#).
- Required VPC endpoints if your VPC doesn't have internet access. For example, to configure your VPC endpoints, see [VPC endpoint configuration](#).
- Understanding of your runtime and tool network requirements (databases, APIs, web resources). If you need to use Browser tool which requires internet access, then your VPC should have internet access through NAT Gateway. For example, see [Security group considerations](#).

 **Important**

AgentCore creates a network interface in your account with a private IP address. Using a public subnet does not provide internet connectivity. To enable internet access, place it in private subnets with a route to a NAT Gateway.

## Supported Availability Zones

AgentCore supports VPC connectivity in specific Availability Zones within each supported region. When configuring subnets for your Amazon Bedrock AgentCore Runtime and built-in tools, ensure that your subnets are located in the supported Availability Zones for your region.

The following table shows the supported Availability Zone IDs for each region:

Region	Region Code	Supported Availability Zones
US East (N. Virginia)	us-east-1	<ul style="list-style-type: none"><li>use1-az1</li><li>use1-az2</li><li>use1-az4</li></ul>
US East (Ohio)	us-east-2	<ul style="list-style-type: none"><li>use2-az1</li><li>use2-az2</li><li>use2-az3</li></ul>

Region	Region Code	Supported Availability Zones
US West (Oregon)	us-west-2	<ul style="list-style-type: none"> <li>• usw2-az1</li> <li>• usw2-az2</li> <li>• usw2-az3</li> </ul>
Asia Pacific (Sydney)	ap-southeast-2	<ul style="list-style-type: none"> <li>• apse2-az1</li> <li>• apse2-az2</li> <li>• apse2-az3</li> </ul>
Asia Pacific (Mumbai)	ap-south-1	<ul style="list-style-type: none"> <li>• aps1-az1</li> <li>• aps1-az2</li> <li>• aps1-az3</li> </ul>
Asia Pacific (Singapore)	ap-southeast-1	<ul style="list-style-type: none"> <li>• apse1-az1</li> <li>• apse1-az2</li> <li>• apse1-az3</li> </ul>
Asia Pacific (Tokyo)	ap-northeast-1	<ul style="list-style-type: none"> <li>• apne1-az1</li> <li>• apne1-az2</li> <li>• apne1-az4</li> </ul>
Europe (Ireland)	eu-west-1	<ul style="list-style-type: none"> <li>• euw1-az1</li> <li>• euw1-az2</li> <li>• euw1-az3</li> </ul>
Europe (Frankfurt)	eu-central-1	<ul style="list-style-type: none"> <li>• euc1-az1</li> <li>• euc1-az2</li> <li>• euc1-az3</li> </ul>

## **⚠️ Important**

Subnets must be located in the supported Availability Zones listed above. If you specify subnets in unsupported Availability Zones, the configuration will fail during resource creation.

To identify the Availability Zone ID of your subnets, you can use the following CLI command:

```
aws ec2 describe-subnets --subnet-ids subnet-12345678 --query
'Subnets[0].AvailabilityZoneId'
```

## IAM permissions

AgentCore uses the service-linked role `AWSServiceRoleForBedrockAgentCoreNetwork` to create and manage network interfaces in your VPC. This role is automatically created when you first configure Amazon Bedrock AgentCore Runtime or AgentCore built-in tools to use VPC connectivity.

If you need to create this role manually, your IAM entity needs the following permissions:

```
{
 "Action": "iam:CreateServiceLinkedRole",
 "Effect": "Allow",
 "Resource": "arn:aws:iam::*:role/aws-service-role/network.bedrock-
agentcore.amazonaws.com/AWSServiceRoleForBedrockAgentCoreNetwork",
 "Condition": {
 "StringLike": {
 "iam:AWSServiceName": "network.bedrock-agentcore.amazonaws.com"
 }
 }
}
```

This permission is already included in the AWS managed policy [BedrockAgentCoreFullAccess](#).

## Best practices

For optimal performance and security with VPC-connected Amazon Bedrock AgentCore Runtime and built-in tools:

- **High Availability:**

- Configure at least two private subnets in different Availability Zones. For a list of supported Availability Zones, see [Supported Availability Zones](#).
  - Deploy dependent resources (such as databases or caches) with multi-AZ support to avoid single points of failure.
- **Network Performance:**
    - Place Amazon Bedrock AgentCore Runtime or built-in tools subnets in the same Availability Zones as the resources they connect to. This reduces cross-AZ latency and data transfer costs.
    - Use VPC endpoints for AWS services whenever possible. Endpoints provide lower latency, higher reliability, and avoid NAT gateway charges for supported services.
  - **Security:**
    - Apply the principle of least privilege when creating security group rules.
    - Enable VPC Flow Logs for auditing and monitoring. Review logs regularly to identify unexpected traffic patterns.
  - **Internet Access:**
    - To provide internet access from Amazon Bedrock AgentCore Runtime or built-in tools inside a VPC, configure a NAT gateway in a public subnet. Update the route table for private subnets to send outbound traffic (0.0.0.0/0) to the NAT gateway.
    - We recommend using VPC endpoints for AWS services instead of internet routing to improve security and reduce costs.

## Configuring VPC access for runtime and tools

You can configure VPC access for Amazon Bedrock AgentCore Runtime and built-in tools using the AWS Management Console, AWS CLI, or AWS SDKs.

### Runtime configuration

#### AWS Management Console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. Navigate to the AgentCore section
3. Select or create an Amazon Bedrock AgentCore Runtime configuration
4. Choose your ECR image
5. Under the Network configuration section, choose **VPC**

6. Select your VPC from the dropdown list
7. Select the appropriate subnets for your application needs
8. Select one or more security groups to apply to the ENIs
9. Save your configuration

## AWS CLI

```
aws bedrock-agentcore create-runtime \
--runtime-name "MyAgentRuntime" \
--network-configuration '{
 "networkMode": "VPC",
 "networkModeConfig": {
 "subnets": ["subnet-0123456789abcdef0", "subnet-0123456789abcdef1"],
 "securityGroups": ["sg-0123456789abcdef0"]
 }
}'
```

## AWS SDK (Python)

```
import boto3

client = boto3.client('bedrock-agentcore')

response = client.create_runtime(
 runtimeName='MyAgentRuntime',
 networkConfiguration={
 'networkMode': 'VPC',
 'networkModeConfig': {
 'subnets': ['subnet-0123456789abcdef0', 'subnet-0123456789abcdef1'],
 'securityGroups': ['sg-0123456789abcdef0']
 }
 }
)
```

## Code Interpreter configuration

### AWS Management Console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.

2. Navigate to AgentCore → Built-in Tools → Code Interpreter
3. Select **Create Code Interpreter** or modify existing configuration
4. Provide a tool name (optional)
5. Configure execution role with necessary permissions
6. Under Network configuration, choose **VPC**
7. Select your VPC from the dropdown
8. Choose appropriate subnets (recommend private subnets across multiple AZs with NAT gateway)
9. Select security groups for ENI access control
10. Configure execution role with necessary permissions
11. Save your configuration

## AWS CLI

```
aws bedrock-agentcore-control create-code-interpreter \
--region <Region> \
--name "my-code-interpreter" \
--description "My Code Interpreter with VPC mode for data analysis" \
--execution-role-arn "arn:aws:iam::123456789012:role/my-execution-role" \
--network-configuration '{
 "networkMode": "VPC",
 "networkModeConfig": {
 "subnets": ["subnet-0123456789abcdef0", "subnet-0123456789abcdef1"],
 "securityGroups": ["sg-0123456789abcdef0"]
 }
}'
```

## AWS SDK (Python)

```
import boto3

Initialize the boto3 client
cp_client = boto3.client(
 'bedrock-agentcore-control',
 region_name="<Region>",
 endpoint_url="https://bedrock-agentcore-control.<Region>.amazonaws.com"
)
```

```
Create a Code Interpreter
response = cp_client.create_code_interpreter(
 name="myTestVpcCodeInterpreter",
 description="Test code sandbox for development",
 executionRoleArn="arn:aws:iam::123456789012:role/my-execution-role",
 networkConfiguration={
 'networkMode': 'VPC',
 'networkModeConfig': {
 'subnets': ['subnet-0123456789abcdef0', 'subnet-0123456789abcdef1'],
 'securityGroups': ['sg-0123456789abcdef0']
 }
 }
)

Print the Code Interpreter ID
code_interpreter_id = response["codeInterpreterId"]
print(f"Code Interpreter ID: {code_interpreter_id}")
```

## Browser Tool configuration

### AWS Management Console

1. Open the AgentCore console at <https://console.aws.amazon.com/bedrock-agentcore/home#>.
2. In the navigation pane, choose **Built-in tools**
3. Choose **Create Browser tool**
4. Provide a tool name (optional) and description (optional)
5. Set execution role permissions
6. Under the Network configuration section, choose **VPC** mode
7. Select your VPC and subnets
8. Configure security groups for web access requirements
9. Set execution role permissions
10. Save your configuration

### AWS CLI

```
aws bedrock-agentcore-control create-browser \
```

```
--region <Region> \
--name "my-browser" \
--description "My browser for web interaction" \
--network-configuration '{
 "networkMode": "VPC",
 "networkModeConfig": {
 "subnets": ["subnet-0123456789abcdef0", "subnet-0123456789abcdef1"],
 "securityGroups": ["sg-0123456789abcdef0"]
 }
}' \
--recording '{
 "enabled": true,
 "s3Location": {
 "bucket": "my-bucket-name",
 "prefix": "sessionreplay"
 }
}' \
--execution-role-arn "arn:aws:iam::123456789012:role/my-execution-role"
```

## AWS SDK (Python)

```
import boto3

Initialize the boto3 client
cp_client = boto3.client(
 'bedrock-agentcore-control',
 region_name=<Region>",
 endpoint_url="https://bedrock-agentcore-control.<Region>.amazonaws.com"
)

Create a Browser
response = cp_client.create_browser(
 name="myTestVpcBrowser",
 description="Test browser with VPC mode for development",
 networkConfiguration={
 'networkMode': 'VPC',
 'networkModeConfig': {
 'subnets': ['subnet-0123456789abcdef0', 'subnet-0123456789abcdef1'],
 'securityGroups': ['sg-0123456789abcdef0']
 }
 },
 executionRoleArn="arn:aws:iam::123456789012:role/Sessionreplay",
 recording={
```

```
 "enabled": True,
 "s3Location": {
 "bucket": "session-record-123456789012",
 "prefix": "replay-data"
 }
 }
}
```

## Security group considerations

Security groups act as virtual firewalls for your Amazon Bedrock AgentCore Runtime or built-in tool when connected to a VPC. They control inbound and outbound traffic at the instance level. To configure security groups for your runtime:

- **Outbound rules** – Define outbound rules to allow your Amazon Bedrock AgentCore Runtime to connect to required VPC resources.
- **Inbound rules** – Ensure that the target resource's security group allows inbound connections from the security group associated with your Amazon Bedrock AgentCore Runtime.
- **Least privilege** – Apply the principle of least privilege by allowing only the minimum required traffic.

### Example: Connecting to an Amazon RDS database

When your Amazon Bedrock AgentCore Runtime connects to an Amazon RDS database, configure the security groups as follows:

#### Amazon Bedrock AgentCore Runtime security group

- **Outbound** – Allow TCP traffic to the RDS database's security group on port 3306 (MySQL).
- **Inbound** – Not required. The runtime only initiates outbound connections.

#### Amazon RDS database security group

- **Inbound** – Allow TCP traffic from the Amazon Bedrock AgentCore Runtime security group on port 3306.
- **Outbound** – Not required. Return traffic is automatically allowed because security groups are stateful.

## VPC endpoint configuration

When running Amazon Bedrock AgentCore Runtime in a private VPC without internet access, you must configure the following VPC endpoints to ensure proper functionality:

### Required VPC endpoints

- **Amazon ECR Requirements:**

- Docker endpoint: com.amazonaws.*region*.ecr.dkr
- ECR API endpoint: com.amazonaws.*region*.ecr.api

- **Amazon S3 Requirements:**

- Gateway endpoint for ECR docker layer storage: com.amazonaws.*region*.s3

- **CloudWatch Requirements:**

- Logs endpoint: com.amazonaws.*region*.logs

 **Note**

Be sure to replace *region* with your specific region if different.

## Internet access considerations

When you connect Amazon Bedrock AgentCore Runtime or a built-in tool to a Virtual Private Cloud (VPC), it does not have internet access by default. By default, these resources can communicate only with resources inside the same VPC. If your runtime or tool requires access to both VPC resources and the internet, you must configure your VPC accordingly.

### Internet access architecture

To enable internet access for your VPC-connected Amazon Bedrock AgentCore Runtime or built-in tool, configure your VPC with the following components:

- **Private subnets** – Place the Amazon Bedrock AgentCore Runtime or tool's network interfaces in private subnets.
- **Public subnets with a NAT gateway** – Deploy a NAT gateway in one or more public subnets to provide outbound internet access for private resources.
- **Internet gateway (IGW)** – Attach an internet gateway to your VPC to enable communication between the NAT gateway and the internet.

## Routing configuration

Update your subnet route tables as follows:

- **Private subnet route table** – Add a default route (0.0.0.0/0) that points to the NAT gateway. This allows outbound traffic from the runtime or tool to reach the internet.
- **Public subnet route table** – Add a default route (0.0.0.0/0) that points to the internet gateway. This allows the NAT gateway to communicate with the internet.

### Important

Connecting Amazon Bedrock AgentCore Runtime and built-in tools to public subnets does not provide internet access. Always use private subnets with NAT gateways for internet connectivity.

## Monitoring and troubleshooting

To monitor and troubleshoot your VPC-connected Amazon Bedrock AgentCore Runtime and tools:

### CloudWatch Logs

Enable CloudWatch Logs for your Amazon Bedrock AgentCore Runtime to identify any connectivity issues:

- Check error messages related to VPC connectivity
- Look for timeout errors when connecting to VPC resources
- Monitor initialization times (VPC connectivity may increase session startup times)

## Common issues and solutions

### • Connection timeouts:

- Verify security group rules are correct
- Ensure route tables are properly configured
- Check that the target resource is running and accepting connections

### • DNS resolution failures:

- Ensure that DNS resolution is enabled in your VPC

- Verify that your DHCP options are configured correctly
- **Missing ENIs:**
  - Check the IAM permissions to ensure the service-linked role has appropriate permissions
  - Look for any service quotas that may have been reached

## Code Interpreter issues

- **Code Interpreter invoke call timeouts when trying to call a public endpoint:**
  - Verify that VPC is configured with NAT gateway for internet access
- **Invoke calls for a Code Interpreter with private VPC endpoints throw "AccessDenied" errors:**
  - Make sure the execution role passed during Code Interpreter creation has the right permissions for AWS service for which VPC endpoint was configured
- **Invoke calls for a Code Interpreter with some private VPC endpoints show "Unable to locate Credentials" error:**
  - Check that the execution role has been provided while creating the code interpreter

## Browser Tool issues

- **Live-View/Connection Stream is unable to load webpages and fails with connection timeouts:**
  - Check if the browser was created with Private Subnet with NAT Gateway

## Testing VPC connectivity

To verify that your AgentCore Runtime and tools have proper VPC connectivity, you can test connections to your private resources and verify that network interfaces are created correctly in your specified subnets.

To verify that your AgentCore tool has internet access, you can configure a Code Interpreter with your VPC configuration and use the Invoke API with executeCommand that attempts to connect to a public API or website using curl command and check the response. If the connection times out, review your VPC configuration, particularly your route tables and NAT gateway setup.

```
Using awscurl
awscurl -X POST \
"https://bedrock-agentcore.<Region>.amazonaws.com/code-interpreters/
<code_interpreter_id>/tools/invoke" \
```

```
-H "Content-Type: application/json" \
-H "Accept: application/json" \
-H "x-amzn-code-interpreter-session-id: your-session-id" \
--service bedrock-agentcore \
--region <Region> \
-d '{
 "name": "executeCommand",
 "arguments": {
 "command": "curl amazon.com"
 }
}'
```

## Cross-region inference in Amazon Bedrock AgentCore Memory

With cross-region inference, Amazon Bedrock AgentCore Memory will automatically select the optimal region within your geography (as described in more detail below) to process your inference request, maximizing available compute resources and model availability, and providing the best customer experience.

Cross-region inference requests are kept within the AWS Regions that are part of the geography where the data originally resides. For example, a request made within the US is kept within the AWS Regions in the US. Although the data remains stored only in the primary region, when using cross-region inference, your input prompts and output results may move outside of your primary region. All data will be transmitted encrypted across Amazon's secure network.

### Note

There's no additional cost for using cross-region inference.

Amazon CloudWatch and AWS CloudTrail logs won't specify the AWS Region in which data inference occurs.

If you don't want cross-region inference, you can manage your model selection using a [built-in with overrides](#) strategy.

## Supported Regions for AgentCore Memory cross-region inference

For a list of Region codes and endpoints supported in AgentCore, see [the section called "AWS Regions"](#). For endpoints, see [Amazon Bedrock AgentCore endpoints and quotas](#).

Supported AgentCore Memory geography	Inference regions
United States	US East (N. Virginia) (us-east-1)
	US East (Ohio) (us-east-2)
	US West (Oregon) (us-west-2)
Europe	Europe (Frankfurt) (eu-central-1)
	Europe (Ireland) (eu-west-1)
Asia Pacific	Asia Pacific (Tokyo) (ap-northeast-1)
	Asia Pacific (Mumbai) (ap-south-1)
	Asia Pacific (Singapore) (ap-southeast-1)
	Asia Pacific (Sydney) (ap-southeast-2)

## Identity and access management for Amazon Bedrock AgentCore

AWS Identity and Access Management (IAM) is an AWS service that helps an administrator securely control access to AWS resources. IAM administrators control who can be *authenticated* (signed in) and *authorized* (have permissions) to use AgentCore resources. IAM is an AWS service that you can use with no additional charge.

### Topics

- [Audience](#)
- [Authenticating with identities](#)
- [Managing access using policies](#)
- [How Amazon Bedrock AgentCore works with IAM](#)
- [Identity-based policy examples for Amazon Bedrock AgentCore](#)
- [AWS managed policies for Amazon Bedrock AgentCore](#)
- [Using service-linked roles for Amazon Bedrock AgentCore](#)

- [Understanding Credentials Management in Amazon Bedrock AgentCore](#)
- [Troubleshooting Amazon Bedrock AgentCore identity and access](#)

## Audience

How you use AWS Identity and Access Management (IAM) differs based on your role:

- **Service user** - request permissions from your administrator if you cannot access features (see [Troubleshooting Amazon Bedrock AgentCore identity and access](#))
- **Service administrator** - determine user access and submit permission requests (see [How Amazon Bedrock AgentCore works with IAM](#))
- **IAM administrator** - write policies to manage access (see [Identity-based policy examples for Amazon Bedrock AgentCore](#))

## Authenticating with identities

Authentication is how you sign in to AWS using your identity credentials. You must be authenticated as the AWS account root user, an IAM user, or by assuming an IAM role.

You can sign in as a federated identity using credentials from an identity source like AWS IAM Identity Center (IAM Identity Center), single sign-on authentication, or Google/Facebook credentials. For more information about signing in, see [How to sign in to your AWS account](#) in the *AWS Sign-In User Guide*.

For programmatic access, AWS provides an SDK and CLI to cryptographically sign requests. For more information, see [AWS Signature Version 4 for API requests](#) in the *IAM User Guide*.

### AWS account root user

When you create an AWS account, you begin with one sign-in identity called the AWS account *root user* that has complete access to all AWS services and resources. We strongly recommend that you don't use the root user for everyday tasks. For tasks that require root user credentials, see [Tasks that require root user credentials](#) in the *IAM User Guide*.

### Federated identity

As a best practice, require human users to use federation with an identity provider to access AWS services using temporary credentials.

A *federated identity* is a user from your enterprise directory, web identity provider, or AWS Directory Service that accesses AWS services using credentials from an identity source. Federated identities assume roles that provide temporary credentials.

For centralized access management, we recommend AWS IAM Identity Center. For more information, see [What is IAM Identity Center?](#) in the *AWS IAM Identity Center User Guide*.

## IAM users and groups

An [\*IAM user\*](#) is an identity with specific permissions for a single person or application. We recommend using temporary credentials instead of IAM users with long-term credentials. For more information, see [Require human users to use federation with an identity provider to access AWS using temporary credentials](#) in the *IAM User Guide*.

An [\*IAM group\*](#) specifies a collection of IAM users and makes permissions easier to manage for large sets of users. For more information, see [Use cases for IAM users](#) in the *IAM User Guide*.

## IAM roles

An [\*IAM role\*](#) is an identity with specific permissions that provides temporary credentials. You can assume a role by [switching from a user to an IAM role \(console\)](#) or by calling an AWS CLI or AWS API operation. For more information, see [Methods to assume a role](#) in the *IAM User Guide*.

IAM roles are useful for federated user access, temporary IAM user permissions, cross-account access, cross-service access, and applications running on Amazon EC2. For more information, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

## Managing access using policies

You control access in AWS by creating policies and attaching them to AWS identities or resources. A policy defines permissions when associated with an identity or resource. AWS evaluates these policies when a principal makes a request. Most policies are stored in AWS as JSON documents. For more information about JSON policy documents, see [Overview of JSON policies](#) in the *IAM User Guide*.

Using policies, administrators specify who has access to what by defining which **principal** can perform **actions** on what **resources**, and under what **conditions**.

By default, users and roles have no permissions. An IAM administrator creates IAM policies and adds them to roles, which users can then assume. IAM policies define permissions regardless of the method used to perform the operation.

## Identity-based policies

Identity-based policies are JSON permissions policy documents that you attach to an identity (user, group, or role). These policies control what actions identities can perform, on which resources, and under what conditions. To learn how to create an identity-based policy, see [Define custom IAM permissions with customer managed policies](#) in the *IAM User Guide*.

Identity-based policies can be *inline policies* (embedded directly into a single identity) or *managed policies* (standalone policies attached to multiple identities). To learn how to choose between managed and inline policies, see [Choose between managed policies and inline policies](#) in the *IAM User Guide*.

## Resource-based policies

Resource-based policies are JSON policy documents that you attach to a resource. Examples include IAM *role trust policies* and Amazon S3 *bucket policies*. In services that support resource-based policies, service administrators can use them to control access to a specific resource. You must [specify a principal](#) in a resource-based policy.

Resource-based policies are inline policies that are located in that service. You can't use AWS managed policies from IAM in a resource-based policy.

## Other policy types

AWS supports additional policy types that can set the maximum permissions granted by more common policy types:

- **Permissions boundaries** – Set the maximum permissions that an identity-based policy can grant to an IAM entity. For more information, see [Permissions boundaries for IAM entities](#) in the *IAM User Guide*.
- **Service control policies (SCPs)** – Specify the maximum permissions for an organization or organizational unit in AWS Organizations. For more information, see [Service control policies](#) in the *AWS Organizations User Guide*.
- **Resource control policies (RCPs)** – Set the maximum available permissions for resources in your accounts. For more information, see [Resource control policies \(RCPs\)](#) in the *AWS Organizations User Guide*.
- **Session policies** – Advanced policies passed as a parameter when creating a temporary session for a role or federated user. For more information, see [Session policies](#) in the *IAM User Guide*.

## Multiple policy types

When multiple types of policies apply to a request, the resulting permissions are more complicated to understand. To learn how AWS determines whether to allow a request when multiple policy types are involved, see [Policy evaluation logic](#) in the *IAM User Guide*.

## How Amazon Bedrock AgentCore works with IAM

Before you use IAM to manage access to AgentCore, learn what IAM features are available to use with AgentCore.

IAM feature	AgentCore support
<a href="#">Identity-based policies</a>	Yes
<a href="#">Resource-based policies</a>	No
<a href="#">Policy actions</a>	Yes
<a href="#">Policy resources</a>	Yes
<a href="#">Policy condition keys</a>	Yes
<a href="#">ACLs</a>	No
<a href="#">ABAC (tags in policies)</a>	Partial
<a href="#">Temporary credentials</a>	Yes
<a href="#">Principal permissions</a>	Yes
<a href="#">Service roles</a>	Yes
<a href="#">Service-linked roles</a>	Yes

To get a high-level view of how AgentCore and other AWS services work with most IAM features, see [AWS services that work with IAM](#) in the *IAM User Guide*.

## Identity-based policies for AgentCore

### Supports identity-based policies: Yes

Identity-based policies are JSON permissions policy documents that you can attach to an identity, such as an IAM user, group of users, or role. These policies control what actions users and roles can perform, on which resources, and under what conditions. To learn how to create an identity-based policy, see [Define custom IAM permissions with customer managed policies](#) in the *IAM User Guide*.

With IAM identity-based policies, you can specify allowed or denied actions and resources as well as the conditions under which actions are allowed or denied. To learn about all of the elements that you can use in a JSON policy, see [IAM JSON policy elements reference](#) in the *IAM User Guide*.

### Identity-based policy examples for AgentCore

To view examples of AgentCore identity-based policies, see [Identity-based policy examples for Amazon Bedrock AgentCore](#).

## Resource-based policies within AgentCore

### Supports resource-based policies: No

Resource-based policies are JSON policy documents that you attach to a resource. Examples of resource-based policies are IAM *role trust policies* and Amazon S3 *bucket policies*. In services that support resource-based policies, service administrators can use them to control access to a specific resource. For the resource where the policy is attached, the policy defines what actions a specified principal can perform on that resource and under what conditions. You must [specify a principal](#) in a resource-based policy. Principals can include accounts, users, roles, federated users, or AWS services.

To enable cross-account access, you can specify an entire account or IAM entities in another account as the principal in a resource-based policy. For more information, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

## Policy actions for AgentCore

### Supports policy actions: Yes

Administrators can use AWS JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Action element of a JSON policy describes the actions that you can use to allow or deny access in a policy. Include actions in a policy to grant permissions to perform the associated operation.

To see a list of AgentCore actions, see [Actions Defined by Amazon Bedrock AgentCore](#) in the *Service Authorization Reference*.

Policy actions in AgentCore use the following prefix before the action:

```
bedrock-agentcore
```

To specify multiple actions in a single statement, separate them with commas.

```
"Action": [
 "bedrock-agentcore:action1",
 "bedrock-agentcore:action2"
]
```

To view examples of AgentCore identity-based policies, see [Identity-based policy examples for Amazon Bedrock AgentCore](#).

## Policy resources for AgentCore

**Supports policy resources:** Yes

Administrators can use AWS JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Resource JSON policy element specifies the object or objects to which the action applies. As a best practice, specify a resource using its [Amazon Resource Name \(ARN\)](#). For actions that don't support resource-level permissions, use a wildcard (\*) to indicate that the statement applies to all resources.

```
"Resource": "*"
```

To see a list of AgentCore resource types and their ARNs, see [Resources Defined by Amazon Bedrock AgentCore](#) in the *Service Authorization Reference*. To learn with which actions you can specify the ARN of each resource, see [Actions Defined by Amazon Bedrock AgentCore](#).

To view examples of AgentCore identity-based policies, see [Identity-based policy examples for Amazon Bedrock AgentCore](#).

## Policy condition keys for AgentCore

**Supports service-specific policy condition keys:** Yes

Administrators can use AWS JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Condition element specifies when statements execute based on defined criteria. You can create conditional expressions that use [condition operators](#), such as equals or less than, to match the condition in the policy with values in the request. To see all AWS global condition keys, see [AWS global condition context keys](#) in the *IAM User Guide*.

To see a list of AgentCore condition keys, see [Condition Keys for Amazon Bedrock AgentCore](#) in the *Service Authorization Reference*. To learn with which actions and resources you can use a condition key, see [Actions Defined by Amazon Bedrock AgentCore](#).

The following condition keys are especially useful when working with Amazon Bedrock AgentCore:

- `bedrock-agentcore:InboundJwtClaim/iss` - You can use this condition key to restrict access to APIs that accept a JWT representing an enduser to work with specific issuer (iss) claim values present in the JWT passed in the request. You can apply this condition key to the `GetWorkloadAccessTokenForJwt` and `CompleteResourceTokenAuth` operations.
- `bedrock-agentcore:InboundJwtClaim/sub` - You can use this condition key to restrict access to APIs that accept a JWT to work with specific subject (sub) claim values present in the JWT passed in the request. You can apply this condition key to the `GetWorkloadAccessTokenForJwt` and `CompleteResourceTokenAuth` operations.
- `bedrock-agentcore:InboundJwtClaim/aud` - You can use this condition key to restrict access to APIs that accept a JWT to work with specific audience (aud) claim values present in the JWT passed in the request. You can apply this condition key to the `GetWorkloadAccessTokenForJwt` and `CompleteResourceTokenAuth` operations.
- `bedrock-agentcore:userid` - You can use this condition key to restrict access to APIs that accept a static user ID to work only with the defined user ID values in your policy statement. You can apply this condition key to the `GetWorkloadAccessTokenForUserId` and `CompleteResourceTokenAuth` operations.
- `bedrock-agentcore:InboundJwtClaim/scope` - You can use this condition key to restrict access based on the scope claim in the JWT passed in the request.

- `bedrock-agentcore:InboundJwtClaim/client_id` - You can use this condition key to restrict access to APIs that accept a JWT to work with specific `client_id` claim values present in the JWT passed in the request. This key is only available when the JWT has the `client_id` claim exactly and is not available when the information is communicated in other similar claims. You can apply this condition key to the `GetWorkloadAccessTokenForJwt` and `CompleteResourceTokenAuth` operations.

To view examples of AgentCore identity-based policies, see [Identity-based policy examples for Amazon Bedrock AgentCore](#).

## ACLs in AgentCore

**Supports ACLs:** No

Access control lists (ACLs) control which principals (account members, users, or roles) have permissions to access a resource. ACLs are similar to resource-based policies, although they do not use the JSON policy document format.

## ABAC with AgentCore

**Supports ABAC (tags in policies):** Partial

Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes called tags. You can attach tags to IAM entities and AWS resources, then design ABAC policies to allow operations when the principal's tag matches the tag on the resource.

To control access based on tags, you provide tag information in the [condition element](#) of a policy using the `aws:ResourceTag/key-name`, `aws:RequestTag/key-name`, or `aws:TagKeys` condition keys.

If a service supports all three condition keys for every resource type, then the value is **Yes** for the service. If a service supports all three condition keys for only some resource types, then the value is **Partial**.

For more information about ABAC, see [Define permissions with ABAC authorization](#) in the *IAM User Guide*. To view a tutorial with steps for setting up ABAC, see [Use attribute-based access control \(ABAC\)](#) in the *IAM User Guide*.

## Using temporary credentials with AgentCore

**Supports temporary credentials:** Yes

Temporary credentials provide short-term access to AWS resources and are automatically created when you use federation or switch roles. AWS recommends that you dynamically generate temporary credentials instead of using long-term access keys. For more information, see [Temporary security credentials in IAM](#) and [AWS services that work with IAM](#) in the *IAM User Guide*.

## Cross-service principal permissions for AgentCore

**Supports forward access sessions (FAS):** Yes

Forward access sessions (FAS) use the permissions of the principal calling an AWS service, combined with the requesting AWS service to make requests to downstream services. For policy details when making FAS requests, see [Forward access sessions](#).

## Service roles for AgentCore

**Supports service roles:** Yes

A service role is an [IAM role](#) that a service assumes to perform actions on your behalf. An IAM administrator can create, modify, and delete a service role from within IAM. For more information, see [Create a role to delegate permissions to an AWS service](#) in the *IAM User Guide*.

### Warning

Changing the permissions for a service role might break AgentCore functionality. Edit service roles only when AgentCore provides guidance to do so.

## Service-linked roles for AgentCore

**Supports service-linked roles:** Yes

A service-linked role is a type of service role that is linked to an AWS service. The service can assume the role to perform an action on your behalf. Service-linked roles appear in your AWS account and are owned by the service. An IAM administrator can view, but not edit the permissions for service-linked roles.

For details about creating or managing service-linked roles, see [AWS services that work with IAM](#). Find a service in the table that includes a Yes in the **Service-linked role** column. Choose the **Yes** link to view the service-linked role documentation for that service.

# Identity-based policy examples for Amazon Bedrock AgentCore

By default, users and roles don't have permission to create or modify AgentCore resources. To grant users permission to perform actions on the resources that they need, an IAM administrator can create IAM policies.

To learn how to create an IAM identity-based policy by using these example JSON policy documents, see [Create IAM policies \(console\)](#) in the *IAM User Guide*.

For details about actions and resource types defined by AgentCore, including the format of the ARNs for each of the resource types, see [Actions, Resources, and Condition Keys for Amazon Bedrock AgentCore](#) in the *Service Authorization Reference*.

## Topics

- [Policy best practices](#)
- [Using the AgentCore console](#)
- [Allow users to view their own permissions](#)

## Policy best practices

Identity-based policies determine whether someone can create, access, or delete AgentCore resources in your account. These actions can incur costs for your AWS account. When you create or edit identity-based policies, follow these guidelines and recommendations:

- **Get started with AWS managed policies and move toward least-privilege permissions** – To get started granting permissions to your users and workloads, use the *AWS managed policies* that grant permissions for many common use cases. They are available in your AWS account. We recommend that you reduce permissions further by defining AWS customer managed policies that are specific to your use cases. For more information, see [AWS managed policies](#) or [AWS managed policies for job functions](#) in the *IAM User Guide*.
- **Apply least-privilege permissions** – When you set permissions with IAM policies, grant only the permissions required to perform a task. You do this by defining the actions that can be taken on specific resources under specific conditions, also known as *least-privilege permissions*. For more information about using IAM to apply permissions, see [Policies and permissions in IAM](#) in the *IAM User Guide*.
- **Use conditions in IAM policies to further restrict access** – You can add a condition to your policies to limit access to actions and resources. For example, you can write a policy condition to

specify that all requests must be sent using SSL. You can also use conditions to grant access to service actions if they are used through a specific AWS service, such as AWS CloudFormation. For more information, see [IAM JSON policy elements: Condition](#) in the *IAM User Guide*.

- **Use IAM Access Analyzer to validate your IAM policies to ensure secure and functional permissions** – IAM Access Analyzer validates new and existing policies so that the policies adhere to the IAM policy language (JSON) and IAM best practices. IAM Access Analyzer provides more than 100 policy checks and actionable recommendations to help you author secure and functional policies. For more information, see [Validate policies with IAM Access Analyzer](#) in the *IAM User Guide*.
- **Require multi-factor authentication (MFA)** – If you have a scenario that requires IAM users or a root user in your AWS account, turn on MFA for additional security. To require MFA when API operations are called, add MFA conditions to your policies. For more information, see [Secure API access with MFA](#) in the *IAM User Guide*.

For more information about best practices in IAM, see [Security best practices in IAM](#) in the *IAM User Guide*.

## Using the AgentCore console

To access the Amazon Bedrock AgentCore console, you must have a minimum set of permissions. These permissions must allow you to list and view details about the AgentCore resources in your AWS account. If you create an identity-based policy that is more restrictive than the minimum required permissions, the console won't function as intended for entities (users or roles) with that policy.

You don't need to allow minimum console permissions for users that are making calls only to the AWS CLI or the AWS API. Instead, allow access to only the actions that match the API operation that they're trying to perform.

To ensure that users and roles can still use the AgentCore console, also attach the AgentCore [ConsoleAccess](#) or [ReadOnly](#) AWS managed policy to the entities. For more information, see [Adding permissions to a user](#) in the *IAM User Guide*.

## Allow users to view their own permissions

This example shows how you might create a policy that allows IAM users to view the inline and managed policies that are attached to their user identity. This policy includes permissions to complete this action on the console or programmatically using the AWS CLI or AWS API.

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "ViewOwnUserInfo",
 "Effect": "Allow",
 "Action": [
 "iam:GetUserPolicy",
 "iam>ListGroupsForUser",
 "iam>ListAttachedUserPolicies",
 "iam>ListUserPolicies",
 "iam GetUser"
],
 "Resource": ["arn:aws:iam::*:user/${aws:username}"]
 },
 {
 "Sid": "NavigateInConsole",
 "Effect": "Allow",
 "Action": [
 "iam:GetGroupPolicy",
 "iam:GetPolicyVersion",
 "iam GetPolicy",
 "iam>ListAttachedGroupPolicies",
 "iam>ListGroupPolicies",
 "iam>ListPolicyVersions",
 "iam>ListPolicies",
 "iam>ListUsers"
],
 "Resource": "*"
 }
]
}
```

## AWS managed policies for Amazon Bedrock AgentCore

An AWS managed policy is a standalone policy that is created and administered by AWS. AWS managed policies are designed to provide permissions for many common use cases so that you can start assigning permissions to users, groups, and roles.

Keep in mind that AWS managed policies might not grant least-privilege permissions for your specific use cases because they're available for all AWS customers to use. We recommend that you reduce permissions further by defining [customer managed policies](#) that are specific to your use cases.

You cannot change the permissions defined in AWS managed policies. If AWS updates the permissions defined in an AWS managed policy, the update affects all principal identities (users, groups, and roles) that the policy is attached to. AWS is most likely to update an AWS managed policy when a new AWS service is launched or new API operations become available for existing services.

For more information, see [AWS managed policies](#) in the *IAM User Guide*.

## AWS managed policy: `BedrockAgentCoreFullAccess`

You can attach [`BedrockAgentCoreFullAccess`](#) to your users, groups, and roles.

This policy grants permissions that allow full access to the Amazon Bedrock AgentCore.

### Permissions details

This policy includes the following permissions:

- `bedrock-agentcore` (Amazon Bedrock Agent Core) – Allows principals full access to all Amazon Bedrock Agent Core resources.
- `iam` (AWS Identity and Access Management) – Allows principals to list and get information about roles and policies, and to pass roles with "BedrockAgentCore" in the name to the bedrock-agentcore service. Also allows creating service-linked roles for CloudWatch Application Signals, Amazon Bedrock AgentCore network, and Amazon Bedrock AgentCore runtime identity.
- `secretsmanager` (AWS Secrets Manager) – Allows principals to create, update, retrieve, and delete secrets with names that begin with "bedrock-agentcore".
- `kms` (AWS Key Management Service) – Allows principals to list and describe keys, and to decrypt data within the same AWS account when called via the Bedrock Agent Core service.

- `s3` (Amazon Simple Storage Service) – Allows principals to get objects from S3 buckets with names that begin with "bedrock-agentcore-gateway-" when called via the Bedrock Agent Core service.
- `lambda` (AWS Lambda) – Allows principals to list Lambda functions.
- `logs` (Amazon CloudWatch Logs) – Allows principals to access, query, and manage log data in log groups related to Bedrock Agent Core and Application Signals, including creating log groups and streams.
- `application-autoscaling` (Application Auto Scaling) – Allows principals to describe scaling policies.
- `application-signals` (Amazon CloudWatch Application Signals) – Allows principals to retrieve information about application signals and start discovery.
- `autoscaling` (Amazon EC2 Auto Scaling) – Allows principals to describe Auto Scaling resources.
- `cloudwatch` (Amazon CloudWatch) – Allows principals to retrieve and list metrics, generate queries, and access other CloudWatch resources.
- `oam` (Amazon CloudWatch Observability Access Manager) – Allows principals to list sinks.
- `rum` (Amazon CloudWatch RUM) – Allows principals to retrieve and list RUM resources.
- `synthetics` (Amazon CloudWatch Synthetics) – Allows principals to describe and get information about Synthetics resources.
- `xray` (AWS X-Ray) – Allows principals to retrieve trace information, manage trace segment destinations, and work with indexing rules.

## AWS managed policy: `BedrockAgentCoreNetworkServiceRolePolicy`

This policy is attached to a service-linked role that allows the service to perform actions on your behalf. You cannot attach this policy to your users, groups, or roles.

This policy grants permissions that allow AgentCore to create and manage network interfaces in your VPC when running in VPC mode.

### Permissions details

This policy includes the following permissions:

- `ec2` (Amazon Elastic Compute Cloud) – Allows the service to create, manage, and delete network interfaces in your VPC, assign and unassign private IP addresses, and describe VPC resources.

Network interfaces are tagged with "AmazonBedrockAgentCoreManaged" to ensure the service only manages resources it creates.

You can view this policy at [BedrockAgentCoreNetworkServiceRolePolicy](#).

For more information about the service-linked role that uses this policy, see [Using service-linked roles for Amazon Bedrock AgentCore](#).

### AWS managed policy:

#### **AmazonBedrockAgentCoreMemoryBedrockModelInferenceExecutionRolePolicy**

You can attach [AmazonBedrockAgentCoreMemoryBedrockModelInferenceExecutionRolePolicy](#) to your users, groups, and roles.

This policy grants permissions that allow full access to the Amazon Bedrock Agent Core Memory.

### Permissions details

This policy includes the following permissions.

- bedrock – Allows principals to call the Amazon Bedrock Invokemodel and InvokeModelWithResponseStream actions. This is required so that an agent can store memories.

### **AWS managed policy: BedrockAgentCoreRuntimeIdentityServiceRolePolicy**

This policy is attached to a service-linked role that allows the service to perform actions on your behalf. You cannot attach this policy to your users, groups, or roles.

This policy grants permissions that allow access to identity and token management resources that are required for AgentCore Runtime authentication and authorization.

### Permissions details

This policy includes the following permissions:

- `bedrock-agentcore` (Amazon Bedrock Agent Core) – Allows the service to get workload access tokens for JWT authentication and user ID-based authentication. Specifically allows `GetWorkloadAccessToken`, `GetWorkloadAccessTokenForJWT`, and `GetWorkloadAccessTokenForUserId` actions on the default workload identity directory and its associated workload identities.

## Policy contents

You can view the complete policy at [BedrockAgentCoreRuntimeldentityServiceRolePolicy](#).

For more information about the service-linked role that uses this policy, see [Using service-linked roles for Amazon Bedrock AgentCore](#).

## AgentCore updates to AWS managed policies

View details about updates to AWS managed policies for AgentCore since this service began tracking these changes. For automatic alerts about changes to this page, subscribe to the RSS feed on the AgentCore Document history page.

Change	Description	Date
<a href="#">BedrockAgentCoreRuntimeldentityServiceRolePolicy</a> – New policy	Added a new AWS managed policy that allows AgentCore to manage workload identity access tokens and OAuth credentials for agent runtimes.	October 10, 2025
<a href="#">BedrockAgentCoreFullAccess</a> – Updated policy	Added permission to create the Amazon Bedrock AgentCore runtime identity service-linked role.	October 9, 2025
<a href="#">BedrockAgentCoreFullAccess</a> – Updated policy	Added permission to create the Amazon Bedrock	October 8, 2025

Change	Description	Date
	AgentCore runtime identity service-linked role.	
<a href="#"><u>BedrockAgentCoreFullAccess</u></a> – Updated policy	Added permission to create the Amazon Bedrock AgentCore network service-linked role.	September 19, 2025
<a href="#"><u>BedrockAgentCoreNetworkServiceRolePolicy</u></a> – New policy	Added a new AWS managed policy that allows AgentCore to create and manage network interfaces in your VPC when running in VPC mode.	September 19, 2025
AgentCore started tracking changes	AgentCore started tracking changes for its AWS managed policies.	July 16, 2025

## Using service-linked roles for Amazon Bedrock AgentCore

Amazon Bedrock AgentCore uses AWS Identity and Access Management (IAM) service-linked roles. A service-linked role is a unique type of IAM role that is linked directly to AgentCore. Service-linked roles are predefined by AgentCore and include all the permissions that the service requires to call other AWS services on your behalf.

A service-linked role makes using AgentCore easier because you don't have to manually add the necessary permissions. AgentCore defines the permissions of its service-linked roles, and unless defined otherwise, only AgentCore can assume its roles. The defined permissions include the trust policy and the permissions policy, and that permissions policy cannot be attached to any other IAM entity.

You can delete the roles only after first deleting their related resources. This protects your AgentCore resources because you can't inadvertently remove permission to access the resources.

AgentCore uses the following service-linked roles:

- `AWSServiceRoleForBedrockAgentCoreNetwork` - Manages network interfaces in your VPC
- `AWSServiceRoleForBedrockAgentCoreRuntimeIdentity` - Manages workload identity access tokens and OAuth credentials for agent runtimes

## AgentCore service-linked role permissions

### Network service-linked role

AgentCore uses the service-linked role named `AWSServiceRoleForBedrockAgentCoreNetwork` to allow AgentCore to create and manage network interfaces in your VPC on your behalf.

The `AWSServiceRoleForBedrockAgentCoreNetwork` service-linked role trusts the following services to assume the role:

- `network.bedrock-agentcore.amazonaws.com`

The role permissions policy allows AgentCore to complete the following actions on the specified resources:

You can view the complete policy at [BedrockAgentCoreNetworkServiceRolePolicy](#).

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "AllowCreateEniInAnySubnet",
 "Effect": "Allow",
 "Action": "ec2:CreateNetworkInterface",
 "Resource": "arn:aws:ec2:*:subnet/*"
 },
 {
 "Sid": "AllowCreateEniWithSecurityGroups",
 "Effect": "Allow",
 "Action": "ec2:CreateNetworkInterface",
 "Resource": "arn:aws:ec2:*:security-group/*"
 },
 {
 "Sid": "AllowCreateEniWithBedrockManagedRequestTag",
 "Effect": "Allow",
 "Action": "ec2:CreateNetworkInterface",
 "Resource": "arn:aws:ec2:*:network-interface/*",
 }
]
}
```

```
"Condition": {
 "ForAllValues:StringEquals": {
 "aws:TagKeys": [
 "AmazonBedrockAgentCoreManaged"
]
 },
 "StringEquals": {
 "aws:RequestTag/AmazonBedrockAgentCoreManaged": "true"
 }
},
{
 "Sid": "AllowTagEniOnCreate",
 "Effect": "Allow",
 "Action": "ec2:CreateTags",
 "Resource": "arn:aws:ec2:*:*:network-interface/*",
 "Condition": {
 "StringEquals": {
 "ec2:CreateAction": "CreateNetworkInterface"
 }
 }
},
{
 "Sid": "AllowManageEniWhenBedrockManaged",
 "Effect": "Allow",
 "Action": [
 "ec2:DeleteNetworkInterface",
 "ec2:AssignPrivateIpAddresses",
 "ec2:UnassignPrivateIpAddresses",
 "ec2:CreateNetworkInterfacePermission"
],
 "Resource": "arn:aws:ec2:*:*:network-interface/*",
 "Condition": {
 "StringEquals": {
 "aws:ResourceTag/AmazonBedrockAgentCoreManaged": "true"
 }
 }
},
{
 "Sid": "AllowGetSecurityGroupsForVpc",
 "Effect": "Allow",
 "Action": [
 "ec2:GetSecurityGroupsForVPC"
],
```

```
 "Resource": "arn:aws:ec2:*:*:vpc/*"
 },
 {
 "Sid": "AllowDescribeNetworkingResources",
 "Effect": "Allow",
 "Action": [
 "ec2:DescribeNetworkInterfaces",
 "ec2:DescribeSecurityGroups",
 "ec2:DescribeSubnets",
 "ec2:DescribeVpcs"
],
 "Resource": "*"
 }
]
```

## Identity service-linked role

AgentCore uses the service-linked role named `AWSServiceRoleForBedrockAgentCoreRuntimeIdentity` to allow AgentCore to manage workload identity access tokens and OAuth credentials on your behalf.

The `AWSServiceRoleForBedrockAgentCoreRuntimeIdentity` service-linked role trusts the following services to assume the role:

- `runtime-identity.bedrock-agentcore.amazonaws.com`

The role permissions policy allows AgentCore to complete these actions on the specified resources.

You can view the complete policy at [BedrockAgentCoreRuntimeIdentityServiceRolePolicy](#).

```
{
 "Version": "2012-10-17",
 "Statement": {
 "Sid": "AllowWorkloadIdentityAccess",
 "Effect": "Allow",
 "Action": [
 "bedrock-agentcore:GetWorkloadAccessToken",
 "bedrock-agentcore:GetWorkloadAccessTokenForJWT",
 "bedrock-agentcore:GetWorkloadAccessTokenForUserId"
],
 "Resource": [
 "arn:aws:lambda:us-east-1:123456789012:function:workload-identity-access"
]
 }
}
```

```
 "arn:aws:bedrock-agentcore:::workload-identity-directory/default",
 "arn:aws:bedrock-agentcore:::workload-identity-directory/default/
workload-identity/*"
]
}
}
```

For information about changes to this policy, see [AgentCore updates to AWS managed policies](#).

## Understanding the Identity Feature

The service-linked role is used to support OAuth authentication and JWT bearer token features for AgentCore Runtime resources. This feature allows agent runtimes to securely manage workload identities and access external OAuth providers on behalf of users.

## Key Benefits of Identity Management

- **Simplified Permission Management:** Eliminates the need to manually configure IAM policies for workload identity access
- **Secure Token Management:** Provides secure access to workload access tokens for OAuth flows
- **User Federation:** Enables three-legged OAuth flows for accessing external services like Google Drive, Microsoft Graph, etc.
- **Automatic Provisioning:** Service-linked role is created automatically when needed

## How Identity Management Works

When you invoke an AgentCore Runtime with OAuth authentication or JWT bearer tokens:

1. You configure JWT authorizer settings (discovery URL, allowed clients, allowed audiences) during runtime creation
2. AgentCore creates the service-linked role automatically to manage workload identity permissions
3. The runtime uses the service-linked role to exchange JWT tokens for workload access tokens
4. Your agent code can use these tokens to access external OAuth providers and services
5. All token management is handled securely through the AgentCore Identity service

## Migration from Legacy Approach

For existing agents (created before October 13, 2025)

- Continue to use manual IAM policies attached to the agent execution role
- No automatic migration - existing behavior is preserved

For new agents (created on or after October 13, 2025)

- Automatically use the service-linked role approach
- No manual IAM policy configuration required
- Simplified setup and management

The service-linked role ensures that AgentCore can only access workload identity resources that are explicitly associated with your agent runtimes, maintaining secure isolation and clear resource attribution.

For implementation details, see [Authenticate and authorize with Inbound Auth and Outbound Auth](#).

## Creating a service-linked role for AgentCore

You don't need to manually create service-linked roles. AgentCore creates them automatically when needed:

- **Network service-linked role:** Created when you create an AgentCore Runtime, Code Interpreter, or Browser resources with VPC configuration
- **Identity service-linked role:** Created when you create or update an AgentCore Runtime on or after **October 13, 2025**

If you delete a service-linked role and then need to create it again, you can use the same process to re-create the role in your account. When you create the appropriate AgentCore resources, AgentCore creates the service-linked role for you again.

### Permissions required to create a service-linked role

You must configure permissions to allow an IAM entity (such as a user, group, or role) to create, edit, or delete a service-linked role. The IAM entity needs to have the following permissions:

#### For the Network service-linked role

```
{
 "Action": "iam:CreateServiceLinkedRole",
 "Effect": "Allow",
 "Resource": "arn:aws:iam::*:role/aws-service-role/network.bedrock-
agentcore.amazonaws.com/AWSServiceRoleForBedrockAgentCoreNetwork",
 "Condition": {
 "StringLike": {
 "iam:AWSPropertyName": "network.bedrock-agentcore.amazonaws.com"
 }
 }
}
```

## For the Identity service-linked role

```
{
 "Sid": "CreateBedrockAgentCoreRuntimeIdentityServiceLinkedRolePermissions",
 "Effect": "Allow",
 "Action": "iam:CreateServiceLinkedRole",
 "Resource": "arn:aws:iam::*:role/aws-service-role/runtime-identity.bedrock-
agentcore.amazonaws.com/AWSServiceRoleForBedrockAgentCoreRuntimeIdentity",
 "Condition": {
 "StringEquals": {
 "iam:AWSPropertyName": "runtime-identity.bedrock-agentcore.amazonaws.com"
 }
 }
}
```

These permissions are already included in the AWS managed policy [BedrockAgentCoreFullAccess](#).

## Editing a service-linked role for AgentCore

AgentCore does not allow you to edit the AWSServiceRoleForBedrockAgentCoreNetwork or AWSServiceRoleForBedrockAgentCoreRuntimeIdentity service-linked roles. After you create a service-linked role, you cannot change the name of the role because various entities might reference the role. However, you can edit the description of the role using IAM. For more information, see [Editing a service-linked role](#).

## Deleting a service-linked role for AgentCore

If you no longer need to use a feature or service that requires a service-linked role, we recommend that you delete that role. That way you don't have an unused entity that is not actively monitored

or maintained. However, you must delete all your AgentCore resources that use the service-linked role before you can delete the role:

- **Network service-linked role:** Delete all AgentCore Runtime, Code Interpreter, and Browser resources with VPC configuration
- **Identity service-linked role:** Delete all AgentCore Runtime resources

## Cleaning up a service-linked role

Before you can use IAM to delete a service-linked role, you must first confirm that the role has no active sessions and remove any resources used by the role.

### To check whether the service-linked role has an active session in the IAM console

1. Sign in to the AWS Management Console and open the IAM console at <https://console.aws.amazon.com/iam/>.
2. In the navigation pane of the IAM console, choose **Roles**, and then choose the name (not the check box) of the `AWSServiceRoleForBedrockAgentCoreNetwork` role.
3. On the **Summary** page for the selected role, choose the **Access Advisor** tab.
4. On the **Access Advisor** tab, review the recent activity for the service-linked role.

#### Note

If you are unsure whether AgentCore is using a service-linked role, you can try to delete the role. If the service is using the role, then the deletion fails and you can view the Regions where the role is being used. If the role is being used, then you must wait for the session to end before you can delete the role. You cannot revoke the session for a service-linked role.

If you want to remove a service-linked role, you must first delete the appropriate AgentCore resources:

- `AWSServiceRoleForBedrockAgentCoreNetwork`: Delete all AgentCore Runtime, Code Interpreter, and Browser resources with VPC configuration
- `AWSServiceRoleForBedrockAgentCoreRuntimeIdentity`: Delete all AgentCore Runtime resources

## Manually delete the service-linked role

Use the IAM console, the AWS CLI, or the IAM API to delete service-linked roles. For more information, see [Deleting a service-linked role](#).

# Understanding Credentials Management in Amazon Bedrock AgentCore

## MicroVM Metadata Service (MMDS)

When you configure an execution role with Amazon Bedrock AgentCore Browser, AgentCore Code Interpreter, or AgentCore Runtime, the underlying compute uses MMDS to access credentials, similar to how EC2 instances use the [Instance Metadata Service \(IMDS\)](#). This allows the service within the VM to retrieve temporary AWS credentials for operations like S3 access. This is independent of the network mode that the AgentCore Code Interpreter, AgentCore Browser, or AgentCore Runtime is running in.

### Important

When configuring the execution role permissions, use careful consideration since any code or actor running inside the VM can access these credentials by calling the metadata endpoint.

## Best Practices for Role Setup

- Follow the principle of least privilege when setting up the execution role. Especially when using these tools with LLMs, that can generate arbitrary code, it's crucial to limit permissions to only what you intend.
- Avoid privilege escalation by ensuring that the execution role associated with your resource has equal or fewer privileges than the users who can invoke it.

The following shows an example of properly scoped permissions:

```
{
 "Effect": "Allow",
 "Action": ["s3:GetObject", "s3:PutObject"],
 "Resource": "arn:aws:s3:::<your-specific-bucket>/*"
}
```

# Troubleshooting Amazon Bedrock AgentCore identity and access

Use the following information to help you diagnose and fix common issues that you might encounter when working with AgentCore and IAM.

## Topics

- [I am not authorized to perform an action in AgentCore](#)
- [I am not authorized to perform iam:PassRole](#)
- [I want to allow people outside of my AWS account to access my AgentCore resources](#)

## I am not authorized to perform an action in AgentCore

If you receive an error that you're not authorized to perform an action, your policies must be updated to allow you to perform the action.

The following example error occurs when the mateojackson IAM user tries to use the console to view details about a fictional *my-example-widget* resource but doesn't have the fictional bedrock-agentcore:*GetWidget* permissions.

```
User: arn:aws:iam::123456789012:user/mateojackson is not authorized to perform:
bedrock-agentcore:GetWidget on resource: my-example-widget
```

In this case, the policy for the mateojackson user must be updated to allow access to the *my-example-widget* resource by using the bedrock-agentcore:*GetWidget* action.

If you need help, contact your AWS administrator. Your administrator is the person who provided you with your sign-in credentials.

## I am not authorized to perform iam:PassRole

If you receive an error that you're not authorized to perform the iam:PassRole action, your policies must be updated to allow you to pass a role to AgentCore.

Some AWS services allow you to pass an existing role to that service instead of creating a new service role or service-linked role. To do this, you must have permissions to pass the role to the service.

The following example error occurs when an IAM user named `marymajor` tries to use the console to perform an action in AgentCore. However, the action requires the service to have permissions that are granted by a service role. Mary does not have permissions to pass the role to the service.

```
User: arn:aws:iam::123456789012:user/marymajor is not authorized to perform:
 iam:PassRole
```

In this case, Mary's policies must be updated to allow her to perform the `iam:PassRole` action.

If you need help, contact your AWS administrator. Your administrator is the person who provided you with your sign-in credentials.

## I want to allow people outside of my AWS account to access my AgentCore resources

You can create a role that users in other accounts or people outside of your organization can use to access your resources. You can specify who is trusted to assume the role. For services that support resource-based policies or access control lists (ACLs), you can use those policies to grant people access to your resources.

To learn more, consult the following:

- To learn whether AgentCore supports these features, see [How Amazon Bedrock AgentCore works with IAM](#).
- To learn how to provide access to your resources across AWS accounts that you own, see [Providing access to an IAM user in another AWS account that you own](#) in the *IAM User Guide*.
- To learn how to provide access to your resources to third-party AWS accounts, see [Providing access to AWS accounts owned by third parties](#) in the *IAM User Guide*.
- To learn how to provide access through identity federation, see [Providing access to externally authenticated users \(identity federation\)](#) in the *IAM User Guide*.
- To learn the difference between using roles and resource-based policies for cross-account access, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

## Compliance validation for Amazon Bedrock AgentCore

AWS has completed its internal assessment to validate that Amazon Bedrock AgentCore aligns with several of the AWS compliance programs. In addition, Amazon Bedrock AgentCore is pursuing

FedRAMP compliance. Our third-party auditors will review and test Amazon Bedrock AgentCore during the next audit cycles for these compliance programs.

To learn whether an AWS service is within the scope of specific compliance programs, see [AWS services in Scope by Compliance Program](#) and choose the compliance program that you are interested in. For general information, see [AWS Compliance Programs](#).

You can download third-party audit reports using AWS Artifact. For more information, see [Downloading Reports in AWS Artifact](#).

Your compliance responsibility when using AWS services is determined by the sensitivity of your data, your company's compliance objectives, and applicable laws and regulations. For more information about your compliance responsibility when using AWS services, see [AWS Security Documentation](#).

## Resilience in Amazon Bedrock AgentCore

The AWS global infrastructure is built around AWS Regions and Availability Zones. AWS Regions provide multiple physically separated and isolated Availability Zones, which are connected with low-latency, high-throughput, and highly redundant networking. With Availability Zones, you can design and operate applications and databases that automatically fail over between zones without interruption. Availability Zones are more highly available, fault tolerant, and scalable than traditional single or multiple data center infrastructures.

For more information about AWS Regions and Availability Zones, see [AWS Global Infrastructure](#).

In addition to the AWS global infrastructure, AgentCore offers several features to help support your data resiliency and backup needs.

## Cross-service confused deputy prevention

The confused deputy problem is a security issue where an entity that doesn't have permission to perform an action can coerce a more-privileged entity to perform the action. In AWS, cross-service impersonation can result in the confused deputy problem. Cross-service impersonation can occur when one service (the *calling service*) calls another service (the *called service*). The calling service can be manipulated to use its permissions to act on another customer's resources in a way it should not otherwise have permission to access. To prevent this, AWS provides tools that help you protect your data for all services with service principals that have been given access to resources in your account.

We recommend using the [aws:SourceArn](#) and [aws:SourceAccount](#) global condition context keys in resource policies to limit the permissions that Amazon Bedrock AgentCore gives another service to the resource. Use aws:SourceArn if you want only one resource to be associated with the cross-service access. Use aws:SourceAccount if you want to allow any resource in that account to be associated with the cross-service use.

The most effective way to protect against the confused deputy problem is to use the aws:SourceArn global condition context key with the full ARN of the resource. If you don't know the full ARN of the resource or if you are specifying multiple resources, use the aws:SourceArn global context condition key with wildcard characters (\*) for the unknown portions of the ARN. For example, arn:aws:*servicename*:\*:123456789012:\*.

If the aws:SourceArn value does not contain the account ID, such as an Amazon S3 bucket ARN, you must use both global condition context keys to limit permissions.

The following example shows how you can use the aws:SourceArn and aws:SourceAccount global condition context keys in AgentCore to prevent the confused deputy problem.

#### JSON

```
{
 "Version": "2012-10-17",
 "Statement": [
 {
 "Sid": "AssumeRolePolicy",
 "Effect": "Allow",
 "Principal": {
 "Service": "bedrock-agentcore.amazonaws.com"
 },
 "Action": "sts:AssumeRole",
 "Condition": {
 "StringEquals": {
 "aws:SourceAccount": "123456789012"
 },
 "ArnLike": {
 "aws:SourceArn": "arn:aws:bedrock-agentcore:us-
east-1:123456789012:*"
 }
 }
 }
]
```

{}

# Tagging AgentCore resources

A *tag* is a label that you assign to an AWS resource. Each tag consists of a *key* and an optional *value*, both of which you define.

Tags enable you to categorize your AWS resources in different ways, for example, by purpose, owner, or environment. This is useful when you have many resources of the same type—you can quickly identify a specific resource based on the tags you've assigned to it.

## Tagging overview

Each tag consists of a key and an optional value. For example, you could define a set of tags for your account's AgentCore resources that helps you track each resource's owner and stack level.

We recommend that you devise a set of tag keys that meets your needs for each resource type. Using a consistent set of tag keys makes it easier for you to manage your resources. You can search and filter the resources based on the tags you add.

Tags don't have any semantic meaning to AgentCore and are interpreted strictly as a string of characters. Also, tags are not automatically assigned to your resources. You can edit tag keys and values, and you can remove tags from a resource at any time. You can set the value of a tag to an empty string, but you can't set the value of a tag to null. If you add a tag that has the same key as an existing tag on that resource, the new value overwrites the old value. If you delete a resource, any tags for the resource are also deleted.

## Resources that support tagging

The following AgentCore resources support tagging:

- Agent runtime
- Agent runtime endpoint
- Code interpreter
- Browser
- Gateway
- Workload identity
- OAuth2 credential provider

- API key credential provider
- Workload identity directory
- Token vault
- AgentCore Memory

## Tag restrictions

The following basic restrictions apply to tags:

- Maximum number of tags per resource – 50
- For each resource, each tag key must be unique, and each tag key can have only one value.
- Maximum key length – 128 Unicode characters in UTF-8
- Maximum value length – 256 Unicode characters in UTF-8
- If your tagging schema is used across multiple services and resources, remember that other services may have restrictions on allowed characters. Generally allowed characters are: letters, numbers, and spaces representable in UTF-8, and the following characters: + - = . \_ : / @.
- Tag keys and values are case-sensitive.
- Don't use aws :, AWS :, or any upper or lowercase combination of such as a prefix for either keys or values as it is reserved for AWS use. You can't edit or delete tag keys or values with this prefix. Tags with this prefix do not count against your tags per resource limit.

## Working with tags

You can add, edit, or delete tags for AgentCore resources using the console, API, or CLI.

### Adding tags

#### Console

You can add tags when you create the following AgentCore resources:

- Agent runtime
- Agent runtime endpoint
- Code interpreter
- Browser

- Gateway
- Workload identity
- OAuth2 credential provider
- API key credential provider

### To add tags when creating a resource

1. Open the AgentCore console.
2. Navigate to the resource type you want to create.
3. Follow the steps to create the resource. When you reach the **Tags** section, choose **Add tag**.
4. Enter a tag key and optionally a tag value.
5. To add more tags, choose **Add tag** again.
6. Complete the resource creation process.

### To add tags to an existing resource

1. Open the AgentCore console.
2. Navigate to the resource type and select the specific resource.
3. Choose the **Tags** tab.
4. Choose **Add tag**, then enter a key and optionally a value.
5. Choose **Save changes**.

## API

You can add tags when you create resources or to existing resources using the AgentCore API.

### Adding tags when creating resources

You can add tags when you create resources using the following API operations:

- [CreateAgentRuntime](#) – Include tags in the tags parameter.
- [CreateAgentRuntimeEndpoint](#) – Include tags in the tags parameter.
- [CreateCodeInterpreter](#) – Include tags in the tags parameter.

- [CreateBrowser](#) – Include tags in the tags parameter.
- [CreateGateway](#) – Include tags in the tags parameter.
- [CreateWorkloadIdentity](#) – Include tags in the tags parameter.
- [CreateOAuth2CredentialProvider](#) – Include tags in the tags parameter.
- [CreateAPIKeyCredentialProvider](#) – Include tags in the tags parameter.

## Adding tags to existing resources

Use the [TagResource](#) operation to add tags to existing resources.

### CLI

You can use the CLI to add tags to AgentCore resources.

### To add tags to a resource

Use the tag-resource command:

```
aws bedrock-agentcore tag-resource \
 --resource-arn arn:aws:bedrock-agentcore:us-east-1:123456789012:agent-runtime/
example-runtime \
 --tags Key=Environment,Value=Production Key=Team,Value=AI
```

## Managing tags

### Console

You can edit tag values for existing resources in the console.

### To edit tags for an existing resource

1. Open the AgentCore console.
2. Navigate to the resource type and select the specific resource.
3. Choose the **Tags** tab.
4. To edit a tag, modify the key or value directly.
5. Choose **Save changes**.

## API

You can use the AgentCore API to list and manage tags for resources.

### Listing tags

Use the [ListTagsForResource](#) operation to list the tags for a resource.

### Updating tags

Use the [TagResource](#) operation to update existing tags by adding new values for existing keys.

## CLI

You can use the CLI to list and manage tags for AgentCore resources.

### To list tags for a resource

Use the `list-tags-for-resource` command:

```
aws bedrock-agentcore list-tags-for-resource \
 --resource-arn arn:aws:bedrock-agentcore:us-east-1:123456789012:agent-runtime/
example-runtime
```

### To update tags for a resource

Use the `tag-resource` command to update existing tags:

```
aws bedrock-agentcore tag-resource \
 --resource-arn arn:aws:bedrock-agentcore:us-east-1:123456789012:agent-runtime/
example-runtime \
 --tags Key=Environment,Value=Staging
```

## Deleting tags

### Console

You can remove tags from resources in the console.

## To delete tags from a resource

1. Open the AgentCore console.
2. Navigate to the resource type and select the specific resource.
3. Choose the **Tags** tab.
4. To delete a tag, choose **Remove** next to the tag.
5. Choose **Save changes**.

## API

You can use the AgentCore API to remove tags from resources.

### Removing tags

Use the [UntagResource](#) operation to remove tags from a resource.

## CLI

You can use the CLI to remove tags from AgentCore resources.

### To remove tags from a resource

Use the `untag-resource` command:

```
aws bedrock-agentcore untag-resource \
--resource-arn arn:aws:bedrock-agentcore:us-east-1:123456789012:agent-runtime/
example-runtime \
--tag-keys Environment Team
```

# Quotas for Amazon Bedrock AgentCore

Your AWS account has default quotas, formerly referred to as limits, for each AWS service. Unless otherwise noted, each quota is Region-specific. You can request increases for some quotas, and other quotas cannot be increased.

To request a quota increase, contact AWS support.

## Topics

- [AgentCore Runtime Service Quotas](#)
- [AgentCore Memory Service Quotas](#)
- [AgentCore Identity Service Quotas](#)
- [AgentCore Gateway Service Quotas](#)
- [AgentCore Browser Service Quotas](#)
- [AgentCore Code Interpreter Service Quotas](#)

## AgentCore Runtime Service Quotas

When working with AgentCore Runtime, you need to be aware of the service limits that apply to your account. These limits help ensure service stability and availability for all users.

### Resource allocation limits

The following table describes the resource allocation limits for AgentCore Runtime:

#### Resource allocation limits

Limit	Default Value	Adjustable	Notes
Active session workloads per account	1,000 in US East (N. Virginia) and US West (Oregon), and 500 in other AWS Regions.	Yes	Can be increased via support ticket
Total agents per account	1,000	Yes	Can be increased via support ticket

Limit	Default Value	Adjustable	Notes
Versions per agent	1,000	Yes	Inactive versions deleted after 45 days
Endpoints (aliases) per agent	10	Yes	Can be increased via support ticket
Maximum size for a Docker image in an AgentCore Runtime	1 GB	No	
Maximum hardware allocation per session	2vCPU/8GB	No	The maximum memory/CPU usage and allocation per Runtime session

## Invocation limits

The following table describes the invocation limits for AgentCore Runtime:

### Invocation limits

Limit	Value	Adjustable	Notes
Request timeout	15 minutes	No	Maximum time for synchronous requests
Maximum payload size	100 MB	No	Maximum size for request/response payloads
Streaming chunk size	10 MB	No	Maximum size for individual chunks
Streaming maximum duration	60 mins	No	Maximum time for streaming connections

Limit	Value	Adjustable	Notes
Asynchronous job maximum duration	8 hours	No	Maximum execution time for asynchronous jobs
Invocations per second	25 per endpoint	Yes	Rate limit for API calls

## Throttling limits

The following table describes the rate limits for AgentCore Runtime after which you will be throttled:

### Throttling limits

Limit	Value	Adjustable	Notes
InvokeAgentRuntime API rate, per agent, per account	25 TPS	Yes	Transactions per second
New sessions created rate, per endpoint	10 TPM	No	Transactions per minute
CreateAgentRuntime API rate	5 TPS	Yes	Transactions per second
CreateAgentRuntime Endpoint API rate	5 TPS	Yes	Transactions per second
GetAgentRuntime API rate	50 TPS	Yes	Transactions per second

Limit	Value	Adjustable	Notes
GetAgentRuntimeEndpoint API rate	50 TPS	Yes	Transactions per second
UpdateAgentRuntime API rate	5 TPS	Yes	Transactions per second
UpdateAgentRuntime Endpoint API rate	5 TPS	Yes	Transactions per second
DeleteAgentRuntime API rate	5 TPS	Yes	Transactions per second
DeleteAgentRuntime Endpoint API rate	5 TPS	Yes	Transactions per second
ListAgentRuntimes API rate	5 TPS	Yes	Transactions per second
ListAgentRuntimeEndpoints API rate	5 TPS	Yes	Transactions per second
ListAgentRuntimeVersions API rate	5 TPS	Yes	Transactions per second

## Lifetime session lifecycle parameters

The following table describes the lifetime session lifecycle parameters for AgentCore Runtime:

## Lifetime session lifecycle parameters

Phase	Timeout	Adjustable	Notes
Idle session timeout	15 minutes of inactivity	Yes, through the <code>idleRuntimeSessionTimeout</code> API parameter in the <code>Lifecycle Configuration</code> data type	When this limit is reached, the execution environment is terminated and a new one is created for the session
Maximum session duration	8 hrs	Yes, through the <code>maxLifetime</code> API parameter in the <code>Lifecycle Configuration</code> data type	

## AgentCore Memory Service Quotas

The following table describes the lifetime session lifecycle parameters for AgentCore Memory:

## AgentCore Memory limits

Limit	Value	Adjustable	Notes
Maximum number of AgentCore Memory resources per AWS Region in an AWS account	50	Yes	
Maximum number of memory strategies per AgentCore Memory resource	6	No	
Minimum EventExpirationDuration days in a CreateEvent operation	7	No	
Maximum EventExpirationDuration days in a CreateEvent operation	365	No	
Maximum prompt size (AppendTo Prompt) for custom memory strategy (Extraction/Consolidation)	30 KB	No	
Maximum number of messages per CreateEvent operation	100	No	
Maximum message size in a CreateEvent operation	9 KB	No	
Maximum event size in a CreateEvent operation	10 MB	No	
Maximum CreateEvent requests	10	Yes	The maximum number of CreateEvent requests

Limit	Value	Adjustable	Notes
			nt requests per second that you can perform in this AWS account account in the current AWS Region.

Limit	Value	Adjustable	Notes
Maximum CreateEvent requests per actor, per session, including conversational payloads	0.25	No	The maximum number of CreateEvent requests per second, per actor, per session, including conversational payloads that you can perform in this AWS account in the current AWS Region.

Limit	Value	Adjustable	Notes
Maximum CreateEvent requests per actor, per session, not including conversational payloads	10	No	The maximum number of CreateEvent requests per second, per actor, per session, not including conversational payloads that you can perform in this AWS account in the current AWS Region.

Limit	Value	Adjustable	Notes
Maximum RetrieveMemoryRecords requests	5	Yes	The maximum number of RetrieveMemoryRecords requests per second that you can perform in this AWS account in the current AWS Region.

Limit	Value	Adjustable	Notes
Maximum requests for all other AgentCore Memory APIs	20	Yes	The maximum transactions per second (TPS) that can be processed in this AWS account in the current AWS Region for all other AgentCore Memory APIs.

Limit	Value	Adjustable	Notes
Maximum number of tokens per minute for long-term memory extraction	150,000	Yes	The maximum number of tokens per minute that can be processed for long-term memory extraction for built-in strategies in this AWS account in the current AWS Region. You can monitor token use through the <a href="#">Amazon CloudWatch metric named TokenCount</a> .

Limit	Value	Adjustable	Notes
			Set in the Bedrock-AgentCore namespace. You can request an increase to this limit through the Service Quotas console.

## AgentCore Identity Service Quotas

When working with AgentCore Identity, you need to be aware of the service limits that apply to your account. These limits help ensure service stability and availability for all users.

### AgentCore Identity Limits

Limit	Value	Adjustable	Notes
Workload identities	1,000	No	The maximum number of workload identities that you can create in this account in the current Region.
Resource OAuth2 credential providers	50	No	The maximum number of OAuth2 credential providers for egress

Limit	Value	Adjustable	Notes
			resources that you can create in this account in the current Region.
Resource API key credential providers	50	No	The maximum number of API key credential providers for egress resources that you can create in this account in the current Region.

## AgentCore Gateway Service Quotas

This section provides information about Amazon Bedrock AgentCore Gateway endpoints and service limits.

### Endpoints

Amazon Bedrock AgentCore Gateway provides AWS Region-specific endpoints for management operations and runtime access.

The Amazon Bedrock AgentCore Gateway control plane endpoints use the following format, where you can replace `<region>` with any of the AWS Regions listed in [AWS Regions](#).

`bedrock-agentcore-control.<region>.amazonaws.com`

The AgentCore Gateway URLs for runtime access have the following format:

`https://{gateway-Id}.gateway.bedrock-agentcore.{Region}.amazonaws.com`

Where:

- **{gateway-Id}** is the unique identifier for your gateway
- **{Region}** is the AWS Region where your gateway is deployed

Gateway ARNs have the following format:

`arn:${Partition}:bedrock-agentcore:${Region}:${Account}:gateway/${gateway-Id}`

The AgentCore service principal is: `bedrock-agentcore.amazonaws.com`

## Service quotas

Amazon Bedrock AgentCore Gateway has the following service quotas. You can request increases for some quotas using the Service Quotas console.

### Amazon Bedrock AgentCore Gateway service quotas

Quota	Default value	Adjustable
Number of gateways per account	1000	Yes
Number of targets per gateway	100	Yes
Number of tools per target	1000	Yes
Timeout for a gateway invocation	5 minutes	Yes
Maximum inline schema size	1 MB	Yes
Maximum S3 payload schema size	10 MB	Yes
Tool name character limit	256 characters	Yes
CreateGateway API rate	5 transactions per second	Yes
UpdateGateway API rate	5 transactions per second	Yes
GetGateway API rate	10 transactions per second	Yes
ListGateways API rate	10 transactions per second	Yes
DeleteGateway API rate	5 transactions per second	Yes
CreateGatewayTarget API rate	5 transactions per second	Yes
UpdateGatewayTarget API rate	5 transactions per second	Yes
GetGatewayTarget API rate	10 transactions per second	Yes
ListGatewayTargets API rate	10 transactions per second	Yes

Quota	Default value	Adjustable
DeleteGatewayTarget API rate	5 transactions per second	Yes
Concurrent target operations (total of Create/Update/DeleteTarget) on same gateway	5	Yes
tool-call/tool-list rate at gateway level	50 concurrent connections	Yes
tool-call/tool-list rate at account level	50 concurrent connections	Yes
Search-based tool-call rate	25 transactions per minute	Yes
Maximum tool-call/tool-list/tool-search payload size	6 MB	Yes

For more information about service quotas and how to request increases, see [Requesting a quota increase](#) in the *Service Quotas User Guide*.

## AgentCore Browser Service Quotas

The Browser tool has the following service quotas and considerations that apply to your account.

### Browser service quotas

Quota	Default Value	Adjustable	Notes
Concurrent active sessions per account for browser and CI	1000	Yes	Can be increased via support ticket
Total Browser tool configurations per account	100	Yes	Can be increased via support ticket
Hardware configuration per session	1vCPU/4GB	No	The maximum memory/CPU usage and configuration per account

## Browser Invocation Limits

The following table describes the invocation limits for the Browser tool:

### Browser invocation limits

Limit	Value	Adjustable	Notes
Automation stream limit per session	1	No	Maximum number of automation streams per session
Live view stream limit per session	1	No	Maximum number of live view streams per session
Asynchronous command max duration	8 hrs	No	Maximum execution time for asynchronous commands
Disk size	10 GB	No	Maximum disk space available per session

## AgentCore Code Interpreter Service Quotas

The Code Interpreter tool has the following service quotas and considerations that apply to your account.

### Code Interpreter service quotas

Quota	Default Value	Adjustable	Notes
Concurrent active sessions per account	500	Yes	Can be increased via support ticket
Total Code Interpreter tool configurations per account	100	Yes	Can be increased via support ticket

Quota	Default Value	Adjustable	Notes
Hardware configuration per session	2vCPU/8GB	No	The maximum memory/CPU usage and configuration per account

## Code Interpreter Invocation Limits

The following table describes the invocation limits for the Code Interpreter tool:

### Code Interpreter invocation limits

Limit	Value	Adjustable	Notes
Request timeout	15 mins	No	Maximum time for synchronous requests
Max payload size	100 MB	No	Maximum size for request/response payloads
Invocations per second	3	No	Rate limit for API calls per session
Asynchronous command max duration	8 hrs	No	Maximum execution time for asynchronous commands
Disk size	10 GB	No	Maximum disk space available per session

# Document history for the AgentCore User Guide

The following table describes the documentation releases for Amazon Bedrock AgentCore.

Change	Description	Date
<a href="#"><u>Runtime identity service-linked role</u></a>	Added documentation for the new runtime identity service-linked role that manages workload identity access tokens and OAuth credentials. Updated BedrockAgentCoreFullAccess policy to include permission for creating the Amazon Bedrock AgentCore runtime identity service-linked role.	October 13, 2025
<a href="#"><u>General release</u></a>	Amazon Bedrock AgentCore is now generally available.	October 13, 2025
<a href="#"><u>Model Context Protocol (MCP) servers as Gateway targets</u></a>	Added documentation for the Model Context Protocol (MCP) servers as Gateway targets and using synchronization operations.	October 10, 2025
<a href="#"><u>Model Context Protocol (MCP) server support</u></a>	Added documentation for the Model Context Protocol (MCP) server that helps you transform, deploy, and test AgentCore-compatible agents directly from your development environment. The MCP server works with popular MCP clients including Kiro,	October 2, 2025

Cursor, Claude Code, and Amazon Q CLI.

### Managed policy updates

Updated managed policy documentation. Added documentation for the `BedrockAgentCoreNetworkServiceRolePolicy` managed policy. Updated `BedrockAgentCoreFullAccess` policy to include permission for creating the Amazon Bedrock AgentCore network service-linked role.

### Initial release (preview)

Initial release of the Amazon Bedrock AgentCore Developer Guide

September 19, 2025

July 16, 2025