
Cucumber Report

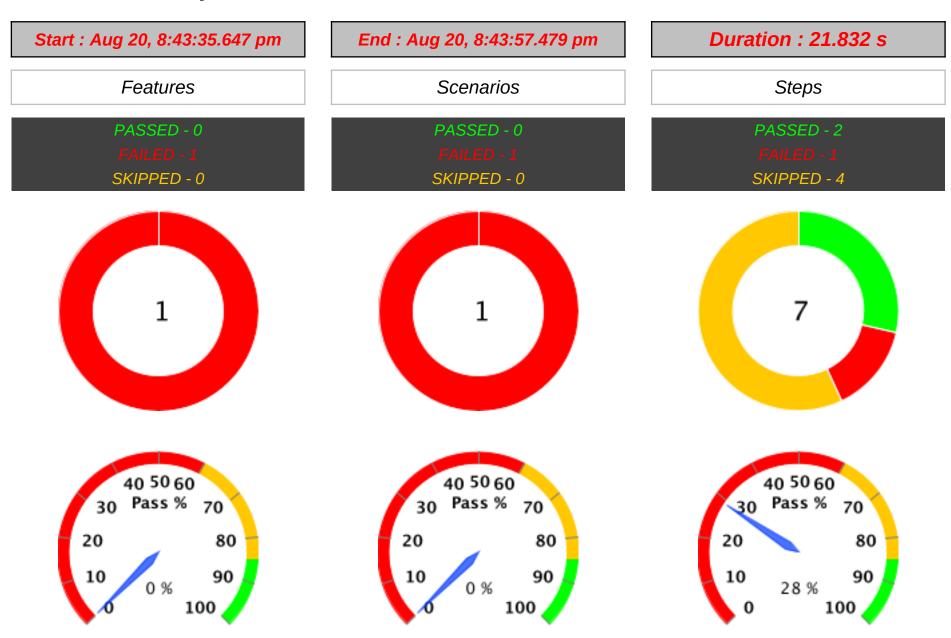

Feature			Scei	nario			Step			
Name	Duration	T	P	F	S	T	P	F	S	
Validation of About screen PersonalInfo in Glamz web application	21.832 s	1	0	1	0	7	2	1	4	

FAIL & SKIP SCENARIOS -- 3 --


7	Scenario Name	
	Validation of About screen PersonalInfo in Glamz web application	Check wether mobile number in PersonalInfo is same as the mobile number in SalonInfo

TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@PersonalInfo	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --




#	Feature Name	T	P	F	S	Duration
1	Validation of About screen PersonalInfo in Glamz web application	1	0	1	0	21.832 s

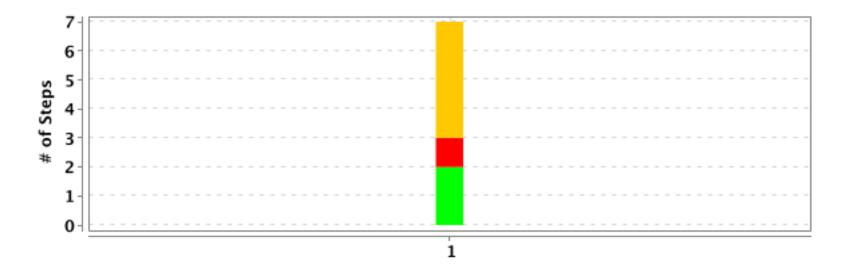


#	#	Feature Name	Scenario Name	T	P	F	S	Duration
- 2	1	Validation of About screen PersonalInfo	Check wether mobile number in PersonalInfo is same as the	7	2	1	4	21.831 s
		in Glamz web application	mobile number in SalonInfo					

DETAILED SECTION

Validation of About screen PersonalInfo in Glamz web application



Check wether mobile number in PersonalInfo is same as the mobile number in SalonInfo

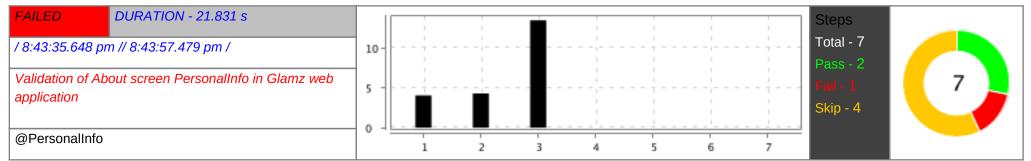

#	Step / Hook Details	Status	Duration
1	Given User launch an Glamz web application	PASSED	4.039 s
2	And User click on Login button	PASSED	4.286 s
3	When User enter username "keerthi@gmail.com" and password "123456789" and logs in	FAILED	13.469 s
	org.openqa.selenium.WebDriverException: Failed to decode response from marionette Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '12.6', java.version: '19.0.1' Driver info: org.openqa.selenium.firefox. FirefoxDriver Command: [5c71024b-decc-4640-a7a8-4a998018ad88, findElement {using=xpath, value=//input[@formcontrolname='password']}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 113.0.1, moz:accessibilityChecks: false, moz:buildID: 20230511191846, moz:debuggerAddress: 127.0.0.1:3469, moz:geckodriverVersion: 0.33.0, moz:headless: false, moz:platformVersion: 21.6.0, moz:processID: 71867, moz:profile: /var/folders/n3/0q1wc9dx5wq, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://127.0.0.1:3469/devtool, se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 5c71024b-decc-4640-a7a8-4a998018ad88 at java.base/java.lang.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.sendKeys(Unknown Source) at pageobjects.LoginPage.loginwithmail(LoginPage.java:40) at stepDefinitions.LoginPageStepDefinitions.user_enter_username_and_password_and_logs_in(LoginPageStepDefinitions.java:22) at ?.User enter username "keerthi@gmail.com" and password "123456789" and logs in(file:///Users/abiramisundarapandian/eclipse-workspace-TESTING/CucumberFrameworkPractise/src/test/java/features/AboutPersonalInfo.feature:7) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepDefinitions.hooks.AddScreenshot(io.cucumber.java.Scenario) org.openga.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '12.6', java.version: '19.0.1' Driver info: org.openga.selenium. firefox.FirefoxDriver Command: [5c71024b-decc-4640-a7a8-4a998018ad88, screenshot {}} Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 113.0.1, moz:accessibilityChecks: false, moz:buildID: 20230511191846, moz:debuggerAddress: 127.0.0.1:3469, moz:geckodriverVersion: 0.33.0, moz:headless: false, moz:publidID: 20230511191846, moz:webdriverClick: true, browserName: firefox, browserName: firefox, browserVersion: 0.33.0, moz:headless: false, moz:publidID: 20230511191846, moz:webdriverClick: true, document of true, strictFileInteractability: false, moz:pecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), sec.cdp: ws://127.0.0.1:3469/devtool, sec.cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 5c71024b-decc-4640-a7a8-4a998018ad88 at java.base/java.lang.reflect.DirectConstructor.handleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWinCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:22) at org.openga.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openga.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) a	FAILED	0.003 s
4	Then User click Setup->About	SKIPPED	0.000 s

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
5	And User clicks on About->PersonalInfo	SKIPPED	0.001 s
6	Given User extracts the mobile number from SalonInfo	SKIPPED	0.000 s
7	And User extracts the mobile number from PersonalInfo and compares it with mobile number in SalonInfo	SKIPPED	0.000 s
	AFTER - stepDefinitions.hooks.afterscenario()	FAILED	0.010 s
	org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to http://127.0.0.1:3469/devtools/browser/5a677573-a877-4fc1-8ee5-aa99aabae52d Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os. arch: 'aarch64', os.version: '12.6', java.version: '19.0.1' Driver info: driver.version: FirefoxDriver at org.openqa.selenium.remote.http.netty.NettyWebSocket. <init>(NettyWebSocket.java:116) at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:147) at org.openqa.selenium.remote.http.netty.NettyClient.openSocket(NettyClient.java:104) at org.openqa.selenium.devtools.Connection.<init>(Connection.java:83) at org.openqa.selenium.firefox.FirefoxDriver.maybeGetDevTools(FirefoxDriver.java:334) at org.openqa.selenium.remote.RemoteWebDriver.quit(RemoteWebDriver.java:426) at org.openqa.selenium.firefox.FirefoxDriver.quit(FirefoxDriver.java:392) at stepDefinitions.hooks.afterscenario(hooks.java:25)</init></init>		