

Representing Data

Digitizing our world

Everything in the computer is stored as a number. This includes numbers of course as well as letters, audio files, movie files, etc.

Unary

"One if by Land Two if by Sea" –Paul Revere

A single symbol or digit: 1. It's the way we count with tick marks in groups of 5. |, ||, |||, ||||, |||||

Unary digits			Value
			0
		1	1
	1	1	2
1	1	1	3

Binary

Numbers are encoded in the machine using binary, 0 or 1 which corresponds to usually 0 and +5 Volts in the hardware. The fundamental element within a computer is a switch that can be either on or off just like a lightbulb. If I have one lightbulb, I can have two states: on or off, 0 or 1, lo or hi, whatever you want to call it.

Q. If I have two lightbulbs, how many states can I have? 4

Binary digits		Value
0	0	0
0	1	1
1	0	2
1	1	3

What about three? $2^3 = 8$:

Binary digits			Value	Count
0	0	0	0	1
0	0	1	1	2
0	1	0	2	3
0	1	1	3	4
1	0	0	4	5
1	0	1	5	6
1	1	0	6	7
1	1	1	7	8

These are two and three bit numbers, which indicates their maximum value.

A **byte** is 8 bits. $2^8 = 256$ states or values 0..255. A **word** is typically the size of the microprocessor's registers. These days that will be 64 bits.

Binary numbers get long pretty quickly: 1010011010 binary is 666 decimal.

Characters

Everything is a number, so how to represent letters? (For now we we'll stick with the American character set). We assign a unique number to each letter:

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040	Space	Space	64	40	100	64	@	96	60	140	96	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	65	A	97	61	141	97	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	66	B	98	62	142	98	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	67	C	99	63	143	99	c
4	4	004	EOT (end of transmission)	36	24	044	\$	\$	68	44	104	68	D	100	64	144	100	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	69	E	101	65	145	101	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	70	F	102	66	146	102	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	71	G	103	67	147	103	g
8	8	010	BS (backspace)	40	28	050	((72	48	110	72	H	104	68	150	104	h
9	9	011	TAB (horizontal tab)	41	29	051))	73	49	111	73	I	105	69	151	105	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	74	J	106	6A	152	106	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	75	K	107	6B	153	107	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	76	L	108	6C	154	108	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	77	M	109	6D	155	109	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	78	N	110	6E	156	110	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	79	O	111	6F	157	111	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	80	P	112	70	160	112	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	81	Q	113	71	161	113	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	82	R	114	72	162	114	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	83	S	115	73	163	115	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	84	T	116	74	164	116	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	85	U	117	75	165	117	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	86	V	118	76	166	118	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	87	W	119	77	167	119	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	88	X	120	78	170	120	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	89	Y	121	79	171	121	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	90	Z	122	7A	172	122	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	91	[123	7B	173	123	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	92	\	124	7C	174	124	
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	93]	125	7D	175	125	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	94	^	126	7E	176	126	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	95	_	127	7F	177	127	DEL

Source: www.LookupTables.com

You can think of this is kind of an encryption. Instead of saying "Hi" you might say "73 105."

There are multiple standards but the clear winner is [ASCII](#). In the old days there was also [EBCDIC](#).

As we will see shortly, a phrase or sentence or word is just a sequence of characters hence a sequence of numbers stored in the machine.

```
$ cat sentence.txt
```

As we will see shortly, a phrase or sentence or word is just a sequence of characters hence a sequence of numbers stored in the machine.

```
$ od -b sentence.txt
```

```
0000000 101 163 040 167 145 040 167 151 154 154 040 163 145 145 040 163
0000020 150 157 162 164 154 171 054 040 141 040 160 150 162 141 163 145
0000040 040 157 162 040 163 145 156 164 145 156 143 145 040 157 162 040
0000060 167 157 162 144 040 151 163 040 152 165 163 164 040 141 040 163
0000100 145 161 165 145 156 143 145 012 157 146 040 143 150 141 162 141
0000120 143 164 145 162 163 040 150 145 156 143 145 040 141 040 163 145
0000140 161 165 145 156 143 145 040 157 146 040 156 165 155 142 145 162
0000160 163 040 163 164 157 162 145 144 040 151 156 040 164 150 145 040
0000200 155 141 143 150 151 156 145 056 012
0000211
```

```
$ od -c -b sentence.txt
```

```
0000000 101 163 040 167 145 040 167 151 154 154 040 163 145 145 040 163
      A  s      w  e      w  i  l  l      s  e  e      s
```

```

0000020  150 157 162 164 154 171 054 040 141 040 160 150 162 141 163 145
          h  o  r  t  l  y  ,      a      p  h  r  a  s  e
0000040  040 157 162 040 163 145 156 164 145 156 143 145 040 157 162 040
          o  r      s  e  n  t  e  n  c  e      o  r
0000060  167 157 162 144 040 151 163 040 152 165 163 164 040 141 040 163
          w  o  r  d      i  s      j  u  s  t      a      s
0000100  145 161 165 145 156 143 145 012 157 146 040 143 150 141 162 141
          e  q  u  e  n  c  e  \n  o  f      c  h  a  r  a
0000120  143 164 145 162 163 040 150 145 156 143 145 040 141 040 163 145
          c  t  e  r  s      h  e  n  c  e      a      s  e
0000140  161 165 145 156 143 145 040 157 146 040 156 165 155 142 145 162
          q  u  e  n  c  e      o  f      n  u  m  b  e  r
0000160  163 040 163 164 157 162 145 144 040 151 156 040 164 150 145 040
          s      s  t  o  r  e  d      i  n      t  h  e
0000200  155 141 143 150 151 156 145 056 012
          m  a  c  h  i  n  e  .  \n
0000211

```

Images

Images are stored as numbers also. Each pixel on the screen is typically represented by three numbers, it's (red, green, blue) RGB values. For example:

white: 255 255 255 (yes they are one byte each)


black: 0 0 0

blue: 0 0 255 (blue is saturated)

Yellow is a mix of red and green: 255 255 0

(Play with omnigraffle or other application that will show color)

Or, we can use a single bit to represent a black-and-white image where zero means off and one means on:



The bit sequence is:

```
00100 01010 01010 10001 11111 10001 00000
```

If you stack vertically, you can see the image sort of:

```
00100
```

```
01010
```

```
01010
```

```
10001
```


```
11111
```

```
10001
```


```
00000
```

Audio

Audio files that you listen to are also represented as just a sequence of numbers where each number represents the amplitude of the signal at discrete locations and time. From Wikipedia page on [Digital audio](#):

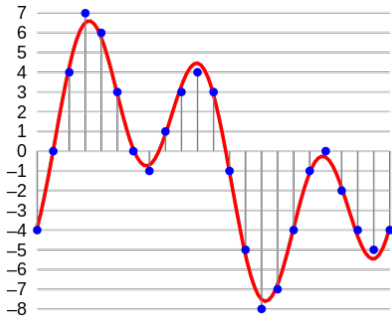

Here is a partial waveform of Prince's "Kiss" song:

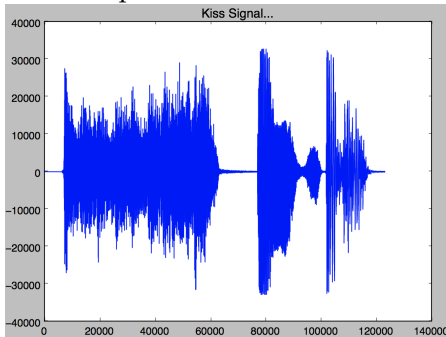

I loaded via a sample program in code/plotaiff.py:

```
$ cd code
$ python plotaiff.py ../data/Kiss.aiff
$ open ../data/Kiss.aiff # play the audio
Q. What to those values represent?
Q. What happens if you scale each value?
$ python scaleaiff.py ../data/Kiss.aiff /tmp/scaled-kiss.aiff
$ open /tmp/scaled-kiss.aiff
```

Entropy

It could be a good time to mention the term [entropy](#), which is a measure of the chaos or disorder of a model or system. In the real world, systems always tend towards increased entropy. For example, the state of my kitchen approaches maximum entropy two weeks after the maid has cleaned up. You will see entropy again when you look at algorithms to construct random forests. Entropy in information theory describes how much information is in a signal.

Q. Does it take more bits or fewer bits to store random noise compared to, for example, a pure tone at a particular frequency?

If you need to store a random variable that can take n values with equal probability, you need $\log_2(n)$ bits to represent that variable/number. On the other hand, if we know for sure that the random variable

is always, say, 9345 or 0 then it only takes a single bit to represent that random variable (9345 is present or not).

Python's atomic elements

There are a few basic or atomic elements in Python and each kind of element knows not only its value but also its type. Is very important to learn the difference between value and type.

Integers

These are just numbers that were used for counting; whole numbers like -9, 0, 3, 1023023823.

What are the types/sizes?

```
>>> type(1000000000000000000)
<type 'int'>
>>> type(100000000000000000000)
<type 'long'>
```

How many bits to store?

```
>>> import math
>>> math.log(1000000000000000000, 2)
59.794705707972525
>>> math.log(100000000000000000000, 2)
63.116633802859894
```

You can make these things as big as you like:

```
>>> type(323241321234123412348123091324)
<type 'long'>
```

But if they are smaller they go into a different type. type is just another function call that asks the type of something.

```
>>> type(3232)
<type 'int'>
```

Real numbers

Real numbers, not whole numbers, are of finite precision but can hold some very large and very small numbers.

```
>>> 3.14159
3.14159
>>> 0.000000000001
1e-12
>>> 23e100
2.3e+101
```

The *e* stuff is the scientific notation and represents the exponent, not the mathematical constant *e*. We call these *floating-point numbers*.

The [Python tutorial on floating-point numbers](#) is something you should look at to learn more about floating-point numbers. The fact that they have finite precision, so-called “double precision,” means you can get some odd results:

```
>>> 0.1 + 0.2
0.30000000000000004
```

This is because 0.1 is actually represented as 0.00011001100110011..., a repeating fraction. It has no nice representation in binary fractions, but numbers like 0.125 = 1/8 do: 0.001 in binary = $\frac{0}{2^1} + \frac{0}{2^2} + \frac{1}{2^3}$.

If you need floating-point numbers that trade precision for efficiency, use the [decimal](#) module:

```
>>> from decimal import Decimal
>>> Decimal(1)/Decimal(10) + Decimal(2)/Decimal(10)
Decimal('0.3')
```

One last thing on Floating-point numbers. Be aware that subtraction can destroy precision. It is considered an ill conditioned operation because subtracting two numbers that are almost equal can give you very imprecise answers.

Boolean values

A Boolean value is either true or false, but Python also allows a number of other things to represent true and false such as 1 can be true and 0 can be false.

```
>>> True
True
>>> False
False
>>> bool(1)
True
>>> bool(0)
False
>>> bool(36)
True
>>> bool("hi")
True
```

Strings

Single, double, or triple quotes. 0 or more characters in between delimiters. We call these literals or hard-coded values.

```
>>> 'a' # a single character string is sometimes called a character
'a'
>>> 'hi'
'hi'
```

```
>>> "hi"
'hi'
>>> """hi"""
'hi'
```

When you need to actually include quotes of some kind in the string, then you surround it with different quotes like "Bob's house".

Special characters

\n is the newline character, \t is the tab character

```
>>> print "Cars:\n\tBMW\n\tAudi"
Cars:
    BMW
    Audi
```

which is like doing:

```
>>> print "Cars:"
Cars:
>>> print "\tBMW"
    BMW
>>> print "\tAudi"
    Audi
```

or

```
>>> print "Cars:"
Cars:
>>> print "    BMW"
    BMW
>>> print "    Audi"
    Audi
```

Conversions

We can convert between numbers

```
>>> float(3)
3.0
>>> int(3.14159)
3
```

and numbers and characters

```
>>> chr(100)
'd'
>>> chr(105)
'i'
```

```
>>> ord('H')
72
>>> str(234)
'234'
```

What the types of operands.

```
>>> "hi" + 501
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: cannot concatenate 'str' and 'int' objects
>>> "hi" + str(501)  # convert number to string then add
'hi501'
>>> 2 / 3
0
>>> 2 / float(3)
0.6666666666666666
>>> 2 / 3.0
0.6666666666666666
>>> 10 == 10
True
>>> 10 == "10"
False
```