


The rest of your steps

The app is live at its own address and the database behind it is switched on. What is left is four short jobs, all yours, and none of them takes more than fifteen minutes. Each gets its own page, with a picture of what is actually happening.

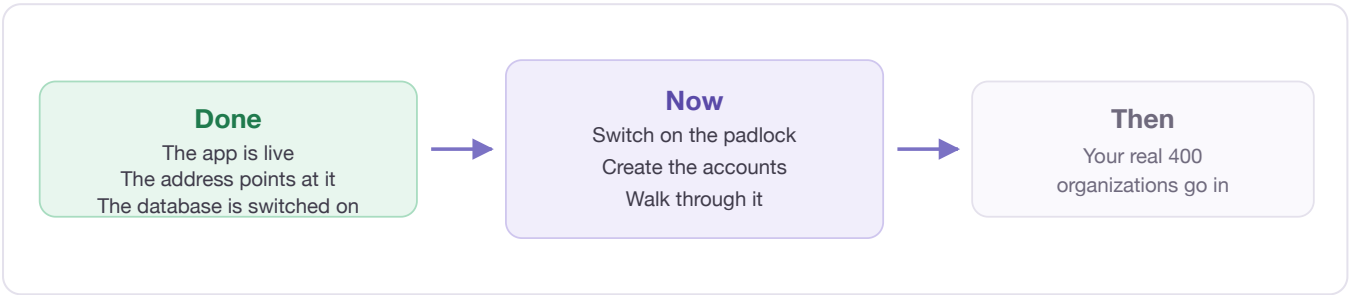

WHAT IS IN HERE

✓	Switch on the database — done	p3	5	Prove the domain is yours	p7
✓	Redeploy the Jira reader — done	p4	6	Switch on the padlock	p8
✓	Put the app live — done	p5	7	Create the sixteen accounts	p9–10
✓	Tell Supabase the new address — done	p6	8	Walk through it	p11

Five steps already done — all checked against the live systems

- The web address** — all eight entries correct at the source, **www** pointing where it should, and the typo you fixed is gone.
- The database** — all four files in. Seven stage rungs, not fourteen, so nothing was renamed too early; **Live** and **Paused** flagged correctly; no stray data anywhere.
- The Jira reader** — deployed and answering.
- The app itself** — live at <https://nphiescore.com/> since 21 August 21:49, and the file being served is byte-for-byte the one that passed 5,116 tests.
- Supabase** — told about the new address, so sign-in emails point at the right place.

How to use this document

Read page 2 to see the shape of what is left. After that, each step has its own page, and you can do them on different days — there is no ordering left between them. **Step 6 is a single tick box and takes about ten seconds.**



The whole road, on one page

Purple circles are yours. Hollow ones are mine and need only a message from you.



The web address **DONE**

Nine entries at Hostinger, pointing nphiescore.com at GitHub.



Switch on the database **DONE**

All four files in, verified: seven stage rungs, the goals table, the counting view and the org-identity columns are all live and hold no stray data.



Redeploy the Jira reader **DONE**

Live and answering, 21 August 18:14 UTC. It turned out never to have been deployed at all before — so the fixed version is the only one that has ever run.



Put the app live at the new address **DONE**

Deployed 21 August 21:49. The live site is now the real app — and it is byte-for-byte the build that passed 5,116 tests.



Tell Supabase the new address **DONE**

Site URL reads <https://nphiescore.com/> and the allow-list carries it alongside the old address. Exactly right.



5

Prove the domain is yours **YOURS · 2 MIN**

One more entry at Hostinger. Not needed for the site to work — it stops anyone else ever claiming the name.



6

Switch on the padlock **YOURS · 1 MIN — READY NOW**

The certificate has been issued (checked 21 Aug). The waiting is over — the tick box will work.



7

Create the sixteen accounts **YOURS · 15 MIN**

Safe to do now — the address they will be given is the final one. **The codes print once.**



8

Walk through the app and tell me what is wrong **YOURS · 20 MIN**

The judgements no test can make. Everything it needs is now in place.

Five done. The four that are left are all yours, and all short.

Step 6 is a single tick box and can be done right now — the certificate has come through. Step 5 is two minutes whenever you like. Step 7 creates the sixteen accounts. Step 8 is the walk-through, and there is one thing to know before you judge what you see — page 11.




Switch on the database — done

Kept for reference. This page explains what it changed.


Verified on 21 August 2026

All four files are in. The seven stage rungs are present and correctly flagged, the goals table and counting view are live, the org-identity columns exist, and none of it holds stray data — exactly the shape the files promise.

TODAY



AFTER STEP 1



Nothing is broken. The app is finished and has nowhere to put its answers yet.

Now you *can* rename the seven stages

That was the one thing to hold off on, and the reason has passed. In **Settings › Catalogue** you can now put the programme's real words on all seven rungs, add the Arabic (left blank on purpose — a guessed translation looks exactly like a reviewed one on screen), and set how many days on a rung counts as “stuck”. **Until you set that last one the Stalled view stays empty on purpose.**

What you get the moment it lands

The Portfolio view stops being empty, every organization gets a stage you can change in two taps, the goals band starts saving instead of failing, and the “at risk” badge starts counting properly instead of sitting on zero.



Redeploy the Jira reader — done

Kept for reference, including the sign-in problem and how it was solved.

Confirmed live at 18:14 UTC on 21 August 2026

And a small surprise: it reports as **version 1**, created for the first time today. The other functions on the project are on versions 5 to 13. **So this one had never actually been deployed before** — meaning the version with the four security problems was never running anywhere, and the fixed one is the only one that has ever served a request. Better news than expected.

A small program runs on Supabase's computers and reads from Jira. Four security problems in it were found and fixed — but **the fixed version is on your Mac and the old one is still the one running**. These commands replace it.

1

Sign the command-line tool in. In Terminal:

```
npx supabase@latest login
```

It prints a code and opens your browser. Check the code on screen matches, click to approve, and come back to Terminal, which confirms the login finished.

2

Now the redeploy. Paste both lines and press **Enter**:

```
cd /Users/aziz/Claude/nphiescore
npx supabase@latest functions deploy jira-read \
  --project-ref lrysgpbkmuggzsjesfkr --use-api
```

It prints progress for a while, then confirms the function was deployed and gives you back the prompt.

If you already tried and got “Access token not provided”

That is exactly this, and nothing was wrong with the command. The full message reads:

```
Access token not provided. Supply an access token by running
`supabase login` or setting the SUPABASE_ACCESS_TOKEN environment variable.
```

It happens because the two Supabase access tokens were **deliberately revoked** during the security clean-up at the start of this project. There is nothing for the tool to sign in with until you make a new one — which is what step 1 does. Nothing is broken.

Nothing here can go wrong — and do it even if you never use Jira

No settings or passwords change; the program reads those fresh each time it runs. Running the command twice is harmless, and a failure leaves the old version running exactly as it was. You do **not** need Docker — that is what `--use-api` on the end is for.




Put the app live — done

Kept for reference. This is what happened, and what it cost.

Deployed 21 August 2026 at 21:49

Before merging: typecheck clean, **5,116 tests green** across 153 files, build succeeded. After: the apex answers 200, the manifest is real, **www** and the old address both redirect in, and the file being served has the same fingerprint as the one that passed the tests. The site title now reads **NphiesCore** rather than the old name — the quickest way to tell at a glance that the new app is the one you are looking at.

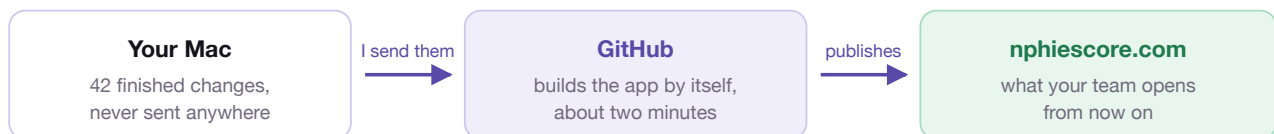

Everything built over the past weeks is still only on your Mac. This is the moment it becomes real.

Your part was one message. Everything below is what it set off, and the right-hand column is the part you may still feel on your own devices.

WHAT CHANGES FOR YOU AND NASSER THAT DAY

Stays exactly as it is

- Your account and password
- Everything in the tracker
- Who can see and do what

Needs doing once, per device

- Sign in again — everyone is signed out
- If the app is on a phone home screen: remove it, add it again from the new address
- If notifications were on: switch off and on again

Why we are doing this now rather than later

That right-hand column is the whole cost of moving, and today it lands on **two people**. Create the sixteen accounts first and it becomes eighteen people doing it, plus sixteen login codes handed out for an address you are about to abandon. This is the reason step 7 comes after step 3 and not before.




Tell Supabase the new address — done

Kept for reference. This page explains what it prevents.

Checked on 21 August 2026

Site URL is <https://nphiescore.com/>, and the redirect list carries https://nphiescore.com/** alongside the old address and the local ones — which is the right shape for the transition.

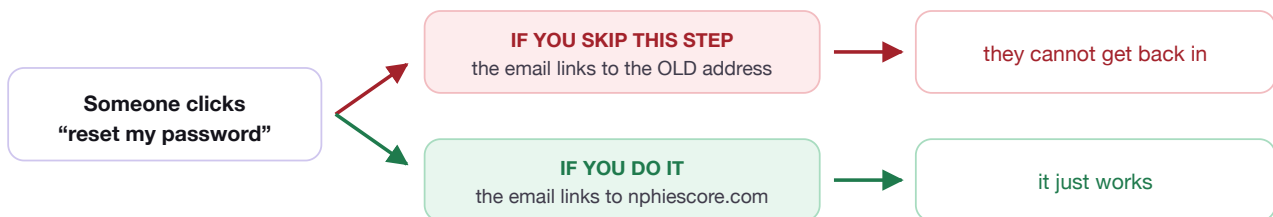

Supabase writes the link in every sign-in and password email. It uses whatever address it has on file.

1

In the Supabase dashboard, go to **Authentication** → **URL Configuration**.

2

Set **Site URL** to <https://nphiescore.com>

3

Add to the Redirect URLs list: https://nphiescore.com/** — and **leave the two that are already there**.

Three entries in the list, not one.

Keep the old entry for a week or two

It costs nothing to leave, and removing it early strands anyone who is halfway through signing in on a link they were sent yesterday. Take it out later, once nobody is using the old address.

5

Prove the domain is yours

Optional. Two minutes. Nothing waits on it and nothing breaks if you skip it.

What this is for, in one sentence: it stops anyone else ever pointing **nphiescore.com** at *their* GitHub account and putting up something that looks like your tracker.

1

Go to **github.com/settings/pages** — type that address in directly. You want the section headed **Verified domains**.

This is the one place people go wrong

It is **your account's** settings, **not the repository's**. The repository has its own page also called “Pages”, with no **Verified domains** section on it at all — which is why it can look as though the instructions are wrong.

Yes: `github.com/settings/pages` **No:**
`github.com/Abosallom/opstrack/settings/pages`

2

Click **Add a domain**, type **nphiescore.com**, click **Add domain**.

GitHub shows you a box containing two things to copy — a **name** and a long random **value**. Leave that page open.

3

At Hostinger, on **the same DNS records page you used before**, add one more record — this time choosing **TXT** as the type:

TYPE	NAME	TTL
TXT	_github-pages-challenge-abosallom	3600
VALUE / POINTS TO		
paste the long random value GitHub just showed you		

4

Wait about two minutes, then click **Verify** on the GitHub page you left open.

The domain moves into the verified list. Leave the record in place forever.

If Verify says it cannot find the record

Almost always impatience — the record has not spread yet. Wait five minutes and press it again. To watch for it, in Terminal — once this prints the value back, **Verify** will work:

```
dig +short _github-pages-challenge-abosallom.nphiescore.com TXT
```

1 SQL

2 Jira

3 Live

4 Supabase

5 Prove

6 Padlock

7 People

8 Tour

Switch on the padlock

One tick box — but only after GitHub is ready, and it will not tell you.

Step 3 happens



app goes live

“Certificate provisioning” — anything up to 24 hours

this is normal, not a fault. Do nothing.

You tick the box



Enforce HTTPS

GitHub makes a security certificate for your domain automatically. It just takes a while.

On GitHub, in **Settings** → **Pages**, there is a tick box called **Enforce HTTPS**. It is what puts the padlock in the address bar and stops anyone reaching the site without one.

Good news — the waiting is already over

Checked on 21 August 2026: GitHub reports the certificate for **nphiescore.com** as **approved**. So you can tick **Enforce HTTPS** straight away; the caution below no longer applies to you, and is kept only in case the domain is ever re-pointed.

The rule that made it worth waiting

If the tick box is greyed out, or the page still says it is provisioning, **leave it alone**. Ticking it before the certificate exists does not make the site less secure — it makes the site **unreachable**, for everyone, until the certificate arrives. Check back the next day.

How you will know it is ready

The provisioning message disappears and the tick box becomes clickable. Tick it, then visit **<https://nphiescore.com>** and look for the padlock next to the address. That is the last piece of the move.

7

Check the names first

Part one of two. This changes nothing — it only shows you what it intends to do.

Every person gets a username, worked out from their name. **A username is what they type at every single sign-in, and it cannot be changed later without locking them out of their own account.** So you read the list before anything is created.

1

In Terminal, paste these two lines:

```
cd /Users/aziz/Claude/nphiescore
node scripts/provision-people.mjs
```

A table of eighteen names appears. Nothing is written — it says “dry run” at the top.

2

Read every row of the “Signs in as” column. These are permanent. Look especially at the ones where the spelling could reasonably go more than one way — `sara.alqhahtani` is the obvious one.

3

If any is wrong, tell me and I will correct it before you go on. Fixing it now is a one-line change; fixing it after the account exists is not fixable at all.

Two rows will say EXISTS — that is correct

Yours and Nasser's. The script recognises you both and deliberately refuses to create second accounts for you, because a second identity would split your history in half and Nasser's username *is* his login. So: eighteen names on the list, **sixteen** new accounts.


You can run this as many times as you like

It writes nothing, needs no password, and can be run today, tomorrow, and again after a correction. It is purely a preview.

7

Create the accounts

Part two. Stay at the keyboard for this one — it prints something you cannot get back.

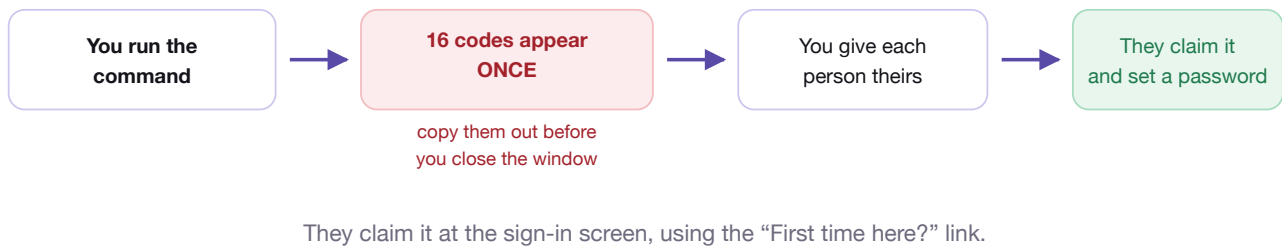

1

Get a temporary key. Sign in at <https://nphiescore.com/> in Chrome — it must be that address, because browsers keep this per web address. Then press `⌘I` to open the developer tools, click the **Console** tab, paste this line and press Enter:

```
const k = 'sb-lrysgpbkmuqgzsjesfkr-auth-token'
JSON.parse(localStorage.getItem(k)).access_token
```

A long string in quotes. Copy it, without the quotes. It is not your password, it expires in about an hour, and that is plenty.

2

Run it for real. In Terminal, paste these four lines, putting your key between the quotes:

```
cd /Users/aziz/Claude/nphiescore
set -a; . ./env.local; . ./env; set +a
export ADMIN_ACCESS_TOKEN='paste-your-key-here'
node scripts/provision-people.mjs --apply
```

If you see usage: apply [-a magic]

The command arrived split in two: `--apply` became `--` on one line and `apply` on the next, and macOS has its own unrelated `apply` command that then complained. Nothing ran. **Check the last line reads `--` `apply` with no break in it** before pressing Enter, and run it again.

The sixteen codes print once and exist nowhere else afterwards

Not in a file, not in the database, not recoverable by anyone. **Copy them out of the Terminal window before you close it.** Lose one and that account must be scrapped and redone. Hand each person theirs directly. **Never paste a code — or the key from step 1 — into a chat.** If one ever does end up somewhere it should not, sign out of the app: that ends the session it belongs to.

Walk through it and tell me what is wrong

Twenty minutes. These are the judgements no test can make for you.

Everything measurable has been measured. What is left is whether it **reads** like your programme — and only you can answer that. Open <https://nphiescore.com/>, sign in, and go through this list. Anything that feels wrong, tell me in one sentence.

- 1 **The opening screen.** Named rings, counts, organizations as circles that resolve as you go in. *Does it look like your programme?*
- 2 **The colour.** The accent, the chips, what happens when you select something. *Does it read as the nphies purple, or still blue?*
- 3 **The Portfolio button.** Its badge is the at-risk count. Open it, then try **Team** and **Vendors**.

Team shows two named managers and one large unnamed pile — that is correct until step 7 gives the other books their people. *Is this your morning answer?*
- 4 **Change one organization's stage.** Tap the stage, pick a new one. *Two taps? Did the undo work?*
- 5 **Search for an organization** by typing four letters of its name. *Is it there, one tap from open?*
- 6 **Then do it again in Arabic**, and then on your phone. The phone has one open question I would like your answer to, and it is on the opening screen — see below.
- 7 **Check Settings → Roles.** The two senior experts should hold **Director**; the three account managers stay **Member**. Recording progress is the team's job; shape and commitments are yours.

Before you judge what you see: the data is still the old practice set

Twenty-two made-up organizations from an August trial, and **none has a stage, a goal or a target** — they predate all three. So the Portfolio lens will look thin and the at-risk badge will read zero; neither is a fault. **Tell me when you want the real demo in** and I will swap it for a realistic slice — ten minutes, fully reversible. The walk-through is worth far more after that.

The one question I need you to decide

On a phone, the opening screen shows the six type-worlds as **counts without names**. Showing the names means 60% of the picture goes off the edge of the screen; the alternative is that people tap once to see them. **Which do you prefer?** It is a one-line change either way.

What is waiting on the other side

None of these needs deciding now. They are here so you know what the shape of the next few months looks like.

Your real four hundred organizations

The demo data comes off the same way it went on — one command, fully reversible. Then your real portfolio goes in from a spreadsheet, one row per organization. There is a template and a guide for filling it in, and the file gets checked and reported on before anything is written. **This waits on your Master Status Report**, not on me.

The certificate generator

Your colleague's NPHIES Certificate-of-Completion tool. The plan is that it stops being typed into by hand and reads its organization IDs and branch lists straight out of the tracker — which is exactly what file 4 in step 1 makes room for.

Jira, if and when you want it

It is off and invisible until deliberately set up. When you want it, it starts strictly read-only: it reads your Jira issues and reports which ones it could match to organizations and which it could not, and writes nothing anywhere. Writing back is built only after you say the tracker is right.

The app on the App Store

TestFlight, which needs your Apple ID in your own hands. I prepare it, you submit it. Scheduled separately — it is not in anybody's way.

And the short version of all eleven pages

Do step 1 this week. Say “push” when you have had the walk-through and are happy. Everything else follows from those two.