

Submit Event & Dynamic Card Builder

Full walkthrough — form submission, element creation, and building a card entirely with JavaScript.

HTML

CSS

JavaScript DOM

Form Events

1 Complete HTML Code

```
index.html

<!doctype html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Document</title>

    <style>
      * {
        margin: 0;
        padding: 0;
        box-sizing: border-box;
        font-family: "Times New Roman", Times, serif;
      }

      html,
      body {
        width: 100%;
        height: 100%;
      }

      #main {
        padding: 30px;
        width: 100%;
        height: 100%;
        background-color: #474646;
      }

      input {
        display: block;
      }

      .card {
        max-width: 300px;
        color: white;
        margin-top: 40px;
        display: inline-block;
        padding: 20px;
        border: 2px solid #c78787;
        border-radius: 5px;
      }

      .card h5 {
        margin-top: 5px;
      }
    </style>
  </head>
  <body>
    <div id="main">
      <div>
        <input type="text" value="Name" />
        <input type="text" value="Email" />
        <input type="text" value="Phone" />
        <input type="text" value="Address" />
        <input type="text" value="City" />
        <input type="text" value="State" />
        <input type="text" value="Zip" />
        <input type="button" value="Submit" />
      </div>
      <div>
        <div class="card">
          <h5>Card</h5>
          <p>Card content</p>
        </div>
      </div>
    </div>
  </body>
</html>
```

```

    .card p {
      font-size: 12px;
      margin-top: 10px;
    }

    .profile {
      width: 50px;
      height: 50px;
      border-radius: 40px;
      margin-bottom: 10px;
      overflow: hidden;
    }

    .profile img {
      height: 110%;
      width: 110%;
      object-fit: cover;
    }
  </style>
</head>

<body>
  <div id="main">
    <form action="">
      <input type="text" placeholder="ProfilePic" />
      <input type="text" placeholder="name" />
      <input type="text" placeholder="profession" />
      <input type="text" placeholder="info" />
      <input type="submit" />
    </form>

    <!-- Card removed from HTML because JavaScript creates it dynamically -->

  </div>

  <script src="card.js"></script>
</body>
</html>

```

2 HTML — Important Parts

Main container

```
<div id="main">
```

Everything is placed inside `#main`. The JavaScript later selects it:

```
let main = document.querySelector("#main");
```

Form

```
<form action="">
```

The form collects the information needed to create the card.

Inputs

```
<input type="text" placeholder="ProfilePic" />
<input type="text" placeholder="name" />
<input type="text" placeholder="profession" />
<input type="text" placeholder="info" />
<input type="submit" />
```

Using:

```
let inputs = document.querySelectorAll("input");
```

the inputs can be accessed by index:

```
inputs[0]    → ProfilePic
inputs[1]    → Name
inputs[2]    → Profession
inputs[3]    → Info
inputs[4]    → Submit
```

3 Why the Card Isn't in the HTML

You originally had:

```
<div class="card">
  <div class="profile">
    
  </div>

  <h3>Harsh Sharma</h3>
  <h5>Software</h5>
  <p>Lorem ipsum...</p>
</div>
```

removed / commented out

but commented it out because **JavaScript now creates the card dynamically**.

So instead of writing `<div class="card">...</div>`, JavaScript does:

```
let card = document.createElement("div");
```

🎯 PROJECT PURPOSE

This is the main purpose of the project: taking form data and creating HTML elements dynamically with JavaScript.

4 JavaScript Code

```
let form = document.querySelector("form");
let inputs = document.querySelectorAll("input");
let main = document.querySelector("#main");
```

card.js

```

form.addEventListener("submit", function (details) {
  details.preventDefault();

  let card = document.createElement("div");
  card.classList.add("card");

  let profile = document.createElement("div");
  profile.classList.add("profile");

  let img = document.createElement("img");
  img.setAttribute("src", inputs[0].value);

  let h3 = document.createElement("h3");
  h3.textContent = inputs[1].value;

  let h5 = document.createElement("h5");
  h5.textContent = inputs[2].value;

  let p = document.createElement("p");
  p.textContent = inputs[3].value;

  profile.appendChild(img);

  card.appendChild(profile);
  card.appendChild(h3);
  card.appendChild(h5);
  card.appendChild(p);

  main.appendChild(card);

  inputs.forEach(function (input) {
    if (input.type !== "submit") {
      input.value = "";
    }
  });
});

```

5 Submit Event

```

form.addEventListener("submit", function (details) {

```

Runs the function when the form is submitted.

Prevent page refresh

```

details.preventDefault();

```

Stops the browser's default form submission.

6 Creating Elements

```
let card = document.createElement("div");
let profile = document.createElement("div");
let img = document.createElement("img");
let h3 = document.createElement("h3");
let h5 = document.createElement("h5");
let p = document.createElement("p");
```

`createElement()` creates HTML elements using JavaScript.

7 Adding Classes

```
card.classList.add("card");
profile.classList.add("profile");
```

Connects the dynamically created elements to the CSS already written in the HTML.

8 Getting Form Values

```
inputs[0].value
inputs[1].value
inputs[2].value
inputs[3].value
```

`.value` gets what the user entered.

9 Setting Content

```
h3.textContent = inputs[1].value;
h5.textContent = inputs[2].value;
p.textContent = inputs[3].value;
```

`.textContent` puts text inside an element.

10 Setting Image Source

```
img.setAttribute("src", inputs[0].value);
```

Takes the profile-picture URL from the first input and sets it as the image's `src`.

11 Building the Card

```
profile.appendChild(img);

card.appendChild(profile);
card.appendChild(h3);
card.appendChild(h5);
card.appendChild(p);

main.appendChild(card);
```

Creates:


```
#main
├── .card
│   ├── .profile
│   │   └── img
│   ├── h3
│   ├── h5
│   └── p
```

12 Clearing the Form

```
inputs.forEach(function (input) {
  if (input.type !== "submit") {
    input.value = "";
  }
});
```

Loops through all inputs and clears everything except the submit button.

13 Complete Flow

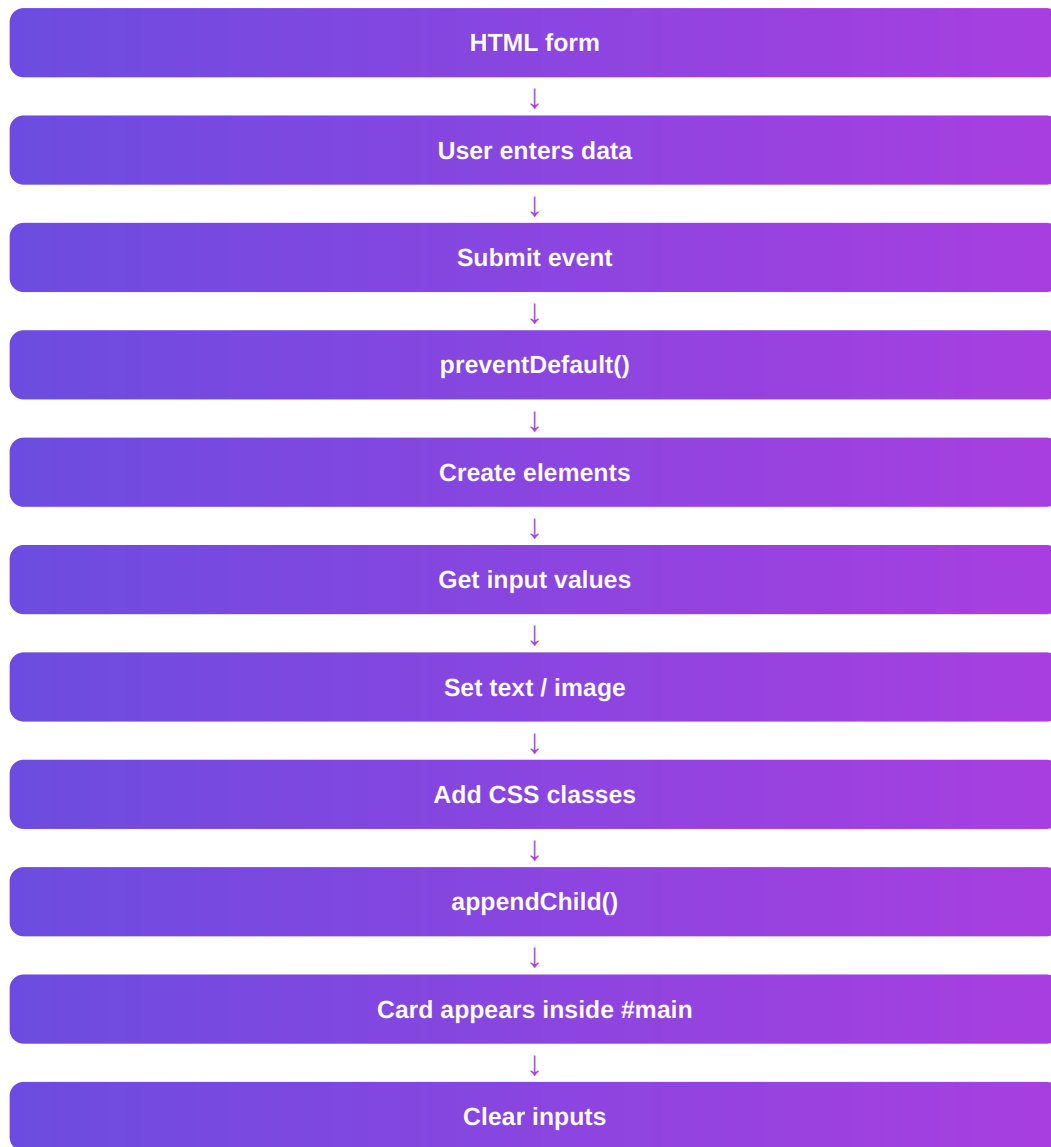

Core concepts

Concept	What it does
<code><form></code>	Collects user data
<code>submit</code>	Detects form submission
<code>preventDefault()</code>	Stops page refresh
<code>querySelector()</code>	Selects one element
<code>querySelectorAll()</code>	Selects multiple elements
<code>.value</code>	Gets input data
<code>createElement()</code>	Creates elements
<code>classList.add()</code>	Adds CSS class
<code>.textContent</code>	Adds text
<code>setAttribute()</code>	Sets an HTML attribute
<code>appendChild()</code>	Builds the DOM structure

Concept	What it does
<code>forEach()</code>	Loops through inputs

✨ This is the complete HTML → CSS → JavaScript → DOM connection in your project.