

Forecasting: principles and practice

Rob J Hyndman

2.4 Non-seasonal ARIMA models

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

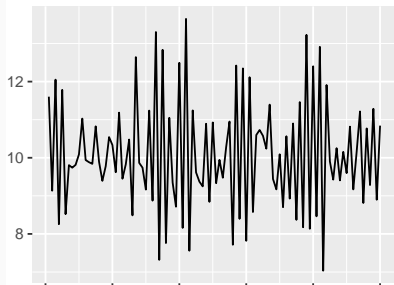

AR(2)

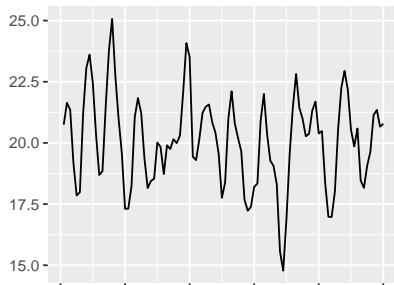

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

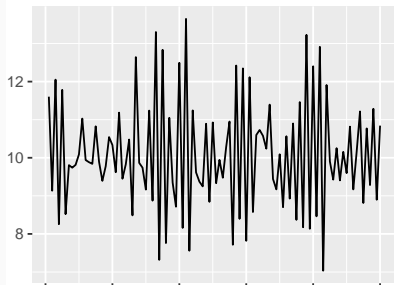

AR(2)

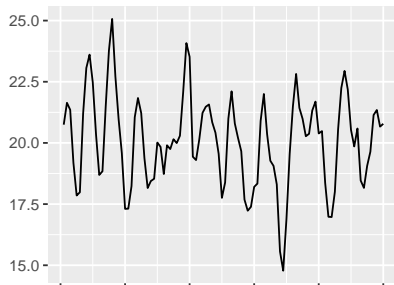

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

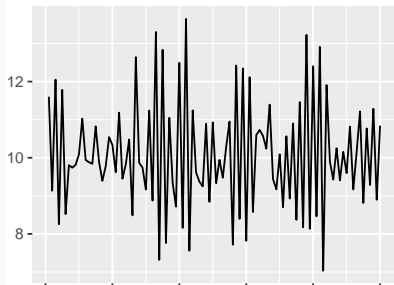

AR(2)

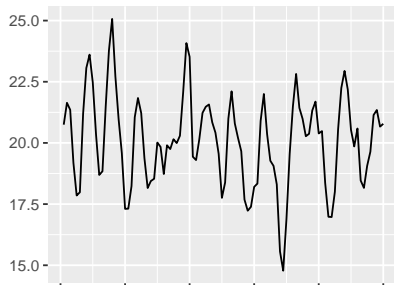

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

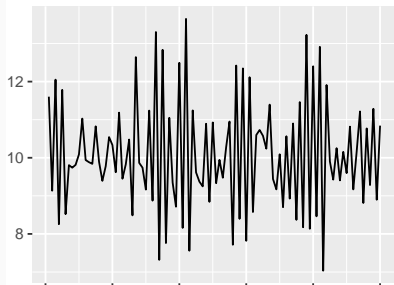

AR(2)

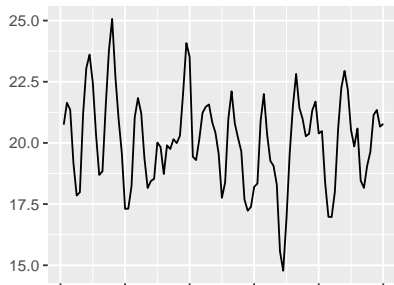

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

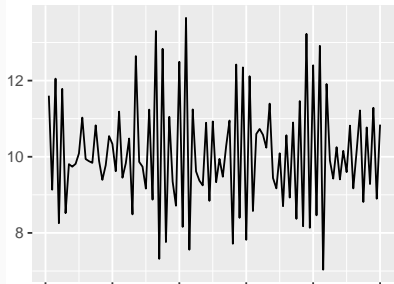

AR(2)

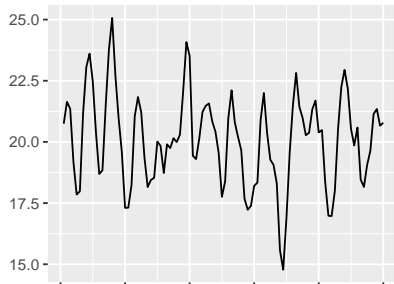

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

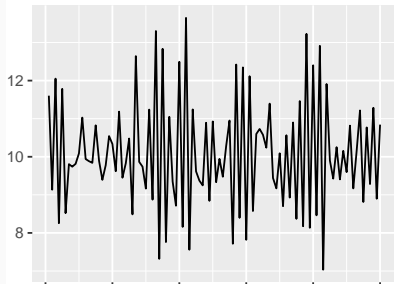

AR(2)

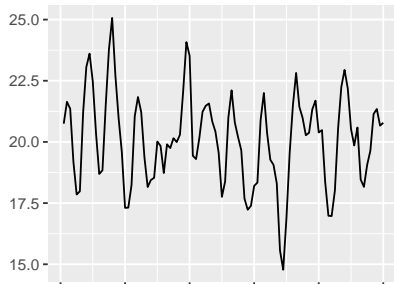

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

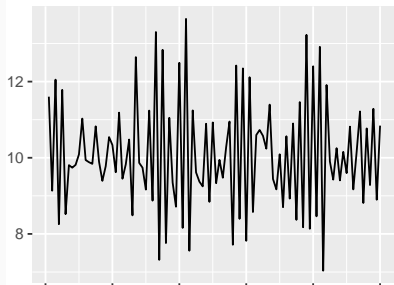

AR(2)

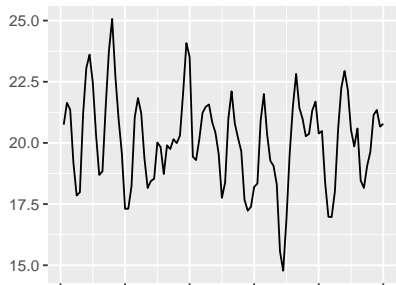

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

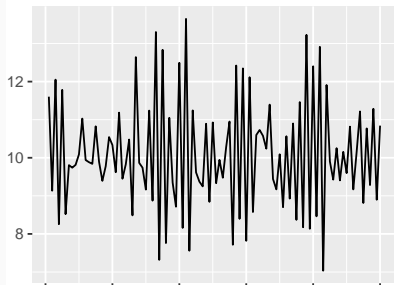

AR(2)

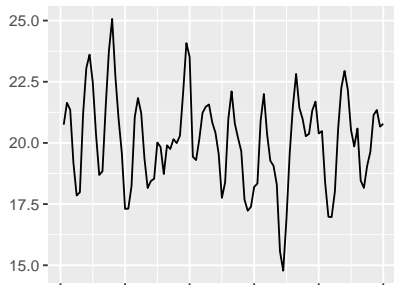

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

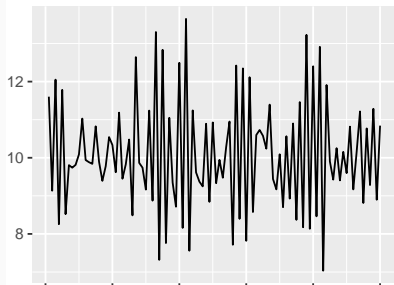

AR(2)

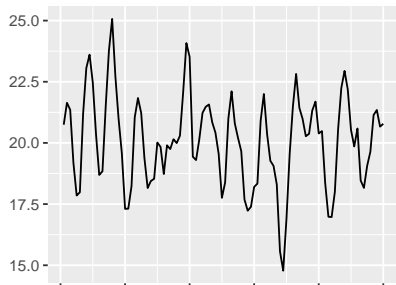

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

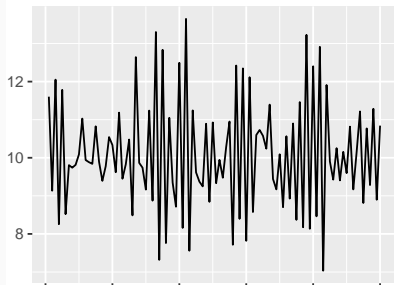

AR(2)

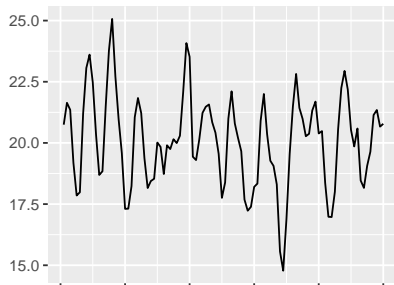

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

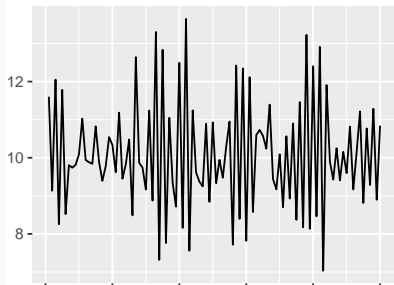

AR(2)

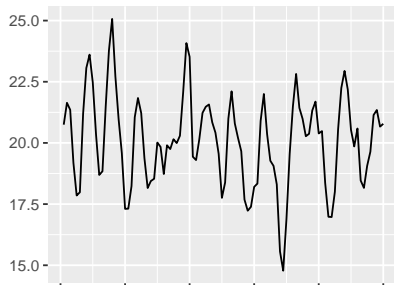

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

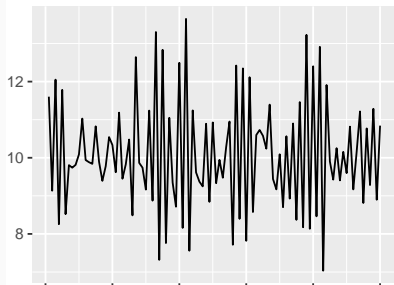

AR(2)

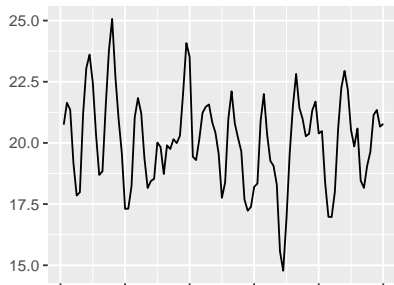

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

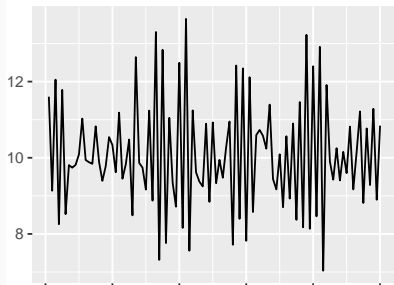

AR(2)

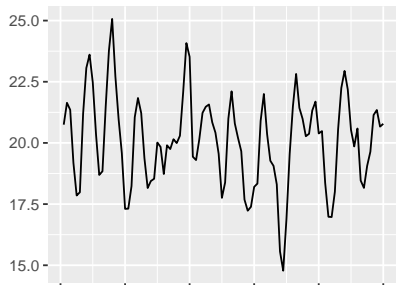

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

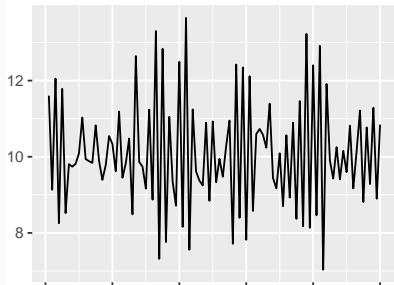

AR(2)

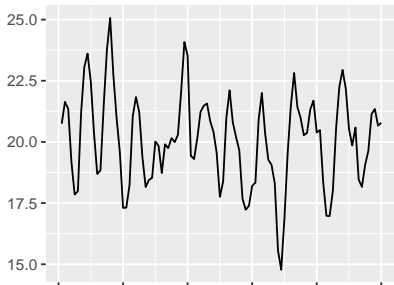

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

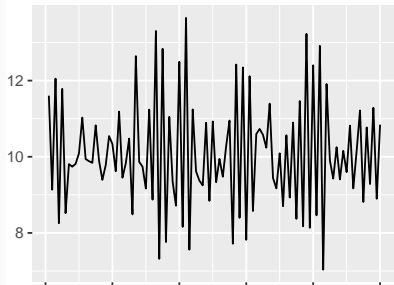

AR(2)

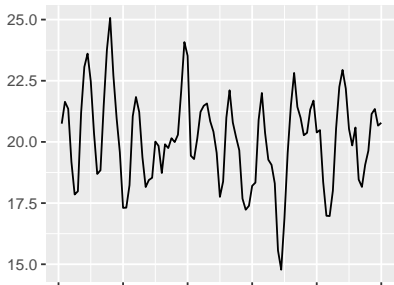

#Autoregressive models


##Autoregressive models

Autoregressive (AR) models:


$$y_t = c + \phi_1 y_{t-1} + \phi_2 y_{t-2} + \cdots + \phi_p y_{t-p} + e_t,$$

where e_t is white noise. This is a multiple regression with **lagged values** of y_t as predictors.

AR(1)

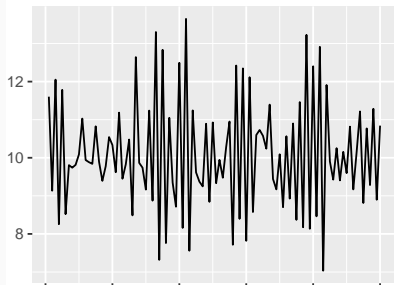


AR(2)

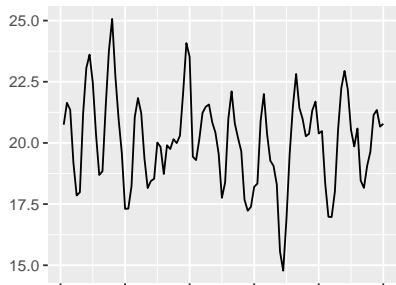

Seasonally adjusted electrical equipment


```
eeadj %>% diff %>% ggtsdisplay
```

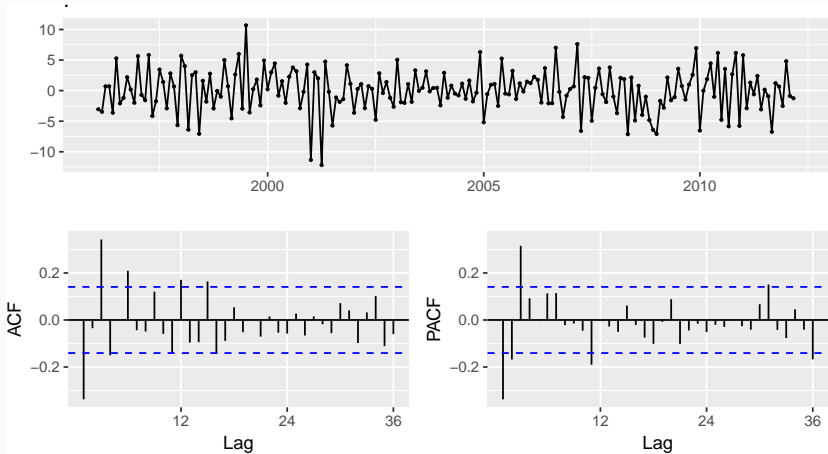

##Seasonally adjusted electrical equipment

Seasonally adjusted electrical equipment


```
eeadj %>% diff %>% ggtsdisplay
```

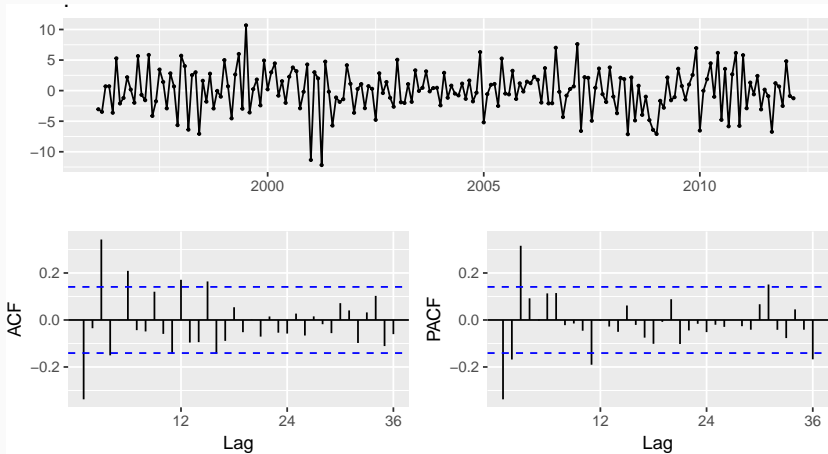

##Seasonally adjusted electrical equipment

Seasonally adjusted electrical equipment

```
eeadj %>% diff %>% ggtsdisplay
```

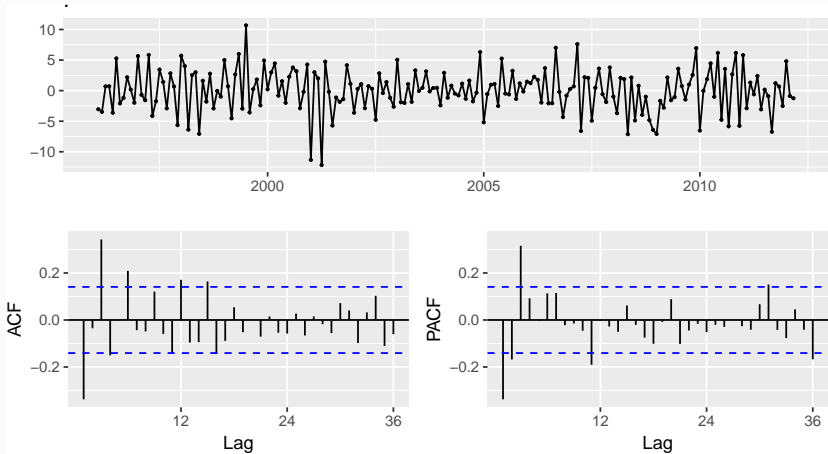

##Seasonally adjusted electrical equipment