Started At: Feb 23, 6:15:46.564 PM


Finished At: Feb 23, 6:15:52.539 PM


Duration : 5.975 s


Features

Scenarios

Steps







Passed - (Failed - 1

Skipped - 0

Passed - 0

Failed - 3

Skipped - 0


Passed - 7

Failed - 2


Skipped - 12








FEATURES SUMMARY 1 - 1

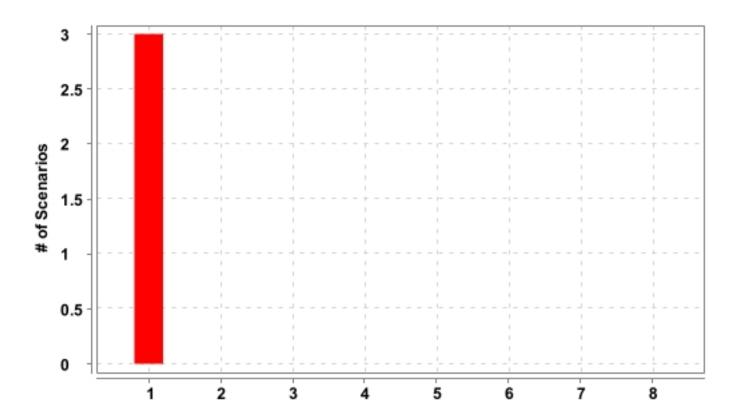

#	Feature Name	T	P	F	S	Duration
1	Testing the transfer scenarious	3	0	3	0	5.975 s

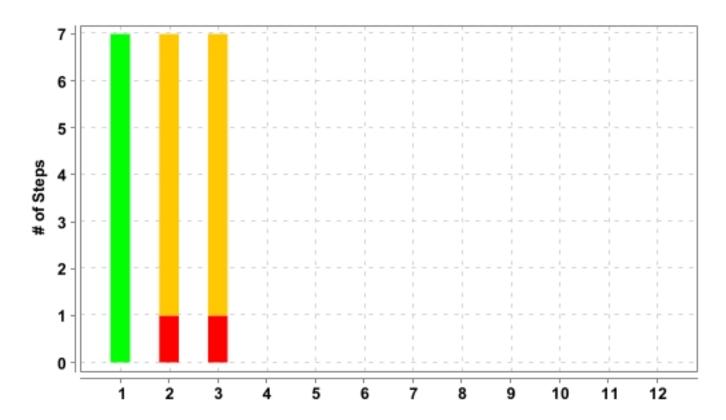

#	Feature Name	Scenario Name	Т	P	F	S	Duration
1	Testing the transfer	I am scenariou A	7	7	0	0	5.782 s
2	Testing the transfer	I am scenariou B	7	0	1	6	0.043 s
3	Testing the transfer	I am scenariou C	7	0	1	6	0.051 s

(F) - Testing the transfer scenarious

// Feb 23, 6:15:46.564 PM // Feb 23, 6:15:52.539 PM //

Duration 5.975 s

Duration

5.782 s

@Tags - @Regression








(F) - Testing the transfer scenarious

(S) - I am scenariou A

// Feb 23, 6:15:46.580 PM // Feb 23, 6:15:52.362 PM //

@Tags - @Regression @smoke

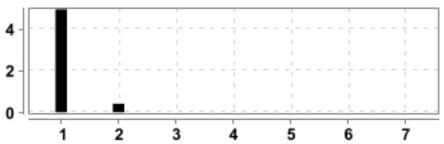






#	Step / Hook Text	Status	Duration
1	Given I want to write a step with precondition	PASSED	4.966 s
2	And some other precondition	PASSED	0.407 s
3	When I complete action	PASSED	0.001 s
4	And some other action	PASSED	0.001 s
5	And yet another action	PASSED	0.000 s
6	Then I validate the outcomes	PASSED	0.001 s
7	And check more outcomes	PASSED	0.001 s
	after - Hooks.hook.afterScenario(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5' System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10', Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: false, browserName: chrome, brow Session ID: 57c6812d8b24681bfcc765bac10d176a at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne at java.base/java.lang.reflect.Constructor.newInstance(Constructor.jav	FAILED	0.277 s

(F) - Testing the transfer scenarious

(S) - I am scenariou B

// Feb 23, 6:15:52.413 PM // Feb 23, 6:15:52.456 PM //

@Tags - @Regression

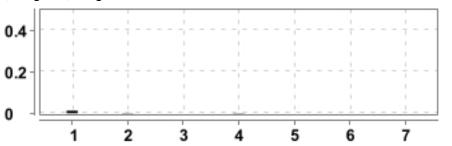

Steps
Total 7
Pass 0
Fall 1



#	Step / Hook Text	Status	Duration
1	Given I want to write a step with precondition	FAILED	0.012 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: 57c6812d8b24681bfcc765bac10d176a		
	*** Element info: {Using=xpath, value=//*[contains(text(),'Log In')]}		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
2	And some other precondition	SKIPPED	0.001 s
3	When I complete action	SKIPPED	0.000 s
4	And some other action	SKIPPED	0.001 s
5	And yet another action	SKIPPED	0.000 s
6	Then I validate the outcomes	SKIPPED	0.000 s
7	And check more outcomes	SKIPPED	0.000 s
	after - Hooks.hook.afterScenario(io.cucumber.java.Scenario)	FAILED	0.006 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: 57c6812d8b24681bfcc765bac10d176a		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.jav		


Duration 0.043 s

(F) - Testing the transfer scenarious

(S) - I am scenariou C

// Feb 23, 6:15:52.488 PM // Feb 23, 6:15:52.539 PM //

@Tags - @Regression

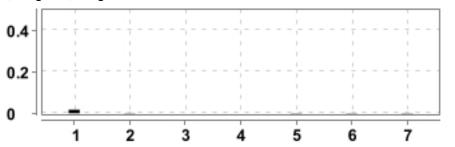

Steps
Total 7
Pass 0
Fail 1



#	Step / Hook Text	Status	Duration
1	Given I want to write a step with precondition	FAILED	0.017 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: 57c6812d8b24681bfcc765bac10d176a		
	*** Element info: {Using=xpath, value=//*[contains(text(),'Log In')]}		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
2	And some other precondition	SKIPPED	0.001 s
3	When I complete action	SKIPPED	0.000 s
4	And some other action	SKIPPED	0.000 s
5	And yet another action	SKIPPED	0.001 s
6	Then I validate the outcomes	SKIPPED	0.001 s
7	And check more outcomes	SKIPPED	0.001 s
	after - Hooks.hook.afterScenario(io.cucumber.java.Scenario)	FAILED	0.007 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: 57c6812d8b24681bfcc765bac10d176a		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.jav		

Duration 0.051 s