Started At: Feb 23, 6:17:09.116 PM

Finished At: Feb 23, 6:17:16.103 PM


Scenarios

Duration : 6.987 s

1

Features






Steps

Passed - 0
Failed - 1
Skipped - 0

Passed - 1
Failed - 2
Skipped - 0


Passed - 7
Failed - 2
Skipped - 12








FEATURES SUMMARY 1 - 1

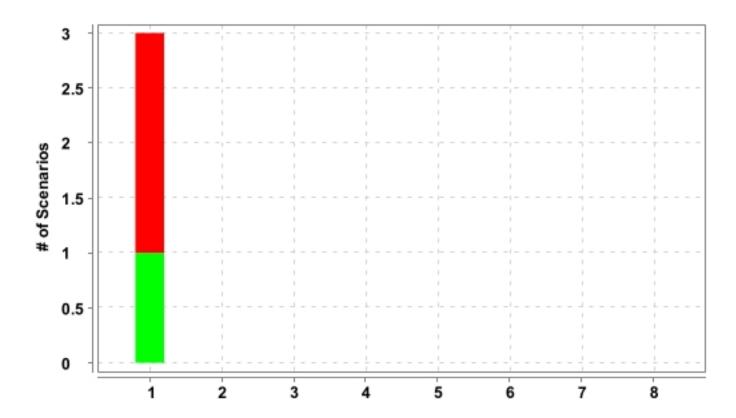

#	Feature Name	T	P	F	S	Duration
1	Testing the transfer scenarious	3	1	2	0	6.987 s

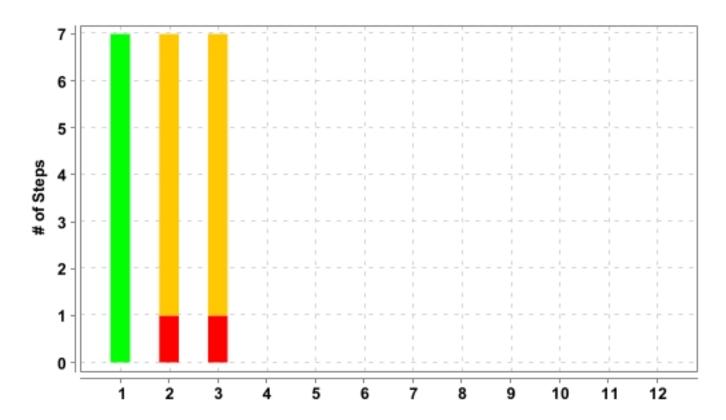

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Testing the transfer	I am scenariou A	7	7	0	0	6.629 s
2	Testing the transfer	I am scenariou B	7	0	1	6	0.194 s
3	Testing the transfer	I am scenariou C	7	0	1	6	0.040 s

(F) - Testing the transfer scenarious

// Feb 23, 6:17:09.116 PM // Feb 23, 6:17:16.103 PM //

Duration 6.987 s


Duration

6.629 s

@Tags - @Regression









(F) - Testing the transfer scenarious

(S) - I am scenariou A

// Feb 23, 6:17:09.168 PM // Feb 23, 6:17:15.797 PM //

@Tags - @Regression @smoke

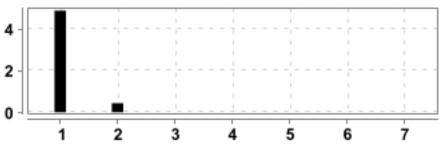






#	Step / Hook Text	Status	Duration
1	Given I want to write a step with precondition	PASSED	4.894 s
2	And some other precondition	PASSED	0.430 s
3	When I complete action	PASSED	0.001 s
4	And some other action	PASSED	0.001 s
5	And yet another action	PASSED	0.000 s
6	Then I validate the outcomes	PASSED	0.001 s
7	And check more outcomes	PASSED	0.001 s
	after - Hooks.hook.afterScenario(io.cucumber.java.Scenario)	PASSED	1.177 s
	I am scenariou A		
	Media saved - null		

(F) - Testing the transfer scenarious

(S) - I am scenariou B

// Feb 23, 6:17:15.835 PM // Feb 23, 6:17:16.029 PM //

@Tags - @Regression

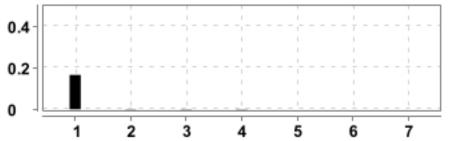

Steps Total 7



#	Step / Hook Text	Status	Duration
1	Given I want to write a step with precondition	FAILED	0.165 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: ff944f10b68102eecbdfcb3abceb97fd		
	*** Element info: {Using=xpath, value=//*[contains(text(),'Log In')]}		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
2	And some other precondition	SKIPPED	0.001 s
3	When I complete action	SKIPPED	0.001 s
4	And some other action	SKIPPED	0.001 s
5	And yet another action	SKIPPED	0.000 s
6	Then I validate the outcomes	SKIPPED	0.000 s
7	And check more outcomes	SKIPPED	0.000 s
	after - Hooks.hook.afterScenario(io.cucumber.java.Scenario)	FAILED	0.008 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: ff944f10b68102eecbdfcb3abceb97fd		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.jav		


Duration 0.194 s

(F) - Testing the transfer scenarious

(S) - I am scenariou C

// Feb 23, 6:17:16.063 PM // Feb 23, 6:17:16.103 PM //

@Tags - @Regression

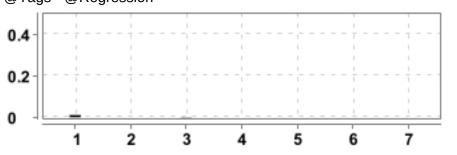

Steps
Total 7
Pass 0



#	Step / Hook Text	Status	Duration
1	Given I want to write a step with precondition	FAILED	0.010 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: ff944f10b68102eecbdfcb3abceb97fd		
	*** Element info: {Using=xpath, value=//*[contains(text(),'Log In')]}		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
2	And some other precondition	SKIPPED	0.000 s
3	When I complete action	SKIPPED	0.001 s
4	And some other action	SKIPPED	0.000 s
5	And yet another action	SKIPPED	0.000 s
6	Then I validate the outcomes	SKIPPED	0.000 s
7	And check more outcomes	SKIPPED	0.000 s
	after - Hooks.hook.afterScenario(io.cucumber.java.Scenario)	FAILED	0.009 s
	org.openqa.selenium.NoSuchSessionException: invalid session id		
	Build info: version: '4.0.0-alpha-7', revision: 'de8579b6d5'		
	System info: host: 'SATYAM', ip: '192.168.1.6', os.name: 'Windows 10',		
	Driver info: org.openqa.selenium.chrome.ChromeDriver		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, brow		
	Session ID: ff944f10b68102eecbdfcb3abceb97fd		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newIns		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.ne		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.jav		

Duration 0.040 s