
```
Source.cpp + X
                                                                                         ▼ 😭 main()
2018_2_b
                                               (Global Scope)
             #include <iostream>
      2
             using namespace std;
           ⊡int main() {
                 int x = 5, y = 20, k = 2;
                 if (x > y) {      //no output cz 5 > 20 not true so nothing will happen
   if (y > k) {
                          k = x;
     10
                      else {
     11
                          k = x + y;
     12
                          cout << k;
     13
     14
     15
     16
     17
                 return 0;
     18
     19
```

```
Source.cpp + X
2018_2_c
                                              (Global Scope)
            #include <iostream>
             using namespace std;
           □int main() {
                 int num;
                 cout << "Input Number: ";</pre>
                 cin >> num;
                 if (num % 2 == 0) {
                     cout << num << " is Even Number" << endl;
     10
                 else {
           11
                     cout << num << " is Odd Number" << endl;</pre>
     12
     13
     14
                 return 0;
     15
     16
```

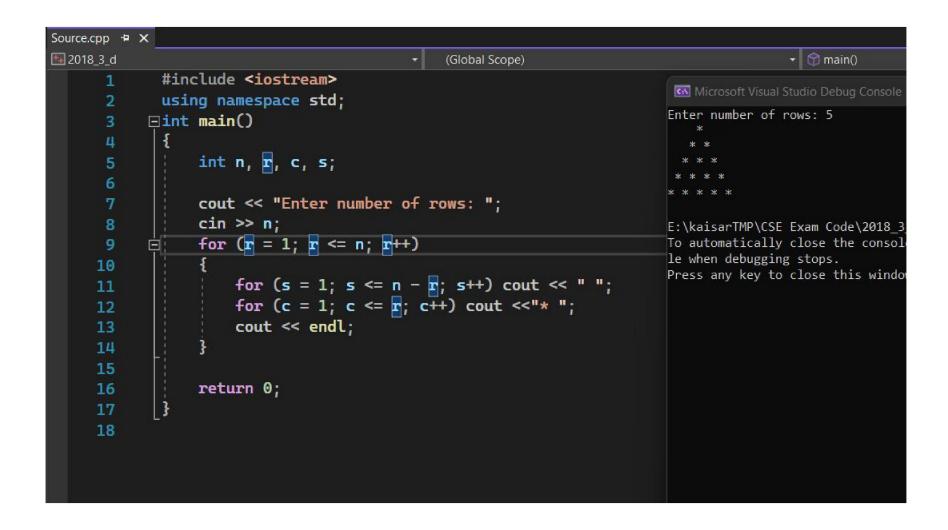

```
Source.cpp 🛨 🗙
5 2018_7_a
                                                (Global Scope)
           □int main() {
                  double Rin, Rout, Vin, Vout;
                  cout << "Inner Radius: ";</pre>
                  cin >> Rin;
                  cout << "Outer Radius: ";</pre>
                  cin >> Rout;
     10
                  cout << "Inner Velocity: ";</pre>
     11
                  cin >> Vin;
     12
     13
                  Vout = Vin * pow((Rin / Rout), 2);
     14
                  cout << "Outer Velocity: "<<Vout<< " ft/sec" << endl;</pre>
     15
     16
                  return 0;
     17
     18
```

```
Source.cpp + X
                                                                                           ▼ 😭 main()
2018_7_b
                                                (Global Scope)
          □#include <iostream>
           #include <iomanip>
            using namespace std;
          ⊡int main() {
                double r1, r2, r3, req = 0.0;
                r1 = 1000.0;
                r2 = 500.0;
                r3 = 250.0;
                req = 1 / ((1 / r1) + (1 / r2) + (1 / r3));
    11
                cout ;
    12
                cout << "The Combined Resistance " << setw(7) << setprecision(5) << setfill('0') << req << "ohms." << endl;</pre>
    13
    14
                return 0;
    17
```

```
Source.cpp ≠ X
5 2018_7_c
                                       (Global Scope)
            #include <cmath>
      2
             using namespace std;
      3
      4
           ∃int main() {
      5
      6
                 int x, n;
                 long sum = 0;
      8
                 cout << "Enter the value of x: ";
      9
                 cin >> x;
     10
                 cout << "Enter the value of n: ";
     11
     12
                 cin >> n;
     13
     14
                 for (int i = 0; i <= n; i++) {
           sum += pow(x, i);
     15
     16
                 cout << "Output of the Series is: ";</pre>
     17
                 cout << sum;
     18
     19
     20
                 return 0;
     21
```