

agent-mem

Source-grounded memory for coding agents

Local capture, retrieval, and source-linked session context

ORIGIN Research on long-term agent memory

SYSTEM Local sources, local search, bounded context

The gap between sessions

CURRENT SESSION

Active context

Prompt, files, tool results, and the decisions made during the current task.

NEXT SESSION

Missing history

Why a decision was made, which source supported it, and whether it was later corrected.

Question: How does a later session retrieve evidence it can verify?

The design decision

RESEARCH ORIGIN

Keep the source complete. Keep injected context small.

The research review separates storage, retrieval, and context handoff.

SOURCE **Original**

evidence

source_event and
source_span preserve
provenance.

SEARCH **Local**

retrieval


FTS5 finds exact terms. E5
finds similar wording.

CONTEXT **Bounded**


evidence

Only the selected
EvidencePacket enters the
session.

The agent-mem viewer

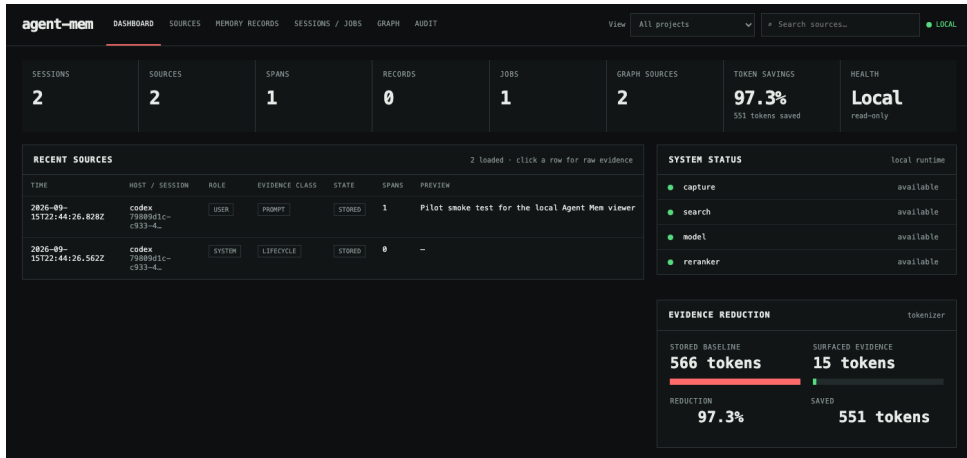


Persistence: the source stays local

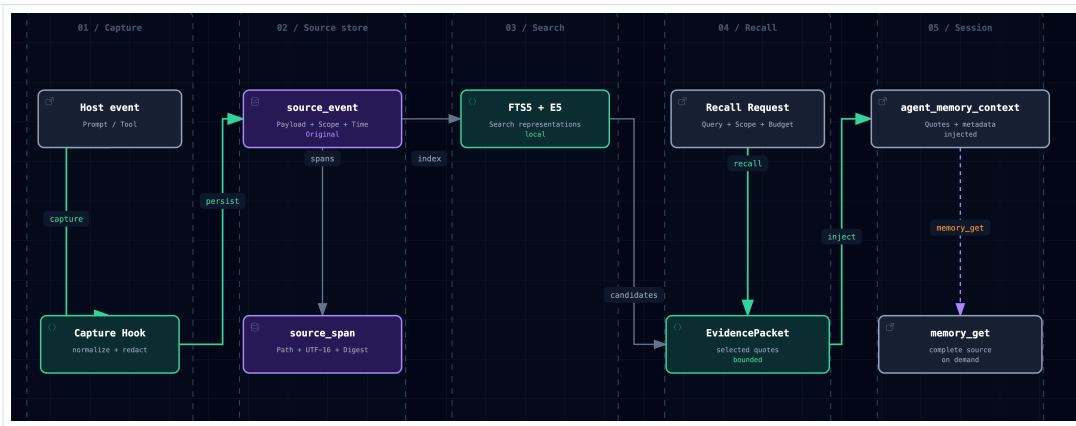

The source stays intact. **FTS5** and **E5** only index it for retrieval.

Session handoff: selected evidence enters

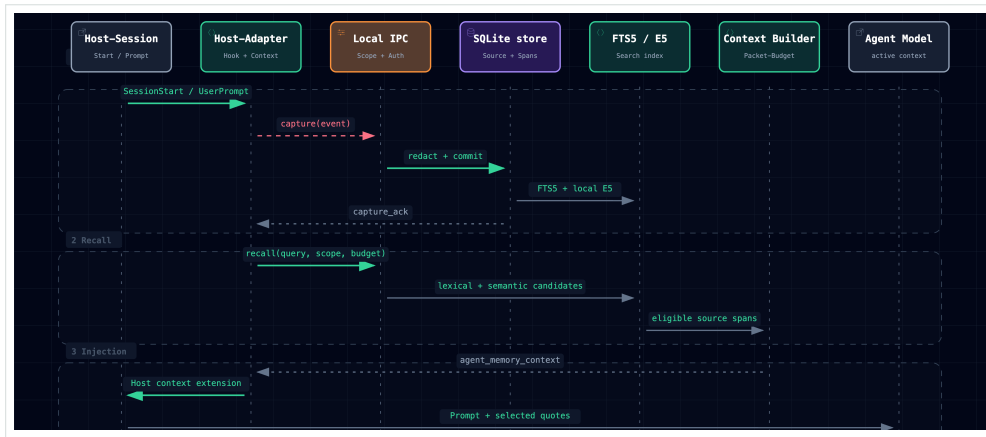

`agent_memory_context` carries selected quotes. `memory_get` reads the full source.

Result and limits

WHAT THE SYSTEM DELIVERS

A later session can retrieve a decision and inspect its source.

TODAY Local capture, FTS5 and E5 retrieval, and bounded source-linked context.

NEXT Revisions, temporal models, and evaluation for stale or conflicting evidence.