



INTERNATIONAL CYBERSECURITY AND DIGITAL FORENSICS ACADEMY

Course: BVWS103-OWASP Top 10 Vulnerabilities And
Exploitation Techniques

Student Name: Abubakari-Sadique Hamidu
Student ID: 2025/FWSD/11392

Course: BVWS102 – Web Application Security Essentials

Instructor: Aminu Iddris (CCNA, CompTIA, CEH, OSCP, CISSP, CISM)

Title: XAMPP Installation on Kali Linux

Introduction

This report presents the steps I followed to install XAMPP on my Kali Linux system. I set up a local web server environment for web application testing and security practice. I performed all tasks directly on my system and verified each service using terminal commands and a web browser.

Objective

The goal of this lab was to install XAMPP on Kali Linux and confirm proper operation of Apache, MySQL, and PHP.

Procedure

Step 1. Update system repositories.

I opened the terminal.

I ran the apt update command.

I confirmed successful repository updates from the terminal output.




The screenshot shows a Kali Linux desktop with a blue-themed background. A terminal window is open, displaying the output of the 'sudo apt update' command. The terminal output shows the following:

```
kali@kali: ~/Downloads
Session Actions Edit View Help
(kali@kali)-[~/Downloads]
└─$ sudo apt update
[sudo] password for kali:
Get:1 http://kali.download/kali kali-rolling InRelease [34.0 kB]
Get:2 http://kali.download/kali kali-rolling/main amd64 Packages [20.7 MB]
Get:3 http://kali.download/kali kali-rolling/main amd64 Contents (deb) [52.2 MB]
49% [3 Contents-amd64 9,895 kB/52.2 MB 19%] 2,604 kB/s 16s
```



Step 3. Make the installer executable.


After downloading the file I navigated to the Downloads directory using the terminal. I changed the installer file permission using the chmod command. I confirmed executable permission from the command output.

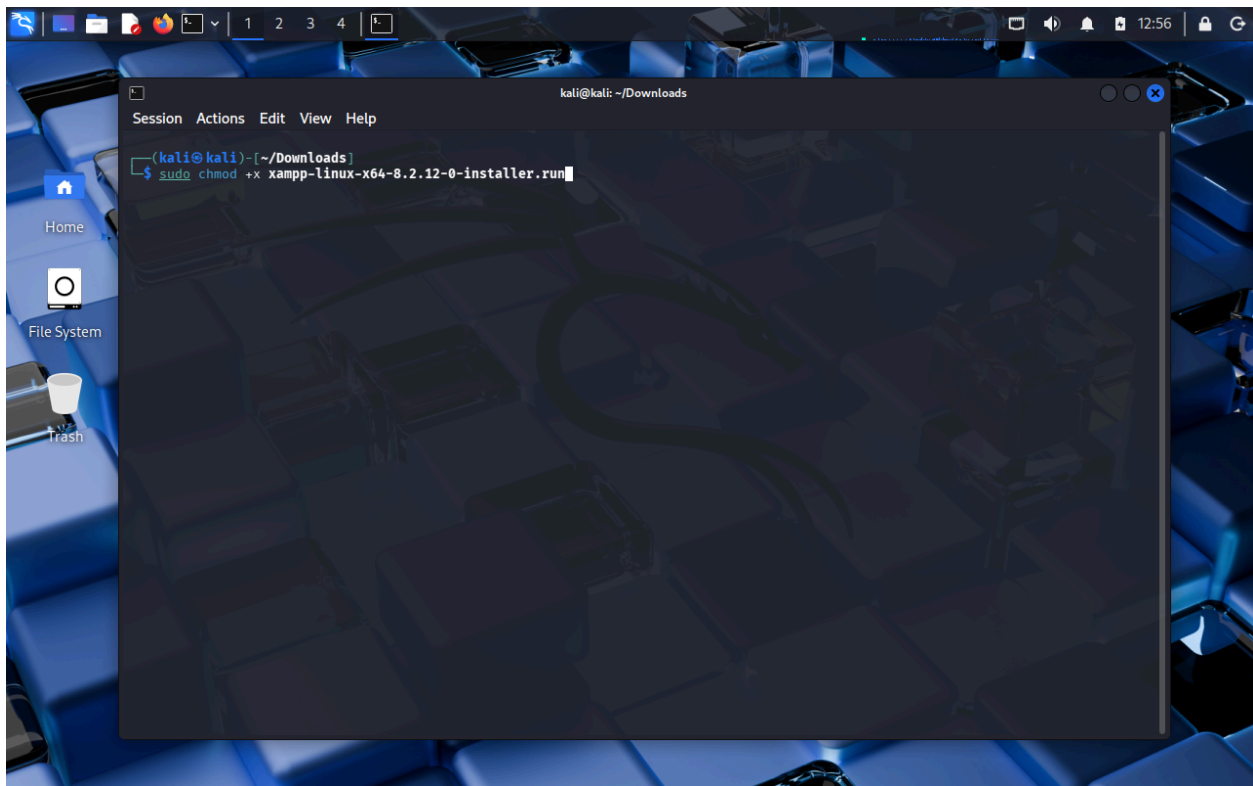

Step 4. Install XAMPP.

I executed the installer using sudo privileges. I followed the graphical installation wizard. I completed the installation without errors.

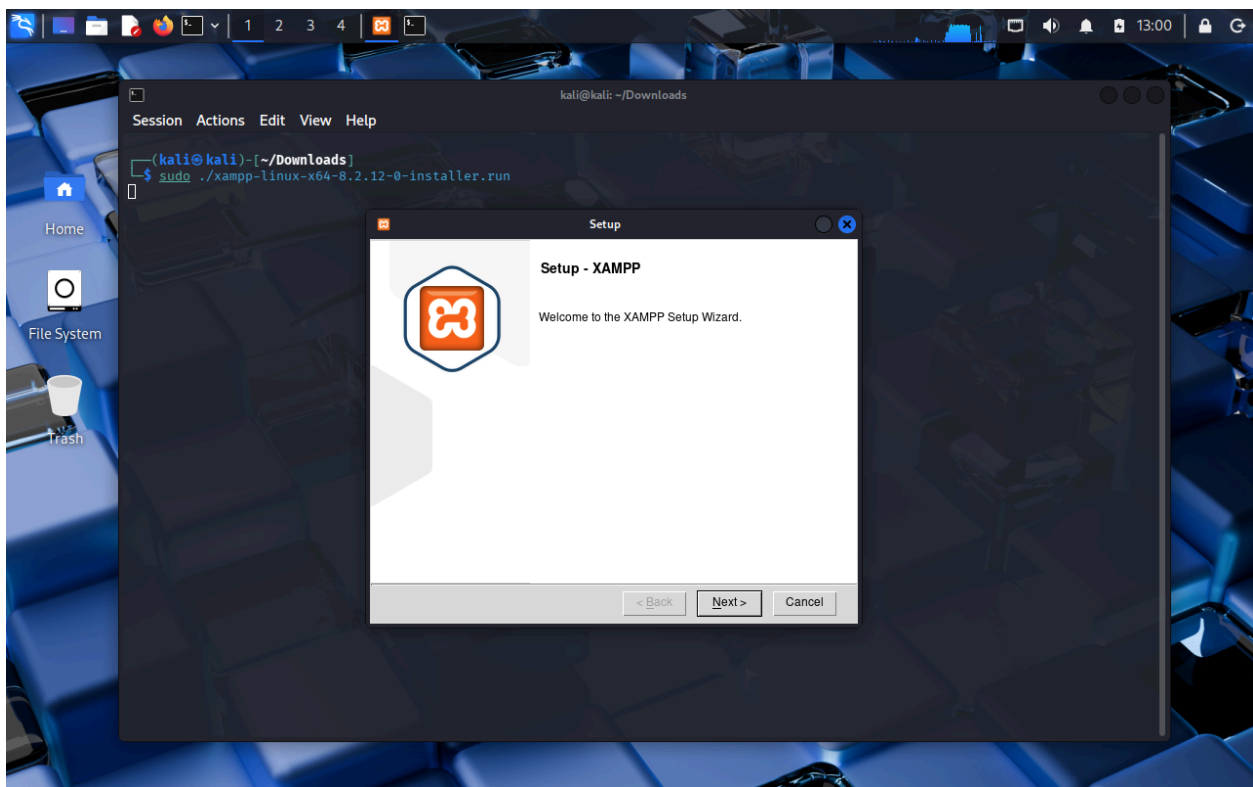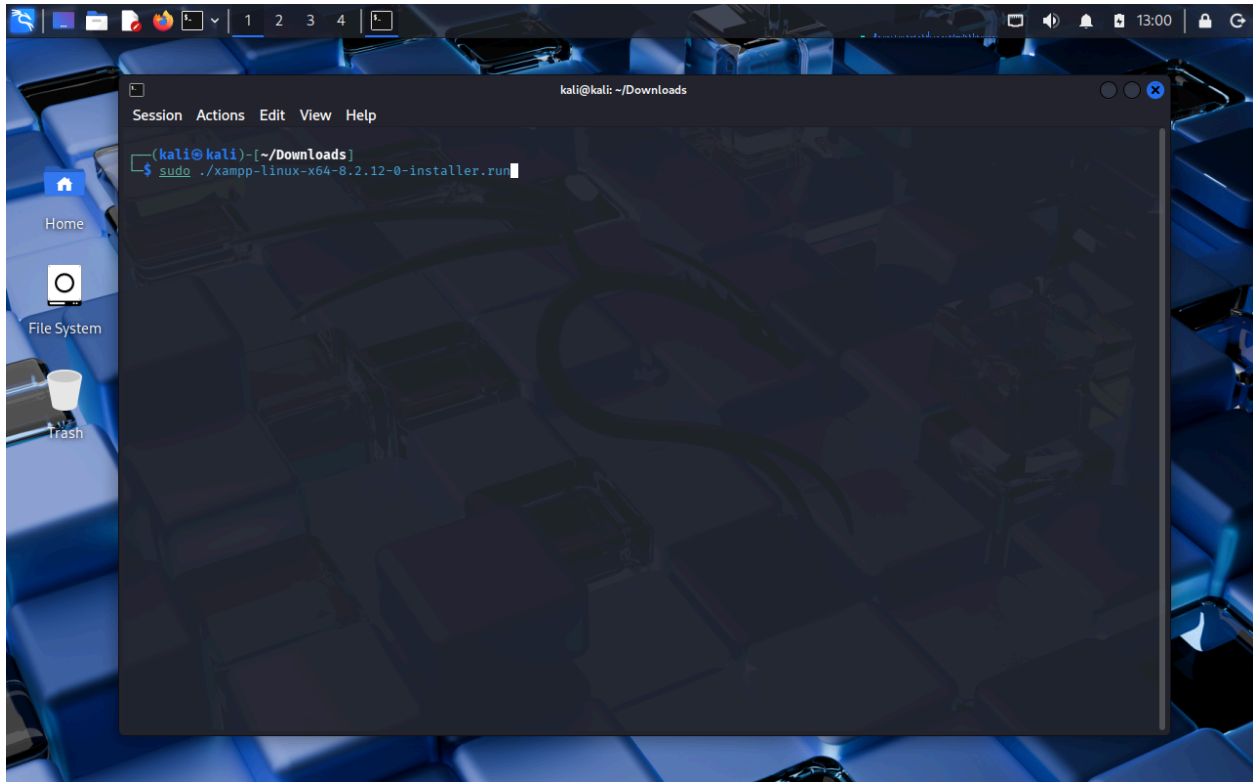


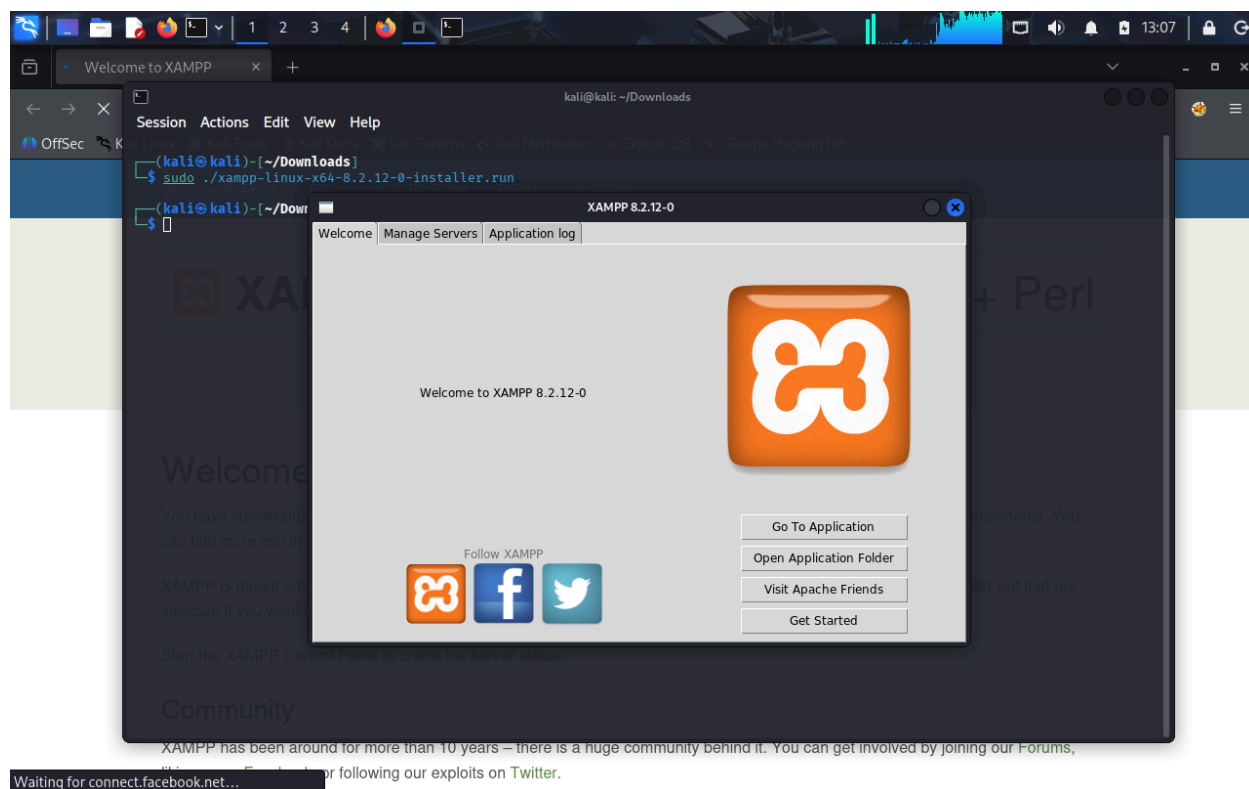

Step 5. Start XAMPP services.

I started XAMPP using the `lampp start` command.

I confirmed that Apache and MySQL services started successfully.

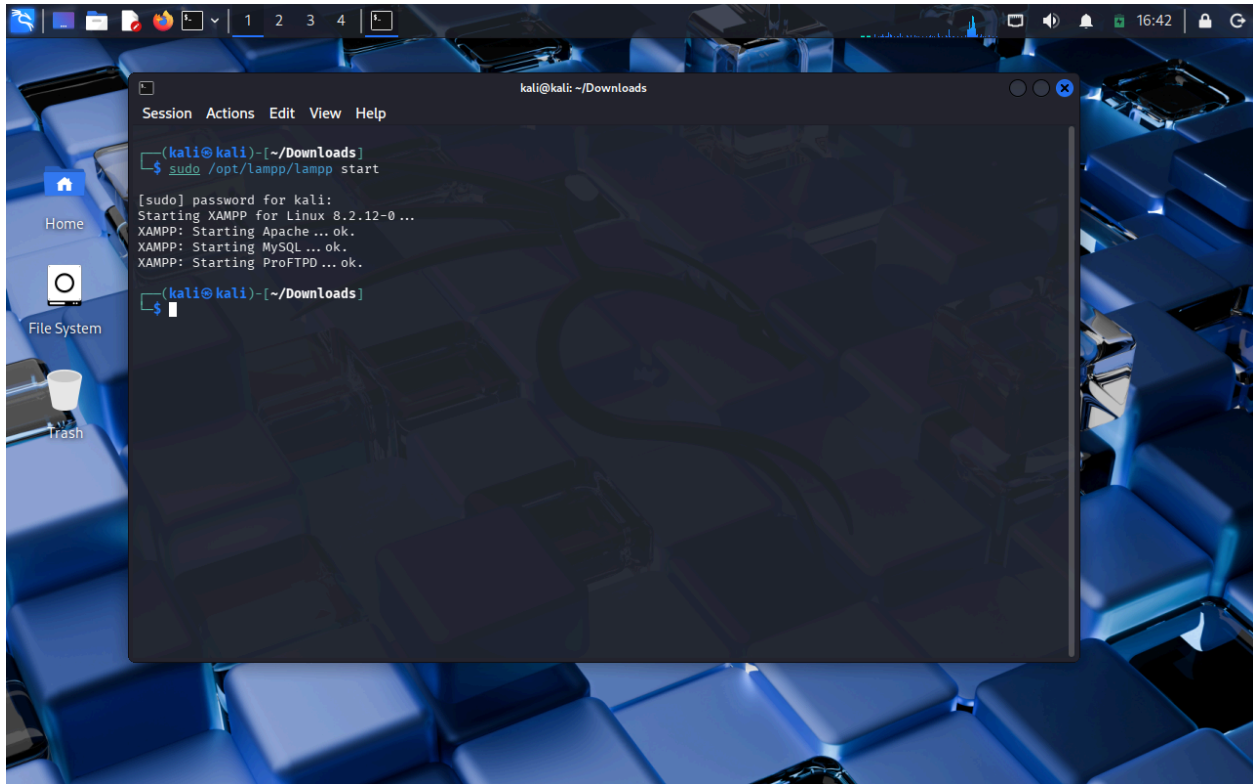


Step 6. Verify installation through browser.

I opened Firefox.

I accessed <http://localhost>.

I viewed the XAMPP welcome page.

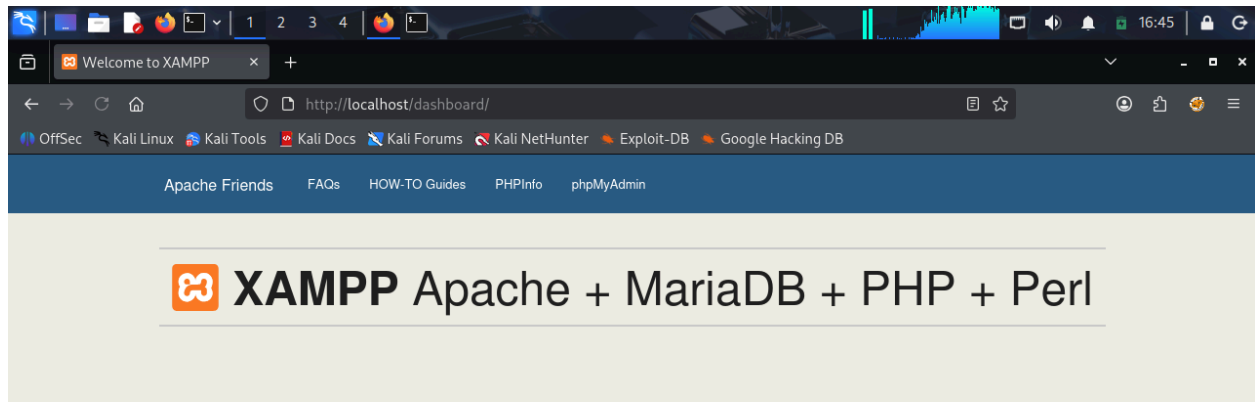

Welcome to XAMPP for Linux 8.2.12

You have successfully installed XAMPP on this system! Now you can start using Apache, MariaDB, PHP and other components. You can find more info in the [FAQs](#) section or check the [HOW-TO Guides](#) for getting started with PHP applications.

XAMPP is meant only for development purposes. It has certain configuration settings that make it easy to develop locally but that are insecure if you want to have your installation accessible to others.

Start the XAMPP Control Panel to check the server status.

Community

XAMPP has been around for more than 10 years – there is a huge community behind it. You can get involved by joining our [Forums](#), liking us on [Facebook](#), or following our exploits on [Twitter](#).

Step 7. Test PHP support.


I navigated to the htdocs directory.

I created a file named test.php.

I added PHP code to display system information.


I accessed <http://localhost/test.php> using the browser.


I confirmed PHP output displayed correctly.

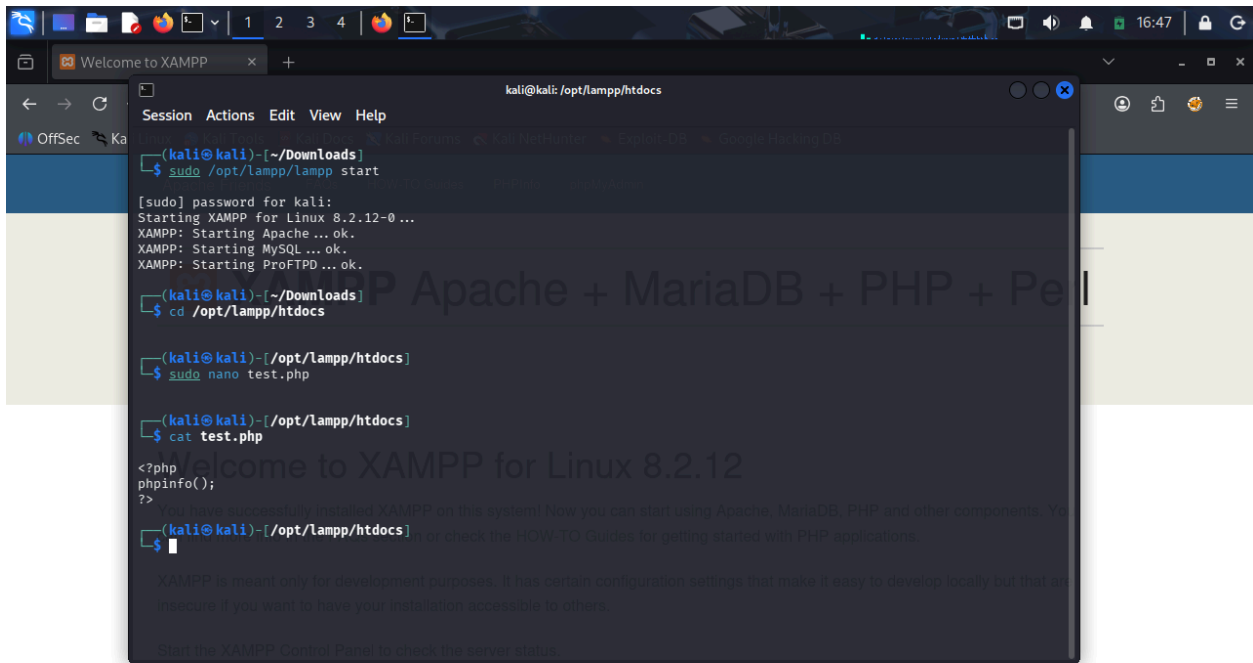

Community

XAMPP has been around for more than 10 years – there is a huge community behind it. You can get involved by joining our [Forums](#), liking us on [Facebook](#), or following our exploits on [Twitter](#).

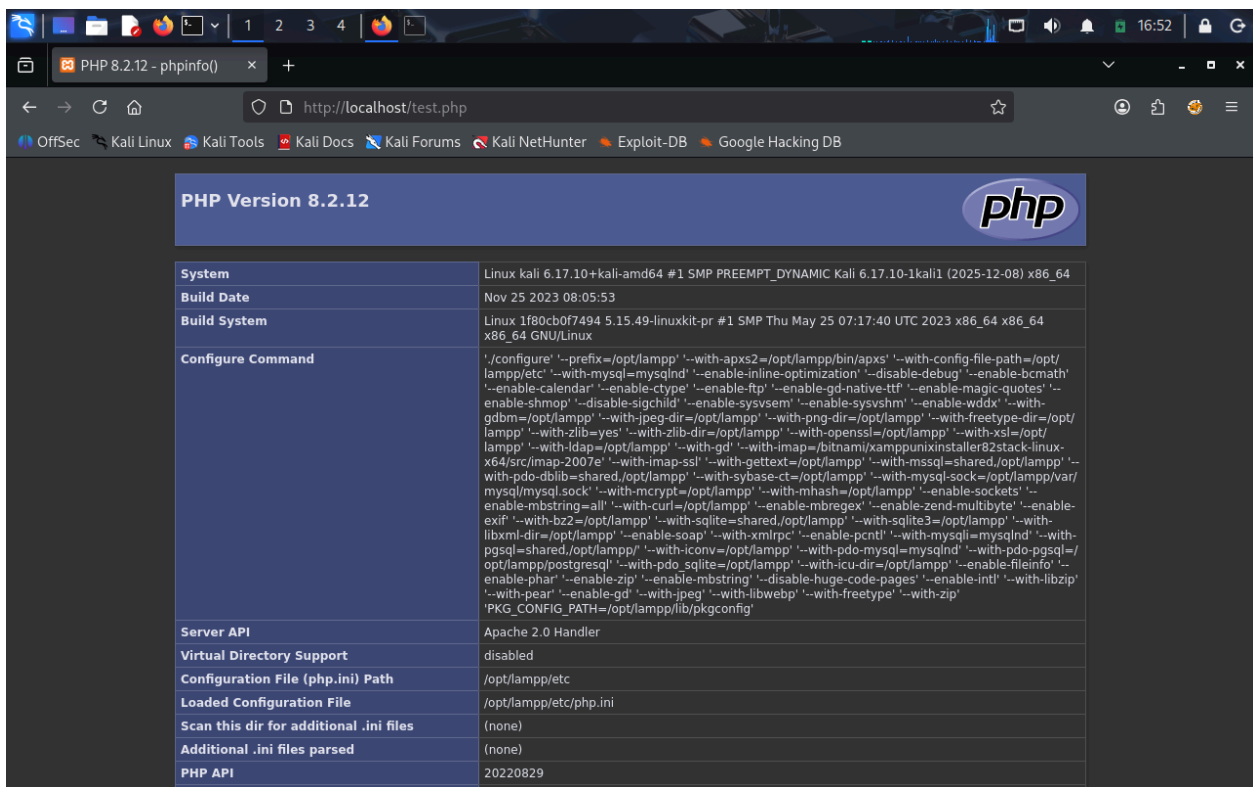

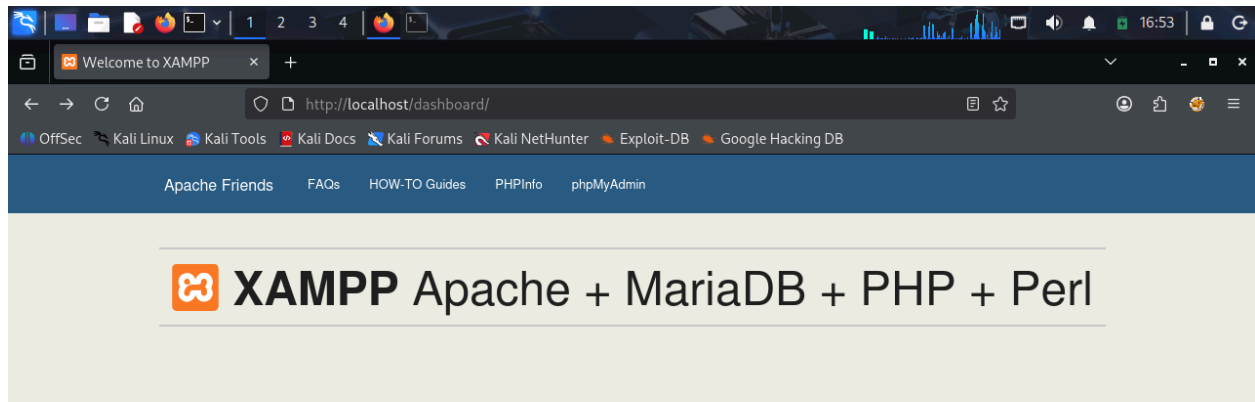

Welcome to XAMPP for Linux 8.2.12

You have successfully installed XAMPP on this system! Now you can start using Apache, MariaDB, PHP and other components. You can find more info in the [FAQs](#) section or check the [HOW-TO Guides](#) for getting started with PHP applications.

XAMPP is meant only for development purposes. It has certain configuration settings that make it easy to develop locally but that are insecure if you want to have your installation accessible to others.

Start the XAMPP Control Panel to check the server status.

Community



XAMPP has been around for more than 10 years – there is a huge community behind it. You can get involved by joining our [Forums](#), liking us on [Facebook](#), or following our exploits on [Twitter](#).

Configuration		
apache2handler		
Apache Version	Apache/2.4.58 (Unix) OpenSSL/1.1.1w PHP/8.2.12 mod_perl/2.0.12 Perl/v5.34.1	
Apache API Version	20120211	
Server Administrator	you@example.com	
Hostname:Port	localhost:0	
User/Group	daemon(1)/1	
Max Requests	Per Child: 0 - Keep Alive: on - Max Per Connection: 100	
Timeouts	Connection: 300 - Keep-Alive: 5	
Virtual Server	No	
Server Root	/opt/lampp	
Loaded Modules	core mod_so http core prefork mod_authn_file mod_authn_dbm mod_authn_anon mod_authn_dbd mod_authn_socache mod_authn_core mod_authz_host mod_authz_groupfile mod_authz_user mod_authz_dbm mod_authz_owner mod_authz_dbd mod_authz_core mod_authnz_ldap mod_access_compat mod_auth_basic mod_auth_form mod_auth_digest mod_allowmethods mod_file_cache mod_cache mod_cache_disk mod_socache_shmcb mod_socache_dbm mod_socache_memcache mod_dbd mod_bucketeer mod_dumpio mod_echo mod_case_filter mod_case_filter_in mod_buffer mod_ratelimit mod_reqtimeout mod_ext_filter mod_request mod_include mod_filter mod_substitute mod_sed mod_charset_lite mod_deflate mod_mime util_ldap mod_log_config mod_log_debug mod_logio mod_env mod_mime_magic mod_cern_meta mod_expires mod_headers mod_usertrack mod_unique_id mod_setenvif mod_version mod_remoteip mod_proxy mod_proxy_connect mod_proxy_ftp mod_proxy_http mod_proxy_fcgi mod_proxy_scgi mod_proxy_ajp mod_proxy_balancer mod_proxy_express mod_session mod_session_cookie mod_session_dbd mod_slotmem_shm mod_ssl mod_lbmethod_byrequests mod_lbmethod_bytraffic mod_lbmethod_bybusyness mod_lbmethod_heartbeat mod_unixd mod_dav mod_status mod_autoindex mod_info mod_suexec mod_cgi mod_cgid mod_dav_fs mod_vhost_alias mod_negotiation mod_dir mod_actions mod_speling mod_userdir mod_alias mod_rewrite mod_php mod_perl	
Directive	Local Value	Master Value
engine	On	On
last modified	Off	Off

Step 8. Stop XAMPP services.

I stopped XAMPP services using the lampp stop command.

I confirmed service shutdown from terminal output.

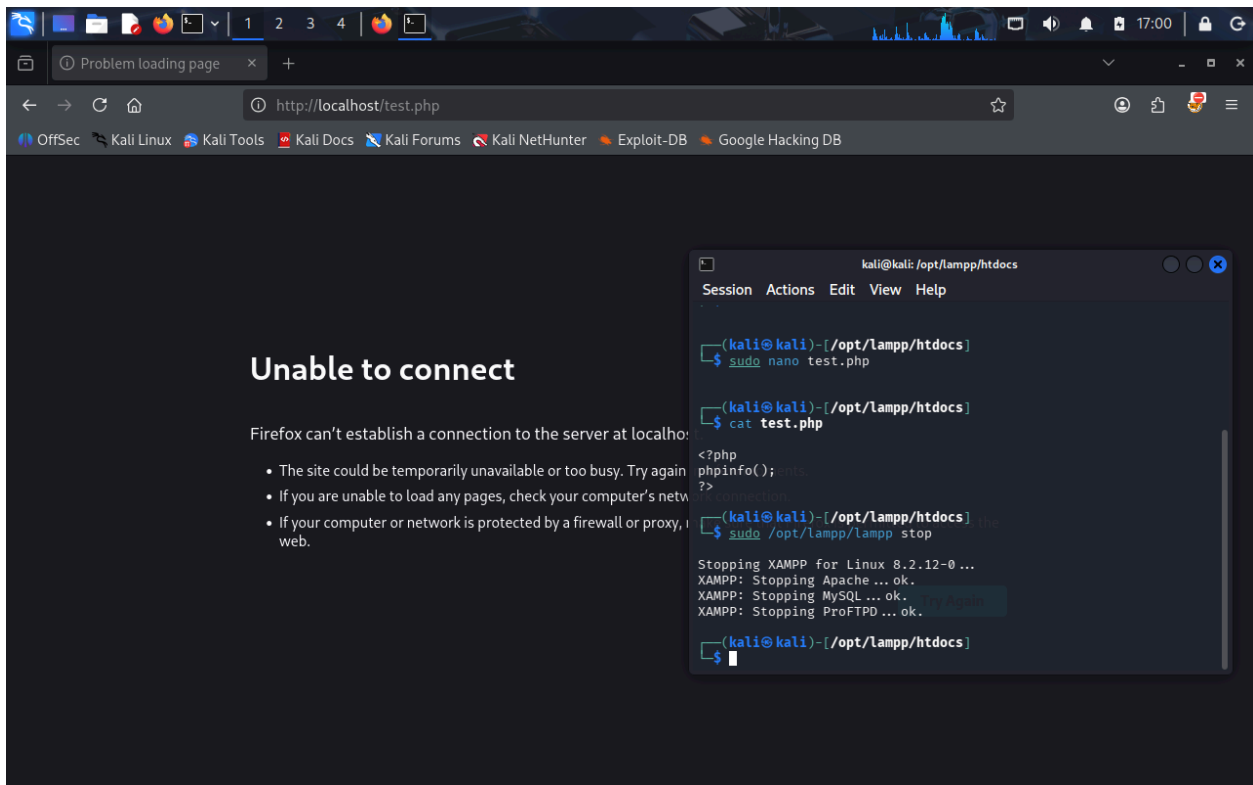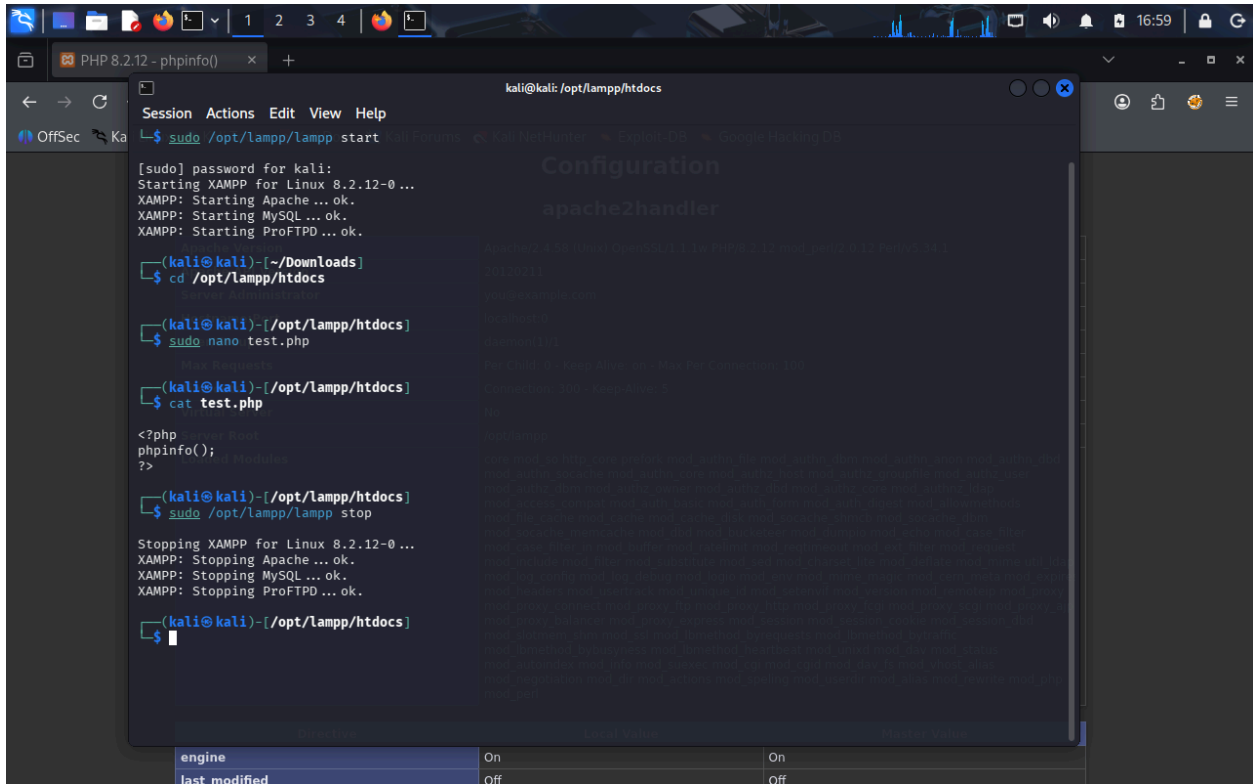

With this, I installed XAMPP successfully on Kali Linux.
Apache and MySQL services started without errors.
PHP functionality worked as expected using a test file.
The local web server environment is ready for further labs.

Conclusion

I completed the XAMPP installation and verification process as required.
The system now supports hosting and testing web applications in a controlled local environment.