


Prompt Management System — Architecture & Workflow

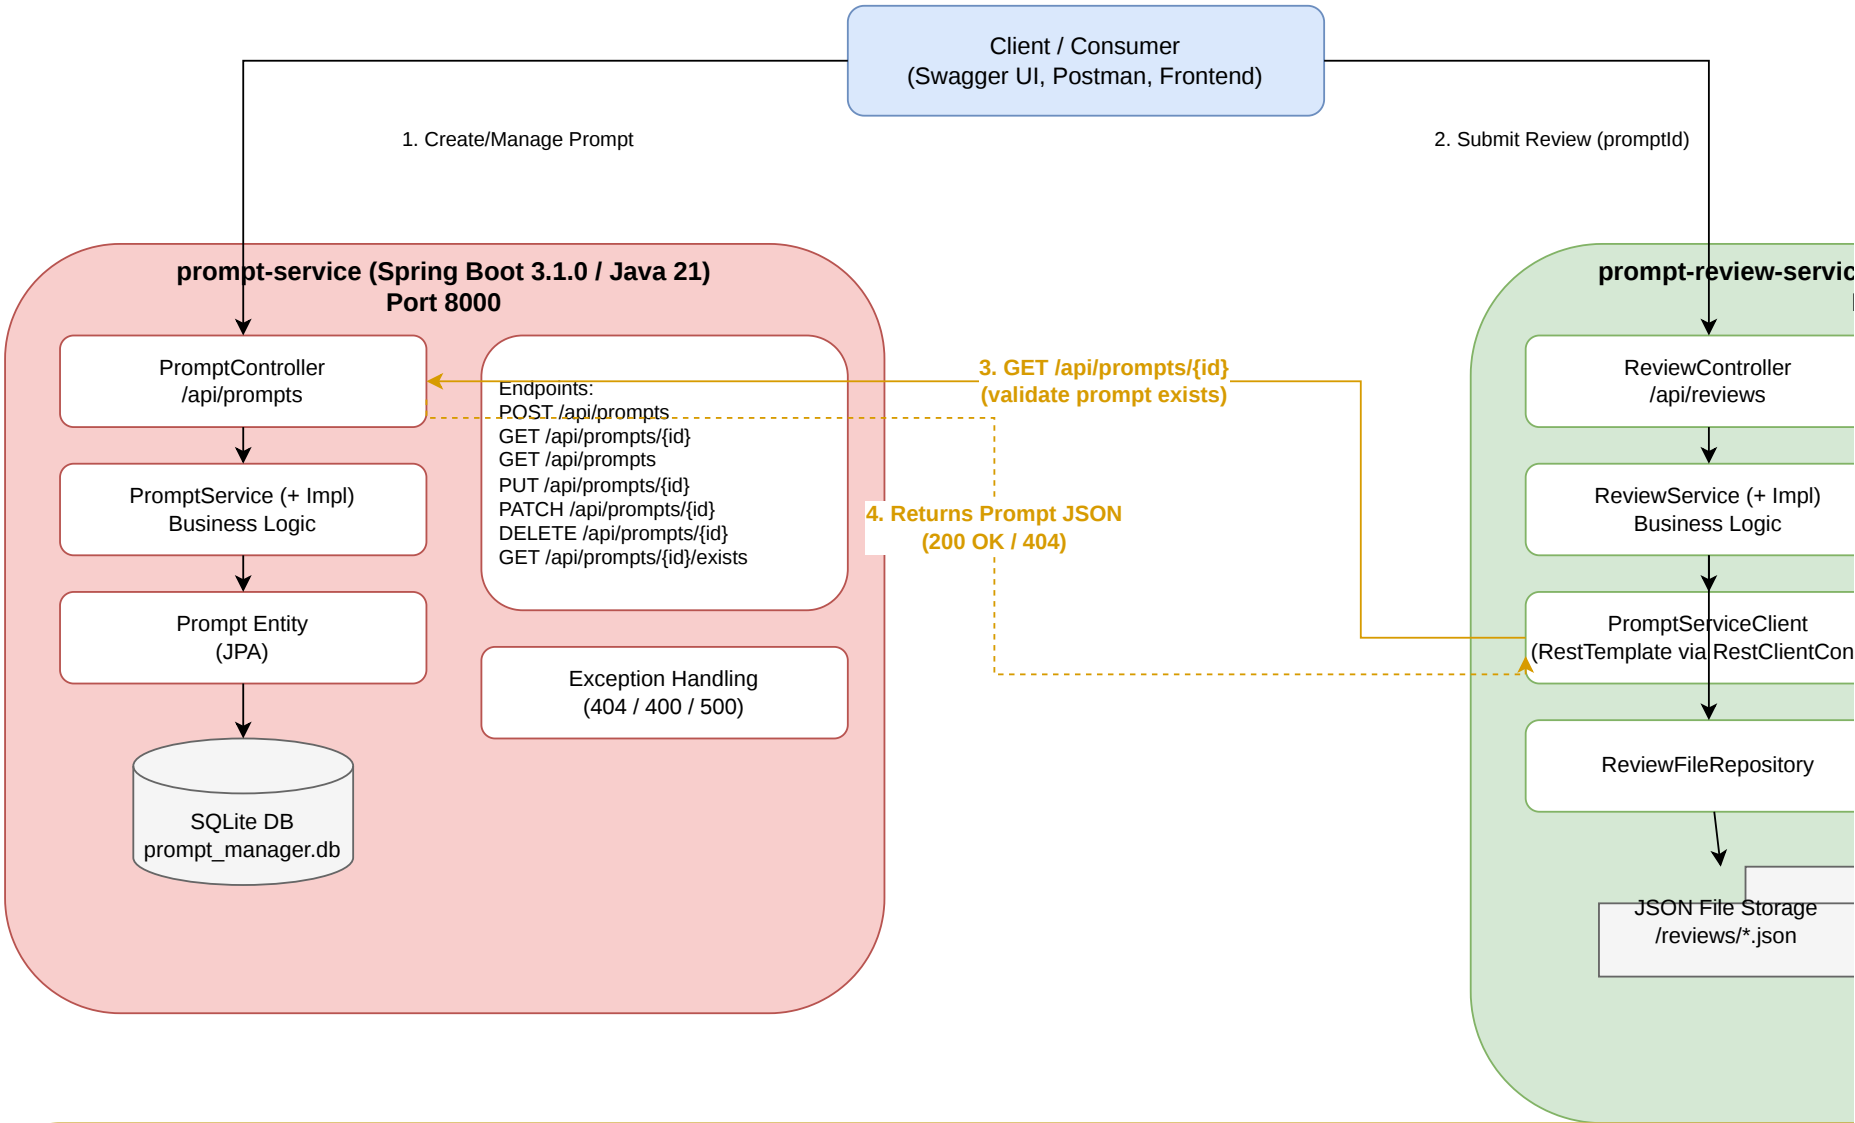

Workflow Notes

1. Start prompt-service FIRST (port 8000), then prompt-review-service (port 8001) — review service depends on prompt-service being reachable.
2. Client creates a Prompt via POST /api/prompts on prompt-service; it is persisted in SQLite (prompt_manager.db) and returns an auto-generated UUID id.
3. Client submits a Review (POST /api/reviews) to prompt-review-service, including the promptId, reviewerName, score (1-5), and feedback.
4. ReviewController delegates to ReviewService, which uses PromptServiceClient (RestTemplate) to call GET /api/prompts/{id} on prompt-service to validate the prompt exists.
5. If the prompt exists (200 OK), review-service captures a promptSnapshot (copy of the prompt's content at review time), assigns an id and reviewedAt timestamp, and persists the Review.
6. If prompt-service is unreachable, the review creation fails with 503. If the promptId does not exist, a 404 is returned instead of a review being created.
7. Clients can then query reviews (all, by promptId, by review id) or fetch an aggregated summary (GET /api/reviews/{promptId}/summary) with totalReviews, averageScore, and feedback.

ce (Spring Boot 3.3.5 / Java 17)
Port 8001

Endpoints:
POST /api/reviews
GET /api/reviews
GET /api/reviews?promptId=
GET /api/reviews/{id}
GET /api/reviews/{promptId}/summary

Exception Handling
(404 / 400 / 500 / 503)

w as a JSON file via ReviewFileRepository (/reviews/ directory).

: list.

