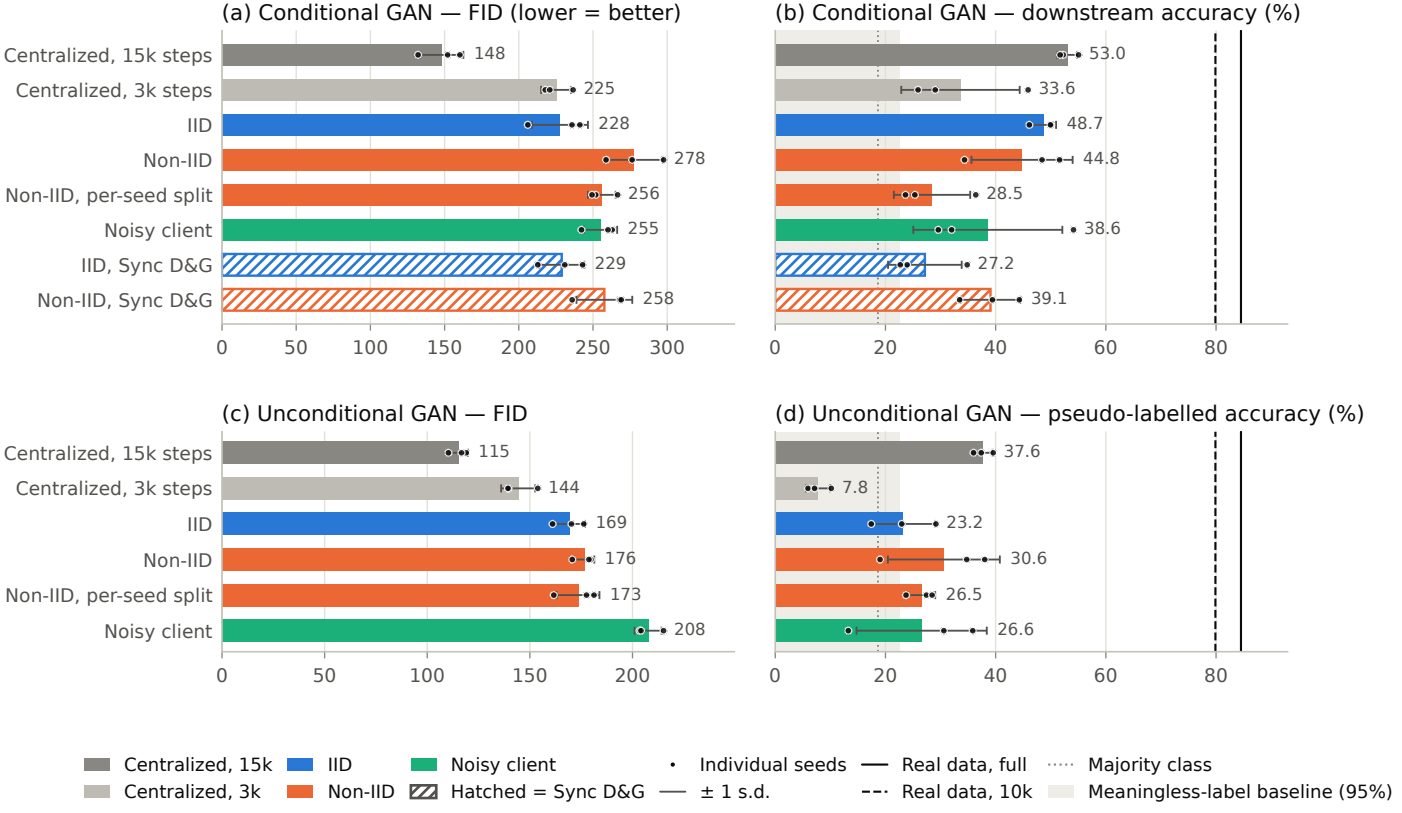
(a) Conditional GAN — FID (lower = better)
Centralized, 15k steps
Centralized, 3k steps
IID
Non-IID
Non-IID, per-seed split
Noisy client
IID, Sync D&G
Non-IID, Sync D&G
148
225
228
278
256
255
229
258
0
50
100
150
200
250
300
(b) Conditional GAN — downstream accuracy (%)
53.0
33.6
48.7
44.8
28.5
38.6
27.2
39.1
0
20
40
60
80
(c) Unconditional GAN — FID
Centralized, 15k steps
Centralized, 3k steps
IID
Non-IID
Non-IID, per-seed split
Noisy client
115
144
169
176
173
208
0
50
100
150
200
(d) Unconditional GAN — pseudo-labelled accuracy (%)
37.6
7.8
23.2
30.6
26.5
26.6
0
20
40
60
80
Centralized, 15k
Centralized, 3k
IID
Non-IID
Noisy client
Hatched = Sync D&G
Individual seeds
± 1 s.d.
Real data, full
Real data, 10k
Majority class
Meaningless-label baseline (95%)