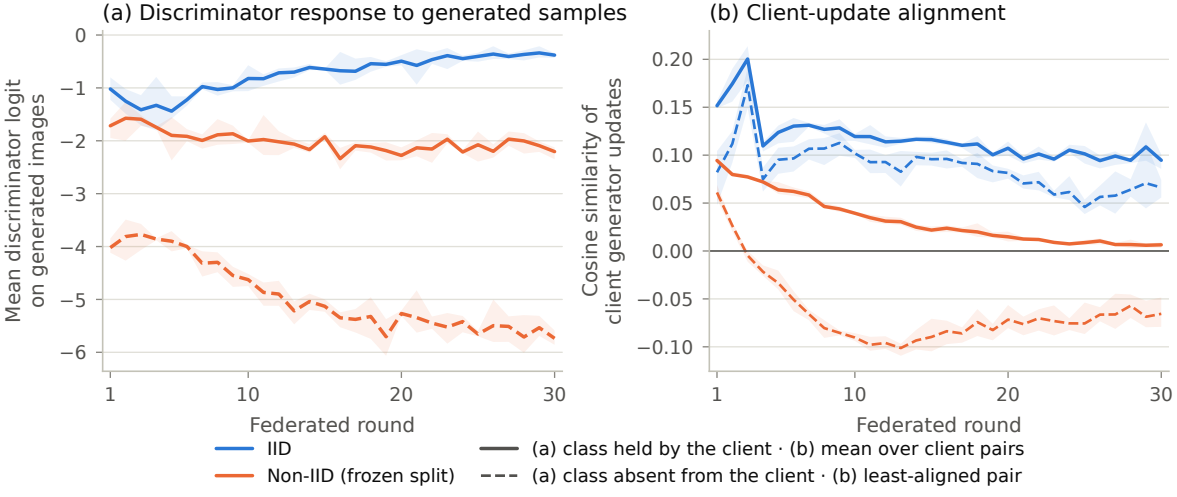
(a) Discriminator response to generated samples
Mean discriminator logit on generated images
0
−1
−2
−3
−4
−5
−6
1
10
20
30
Federated round
(b) Client-update alignment
Cosine similarity of client generator updates
0.20
0.15
0.10
0.05
0.00
−0.05
−0.10
1
10
20
30
Federated round
IID
Non-IID (frozen split)
(a) class held by the client · (b) mean over client pairs
(a) class absent from the client · (b) least-aligned pair