ID_3 Toolkit Script Examples Companion

APOD-ID3-SCRIPT-EXAMPLES-001

Document Control Information

Document Identifier: APOD-ID3-SCRIPT-EXAMPLES-001
Title: Access-Mode ID_3 – Operator / Inspection & Freeze Discipline
Toolkit Script Examples Companion
Edition: Companion Handbook — Version ID_3
Date of Issue: 1st March 2026
Status: Informative Companion — Non-Normative
Author: Anthony Siljeg
Affiliation: Alnotrea Labs / Policy of Developments — Access PoD *Initiative*

Contents

1. Toolkit Introduction 2

2. Full Script List (Execution Index) 3

3. Folder Transition Model 5

4. Environment Requirements 6

5. Execute Inspection Cycle (Example: 2026-02-10) 8

Executing commands in PowerShell 7: **8**

6. Post-Freeze Review Pack Reset (Critical) 15

7. Validation Checklist 16

8. Recovery / Rollback Model 17

9. Execution Model Summary 17

Copy/Paste Execution Notice (Critical)

This PDF is read-only.
For command execution, use the DOCX version of this document.

1. Toolkit Introduction

The **Access-Mode ID_3 Toolkit** provides the execution layer for ID_3 inspection, correction, canonical promotion, freeze declaration, and integrity anchoring.

This document is procedural and execution-focused.
It operationalizes the structural discipline defined in:

- Access-Mode ID_3 — Operator / Inspection & Freeze Discipline
- Rule Engine Formalization — APOD-ID3-RULE-001

ID_3 execution is designed to be lightweight once session material is prepared.

A typical inspection cycle takes approximately **15 minutes** (excluding reading/review time).

The toolkit enforces a deterministic transition model:

```
ID_2 session artifacts
        ↓
ID_3 intake (ID_2_inbox\<DATE>)
        ↓
Working pack (10_working → 20_corrected)
        ↓
Canonical promotion
        ↓
Freeze declaration
        ↓
Integrity anchor (hashes.txt)
        ↓
ID_3_outbox
        ↓
Review pack reset
```

The final stage ensures:

- The working review folder (e.g., `2026-02-10\ID3-20260210-module03-timepressure`) is no longer needed.
- The ID_3 review date folder (e.g., `2026-02-10`) can be removed once empty.
- The `ID_2_inbox` date folder is moved to `records_only` for governance archive.
- The root workspace `ID_3_review_packs\` is clean and ready for the next inspection cycle.

The scripts are structured to support this clean-cycle discipline.

ID_3 inspection is repeatable, not cumulative.

Each run:

- Produces a new immutable outbox pack.
- Preserves provenance.
- Cleans the working space.

2. Full Script List (Execution Index)

The following scripts form the ID_3 execution pipeline.

2.1 Inspect-SessionMetadataShapes.ps1

Purpose:
Performs structural diagnostics on baseline and variant session artifacts.

Stage:
Initial verification (10_working surface).

Function:

- Detects required field presence.
- Validates timestamp formats.
- Detects placeholder identifiers.
- Produces completeness scoring (diagnostic only).
- Identifies schema shape inconsistencies.

Output:

- Structural diagnostic report.
- No file modification.

This script determines whether correction is required.

2.2 Correct-ID3SessionMetadata.ps1

Purpose:
Applies metadata-only structural normalization.

Stage:
Correction phase (20_corrected surface).

Permitted Corrections:

- Deterministic placeholder ID replacement.
- Timestamp normalization to ISO 8601 UTC.
- Array coercion (scalar → array).
- Structural ordering normalization.

Not Permitted:

- Semantic inference.
- Reasoning modification.
- Sign-off reconstruction.
- Content fabrication.

Output:

- Corrected artifacts in 20_corrected.
- Logged structural alignment actions.

2.3 Inspect-SessionMetadataShapes.ps1 (Re-Run)

Purpose:
Re-verifies corrected artifacts.

Stage:
Re-verification.

Condition:

- Zero required-field failures.
- No non-fabrication violations.

Promotion eligibility must be confirmed before freeze.

2.4 Move-And-Freeze-ID3Outbox.ps1

Purpose:
Canonical promotion, freeze declaration, and integrity anchoring.

Stage:
Promotion → Freeze → Hash.

Modes:

DryRun:

- Simulates freeze and promotion.
- Confirms expected output structure.

Real Run:

- Generates canonical JSON artifacts.
- Applies inspection metadata.
- Declares freeze.
- Generates `hashes.txt`.
- Moves pack to `ID_3_outbox`.

Outputs:

- `session_baseline.canonical.json`
- `session_variant.canonical.json`
- `module_03_baseline.canonical.json`
- `module_03_variant.canonical.json`
- `hashes.txt`
- Immutable outbox pack

---

3. Folder Transition Model

During execution, files move through structured stages:

Stage 1 — Intake

```
ID_3_review_packs\
    ID_2_inbox\<DATE>\
```

Source of ID_2 session artifacts.

Stage 2 — Working Pack

```
ID_3_review_packs\<DATE>\ID3-<DATE>-<label>\
    10_working\
    20_corrected\
```

Temporary inspection surface.

This folder is a transient workspace.

Stage 3 — Freeze Output

`ID_3_review_packs\ID_3_outbox\`

Contains immutable frozen packs.

Stage 4 — Governance Archive

`ID_3_review_packs\records_only\`

Contains historical ID_2 inbox sessions used for inspection.

Stage 5 — Workspace Reset

After successful freeze:

1. Confirm outbox pack exists.
2. Move `ID_2_inbox\<DATE>` → `records_only\`.
3. Delete empty review date folder (e.g., `2026-02-10`).
4. Confirm `ID_3_review_packs\` root contains only:
    - `ID_3_outbox`
    - `records_only`
    - `ID_2_inbox` (ready for next intake)

This reset ensures:

- No residue from prior inspection cycles.
- Deterministic environment.
- Clean starting point for next run.

4. Environment Requirements

ID_3 execution assumes the following environment:

Software

- PowerShell 7+
- Access-Mode ID_3 operator scripts installed under:

  ```
  C:\v1.0-Access-mode\modes\ID_3_operator\
  ```

Required Structure

```
ID_3_review_packs\
    ID_2_inbox\
    ID_3_outbox\
    records_only\
```

Rule Specification

The following file must exist:

```
scripts\rules\session_completeness.rule.json
```

Rule version must match the intended inspection cycle.

The following steps below complete the freeze cycle.

---

5. Execute Inspection Cycle (Example: 2026-02-10)

Executing commands in PowerShell 7:

This section defines the complete ID_3 cycle. If using the standalone ID_3 release with pre-populated ID_2 inbox artifacts, Step 1 may be skipped.

`C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\ID_2_inbox\`**`2026-02-10`**

Note 1: For other sessions (custom) from ID_2 standalone release adjust the path folder (DATE) **YYYY-MM-DD** from `C:\v1.0-Access-mode\modes\ID_2_access\records\sessions\`**`YYYY-MM-DD.`**

Note 2: If both releases are on disc `C:\v1.0-Access-mode\modes\ID_2_access` & `ID_3_operator` use step 1 and proceed with all steps.

TIP: If `ID_2_access` is used and a session is complete move `ID_3_operator` under `C:\v1.0-Access-mode\modes\` - All modes ID_x are required on disc in `\modes\` folder. Then proceed to step 1.

Total time (excluding session review): **~15 minutes**

STEP 1 — Intake Copy (ID_2 → ID_3 Inbox)

Purpose: Create deterministic intake surface.

All steps below are executed from:

```
cd "C:\v1.0-Access-mode\modes\ID_3_operator"
```

--- All commands below are intended for direct copy/paste execution in PowerShell 7.

```
pwsh -NoProfile -Command "New-Item -ItemType Directory -Force -Path 'C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\ID_2_inbox\2026-02-10' | Out-Null"
```

```
pwsh -NoProfile -Command "robocopy 'C:\v1.0-Access-mode\modes\ID_2_access\records\sessions\2026-02-10' 'C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\ID_2_inbox\2026-02-10' /E /NFL /NDL /NJH /NJS /NC /NS /NP /R:1 /W:1 | Out-Null"
```

--- Replace YYYY-MM-DD and session folder names as required for custom runs.

Guardrail:
Do NOT use `/MIR`.

STEP 2 — Create 10_working Surface (Deterministic Copy)

Purpose

Extract only the required inspection artifacts from the ID_2 inbox:

- `session.json`
- `module_03_sapp_simulation_stress_testing_ID_2.json`

From Step 1:

`ID_3_review_packs\ID_2_inbox\`**`2026-02-10\`**

Into – Step 2:

`ID_3_review_packs\`**`2026-02-10\ID3-20260210-module03-timepressure\10_working\`**

This is a strict extraction step.
No correction (STEP 4) occurs here yet.

Proceed to the next page - step 2.

Deterministic Copy Block "`# STEP 2` to `Length`" **below.**

--- Execute the following commands in PowerShell 7:

```
# STEP 2 — Create 10_working structure and copy required artifacts

$in  = "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\ID_2_inbox\2026-02-10"
$out = "C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-
10\ID3-20260210-module03-timepressure\10_working"

# Ensure destination structure exists
New-Item -ItemType Directory -Force -Path `
  (Join-Path $out "baseline\jsons"), `
  (Join-Path $out "variants\jsons") | Out-Null

# Define deterministic source paths
$baselineSession  = Join-Path $in "baseline\ID2-20260210-1835-
session\artifacts\session.json"
$baselineModule03 = Join-Path $in "baseline\ID2-20260210-1835-
session\artifacts\module_03_sapp_simulation_stress_testing_ID_2.json"

$variantSession   = Join-Path $in "variants\ID2-20260210-1907-session-
timepressure\artifacts\session.json"
$variantModule03  = Join-Path $in "variants\ID2-20260210-1907-session-
timepressure\artifacts\module_03_sapp_simulation_stress_testing_ID_2.json"

# Fail fast if any required source file is missing
foreach ($src in
@($baselineSession,$baselineModule03,$variantSession,$variantModule03)) {
    if (-not (Test-Path -LiteralPath $src)) {
        throw "Missing required source file: $src"
    }
}

# Copy baseline
Copy-Item -LiteralPath $baselineSession  -Destination (Join-Path $out
"baseline\jsons\session.json") -Force
Copy-Item -LiteralPath $baselineModule03 -Destination (Join-Path $out
"baseline\jsons\module_03_sapp_simulation_stress_testing_ID_2.json") -Force

# Copy variant
Copy-Item -LiteralPath $variantSession  -Destination (Join-Path $out
"variants\jsons\session.json") -Force
Copy-Item -LiteralPath $variantModule03 -Destination (Join-Path $out
"variants\jsons\module_03_sapp_simulation_stress_testing_ID_2.json") -Force

# Verification (should output exactly 4 files)
Get-ChildItem $out -Recurse -File | Select-Object FullName, Length
```

--- Replace YYYY-MM-DD and session folder names as required for custom runs.

Expected Output

```
FullName
--------
C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepressure\10_working\bas…
C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepressure\10_working\bas…
C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepressure\10_working\var…
C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepressure\10_working\var…

PS C:\v1.0-Access-mode\modes\ID_3_operator>
```

On disc you should see exactly 4 files in working_10 folder:

```
baseline\jsons\session.json
baseline\jsons\module_03_sapp_simulation_stress_testing_ID_2.json
variants\jsons\session.json
variants\jsons\module_03_sapp_simulation_stress_testing_ID_2.json
```

or verify on PS7 console right after step 2:

```
Get-ChildItem $out -Recurse -File
```

STEP 3 — Inspect

From - `C:\v1.0-Access-mode\modes\ID_3_operator\`

--- Execute the following commands in PowerShell 7:

```
.\scripts\Inspect-SessionMetadataShapes.ps1
```

Expected Output

```
PS C:\v1.0-Access-mode\modes\ID_3_operator> .\scripts\Inspect-SessionMetadataShapes.ps1
Using working folder: C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepre
ssure\10_working

Using working session (baseline): C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-modu
le03-timepressure\10_working\baseline\jsons\session.json
Using working session (variants): C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-modu
le03-timepressure\10_working\variants\jsons\session.json
Inspection surface: 10_working (fallback)

[PROBE] baseline audience raw type: System.Object[]
[PROBE] baseline audience raw json: ["internal"]

[DEBUG] required fail: session.session_id | type=System.String | value="ID2-YYYYMMDD-HHMM-<shortname>"

Completeness (diagnostic): baseline 74.47% | variant 100% | average 87.24%
file - correction_note.md created (check file)
Next step recommended - Correct-ID3SessionMetadata.ps1 for metadata correction only before hash and freeze

PS C:\v1.0-Access-mode\modes\ID_3_operator>
```

Confirm that `correction_note.md` exists in the 20_corrected folder:

`C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepressure\`**`20_corrected`**

- Required constraints pass or are correctable
- No non-fabrication violations


STEP 4 — Correct

--- Execute the following commands in PowerShell 7:

```
.\scripts\Correct-ID3SessionMetadata.ps1
```

Corrections are metadata-only.

Expected Output

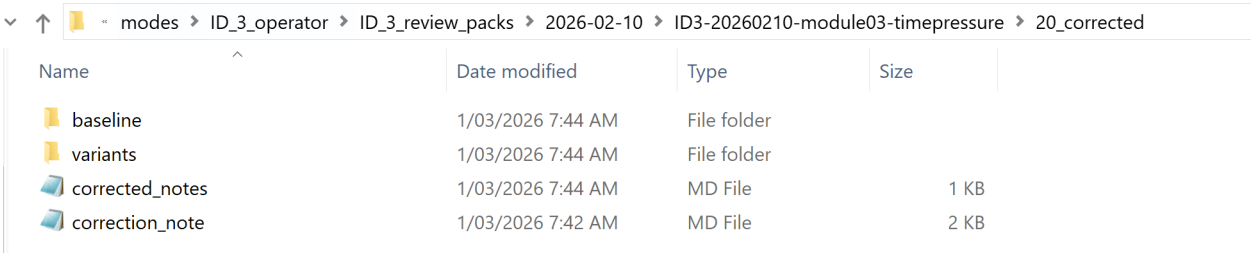



Confirm that `corrected_notes.md` exists in the 20_corrected folder:

`C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepressure\`**`20_corrected`**


STEP 5 — Re-Inspect

--- Execute the following commands in PowerShell 7:

```
.\scripts\Inspect-SessionMetadataShapes.ps1
```

Required failures must equal zero (from ID_2 session to ID_3 inspect - steps 3 to step 5) before freeze.

Expected Output

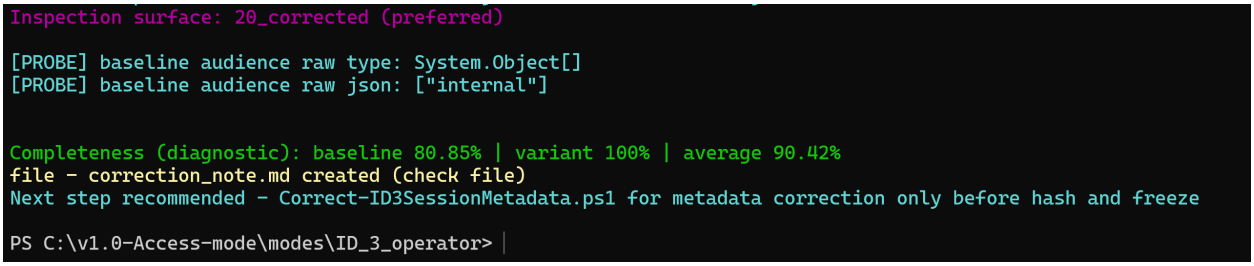

Confirm that updated `correction_note.md` exists in the 20_corrected folder:

`C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-timepressure\`**`20_corrected`**

NOTE: The current working space (FOLDERS) steps 2 to step 5 will convert to a freeze/hash package after step 7.

STEP 6 — Freeze (Dry Run optional) recommended.

--- Execute the following commands in PowerShell 7:

```
pwsh .\scripts\Move-And-Freeze-ID3Outbox.ps1 `
  -PackRoot   "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-
timepressure" `
  -OutboxRoot "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\ID_3_outbox" `
  -InboxRoot  "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\ID_2_inbox" `
  -DryRun
```

Confirm expected canonical files on PS7 console view only.


Proceed to real run on next page.


STEP 7 — Freeze (Real Run)


--- Execute the following commands in PowerShell 7:

```
pwsh .\scripts\Move-And-Freeze-ID3Outbox.ps1 `
  -PackRoot   "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10\ID3-20260210-module03-
timepressure" `
  -OutboxRoot "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\ID_3_outbox" `
  -InboxRoot  "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\ID_2_inbox"
```

Expected Output

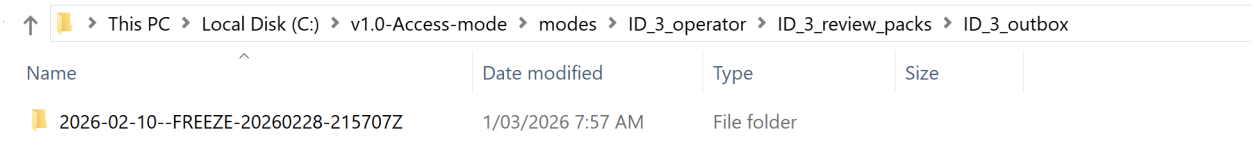

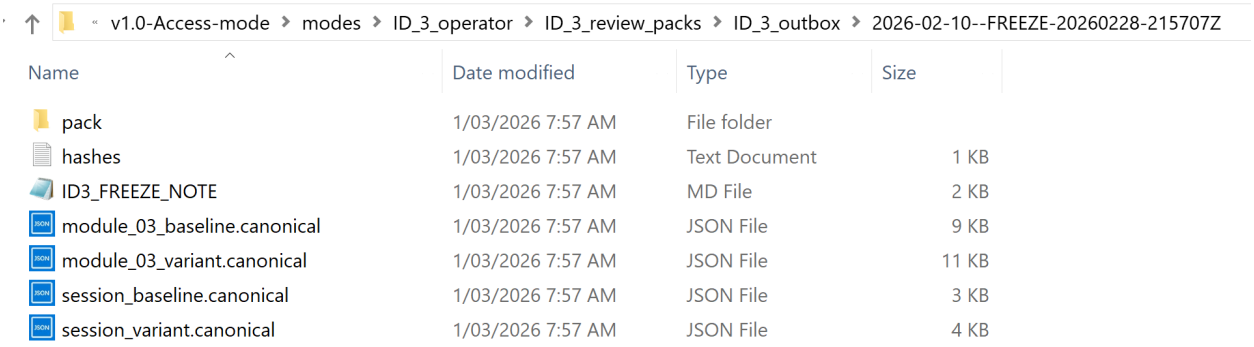

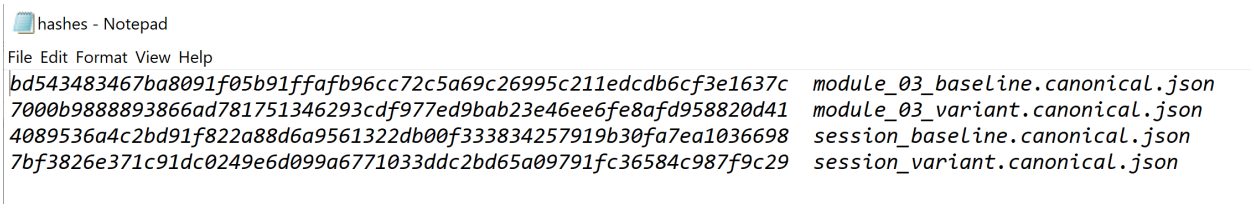


Confirm freeze and hash package with:

--- Execute the following commands in PowerShell 7:

```
Get-ChildItem "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\ID_3_outbox"
```

The canonical pack must exist and contain `hashes.txt`. Confirm the timestamped folder and `ID_3_Freeze_Note.md` are present.

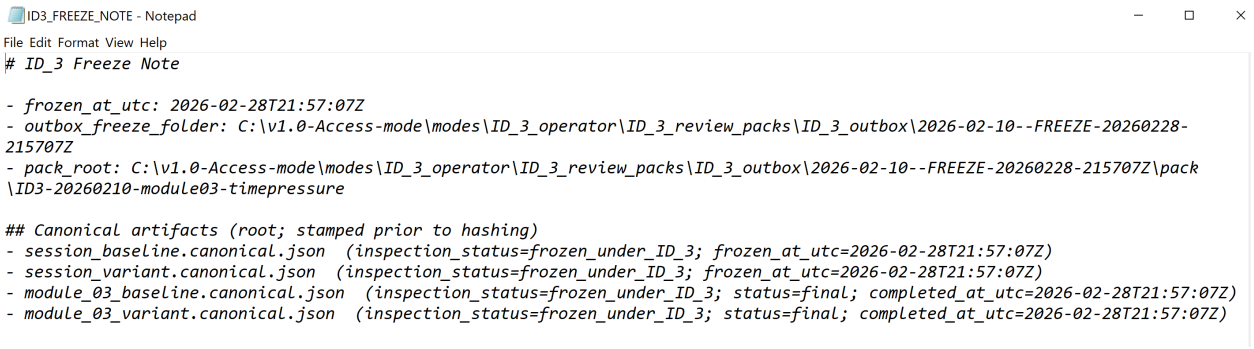

---

6. Post-Freeze Review Pack Reset (Critical)

These next two steps ensure the toolkit remains repeatable and deterministic using the same procedure outlined in Steps 1 through 7.

6.1 Move Inbox to Governance Records

This step preserves ID_2 provenance as governance record.

--- Execute the following commands in PowerShell 7:

```
$src = "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\ID_2_inbox\2026-02-10"
$dst = "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\records_only\2026-02-10"

if (Test-Path $dst) {
    throw "Archive already exists at records_only\2026-02-10 — manual review
required."
}

Move-Item -LiteralPath $src -Destination $dst
```

6.2 Delete Empty Review Date Folder

If folder is empty:

--- Execute the following commands in PowerShell 7:

```
$reviewRoot = "C:\v1.0-Access-
mode\modes\ID_3_operator\ID_3_review_packs\2026-02-10"

if ((Get-ChildItem $reviewRoot -Recurse -Force | Measure-Object).Count -eq 0)
{
    Remove-Item $reviewRoot -Force
}
```

Delete only after confirming the canonical pack exists in ID_3_outbox and the review date folder is empty.

6.3 Confirm Clean Root (Important)

```
Get-ChildItem `
"C:\v1.0-Access-mode\modes\ID_3_operator\ID_3_review_packs"
```

Expected:

`ID_3_outbox\` (freeze/hash - ready for ***seal and long-term archive*** in v1.1-workspace release)
`records_only\` (from original ID_2 provenance)
`ID_2_inbox\` (clean and ready for next run)

---

7. Validation Checklist

Before ending cycle, confirm:

☐ Required constraints passed
☐ No non-fabrication violations
☐ Canonical artifacts generated
☐ hashes.txt present
☐ Outbox pack created
☐ Inbox moved to records_only
☐ Working review folder removed
☐ Root workspace clean

8. Recovery / Rollback Model

If freeze fails:

- Do NOT manually edit canonical artifacts.
- Review diagnostic output
- Correct metadata
- Re-run Inspect → Correct → Inspect
- Re-run Freeze (DryRun first)

If hash mismatch occurs:

- Verify deterministic ordering
- Verify timestamp normalization
- Re-run canonical promotion

If semantic inconsistency detected:

- Revert to ID_2 posture
- Do not attempt repair under ID_3

9. Execution Model Summary

```
ID_2
   ↓
Intake (STEP 1)
   ↓
10_working → 20_corrected (STEPS 2–4)
   ↓
Canonical Promotion (STEP 5)
   ↓
Freeze + Hash (STEP 6–7)
   ↓
Outbox → Archive → Reset
```